

Technical Data

DIODE



maximum ratings


Voltage, Reverse (VZ)	9.1	V	NO.	1N3019B-M
Voltage, Reverse Peak (VRM)		V	TYPE	1W-ZENER
Current at VR = 0V (IO)		A		
Current Average Rectified (IF)		A		
Current Surge Peak (IZM)	0.105	A	CASE	DO-13
Current, Surge (IFM) at tp =		A		MIL-S-19500
Max. Power Dissipation (PT) at TC = 25 °C	1.0	W		BURN-IN 48h/125°C
Max. Thermal Resistance (Rth J-A)	150.0	°C/W		
Max. Junction Temperature (TJ)	175.0	°C		

PERFORMANCE CHARACTERISTICS at $T_c = 25^\circ\text{C}$, unless otherwise noted

NO.	SYMBOL	CONDITIONS	MIN.	MAX.	UNITS
1.	VZ	$I_Z = 28.0 \text{ mA}$, $t_p = 100.0 \mu\text{s}$, $\text{dc} = 0.1 \%$	8.65	9.55	V
2.	RZ	$I_Z = 28.0 \text{ mA}$, $\Delta I_Z = 10.0\% I_Z$, $f = 1.0 \text{ kHz}$	-	5.0	Ω
3.	RZ	$I_Z = 0.5 \text{ mA}$	-	700.0	Ω
4.	IR	$V_R = 6.6 \text{ V}$	-	7.5	μA
5.	VF	$I_F = 200.0 \text{ mA}$ (1)	-	1.5	V
6.					
7.					
8.					
9.					
10.					
11.					
12.					
13.					
14.					
15.					
16.					
17.					
18.					
19.					
20.					

Notes (1) pulse-tested $t_p \leq 300 \mu\text{s}$, duty cycle $\leq 2 \%$

DIMENSIONS
in mm

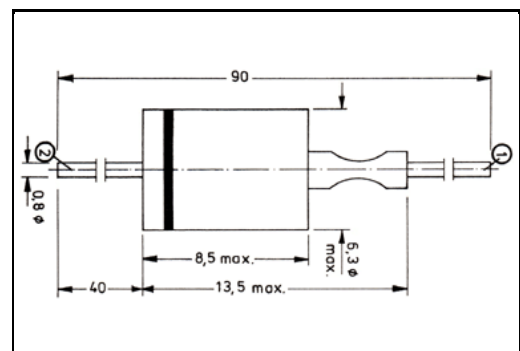

Marking 1N3019B-M + GREEN DOT
Customer GENERAL PURPOSE