

LM6029A

LCD Module User Manual

Shenzhen TOPWAY Technology Co., Ltd.

Rev.	Descriptions	Release Date
0.1	Prelimiay release	2006-03-31

Table of Content

1. Basic Specifications	3
1.1 Display Specifications	3
1.2 Mechanical Specifications	3
1.3 Block Diagram.....	3
1.4 Terminal Functions.....	4
2. Absolute Maximum Ratings	5
3. Electrical Characteristics	5
3.1 DC Characteristics	5
3.2 LED Backlight Circuit Characteristics	5
3.3 AC Characteristics	6
4. Function Specifications	7
4.1 Basic Setting	7
4.2 Resetting the LCD module	7
4.3 Display Memory Map	7
4.4 Display Commands	8
4.5 Display Commands (continue)	9
4.6 Basic Operating Sequence (example).....	10
5. Design and Handling Precaution	11

1. Basic Specifications

1.1 Display Specifications

- 1) LCD Display Mode : FSTN, Positive, Transflective
- 2) Display Color : Display Data = "1" : Dark Gray (*1)
: Display Data = "0" : Light Gray (*2)
- 3) Viewing Angle : 6H
- 4) Driving Method : 1/65 duty, 1/9 bias
- 5) Backlight : White LED

Note:

*1. Color tone may slightly change by Temperature and Driving Condition.


*2. The Color is defined as the inactive / background color

www.DataSheet4U.com

1.2 Mechanical Specifications

- 1) Outline Dimension : 59.6 x 50.6 x 8.7
(See attached Outline Drawing for details)

1.3 Block Diagram

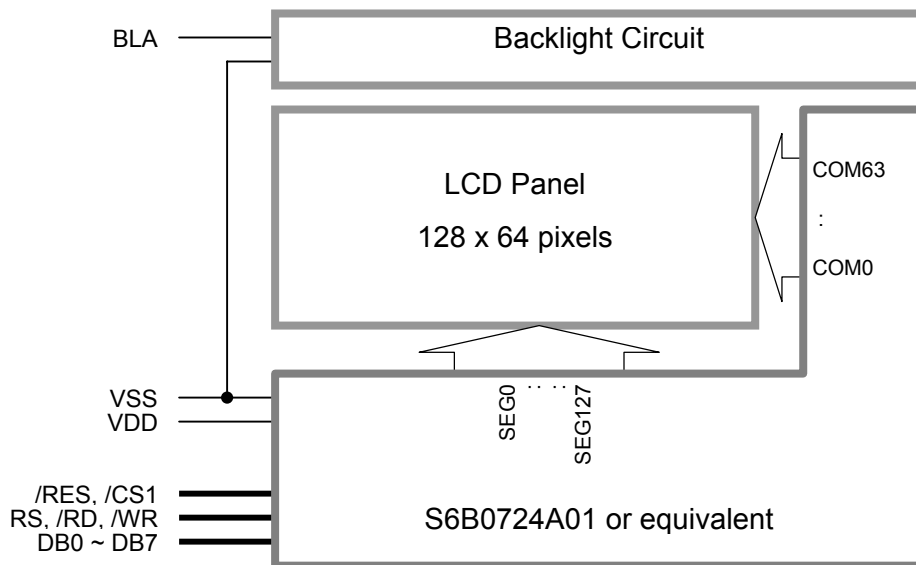

1.4 Terminal Functions

Pin No.	Pin Name	I/O	Descriptions
1	VSS	Power	Negative Power Supply, Ground (0V)
2	VDD	Power	Positive Power Supply
3	DB7	I/O	8-bit Data bus;
:	:	:	Three state I/O terminal for display data or instruction data
10	DB0	I/O	When /CS=H, DB0~DB7= High Impedance
11	/RD	Input	/WR=H, /RD=L; Data or Status read form the LCD module
12	/WR	Input	/WR=L→H, /RD=H; Data or Instruction latch into the LCD module
13	RS	Input	Register Select RS = H, Transferring the Display Data RS = L, Transferring the Control Data
14	/RES	Input	Reset signal /RES = L, Initialization is executed /RES = H, Normal running.
15	/CS1	Input	Chip Select /CS1=L, enable access to the LCD module /CS1=H, disable access to the LCD module
16	BLA	Power	Positive Power for LED backlight

2. Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit	Condition
Supply Voltage	V_{DD}	-0.3	+3.7	V	$V_{SS} = 0V$
Input Voltage	V_{IN}	-0.3	$V_{DD}+0.3$	V	$V_{SS} = 0V$
Operating Temperature	T_{OP}	0	+50	°C	No Condensation
Storage Temperature	T_{ST}	-20	+60	°C	No Condensation

Cautions:

Any Stresses exceeding the Absolute Maximum Ratings may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

3. Electrical Characteristics

3.1 DC Characteristics

$V_{SS}=0V, V_{DD}=3.3V, T_{OP}=25^{\circ}C$

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition / Application Pin
Operating Voltage	V_{DD}	2.9	-	3.6	V	VDD
Input High Voltage	V_{IH}	$0.8 \times V_{DD}$	-	V_{DD}	V	/RES, /CS1, RS, /WR,
Input Low Voltage	V_{IL}	V_{SS}	-	$0.2 \times V_{DD}$	V	/RD, DB0~DB7
Output High Voltage	V_{OH}	$0.8 \times V_{DD}$	-	V_{DD}	V	$I_{OH}=-0.5mA, DB0\sim DB7$
Output Low Voltage	V_{OL}	V_{SS}	-	$0.2 \times V_{DD}$	V	$I_{OL}=0.5mA, DB0\sim DB7$
Operating Current	I_{DD}	-	0.3	1.5	mA	VDD
Sleep Mode Current	I_{DDS}	-	-	2.0	μA	VDD


3.2 LED Backlight Circuit Characteristics

$V_{SS}=0V, I_{f_{BLA}}=39mA, T_{OP}=25^{\circ}C$

Items	Symbol	MIN.	TYP.	MAX.	Unit	Applicable Pin
Forward Voltage	$V_{f_{BLA}}$	-	3.3	-	V	BLA
Forward Current	$I_{f_{BLA}}$	-	-	60	mA	BLA


Cautions:

Exceeding the recommended driving current could cause substantial damage to the backlight and shorten its lifetime.

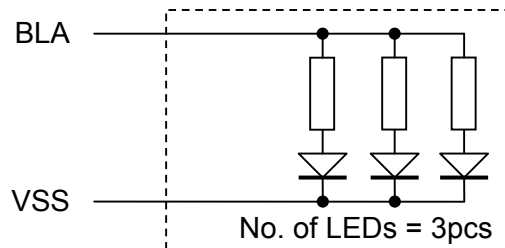

3.3 AC Characteristics

3.3.1 8080 Mode System Bus Timing

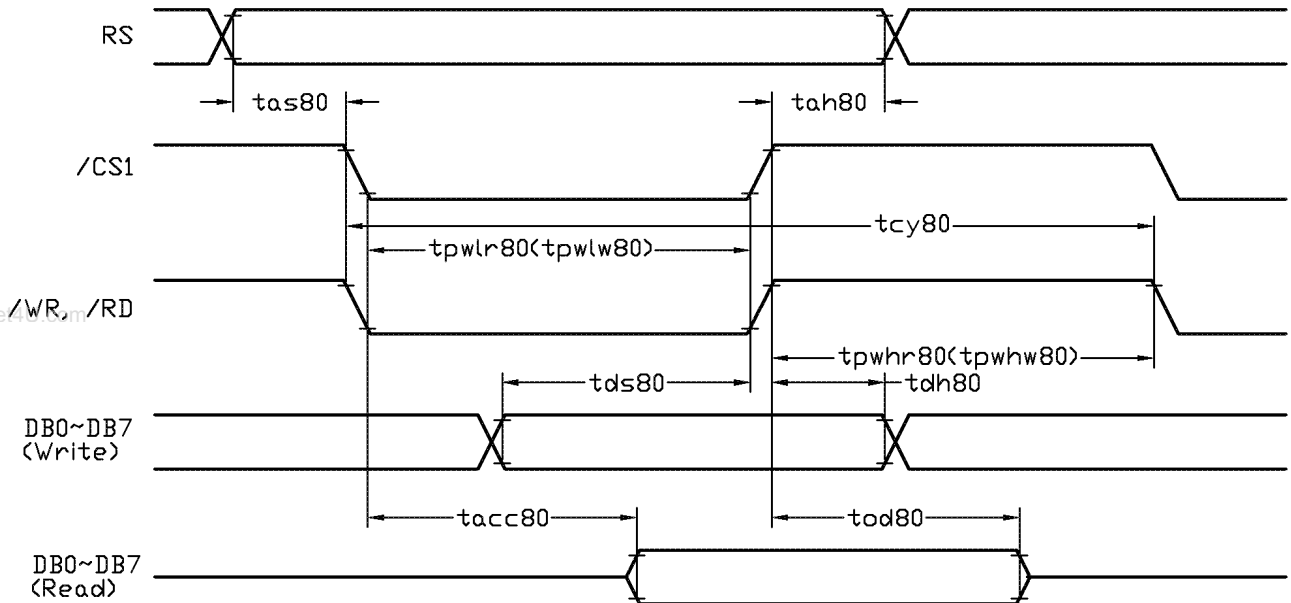

$V_{SS}=0V, V_{DD}=3.3V, T_{OP}=25^{\circ}C$


Item	Symbol	MIN.	TYP.	MAX.	Unit
System cycle time	tcy80	375	-	-	ns
Address setup time (RS)	tas80	10	-	-	ns
Address hold time (RS)	tah80	10	-	-	ns
Control LOW pulse width (/RD)	tpwlr80	150	-	-	ns
Control LOW pulse width (/WR)	tpwlw80	75	-	-	ns
Control HIGH pulse width (/RD)	tpwhr80	75	-	-	ns
Control HIGH pulse width (/WR)	tpwhw80	75	-	-	ns
Data setup time	tds80	50	-	-	ns
Data hold time	tdh80	19	-	-	ns
/RD access time (*2)	tacc80	-	-	175	ns
Output disable time (*2)	tod80	-	-	125	ns

Note:

*1. Input signal rise/fall time should be less than 12ns

*2. CL=100pF

3.3.2 Reset Timing

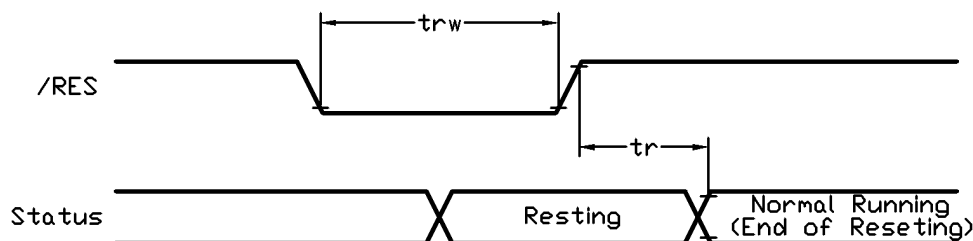

$V_{SS}=0V, V_{DD}=3.3V, T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Reset time	tr	-	-	2	μs
Reset LOW pulse width	trw	2	-	-	μs

Note:

*1. Input signal rise/fall time should be less than 12ns

4. Function Specifications

4.1 Basic Setting

To drive the LCD module correctly and provide normally display, please use the following setting

- ADC = 0 (normal)
- SHL select = 1 (reverse)
- LCD Bias Select = 1/9
- Initial Display Line = 0
- Entire Display ON/OFF = OFF (normal)
- Reverse Display ON/OFF = OFF (normal)
- Set Power Control Set:
voltage follower = ON, voltage converter = ON, voltage regulator = ON
- Display ON/OFF = ON

Note:

*1. These setting/commands should issue the LCD module while start up.

*2. See the Display Commands section for details.

4.2 Resetting the LCD module

The LCD module should be initialized by using /RES terminal.

While turning on the VDD and VSS power supply, maintain /RES terminal at LOW level. After the power supply stabilized, release the reset terminal (/RES=HIGH)

4.3 Display Memory Map

Page address	data	LCD Display (front view)	
0	D0 : D7		
1	D0 : D7		
2	D0 : D7		
3	D0 : D7		
4	D0 : D7		
5	D0 : D7		
6	D0 : D7		
7	D0 : D7		
Column Address		00h	→ 7Fh

Note:

*1. ADC = 0 (normal)

*2. SHL Selection = 1 (reverse)

*3. Initial Display Line = 0

4.4 Display Commands

No.	Instructions	Code										Function	
		RS	/RD	/WR	D7	D6	D5	D4	D3	D2	D1		D0
1	Display ON/OFF	0	1	0	1	0	1	0	1	1	1	DON	DON=0, display off DON=1, display on
2	Initial Display Line	0	1	0	0	1	Initial Display Line					Specifies DDRAM line for COM0	
3	Set Page Address	0	1	0	1	0	1	1	Page Address			Set page address	
4	Set Column Address (Upper-4-bits)	0	1	0	0	0	0	1	Col. Add. Upper			Set the upper-4-bit of column address counter	
	Set Column Address (Lower-4-bits)	0	1	0	0	0	0	0	Col. Add. Lower			Set the lower-4-bit of column address counter	
5	Read Status	0	0	1	Status			0	0	0	0	Read the internal status D4=RESET, 1=resetting, 0=normal D5=Display ON/OFF, 1=off, 0=on D6=ADC Flag, D7=BUSY Flag, 1=busy, 0=ready	
6	Write Display Data	1	1	0	Display Data							Write data into the display RAM	
7	Read Display Data	1	0	1	Display Data							Read data from the display RAM	
8	ADC Select	0	1	0	1	0	1	0	0	0	0	ADC	Sets the Column Address direction ADC= 0, Normal display (SEG0→SEG131) ADC=1, flipped in x direction (SEG131→SEG0)
9	Normal/Reverse Display	0	1	0	1	0	1	0	0	1	1	REV	REV=0, Normal display REV=1, Reverse display
10	Entire Display ON	0	1	0	1	0	1	0	0	1	0	EON	EON=0, Normal display EON=1, Entire display ON
11	Set LCD Bias	0	1	0	1	0	1	0	0	0	1	BIAS	Set the LCD driving voltage bias BIAS=0, 1/9 BIAS BIAS=1, 1/7 BIAS
12	Set Read-Modify-Write	0	1	0	1	1	1	0	0	0	0	0	Enter the "Read-Modify-Write" mode column address counter will increase in each "Write Display Data", and will not increase in each "Read Display Data command"
13	Reset Read-Modify-Write	0	1	0	1	1	1	0	1	1	1	0	Release the "Read-Modify-Write" mode
14	Reset	0	1	0	1	1	1	0	0	0	1	0	Resets the LCD module
15	SHL Select	0	1	0	1	1	0	0	SHL	*	*	*	Set the COM scanning direction SHL=0, Normal display SHL=1, Flipped in y direction * = don't care terms
16	Power Control Set	0	1	0	0	0	1	0	1	VC	VR	VF	Set the power circuit operation mode VF: LCD Supply Voltage Follower VR: LCD Supply Voltage Regulator VC: LCD Supply Voltage Converter (1=ON, 0=OFF)

4.5 Display Commands (continue)

No.	Instructions	Code										Function	
		A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1		D0
17	Regulator Resistor Select	0	1	0	0	0	1	0	0	Ratio Setting		Set the built-in resistor ratio (Rb/Ra)	
18	Set Reference Voltage Mode	0	1	0	1	0	0	0	0	0	0	1	Set reference voltage mode
	Set Reference Voltage Register	0	1	0	x	x	Electronic Control value				Set reference voltage register (Display contrast value)		
20	Power Save	-	-	-	-	-	-	-	-	-	-	Compound Instruction: Display OFF + Entire Display ON	
21	Power Save Reset	-	-	-	-	-	-	-	-	-	-	Compound Instruction: Display ON + Entire Display OFF	
22	NOP	0	1	0	1	1	1	0	0	0	1	1	Non-operation command
23	Test_1	0	1	0	1	1	1	1	x	x	x	x	Test Command. Do not use.
24	Test_2	0	1	0	1	0	0	1	x	x	x	x	Test Command. Do not use.

Note: *1. Do not use any other command not listed, or the system malfunction may result.
 *2. For the details of the Display Commands, please refer to S6B0724 data sheet.

4.5.1 Power off the LCD Module

It recommends that enter Power Save mode before power off the LCD module.

4.5.2 Refreshing The LCD Module

It recommends that the operating modes and display contents be refreshed periodically to prevent the effect of unexpected noise.

4.6 Basic Operating Sequence (example)

4.6.1 Initialization Sequence

Code Function											Note	
A0	D7	D6	D5	D4	D3	D2	D1	D0	hex			
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	See AC Characteristics section for timing details
0	1	0	1	0	0	0	1	0	A2h			LCD panel Characteristic
0	1	0	1	0	0	0	0	0	A0h			No flip on x-direction (SEG)
0	1	1	0	0	1	0	0	0	C8h			Flip on y-direction (COM)
0	0	1	0	0	0	0	0	0	40h			i.e. Display RAM "page 0 - D0" Matched to top line of the LCD
0	0	0	1	0	1	1	0	0	26h			Turn on the internal Voltage Converter and wait until VOUT stable.
-	-	-	-	-	-	-	-	-	-			
0	0	0	1	0	1	1	1	0	2Eh			Turn on the Internal Voltage Regulator and wait until VOUT stable.
-	-	-	-	-	-	-	-	-	-			
0	0	0	1	0	1	1	1	1	2Fh			Turn on the internal Voltage Follower and wait until VOUT stable
-	-	-	-	-	-	-	-	-	-			
0	0	0	1	0	0	1	0	1	25h			Set the built-in resistor ratio to middle
0	1	0	0	0	0	0	0	1	81h			Set to the middle of the range It may be adjusted for achieving the best display contrast
0	0	0	1	0	0	0	0	0	20h			
0	1	0	1	0	1	1	1	1	AFh			Turn on the LCD display
0	1	0	1	1	0	0	0	0	B0h			Specify the Display Data RAM page address to 00h
0	0	0	0	1	0	0	0	0	10h			Specify the Display Data RAM column address to 00h
0	0	0	0	0	0	0	0	0	00h			
1	Display Data											Write data to Display Data RAM. After write, the internal Column Address Counter will be increased by 1 automatically
Write Other Display Data ...												

5. Design and Handling Precaution

1. The LCD panel is made by glass. Any mechanical shock (eg. dropping from high place) will damage the LCD module.
2. Do not add excessive force on the surface of the display, which may cause the Display color change abnormally.
3. The polarizer on the LCD is easily get scratched. If possible, do not remove the LCD protective film until the last step of installation.
4. Never attempt to disassemble or rework the LCD module.
5. Only Clean the LCD with Isopropyl Alcohol or Ethyl Alcohol. Other solvents (eg. water) may damage the LCD.
6. When mounting the LCD module, make sure that it is free from twisting, warping and distortion.
7. Ensure to provide enough space (with cushion) between case and LCD panel to prevent external force adding on it, or it may cause damage to the LCD or degrade the display result.
8. Only hold the LCD module by its side. Never hold LCD module by add force on the heat seal or TAB.
9. Never add force to component of the LCD module. It may cause invisible damage or degrade of the reliability.
10. LCD module could be easily damaged by static electricity. Be careful to maintain an optimum anti-static work environment to protect the LCD module.
11. When peeling off the protective film from LCD, static charge may cause abnormal display pattern. It is normal and will resume to normal in a short while.
12. Take care and prevent get hurt by the LCD panel sharp edge.
13. Never operate the LCD module exceed the absolute maximum ratings.
14. Keep the signal line as short as possible to prevent noisy signal applying to LCD module.
15. Never apply signal to the LCD module without power supply.
16. IC chip (eg. TAB or COG) is sensitive to the light. Strong lighting environment could possibly cause malfunction. Light sealing structure casing is recommend.
17. LCD module reliability may be reduced by temperature shock.
18. When storing the LCD module, avoid exposure to the direct sunlight, high humidity, high temperature or low temperature. They may damage or degrade the LCD module