



深圳市拓普微科技开发有限公司
SHENZHEN TOPWAY TECHNOLOGY CO., LTD.

LM6060CBY-1

LCD Module User Manual

Prepared by: luolailiang Date: 2011-11-10	Checked by: Date:	Approved by: Date:
--	----------------------------------	-----------------------------------

Rev.	Descriptions	Release Date
0.1	Preliminary release	2011-11-10

Table of Content

1. Basic Specifications	3
1.1 Display Specifications	3
1.2 Mechanical Specifications	3
1.3 Block Diagram	3
1.4 Terminal Functions	4
1.5 Jumper Functions	4
2. Absolute Maximum Ratings	5
3. Electrical Characteristics	5
3.1 DC Characteristics	5
3.2 LED Backlight Circuit Characteristics	5
3.3 AC Characteristics	6
3.4 Reset Timing	6
4. Function specifications	7
4.1 Adjusting the Display Contrast	7
4.2 The Serial Interface	7
4.3 Basic Setting	7
4.4 Resetting the LCD module	7
4.5 Display Memory Map	8
4.6 Display Commands	9
4.7 Display Commands (continue)	10
4.8 Basic Operating Sequence (example)	11
5. Design and Handling Precaution	12

1. Basic Specifications

1.1 Display Specifications

- 1) LCD Display Mode : STN-YG, Positive, Transflective
- 2) Display Color : Display Data = "1" : Deep Blue(*1)
: Display Data = "0" : Light Yellow Green (*2)
- 3) Viewing Angle : 6H
- 4) Driving Method : 1/65 duty, 1/9 bias
- 5) Backlight : Yellow Green LED backlight

Note:

*1. Color tone may slightly change by Temperature and Driving Condition.


*2. The Color is defined as the inactive / background color

*3. Fine Contrast adjustment function is necessary in the application design for optimal display result

1.2 Mechanical Specifications

- 1) Outline Dimension : 73.0 x 42.0 x 13.1MAX (mm)
(See attached Outline Drawing for details)

1.3 Block Diagram

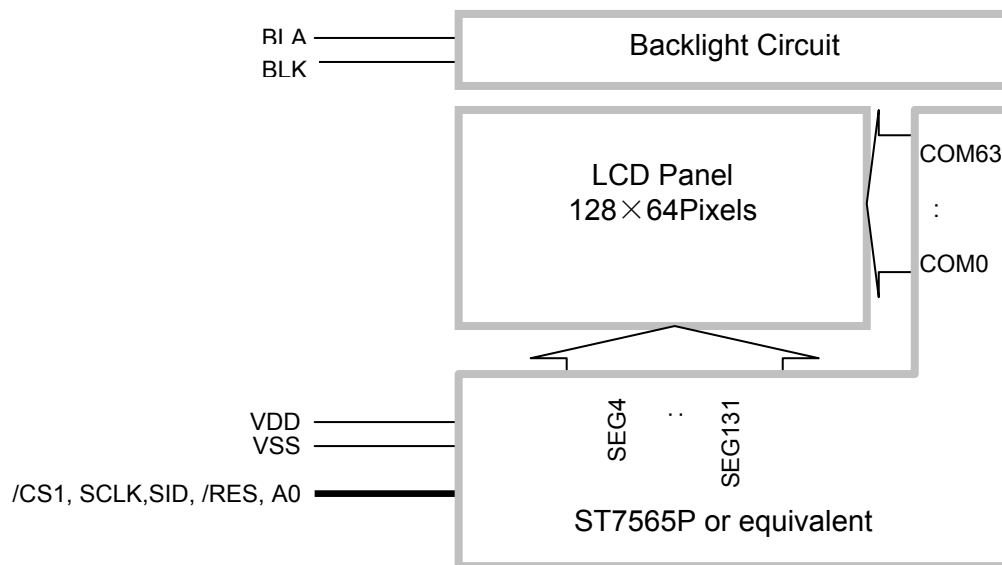

1.4 Terminal Functions

PIN NO	PIN Name	I/O	Descriptions
			Serial mode
1	/CS1	Input	Chip Select /CS1=L, enable access to the LCD module /CS1=H, disable access to the LCD module
2	/RES	Input	Reset signal /RES = L, Initialization is executed /RES = H, Normal running.
3	A0	Input	Register Select A0 = H, Transferring the Display Data A0 = L, Transferring the Control Data
4	NC	-	No connection,leave open
5	NC	-	No connection,leave open
6	NC	-	No connection,leave open
:	:	:	:
11	NC	-	No connection,leave open
12	SCLK	I/O	Serial clock input
13	SID	I/O	Serial data input
14	VDD	Supply	Positive power supply
15	VSS	Supply	Negative power supply,0V
16	BLA	Supply	Positive power for LED backlight
17	BLK	Supply	Negative power supply for LED backlight, 0V
18	NC	-	No connection

1.5 Jumper Functions

JP1	JP2	JP3	JP4	Interface Mode
CLOSE	OPEN	CLOSE	OPEN	6800 Mode
OPEN	CLOSE	CLOSE	OPEN	8080 Mode
OPEN	CLOSE	OPEN	CLOSE	Serial Mode(default)

2. Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit	Condition
Supply Voltage	V_{DD}	-0.3	+3.3	V	$V_{SS} = 0V$
Input Voltage	V_{IN}	-0.3	$V_{DD}+0.3$	V	$V_{SS} = 0V$
Operating Temperature	T_{OP}	-20	+70	°C	No Condensation
Storage Temperature	T_{ST}	-30	+80	°C	No Condensation

Cautions:

Any Stresses exceeding the Absolute Maximum Ratings may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

3. Electrical Characteristics

3.1 DC Characteristics


$V_{SS}=0V, V_{DD}=3.0V, T_{OP}=25^{\circ}C$

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition / Application Pin
Operating Voltage	V_{DD}	2.8	-	3.3	V	VDD
Input High Voltage	V_{IH}	$0.8 \times V_{DD}$	-	V_{DD}	V	/RES, /CS1, A0,
Input Low Voltage	V_{IL}	V_{SS}	-	$0.2 \times V_{DD}$	V	SCLK, SID
Operating Current	I_{DD}	-	0.3	2.5	mA	VDD

3.2 LED Backlight Circuit Characteristics


$V_{BLK}=0V, I_{f_{BLA}}=180mA, T_{OP}=25^{\circ}C$

Items	Symbol	MIN.	TYP.	MAX.	Unit	Applicable Pin
Forward Voltage	$V_{f_{BLA}}$	-	5.0	-	V	BLA
Forward Current	$I_{f_{BLA}}$	-	180	270	mA	BLA

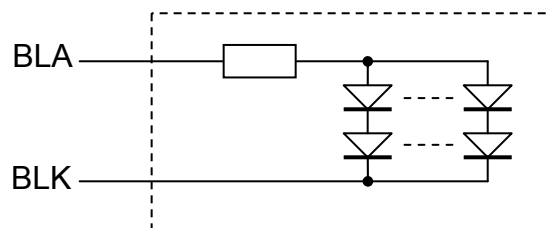

3.3 AC Characteristics

3.3.1 Serial Mode Interface

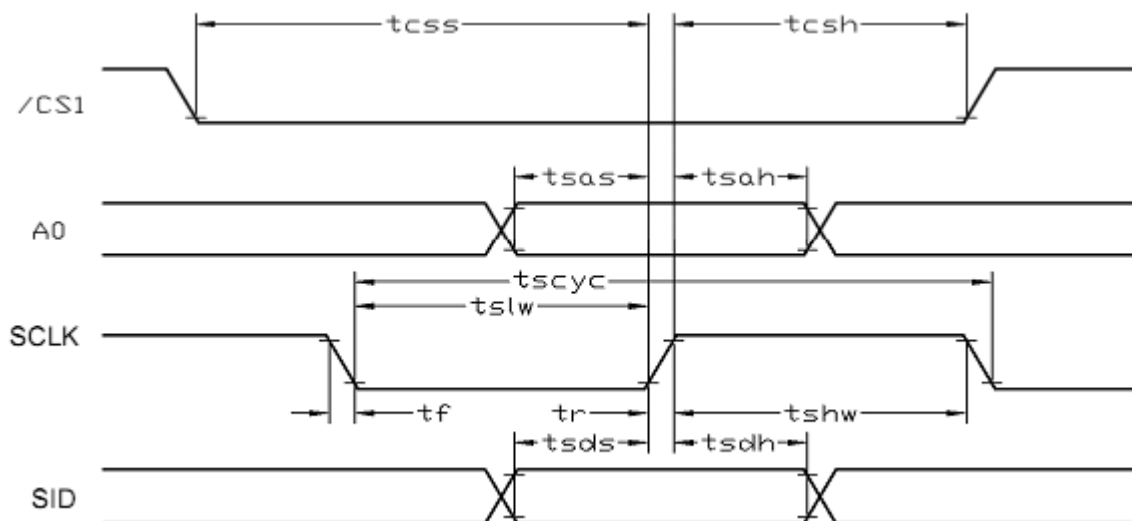

$V_{SS}=0V, V_{DD}=3.0V, T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Serial Clock Period	tscyc	125	-	-	ns
Address setup time (A0)	tsas	38	-	-	ns
Address hold time (A0)	tsah	25	-	-	ns
SCLK "H" pulse width	tshw	63	-	-	ns
SCLK "L" pulse width	tslw	63	-	-	ns
Data setup time	tsds	38	-	-	ns
Data hold time	tsdh	25	-	-	ns
/CS1-SCLK time	tcsh	75	-	-	ns
/CS1-SCLK time	tcsh	75	-	-	ns


Note:

*1. Input signal rise/fall time should be less than 15ns .

*2. CL=100pF

*3.All timing is using 20% and 80% of VDD as the reference.

3.4 Reset Timing

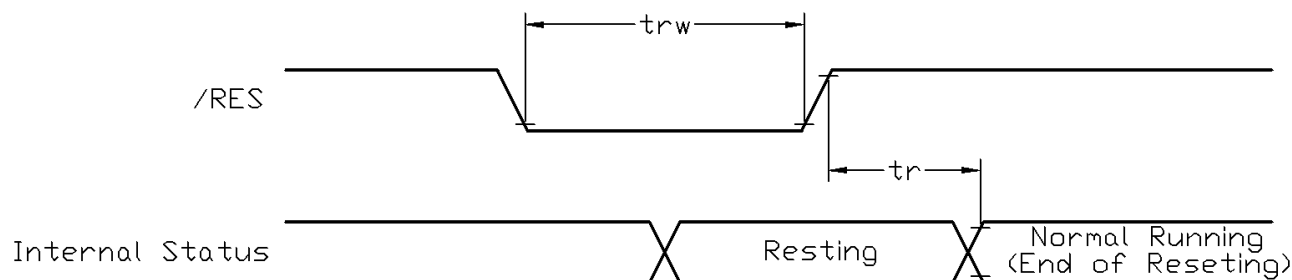

$V_{SS}=0V, V_{DD}=3.0V, T_{OP}=25^{\circ}C$

Item	Symbol	MIN.	TYP.	MAX.	Unit
Reset time	tr	-	-	2.5	μs
Reset LOW pulse width	trw	2.5	-	-	μs

Note:

*1.All timing is using 20% and 80% of VDD as the reference.


4. Function specifications

4.1 Adjusting the Display Contrast

- This LCD module equipped with latest digital contrast adjustment function.
- Its display contrast could be adjusted by MCU command. (please see the command tables for details)
- It is recommended to provide a contrast adjustment interface for end-user, where the best display result could meet the individual preference in mass production.

4.2 The Serial Interface

When the serial interface has been selected then when the chip is in active state the serial data input(SID) and the serial clock(SCLK) can be received. The serial data is read from the serial data input pin in the rising edge of the serial clock . When "A0"="H", the data is display data, and when "A0"="L", the data is command.

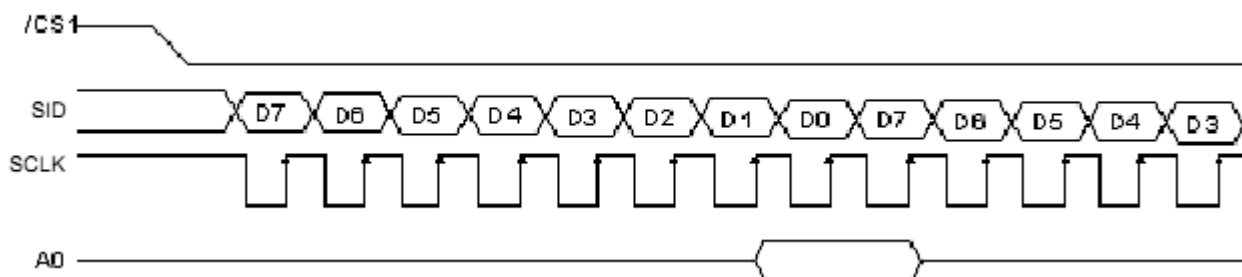

4.3 Basic Setting

To drive the LCD module correctly and provide normally display, please use the following setting

- ADC = 0 (normal)
- SHL select = 1 (reverse)
- LCD Bias Select = 1/9
- Initial Display Line = 0
- Entire Display ON/OFF = OFF (normal)
- Reverse Display ON/OFF = OFF (normal)
- Set Power Control Set:
 - voltage follower = ON, voltage converter = ON, voltage regulator = ON
- Booster Set = 4x
- Display ON/OFF = ON

Note:

*1. These setting/commands should issue the LCD module while start up.


*2. See the Display Commands section for details.

4.4 Resetting the LCD module

The LCD module should be initialized by using /RES terminal.

While turning on the VDD and VSS power supply, maintain /RES terminal at LOW level. After the power supply stabilized, release the reset terminal (/RES=HIGH)

4.5 Display Memory Map

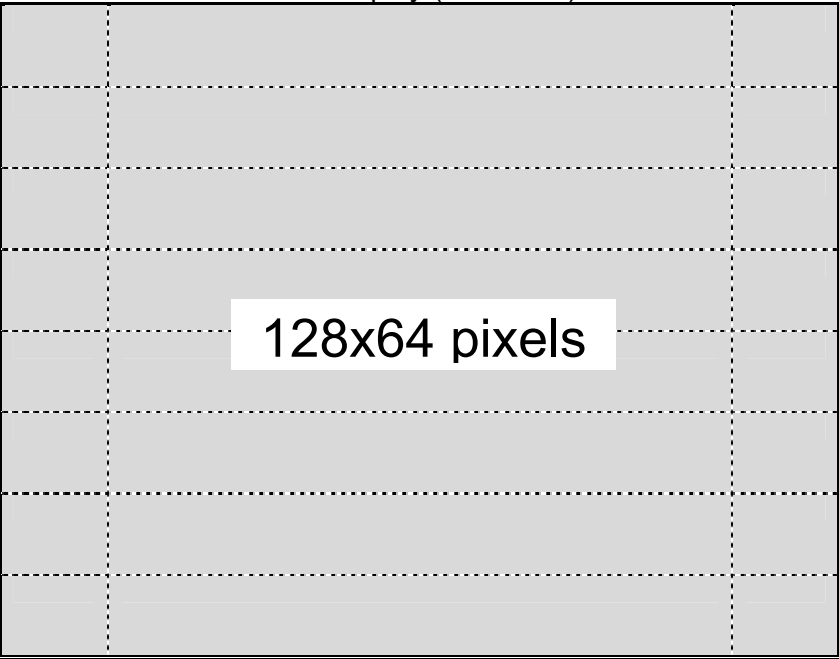Page address	data	LCD Display (front view)	
0	D0 : D7		
1	D0 : D7		
2	D0 : D7		
3	D0 : D7		
4	D0 : D7		
5	D0 : D7		
6	D0 : D7		
7	D0 : D7		
Column Address		00h	→ 7Fh

Note:

*1. ADC = 0 (normal)

*2. SHL Selection = 1 (reverse)

*3. Initial Display Line = 0

4.6 Display Commands

No.	Instructions	Code											Function		
		a0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1	D0			
1	Display ON/OFF	0	1	0	1	0	1	0	1	1	1	DON	DON=0, display off DON=1, display oin		
2	Display start line set	0	1	0	0	1	Display start address				Sets the display RAM display start line address				
3	Set Page Address	0	1	0	1	0	1	1	Page Address			Set the display RAM page address			
4	Set Column Address (Upper-4-bits)	0	1	0	0	0	0	1	Col. Add. Upper			Set the upper-4-bit of column address counter			
	Set Column Address (Lower-4-bits)	0	1	0	0	0	0	0	Col. Add. Lower			Set the lower-4-bit of column address counter			
5	Read Status	0	0	1	Status				0	0	0	0	Read the status data		
6	Write Display Data	1	1	0	Write Data							Write data into the display RAM			
7	Read Display Data	1	0	1	Read Data							Read data form the display RAM			
8	ADC Select	0	1	0	1	0	1	0	0	0	0	ADC	Sets the display RAM address SEG output correspondence ADC= 0,normal . ADC=1, reverse		
9	Normal/Reverse Display	0	1	0	1	0	1	0	0	1	1	REV	REV=0, Normal display REV=1, Reverse display		
10	Entire Display ON/OFF	0	1	0	1	0	1	0	0	1	0	EON	EON=0, Normal display EON=1, Entire display ON		
11	Set LCD Bias	0	1	0	1	0	1	0	0	0	1	BIAS	Set the LCD driving voltage bias BIAS=0, 1/9 BIAS BIAS=1, 1/7 BIAS		
12	Set Read-Modify-Write	0	1	0	1	1	1	0	0	0	0	0	Enter the “Read-Modify-Write” mode column address counter will increase in each “Write Display Data”, and will not increase in each “Read Display Data command”		
13	Reset Read-Modify-Write	0	1	0	1	1	1	0	1	1	1	0	Clear the “Read-Modify-Write” mode		
14	Reset	0	1	0	1	1	1	0	0	0	1	0	Resets the LCD module		
15	SHL Select	0	1	0	1	1	0	0	SHL	*	*	*	Set the COM scanning direction SHL=0, Normal display SHL=1, Flipped in y direction * = don't care terms		
16	Power Control Set	0	1	0	0	0	1	0	1	VC	VR	VF	Set the power circuit operation mode VF: LCD Supply Voltage Follower VR: LCD Supply Voltage Regulator VC: LCD Supply Voltage Converter (1=ON, 0=OFF)		
17	Regulator Resistor Select	0	1	0	0	0	1	0	0	Radio setting			Set the built-in resistor ratio (Rb/Ra)		

Note: *1. Do not use any other command not listed, or the system malfunction may result.
*2. For the details of the Display Commands, please refer to ST7565P data sheet.

4.7 Display Commands (continue)

No.	Instructions	Code										Function	
		A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1		D0
18	Electronic volume mode set	0	1	0	1	0	0	0	0	0	0	1	Set reference voltage mode
	Electronic volume register set	0	1	0	*	*	Electronic Control value				Set reference voltage register (Display contrast value)		
19	Booster Ratio Set	0	1	0	1	1	1	1	1	0	0	0	Select booster ratio
		0	1	0	0	0	0	0	0	0	step		00=2x,3x,4x; 01=5x. 11=6x
20	Power Save	-	-	-	-	-	-	-	-	-	-	-	Compound Instruction: Display OFF + Entire Display ON
21	NOP	0	1	0	1	1	1	0	0	0	1	1	Non-operation command

Note: *1. Do not use any other command not listed, or the system malfunction may result.

*2. For the details of the Display Commands, please refer to ST7565P data sheet.

4.7.1 Power off the LCD Module

It recommends that enter Power Save mode before power off the LCD module.

4.7.2 Refreshing The LCD Module

It recommends that the operating modes and display contents be refreshed periodically to prevent the effect of unexpected noise.

4.8 Basic Operating Sequence (example)

4.8.1 Initialization Sequence

Turn on Power Supply VDD & VSS While maintaining /RES at LOW	<table><tr><th colspan="10">Code Function</th><th rowspan="2">Note</th></tr><tr><th>A0</th><th>D7</th><th>D6</th><th>D5</th><th>D4</th><th>D3</th><th>D2</th><th>D1</th><th>D0</th><th>hex</th></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr></table>										Code Function										Note	A0	D7	D6	D5	D4	D3	D2	D1	D0	hex	-	-	-	-	-	-	-	-	-	-	-	-
Code Function										Note																																	
A0	D7	D6	D5	D4	D3	D2	D1	D0	hex																																		
-	-	-	-	-	-	-	-	-	-	-	-																																
↓	<table><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr></table>											-	-	-	-	-	-	-	-	-	-	-	-																				
-	-	-	-	-	-	-	-	-	-	-	-																																
↓	<table><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>See AC Characteristics section for timing details</td></tr></table>											-	-	-	-	-	-	-	-	-	-	-	See AC Characteristics section for timing details																				
-	-	-	-	-	-	-	-	-	-	-	See AC Characteristics section for timing details																																
↓	<table><tr><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>A2h</td><td>LCD panel Characteristic</td></tr></table>											0	1	0	1	0	0	0	1	0	A2h	LCD panel Characteristic																					
0	1	0	1	0	0	0	1	0	A2h	LCD panel Characteristic																																	
↓	<table><tr><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>A0h</td><td>No flip on x-direction (SEG)</td></tr></table>											0	1	0	1	0	0	0	0	0	A0h	No flip on x-direction (SEG)																					
0	1	0	1	0	0	0	0	0	A0h	No flip on x-direction (SEG)																																	
↓	<table><tr><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>C8h</td><td>Flip on y-direction (COM)</td></tr></table>											0	1	1	0	0	1	0	0	0	C8h	Flip on y-direction (COM)																					
0	1	1	0	0	1	0	0	0	C8h	Flip on y-direction (COM)																																	
↓	<table><tr><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>40h</td><td>i.e. Display RAM “page 0 - D0” Matched to top line of the LCD</td></tr></table>											0	0	1	0	0	0	0	0	0	40h	i.e. Display RAM “page 0 - D0” Matched to top line of the LCD																					
0	0	1	0	0	0	0	0	0	40h	i.e. Display RAM “page 0 - D0” Matched to top line of the LCD																																	
↓	<table><tr><td colspan="10">Power Control Voltage Follower = OFF Voltage Regulator = OFF Voltage Converter = ON</td><td rowspan="2">2Ch</td><td rowspan="2">Turn on the internal Voltage Converter and wait until VOUT stable.</td></tr><tr><td colspan="10">Delay 50ms</td></tr></table>											Power Control Voltage Follower = OFF Voltage Regulator = OFF Voltage Converter = ON										2Ch	Turn on the internal Voltage Converter and wait until VOUT stable.	Delay 50ms																			
Power Control Voltage Follower = OFF Voltage Regulator = OFF Voltage Converter = ON										2Ch	Turn on the internal Voltage Converter and wait until VOUT stable.																																
Delay 50ms																																											
↓	<table><tr><td colspan="10">Power Control Voltage Follower = OFF Voltage Regulator = ON Voltage Converter = ON</td><td rowspan="2">2Eh</td><td rowspan="2">Turn on the Internal Voltage Regulator and wait until VOUT stable.</td></tr><tr><td colspan="10">Delay 50ms</td></tr></table>											Power Control Voltage Follower = OFF Voltage Regulator = ON Voltage Converter = ON										2Eh	Turn on the Internal Voltage Regulator and wait until VOUT stable.	Delay 50ms																			
Power Control Voltage Follower = OFF Voltage Regulator = ON Voltage Converter = ON										2Eh	Turn on the Internal Voltage Regulator and wait until VOUT stable.																																
Delay 50ms																																											
↓	<table><tr><td colspan="10">Power Control Voltage Follower = ON Voltage Regulator = ON Voltage Converter = ON</td><td rowspan="2">2Fh</td><td rowspan="2">Turn on the internal Voltage Follower and wait until VOUT stable</td></tr><tr><td colspan="10">Delay 50ms</td></tr></table>											Power Control Voltage Follower = ON Voltage Regulator = ON Voltage Converter = ON										2Fh	Turn on the internal Voltage Follower and wait until VOUT stable	Delay 50ms																			
Power Control Voltage Follower = ON Voltage Regulator = ON Voltage Converter = ON										2Fh	Turn on the internal Voltage Follower and wait until VOUT stable																																
Delay 50ms																																											
↓	<table><tr><td colspan="10">Booster Ratio Set</td><td rowspan="2">F8h</td><td rowspan="2">4x step up selected</td></tr><tr><td colspan="10"></td><td>00h</td></tr></table>											Booster Ratio Set										F8h	4x step up selected											00h									
Booster Ratio Set										F8h	4x step up selected																																
												00h																															
↓	<table><tr><td colspan="10">Regulator Resistor Select</td><td rowspan="2">25h</td><td rowspan="2">Set the built-in resistor ratio to middle</td></tr><tr><td colspan="10"></td></tr></table>											Regulator Resistor Select										25h	Set the built-in resistor ratio to middle																				
Regulator Resistor Select										25h	Set the built-in resistor ratio to middle																																
↓	<table><tr><td colspan="10">Set Reference Voltage Mode</td><td rowspan="2">81h</td><td rowspan="2">Set to the middle of the range It may be adjusted for achieving the best display contrast</td></tr><tr><td colspan="10">Set Reference Voltage Resistor</td><td>20h</td></tr></table>											Set Reference Voltage Mode										81h	Set to the middle of the range It may be adjusted for achieving the best display contrast	Set Reference Voltage Resistor										20h									
Set Reference Voltage Mode										81h	Set to the middle of the range It may be adjusted for achieving the best display contrast																																
Set Reference Voltage Resistor												20h																															
↓	<table><tr><td colspan="10">Display ON</td><td>AFh</td><td>Turn on the LCD display</td></tr></table>											Display ON										AFh	Turn on the LCD display																				
Display ON										AFh	Turn on the LCD display																																
↓	<table><tr><td colspan="10">Set Page Address = 0</td><td>B0h</td><td>Specify the Display Data RAM page address to 00h</td></tr></table>											Set Page Address = 0										B0h	Specify the Display Data RAM page address to 00h																				
Set Page Address = 0										B0h	Specify the Display Data RAM page address to 00h																																
↓	<table><tr><td colspan="10">Set Column Address (Upper-4bit=0)</td><td rowspan="2">10h</td><td rowspan="2">Specify the Display Data RAM column address to 00h</td></tr><tr><td colspan="10">Set Column Address (Lower-4bit=4)</td><td>04h</td></tr></table>											Set Column Address (Upper-4bit=0)										10h	Specify the Display Data RAM column address to 00h	Set Column Address (Lower-4bit=4)										04h									
Set Column Address (Upper-4bit=0)										10h	Specify the Display Data RAM column address to 00h																																
Set Column Address (Lower-4bit=4)												04h																															
↓	<table><tr><td colspan="10">Write Display Data</td><td>1</td><td>Display Data</td><td>Write data to Display Data RAM.</td></tr></table>											Write Display Data										1	Display Data	Write data to Display Data RAM.																			
Write Display Data										1	Display Data	Write data to Display Data RAM.																															
↓	<table><tr><td colspan="10">Write Other Display Data ...</td><td></td><td></td></tr></table>											Write Other Display Data ...																															
Write Other Display Data ...																																											

5. Design and Handling Precaution

1. The LCD panel is made by glass. Any mechanical shock (eg. dropping from high place) will damage the LCD module.
2. Do not add excessive force on the surface of the display, which may cause the Display color change abnormally.
3. The polarizer on the LCD is easily get scratched. If possible, do not remove the LCD protective film until the last step of installation.
4. Never attempt to disassemble or rework the LCD module.
5. Only Clean the LCD with Isopropyl Alcohol or Ethyl Alcohol. Other solvents (eg. water) may damage the LCD.
6. When mounting the LCD module, make sure that it is free from twisting, warping and distortion.
7. Ensure to provide enough space (with cushion) between case and LCD panel to prevent external force adding on it, or it may cause damage to the LCD or degrade the display result.
8. Only hold the LCD module by its side. Never hold LCD module by add force on the heat seal or TAB.
9. Never add force to component of the LCD module. It may cause invisible damage or degrade of the reliability.
10. LCD module could be easily damaged by static electricity. Be careful to maintain an optimum anti-static work environment to protect the LCD module.
11. When peeling off the protective film from LCD, static charge may cause abnormal display pattern. It is normal and will resume to normal in a short while.
12. Take care and prevent get hurt by the LCD panel sharp edge.
13. Never operate the LCD module exceed the absolute maximum ratings.
14. Keep the signal line as short as possible to prevent noisy signal applying to LCD module.
15. Never apply signal to the LCD module without power supply.
16. IC chip (eg. TAB or COG) is sensitive to the light. Strong lighting environment could possibly cause malfunction. Light sealing structure casing is recommend.
17. LCD module reliability may be reduced by temperature shock.
18. When storing the LCD module, avoid exposure to the direct sunlight, high humidity, high temperature or low temperature. They may damage or degrade the LCD module