



深圳市拓普微科技开发有限公司
SHENZHEN TOPWAY TECHNOLOGY CO., LTD.

LMT121DNEFWD-1

LCD Module User Manual

| | | |
|--|----------------------------------|-----------------------------------|
| Prepared by: Chen Ji Date: 2014-09-17 | Checked by: Date: | Approved by: Date: |
|--|----------------------------------|-----------------------------------|

| Rev. | Descriptions | Release Date |
|------|--------------|--------------|
| 0.1 | Preliminary | 2014-09-17 |
| | | |
| | | |


Table of Content

| | |
|--|-----------|
| 1. General Specification | 3 |
| 2. Block Diagram..... | 3 |
| 3. Input/Output Terminals | 4 |
| 3.1 TFT Terminals..... | 4 |
| 3.2 BackLight Terminals..... | 4 |
| 4. Absolute Maximum Ratings..... | 5 |
| 5. Electrical Characteristics | 5 |
| 5.1 Driving TFT LCD Panel | 5 |
| 5.2 LED Backlight Circuit Characteristics | 5 |
| 5.3 Power supply voltage Sequence | 6 |
| 6. AC Characteristics..... | 7 |
| 6.1 Timing Characteristics..... | 7 |
| 6.2 Input signal timing chart | 7 |
| 7. Optical Characteristics..... | 8 |
| 8. Precautions of using LCD Modules | 10 |

1. General Specification

| | |
|-------------------------|---|
| Signal Interface : | LVDS |
| Display Technology : | a-Si TFT active matrix |
| Display Mode : | TN Type Full Color / Transmissive / Normal White |
| Screen Size : | 12.1 inch (Diagonal) |
| Outline Dimension : | 276.0x209.0x9.0 (mm) (see Outline DWG for details) |
| Active Area : | 246.0x184.5 (mm) |
| Number of dots : | 800x 3 (RGB) x 600 |
| Dot Pitch : | 0.3075x0.3075 (mm) |
| Pixel Configuration : | R.G.B. Vertical Stripe |
| Backlight : | White LED |
| Surface Treatment : | Anti-Glare |
| Viewing Direction : | 6 o'clock |
| Operating Temperature : | -20 ~ +70°C |
| Storage Temperature : | -30 ~ +80°C |

2. Block Diagram

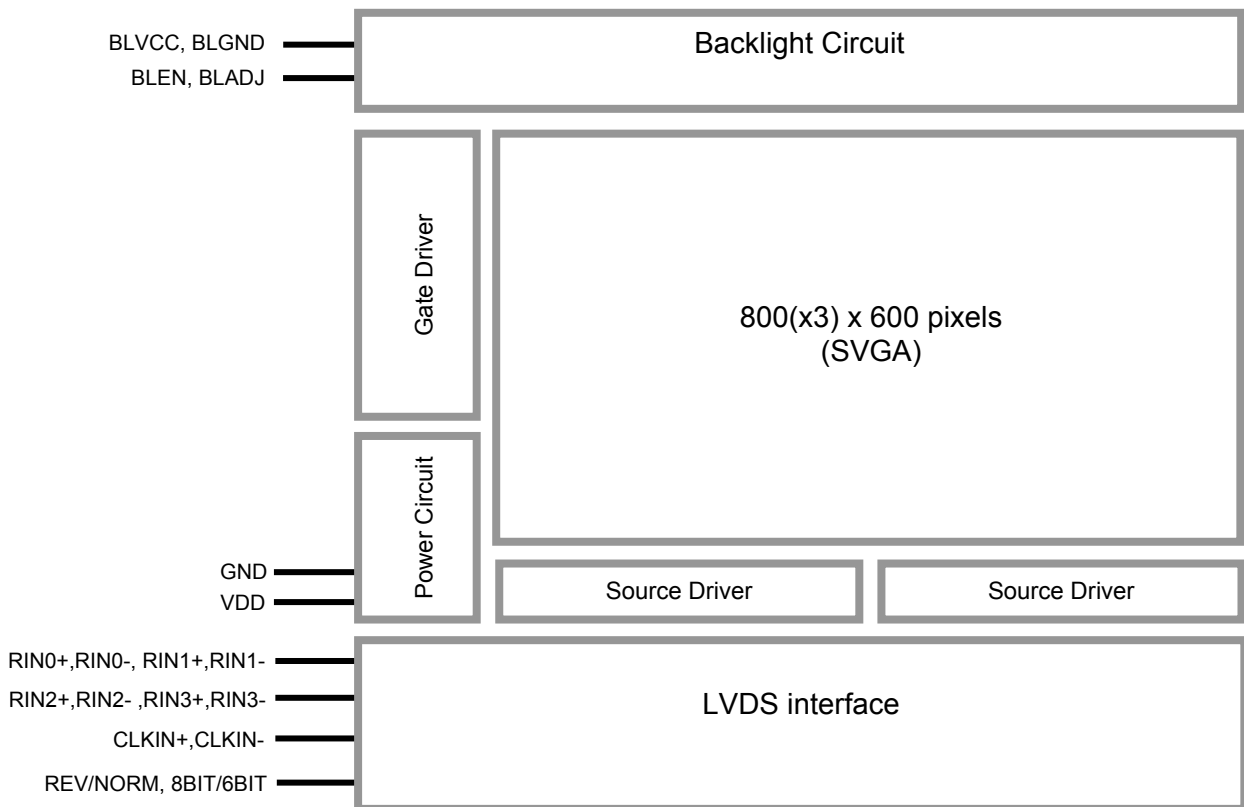

3. Input/Output Terminals

3.1 TFT Terminals

| Pin No. | Pin Name | IO | Descriptions | |
|---------|-----------|-------|---|--|
| | | | 24Bit Mode | 18Bit Mode |
| 1 | VDD | Power | Power Supply | |
| 2 | | | | |
| 3 | GND | Power | Ground | |
| 4 | 8BIT/6BIT | Input | H:8Bits LVDS Input (24bit mode) | L/NC: 6Bits LVDS Input (18bit mode) |
| 5 | RIN0- | Input | LVDS receiver negative signal channel 0 | |
| 6 | RIN0+ | Input | LVDS receiver positive signal channel 0 | |
| 7 | GND | Power | Ground | |
| 8 | RIN1- | Input | LVDS receiver negative signal channel 1 | |
| 9 | RIN1+ | Input | LVDS receiver positive signal channel 1 | |
| 10 | GND | Power | Ground | |
| 11 | RIN2- | Input | LVDS receiver negative signal channel 2 | |
| 12 | RIN2+ | Input | LVDS receiver positive signal channel 2 | |
| 13 | GND | Power | Ground | |
| 14 | CLKIN- | Input | LVDS receiver negative signal clock | |
| 15 | CLKIN+ | Input | LVDS receiver positive signal clock | |
| 16 | GND | Power | Ground | |
| 17 | RIN3- | Input | LVDS receiver negative signal channel 3 | No Connection |
| 18 | RIN3+ | Input | LVDS receiver positive signal channel 3 | No Connection |
| 19 | REV/NORM | Input | Display Reversed Function (H: Display Reverse; L/NC: Normal Display) | |
| 20 | GND | Power | Ground | |

3.2 BackLight Terminals

| Pin No. | Pin Name | IO | Descriptions |
|---------|----------|-------|---|
| 1 | BLVCC | Power | Positive Power Supply |
| 2 | BLGND | Power | Power Supply GND (0V) |
| 3 | BLEN | Input | Backlight Driver Control BLEN=Hi (5.0V) , Backlight Driving Booster enable BLEN=Lo, Backlight Driving Booster disable |
| 4 | BLADJ | Input | Backlight dimming control PWM may be used to adjust the output brightness |
| 5 | NC | - | - |


4. Absolute Maximum Ratings

GND=0V, T_{OP}=25°C

| Items | Symbol | Min. | Max. | Unit | Condition |
|-----------------------|-----------------|------|------|------|-----------------|
| Power Voltage | VDD | -0.3 | +5.0 | V | GND = 0V |
| Input voltage | V _{IN} | -0.3 | +3.3 | V | GND= 0V |
| Operating Temperature | T _{OP} | -20 | +70 | °C | No Condensation |
| Storage Temperature | T _{ST} | -30 | +80 | °C | No Condensation |

Note1: V_{IN} represent RIN0±,RIN1±,RIN2±,RIN3±,CLKIN±

Note2: Recommended Temperature/Humidity Graph as follow

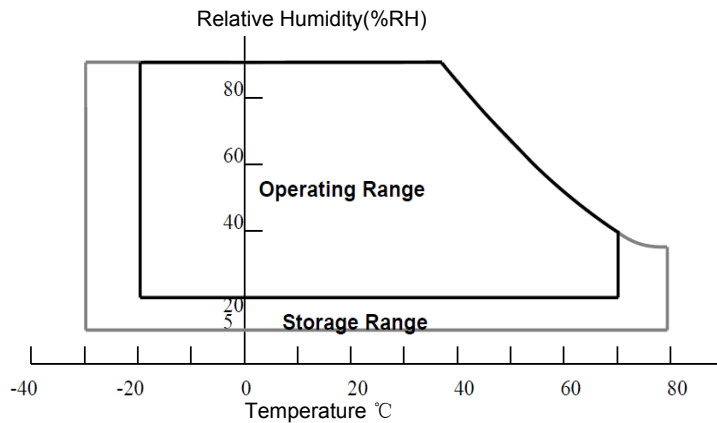

5. Electrical Characteristics

5.1 Driving TFT LCD Panel

GND=0V, VDD=3.3V, T_{OP}=25°C

| Items | Symbol | MIN. | TYP. | MAX. | Unit | Note |
|--|-------------------|------|------|------|------|---------------------------|
| Power supply voltage | VDD | 3.0 | 3.3 | 3.6 | V | *1 |
| Power supply current | IDD | - | - | 352 | mA | |
| Permissible ripple voltage | VRP | - | - | 100 | mV | |
| Differential input voltage | V _{id} | 250 | - | 450 | mV | |
| Differential input threshold voltage for LVDS receiver | V _T L | -100 | - | - | mV | V _{CM} =1.25V,*2 |
| | V _T H | - | - | 100 | mV | |
| Input voltage width for LVDS receiver | V _i | 0 | - | 2.4 | V | |
| Terminating resistor | R _T | - | 100 | - | Ω | |
| Rush current | I _{rush} | - | - | 1.5 | A | |

*1: All black pattern

*2: Common mode voltage for LVDS receiver


5.2 LED Backlight Circuit Characteristics

BLGND=0V ,T_{OP}=25°C

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit | Note |
|-----------------------------|---------------------------------|-------|------|------|------|-------------------------|
| Light bar operation current | I _F | - | 80 | - | mA | *1 |
| Light bar operation voltage | V _F | 25 | - | 33 | V | |
| Operating lifetime | H _r | 50000 | - | - | Hour | I _{LED} =80 mA |
| PWM Input Threshold Voltage | V _P W _M H | 1.2 | - | - | V | |
| | V _P W _M L | - | - | 0.4 | V | |
| PWM Input Frequency | 1/T _P W _M | 100 | 200 | 10K | Hz | |

*1: Backlight construction 2x10 LEDs

5.3 Power supply voltage Sequence

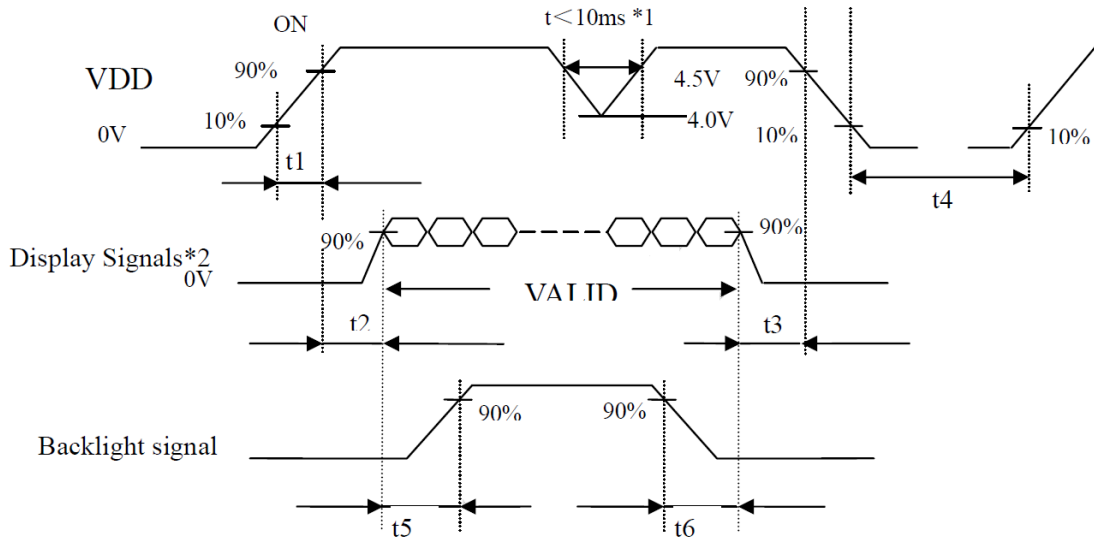

Timing : $0.47ms < t_1 < 10ms$; $0.5 ms < t_2 < 50ms$; $0ms < t_3 < 50ms$; $t_4 > 1000ms$; $t_5 > 200ms$; $t_6 > 200ms$;

*1. When VDD is on, but the value is lower than 4.5V, a protection circuit may work, then the module may not display.

*2 The signal line is not connected with the module, at the end of cable the terminal resistor of 100Ω should be added.

Note1: Display signals (D0+/-, D1+/-, D2+/-, D3+/- and CK+/-) must be “0” voltage, exclude the VALID period (See above sequence diagram). If these signals are higher than 0.3 V, the internal circuit is damaged. If some of display signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If customer stops the display signals, they should cut VDD.

Note2: When VDD is on, it should be set above 4.0V.

Note3: The backlight power supply voltage should be inputted within the valid period of display and function signals, in order to avoid unstable data display.

6. AC Characteristics


6.1 Timing Characteristics

| Parameter | | Symbol | min. | typ. | max. | Unit | Remarks |
|--------------------|----------------------|--------|---|-------|-------|------|-------------------|
| Clock | Frequency | 1/tc | 33.16 | 39.80 | 49.74 | MHz | LVDS |
| | | tc | 30.16 | 25.13 | 20.10 | ns | transmitter input |
| | Rise time, Fall time | - | Refer to the timing characteristics of LVDS transmitter | | | ns | * 1 |
| | Duty | - | | | | - | |
| Horizontal signals | Cycle | th | 14.8 | 18.0 | 26.5 | μs | 55.5kHz(typ.) |
| | | | 920 | 1056 | 1240 | CLK | |
| | Display period | thd | 800 | | | CLK | - |
| Vertical signals | Cycle | tv | 13.3 | 16.67 | 20 | ms | 60.0Hz(typ.) |
| | | | 608 | 628 | 650 | H | |
| | Display period | tvd | 600 | | | H | - |
| DE/Data | Setup time | - | Refer to the timing characteristics of LVDS transmitter | | | ns | * 1 |
| | Hold time | - | | | | ns | |
| | Rise time, Fall time | - | | | | ns | |


*1: See the data sheet of LVDS transmitter.

6.2 Input signal timing chart

Horizontal timing

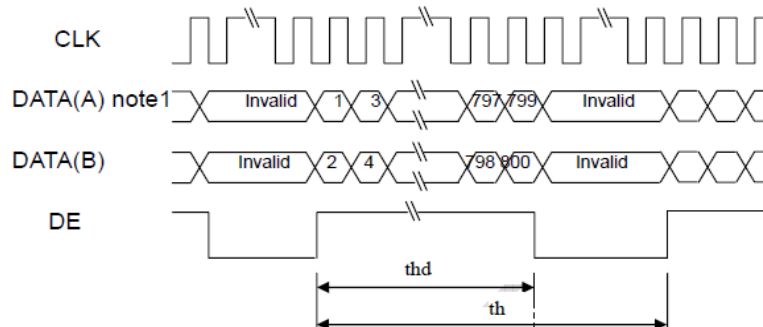

Vertical timing

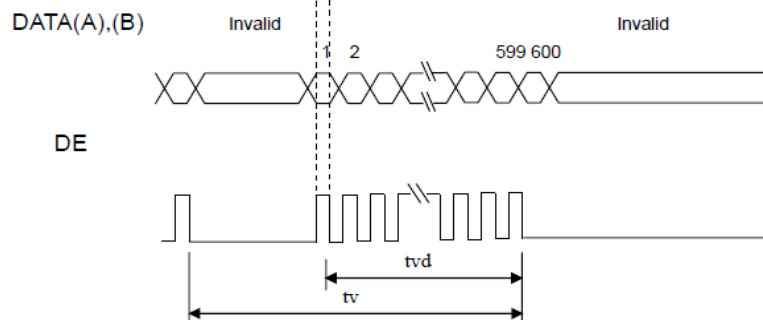

Note 1:

DATA(A)=RA0-RA7,GA0-GA7,BA0-BA7
 DATA(B)=RB0-RB7,GB0-GB7,BB0-BB7

7. Optical Characteristics

| Parameter *1 | | Condition | Symbol | min. | typ. | max. | Unit | Remarks |
|----------------------|-------|---|------------|------|-------|--------|-------------------|---------|
| Luminance | | White at center $\theta R=0^\circ, \theta L=0^\circ$ $\theta U=0^\circ, \theta D=0^\circ$ | L | - | 450 | - | cd/m ² | - |
| Contrast ratio | | White/Black at center $\theta R=0^\circ, \theta L=0^\circ$ $\theta U=0^\circ, \theta D=0^\circ$ | CR | - | 700 | - | - | Note3 |
| Luminance uniformity | | White $\theta R=0^\circ, \theta L=0^\circ$ $\theta U=0^\circ, \theta D=0$ | LU | - | 1.25 | (1.33) | - | Note6 |
| Chromaticity | White | X coordinate | Wx | | 0.313 | | - | Note5 |
| | | Y coordinate | Wy | | 0.329 | | - | |
| | Red | X coordinate | Rx | - | TBD | - | - | |
| | | Y coordinate | Ry | - | TBD | - | - | |
| | Green | X coordinate | Gx | - | TBD | - | - | |
| | | Y coordinate | Gy | - | TBD | - | - | |
| | Blue | X coordinate | Bx | - | TBD | - | - | |
| | | Y coordinate | By | - | TBD | - | - | |
| Color gamut | | $\theta L=0, \theta D=0$ At center,against NTSC | C | - | 55 | - | % | |
| Response time | | White to black | Ton | - | 10 | (20) | ms | Note4 |
| | | Black to white | Toff | - | 25 | (30) | ms | |
| | | Ton+ Toff | - | - | 35 | (50) | ms | |
| Viewing angle | Right | $\theta U=0^\circ, \theta D=0^\circ, CR \geq 10$ | θR | - | 80 | - | . | Note2 |
| | Left | $\theta U=0^\circ, \theta D=0^\circ, CR \geq 10$ | θL | - | 80 | - | . | |
| | Up | $\theta R=0^\circ, \theta L=0^\circ, CR \geq 10$ | θU | - | 65 | - | . | |
| | Down | $\theta R=0^\circ, \theta L=0^\circ, CR \geq 10$ | θD | - | 75 | - | . | |

Note:


*1. The value above are initial Characteristics.

Note 1:
The data are measured after LEDs are turned on for 5 minutes. LCM displays full white. The brightness is the average value of 9 measured spots. Measurement equipment SR-3A (1°)

Measuring condition:

- Measuring surroundings: Dark room
- Measuring temperature: Ta=25°C.
- Adjust operating voltage to get optimum contrast at the center of the display.

Note 2:
The definition of viewing angle:
Refer to the graph below marked by θ and ϕ

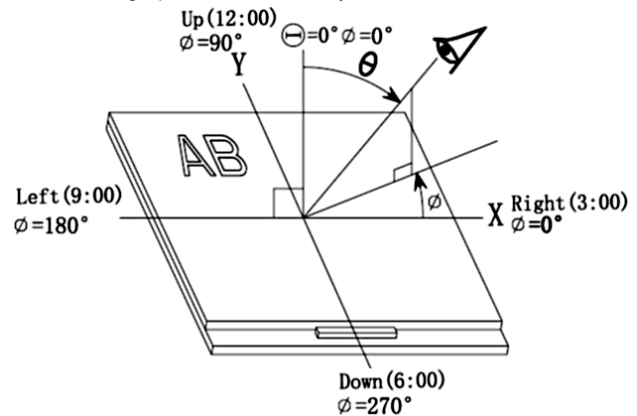


Note 3:
The definition of contrast ratio (Test LCM using SR-3A (1°)):

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance When LCD is at "White" state}}{\text{Luminance When LCD is at "Black" state}}$$

(Contrast Ratio is measured in optimum common electrode voltage)

Note 4:
Definition of Response time. (Test LCD using BM-7A(2°)):


The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

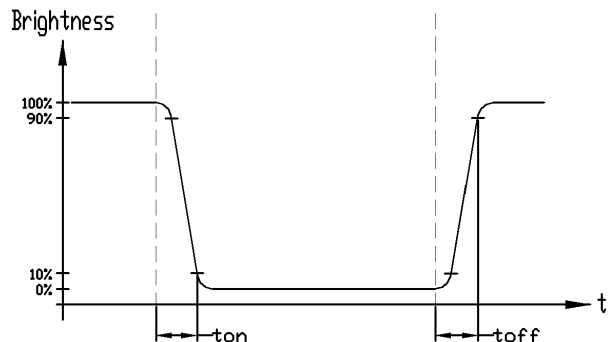

Note 5:
Definition of Color of CIE1931 Coordinate and NTSC Ratio.

Color gamut:


$$S = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}} \times 100\%$$

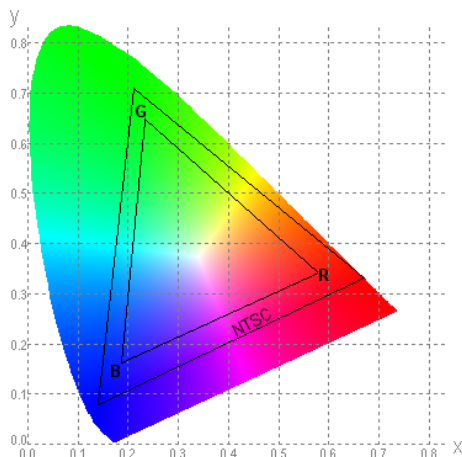

Note 6:
The luminance uniformity is calculated by using following formula.

$$\Delta B_p = B_p (\text{Min.}) / B_p (\text{Max.}) \times 100 (\%)$$

$B_p (\text{Max.})$ = Maximum brightness in 9 measured spots
 $B_p (\text{Min.})$ = Minimum brightness in 9 measured spots.

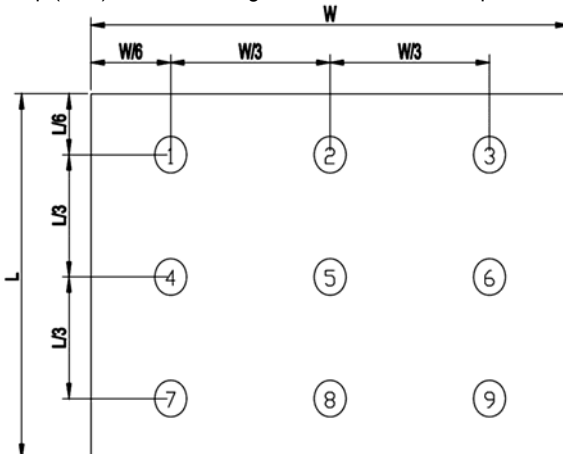

Note 7:
Measured the luminance of white state at center point

8. Precautions of using LCD Modules

Mounting

- Mounting must use holes arranged in four corners or four sides.
- The mounting structure so provide even force on to LCD module. Uneven force (ex. Twisted stress) should not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- It is suggested to attach a transparent protective plate to the surface in order to protect the polarizer. It should have sufficient strength in order to the resist external force.
- The housing should adopt radiation structure to satisfy the temperature specification.
- Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. Never rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics deteriorate the polarizer.)
- When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer

Operating

- The spike noise causes the mis-operation of circuits. It should be within the $\pm 200\text{mV}$ level (Over and under shoot voltage)
- Response time depends on the temperature.(In lower temperature, it becomes longer.)
- Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- When fixed patterns are displayed for a long time, remnant image is likely to occur.
- Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference

Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

Storage

When storing modules as spares for a long time, the following precautions are necessary.

- Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

Protection Film

- When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer. Please carefully peel off the protection film without rubbing it against the polarizer.
- When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Transportation

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.