

MOTOROLA

SEMICONDUCTOR
TECHNICAL DATA

ADVANCE INFORMATION

DUAL LOW POWER
OPERATIONAL AMPLIFIER

These dual operational amplifiers feature 1) low power drain, 2) a common mode input voltage range extending to ground/VEE, 3) Single Supply or Split Supply operation and 4) pin outs compatible with the popular MC1558 dual operational amplifier. The LMT358 series are equivalent to one-half of an LMT324.

These amplifiers have several distinct advantages over standard operational amplifier types in single supply applications. They can operate at supply voltages as low as 3.0 Vdts or as high as 32 Volts with quiescent currents about one-fifth of those associated with the MC1741 (on a per amplifier basis). The common mode input range includes the negative supply, thereby eliminating the necessity for external biasing components in many applications. The output voltage range also includes the negative power supply voltage.

- Short Circuit Protected Outputs
- True Differential Input Stage
- Single Supply Operation: 3.0 to 32 Volts
- Low Input Bias Currents
- Internally Compensated
- Common Mode Range Extends to Negative Supply
- Single and Split Supply Operation
- Similar Performance to the MC1558

MAXIMUM RATINGS (TA = 25°C Unless otherwise noted)

Rating	Symbol	LMT358	LMT2904	Unit
Power Supply Voltages Single Supply Split Supplies	V_{CC} $V_{CC} - V_{EE}$	32 ±16	26 ±13	Vdc
Input Differential Voltage Range	V_{IDR}	±32	±26	Vdc
Input Common Mode Voltage Range	V_{ICR}	0.3 to 32	-0.3 to 26	Vdc
Output Short Circuit Duration	t_S	Continuous	Continuous	Sec
Junction Temperature	T_J	150	150	°C
Storage Temperature Range	T_{STG}	-55 to +125	-55 to +125	°C
Ambient Operating Temperature Range	T_A	0 to +70	-40 to +105	°C

CAUTION: These devices do not have internal ESD protection circuitry and are rated as CLASS 1 devices per the ESD test method in Mil-Std-883D. They should be handled using standard ESD prevention methods to avoid damage to the device.

LMT358, LMT2904

DUAL
DIFFERENTIAL INPUT
OPERATIONAL AMPLIFIERS


SILICON MONOLITHIC
INTEGRATED CIRCUIT



N SUFFIX
PLASTIC PACKAGE
CASE 626



D SUFFIX
PLASTIC PACKAGE
CASE 751-02
SO-8

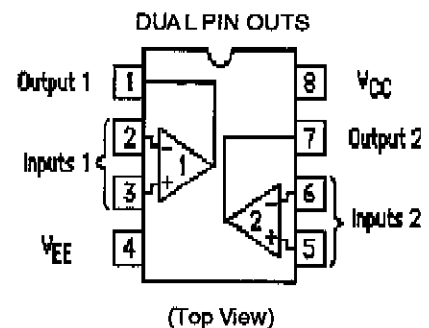

ORDERING INFORMATION

Device	Package	Temperature Range
LMT358N LMT358D	8 Pin Plastic DIP SO-8	0°C to 70°C
LMT2904N LMT2904D	8 Pin Plastic DIP SO-8	-40°C to 105°C

Mac Rev 3.0

ELECTRICAL CHARACTERISTICS ($V_{CC} = +5.0V$, $V_{EE} = \text{Ground}$, $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	LMT358			LMT2904			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage $V_{CC} = 5.0\text{ V to }30.0\text{ V}$, $V_{ICR} = 0\text{ V to }V_{CC} - 1.7\text{ V}$, $V_O = 1.4\text{ V}$, $R_S = 0\ \Omega$ $T_A = +25^\circ\text{C}$ $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$ (Note 1)	V_{IO}	—	2.0	7.0	—	2.0	7.0	mV
Average Temperature Coefficient of Input Offset Voltage, $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	$\Delta V_{IO}/\Delta T$	—	7.0	—	—	7.0	—	$\mu\text{V}/^\circ\text{C}$
Input Offset Current $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$ (Note 1)	I_{IO}	—	5.0	50	—	5.0	50	nA
Average Temperature Coefficient of Input Offset Current, $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	$\Delta I_{IO}/\Delta T$	—	10	—	—	10	—	$\text{pA}/^\circ\text{C}$
Input Bias Current $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	I_{IB}	—	-45	-250	—	-45	-250	nA
Input Common-Mode Voltage range (Note 2) $V_{CC} = 30\text{ V}$, $T_A = +25^\circ\text{C}$ $V_{CC} = 30\text{ V}$, $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	V_{ICR}	0	—	28.3	0	—	24.3	V
Differential Input Voltage Range	V_{IDR}	—	—	V_{CC}	—	—	V_{CC}	V
Large Signal Open-Loop Voltage Gain $R_L = 2.0\text{ k}\Omega$, $V_{CC} = 15\text{ V}$, For Large V_O Swing, $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	A_{VOL}	25	100	—	25	100	—	V/mV
Channel Separation 1.0 kHz $\leq f \leq 20\text{ kHz}$, Input Referenced	CS	—	-120	—	—	-120	—	dB
Common-Mode Rejection Ratio $R_S \leq 10\text{ k}\Omega$	CMRR	65	85	—	50	85	—	dB
Power Supply Rejection Ratio	PSRR	65	100	—	50	100	—	dB
Output Voltage Range $R_L = 2.0\text{ k}\Omega$	V_{OR}	0	—	3.3	0	—	3.3	V
Output Voltage - High Limit ($T_A = T_{\text{high}} \text{ to } T_{\text{low}}$) $V_{CC} = 30\text{ V}$, $R_L = 2.0\text{ k}\Omega$ $V_{CC} = 30\text{ V}$, $R_L = 10\text{ k}\Omega$	V_{OH}	26	—	—	22	—	—	V
Output Voltage - Low Limit $V_{CC} = 5.0\text{ V}$, $R_L = 10\text{ k}\Omega$, $T_A = T_{\text{high}} \text{ to } T_{\text{low}}$	V_{OL}	—	5.0	20	—	5.0	20	mV
Output Source Current ($V_{ID} = +1.0\text{ V}$, $V_{CC} = 15\text{ V}$)	I_{O+}	20	40	—	20	40	—	mA
Output Sink Current $V_{ID} = -1.0\text{ V}$, $V_{CC} = 15\text{ V}$ $V_{ID} = -1.0\text{ V}$, $V_O = 200\text{ mV}$, $T_A = 25^\circ\text{C}$	I_{O-}	10	20	—	10	20	—	mA
Output Short Circuit to Ground (Note 3)	ISC	—	40	60	—	40	60	mA
Power Supply Current ($T_A = T_{\text{high}} \text{ to } T_{\text{low}}$) $V_{CC} = 30\text{ V}$, $V_O = 0\text{ V}$, $R_L = \infty$ $V_{CC} = 5.0\text{ V}$, $V_O = 0\text{ V}$, $R_L = \infty$	I_{CC}	—	1.5	3.0	—	1.5	3.0	mA
		—	0.7	1.2	—	0.7	1.2	

- NOTES: 1. $T_{\text{low}} = 0^\circ\text{C}$, $T_{\text{high}} = +70^\circ\text{C}$ for LMT358, $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +105^\circ\text{C}$ for LMT2904
2. The input common-mode (cm) voltage or either input signal voltage **should not** be allowed to go **NEG** by more than 0.3 V. The upper end of the cm voltage range is $V_{CC} - 1.7V$; either or both inputs can go to $+32V$ w/o damage.
3. Short circuits from the output to V_{CC} can cause excessive heating and eventual destruction. Destructive dissipation can result from simultaneous shorts on all amplifiers.

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola is a registered trademark of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

This data sheet contains preliminary information and design objectives. All specifications are subject to change without notice.