

High Ripple-Rejection Low Dropout CMOS Voltage Regulator

General Description

The LN1150 Series is a positive voltage regulator with a low dropout voltage, high output voltage accuracy, and low current consumption developed based on CMOS technology.

A built-in low on-resistance transistor provides a low dropout voltage and large output current, and a built-in overcurrent protector prevents the load current from exceeding the current capacitance of the output transistor. Small SOT-89-3 package realize high-density mounting..

Applications

- Power supply for DVD and CD-ROM drives
- Power supply for battery-powered devices
- Power supply for personal communication devices
- Power supply for note PCs

Features

- Output voltage: 1.5 V to 5.5 V, selectable in 0.1 V steps.
- High-accuracy output voltage: $\pm 2.0\%$
- Low dropout voltage: 150mV typ. (3.0V output product, $I_{OUT} = 100 \text{ mA}$)
- Low current consumption during operation: 60 μA (typ.), 120 μA (max.)
- High peak current capability: 500mA output is possible (at $V_{IN} \geq V_{OUT(S)} + 1.0 \text{ V}$)
- Built-in ON/OFF circuit: ensures long battery life.
- High ripple rejection: 60dB typ. (at 1.0 kHz)
- Built-in overcurrent protector: overcurrent of output transistor can be restricted.
- Small package: SOT-89-3

Package




- SOT-89-3

Ordering Information

LN1150P ①②③④⑤

Designator	Symbol	Description
① ②	Integer	Output Voltage: Eg: ①=3, ②=0 \Rightarrow 3.0V
③	2	Accuracy: $\pm 2\%$
④	R	SOT-89-3 (A type)
	P	SOT-89-3 (B type)
	Q	SOT-89-3 (C type)
⑤	R	Standard Feed
	L	Reverse Feed

Pin Configuration




Pin Assignment

Pin Number			Pin Name	Function
SOT-89-3(A)	SOT-89-3(B)	SOT-89-3(C)		
3	2	3	VIN	Power Supply
2	1	1	VSS	Ground
1	3	2	VOUT	Output Pin

Marking Rule

SOT-89-3



SOT-89-3L
(Top View)

① Represents the product name

Symbol	Product Name
T	LN1150P◆◆◆◆◆

② Represents the range of output voltage

Output Voltage Range (V)	0.1~3.0	3.1~6.0	6.1~9.0
Symbol	5	6	7


③ Represents the Output Voltage

Symbol	Output Voltage (V)			Symbol	Output Voltage (V)		
0	-	3.1	-	F	1.6	4.6	-
1	-	3.2	-	H	1.7	4.7	-
2	-	3.3	-	K	1.8	4.8	-
3	-	3.4	-	L	1.9	4.9	-
4	-	3.5	-	M	2	5.0	-
5	-	3.6	-	N	2.1	5.1	-
6	-	3.7	-	P	2.2	5.2	-
7	-	3.8	-	R	2.3	5.3	-
8	-	3.9	-	S	2.4	5.4	-
9	-	4	-	T	2.5	5.5	-
A	-	4.1	-	U	2.6	5.6	-
B	1.2	4.2	-	V	2.7	5.7	-
C	1.3	4.3	-	X	2.8	5.8	-
D	1.4	4.4	-	Y	2.9	5.9	-
E	1.5	4.5	-	Z	3	6.0	-

④ Represents the assembly lot no.

0~9, A~Z repeated (G, I, J, O, Q, W excepted)

■ Function Block Diagram

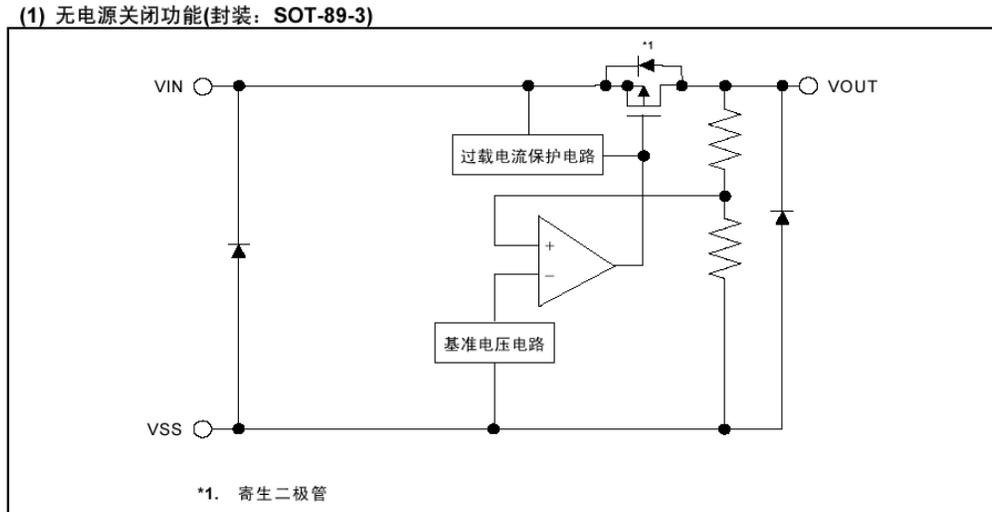


■ Absolute Maximum Ratings

Parameter	Symbol	Maximum Rating	Unit
Input Voltage	V_{IN}	$V_{SS}-0.3 \sim V_{SS}+6$	V
	$V_{ON/OFF}$	$V_{SS}-0.3 \sim V_{IN}+0.3$	
Output Current	V_{OUT}	$V_{SS}-0.3 \sim V_{IN}+0.3$	
Power Dissipation	P_D	SOT-89-3 500	mW
Operating Ambient Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+125	

Caution: The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

■ Typical Application Circuit

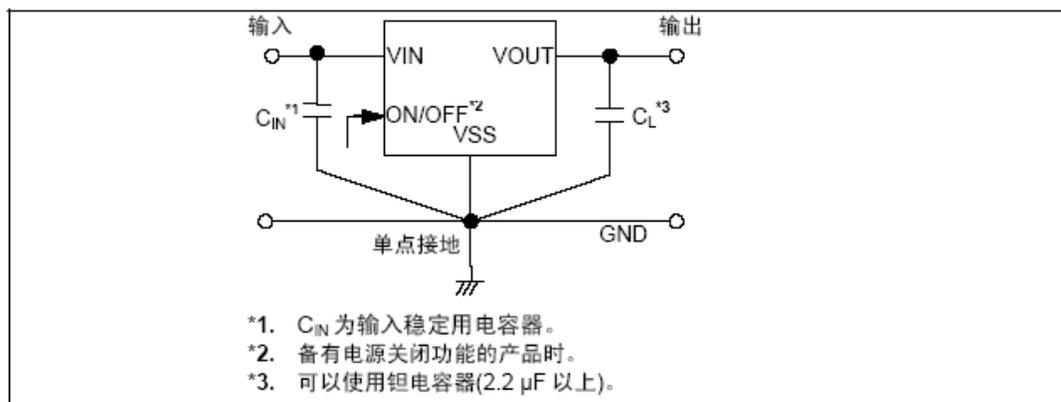


Caution: The above connection diagram and constant will not guarantee successful operation. Perform thorough evaluation using the actual application to set the constant.

Electrical Characteristics


Item	Symbol	Condition	Min	Typ	Max	Unit	Test circuit	
Output voltage	$V_{OUT(E)1}$	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}, I_{OUT} = 30 \text{ mA}$	$V_{OUT(S)} \times 0.98$	$V_{OUT(S)}$	$V_{OUT(S)} \times 1.02$	V	1	
	$V_{OUT(E)2}$	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}, I_{OUT} = 80 \text{ mA}$	$V_{OUT(S)} \times 0.97$	$V_{OUT(S)}$	$V_{OUT(S)} \times 1.03$	V		
Output current ^{*2}	I_{OUT}	$V_{IN} \geq V_{OUT(S)} + 1.0 \text{ V}$	500 ^{*5}	—	—	mA	3	
Dropout voltage	V_{drop}	$I_{OUT} = 100 \text{ mA}$	$2.2 \text{ V} \leq V_{OUT(S)} \leq 2.5 \text{ V}$	—	0.20	0.30	V	1
			$2.6 \text{ V} \leq V_{OUT(S)} \leq 3.3 \text{ V}$	—	0.15	0.26		
			$3.4 \text{ V} \leq V_{OUT(S)} \leq 5.5 \text{ V}$	—	0.12	0.22		
Line regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{OUT(S)} + 0.5 \text{ V} \leq V_{IN} \leq 7 \text{ V}$ $I_{OUT} = 80 \text{ mA}$	—	0.05	0.2	%/V	1	
Load regulation	ΔV_{OUT2}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}$ $1.0 \text{ mA} \leq I_{OUT} \leq 80 \text{ mA}$	—	20	40	mV	1	
temperature coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}, I_{OUT} = 10 \text{ mA}$ $-40^\circ\text{C} \leq T_a \leq 85^\circ\text{C}$	—	± 100	—	ppm/°C	1	
Current consumption during operation	I_{SS1}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V},$	—	60	120	μA	2	
Input voltage	V_{IN}	—	2.0	—	6	V	—	
Ripple rejection	RR	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V}, f = 1.0 \text{ kHz}$ $V_{rip} = 0.5 \text{ V}_{rms}, I_{OUT} = 80 \text{ mA}$	—	60	—	dB	4	
Short-circuit current	I_{short}	$V_{IN} = V_{OUT(S)} + 1.0 \text{ V},$ ON/OFF pin ON, $V_{OUT} = 0 \text{ V}$	—	30	—	mA	3	

Test Circuits


Circuit 1

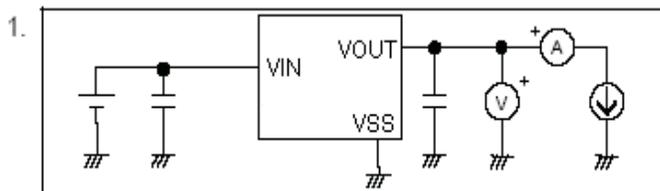


Circuit 2

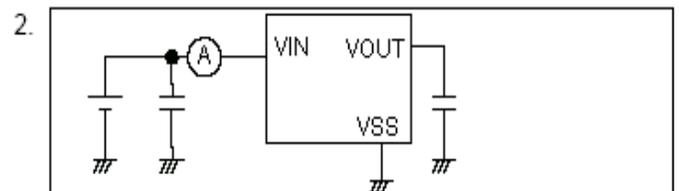

Circuit 3

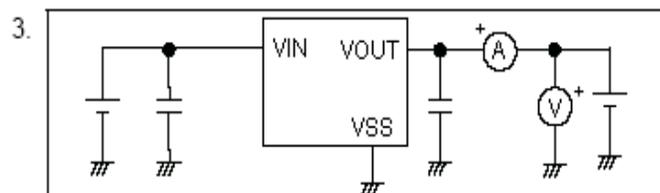


Circuit 4

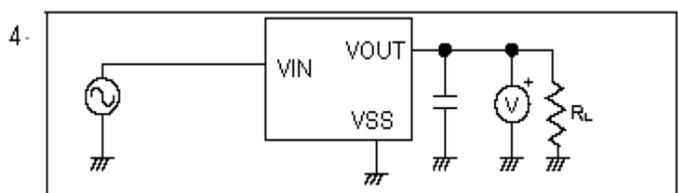


Typical Performance Characteristics

1. Output voltage vs. Output current (when load current increases)


LN1150 (1.5V)

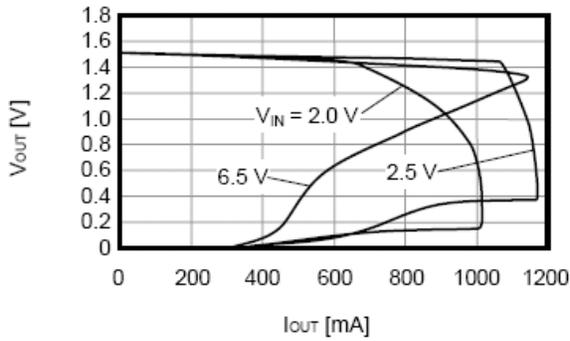

LN1150 (3.0V)

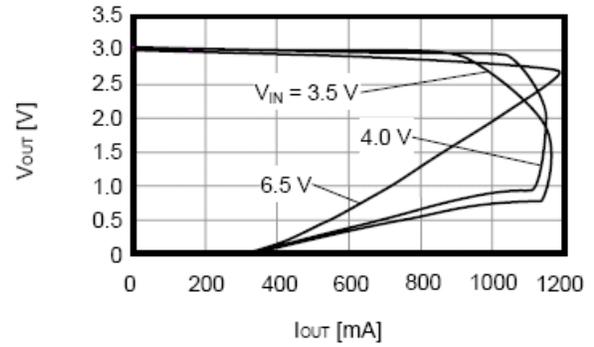


LN1150 (5.0V)

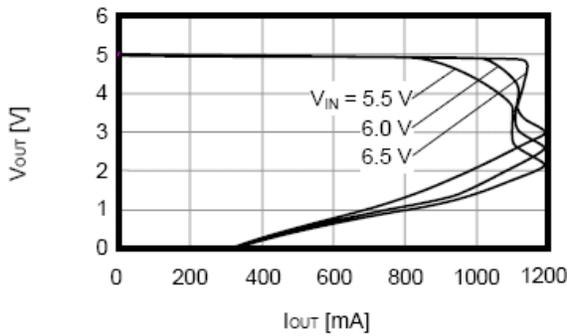


2. Output voltage vs. Input voltage


LN1150 (1.5V)

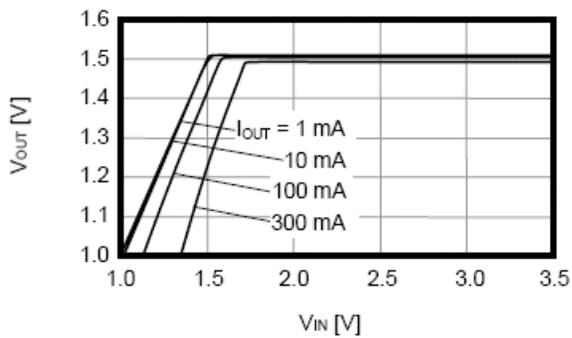

LN1150 (3.0V)

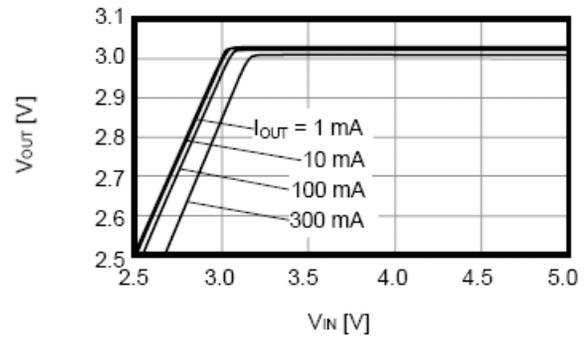


LN1150 (5.0V)

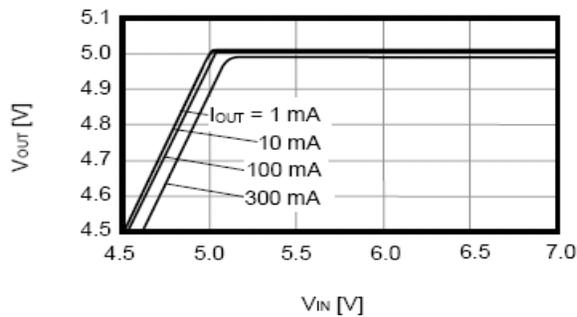


3、Dropout voltage vs. Output current


LN1150 (1.5V)

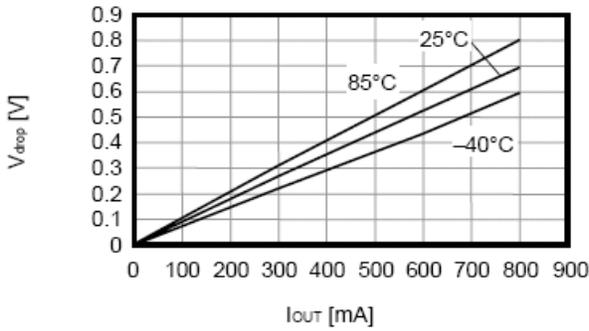


LN1150 (3.0V)

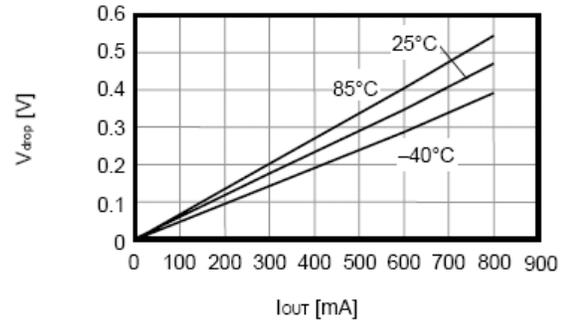

LN1150 (5.0V)

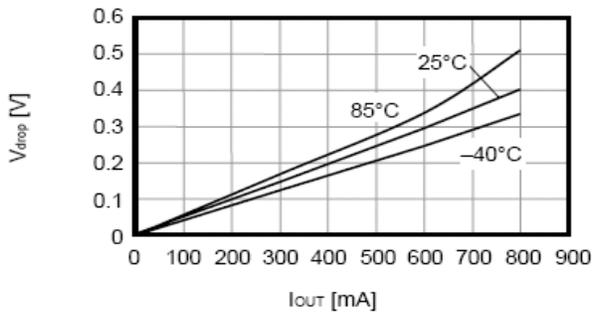


4、Dropout voltage vs. Set output voltage

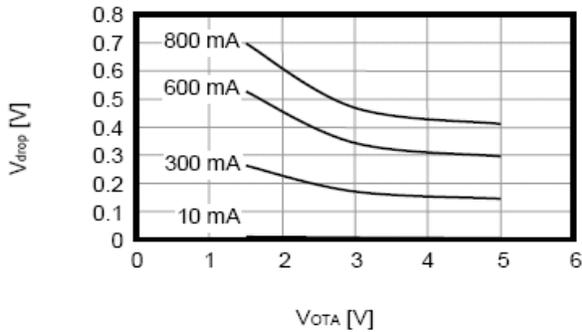


5、Output voltage vs. Ambient temperature


LN1150 (1.5V)

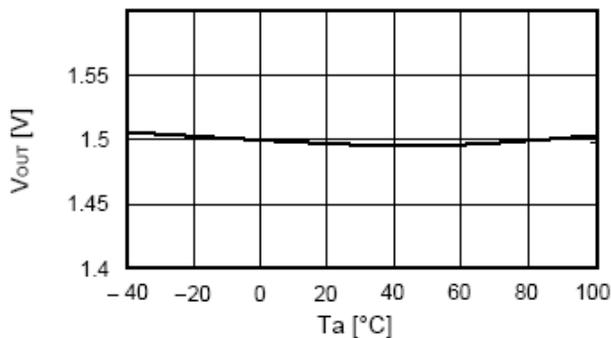

LN1150 (3.0V)

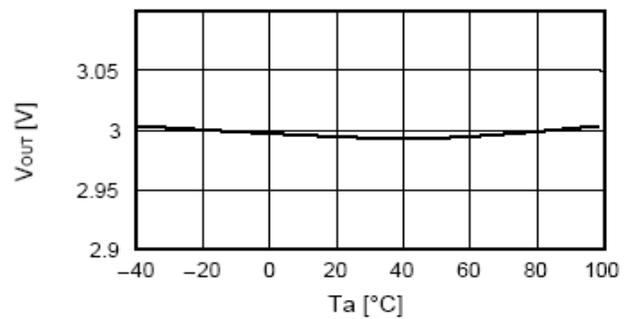


LN1150 (5.0V)

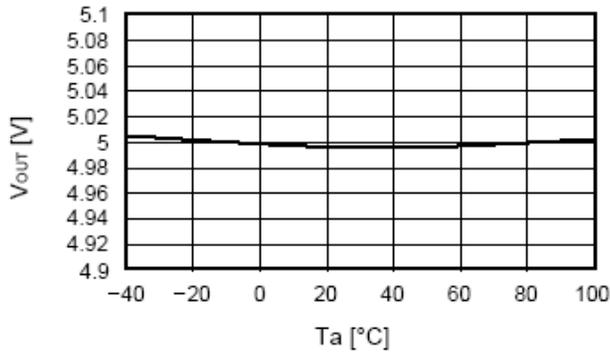

6. Ripple rejection


LN1150 (1.5V)

$V_{IN} = 2.5\text{ V}$, $C_{OUT} = 2.2\ \mu\text{F}$

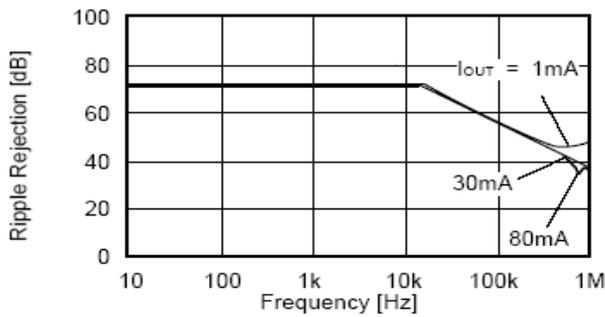


LN1150 (3.0V)

$V_{IN} = 4.0\text{ V}$, $C_{OUT} = 2.2\ \mu\text{F}$

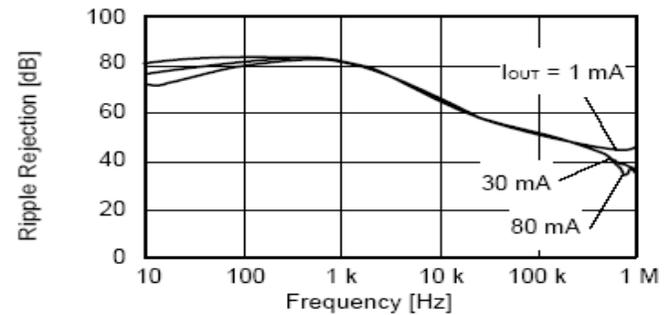

LN1150 (5.0V)


$V_{IN} = 6.0\text{ V}$, $C_{OUT} = 2.2\ \mu\text{F}$

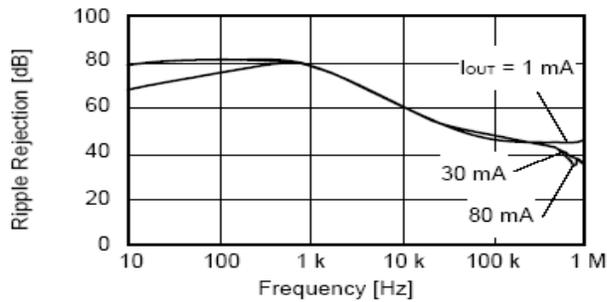

7. Transient response characteristics


Input transient response characteristics

$I_{OUT} = 80\text{ mA}$, $t_r = t_f = 5.0\ \mu\text{s}$, $C_{OUT} = 2.2\ \mu\text{F}$, $C_{IN} = 0\ \mu\text{F}$

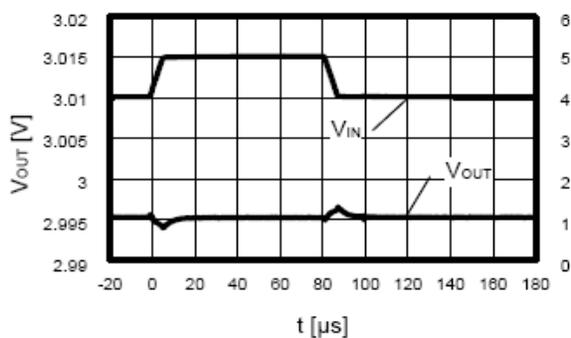


Load transient response characteristics

$V_{IN} = 4.0\text{ V}$, $C_{OUT} = 2.2\ \mu\text{F}$, $C_{IN} = 1.0\ \mu\text{F}$,
 $I_{OUT} = 50 \leftrightarrow 100\text{ mA}$

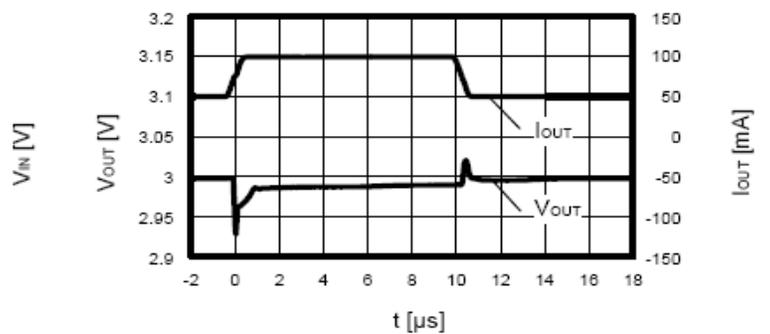

■ Package Information

- SOT-89-3L

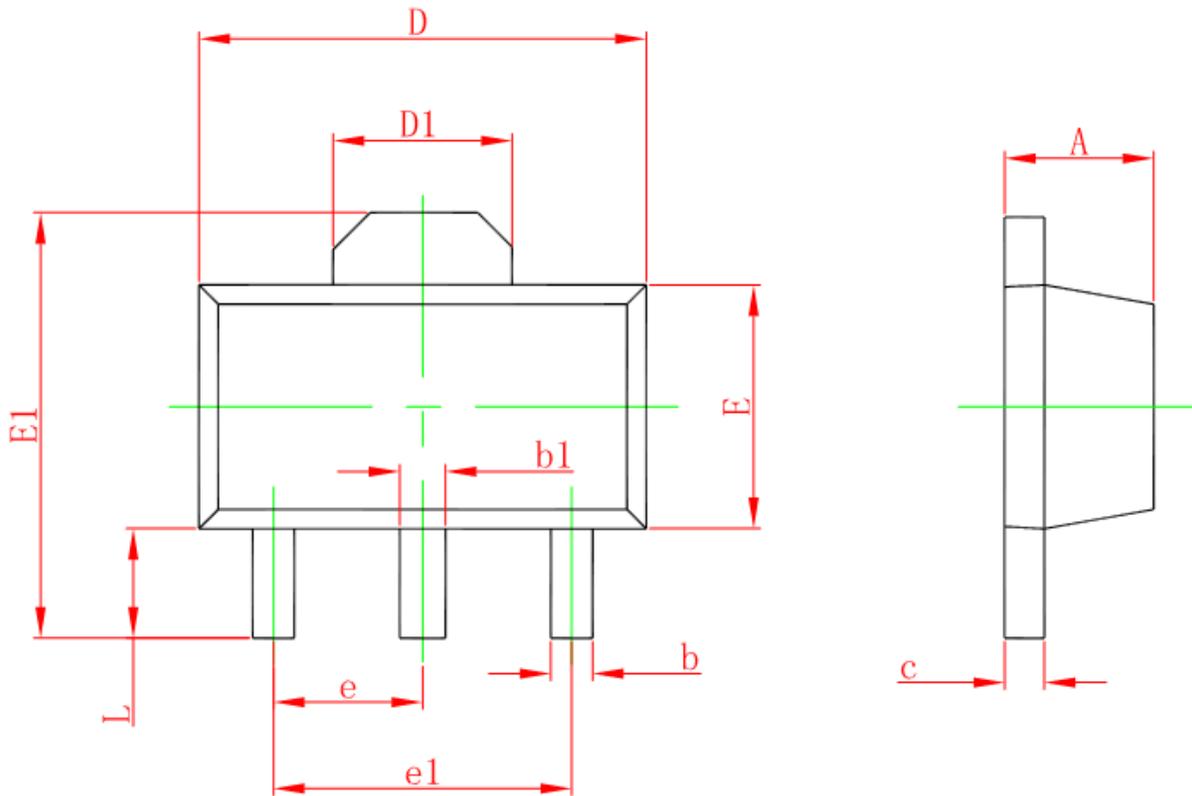

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047