

Dual 2.4W Audio Amplifier 3D Enhancement

General Description

The LN4888A is a dual bridge-connected audio power amplifier which, when connected to a 5V supply, will deliver 2.1W to a 4Ω load or 2.4W to a 3Ω load with less than 1.0% THD+N.

A user selectable "3D Enhancement" mode provides enhanced stereo imaging.

Boomer audio power amplifiers were designed specifically to provide high quality output power from a surface mount package while requiring few external components. To simplify audio system design, the LN4888A combines dual bridge speaker amplifiers and stereo headphone amplifiers on one chip.

The LN4888A features a low-power consumption shutdown mode and thermal shutdown protection. It also utilizes circuitry to reduce "clicks and pops" during device turn-on.

Applications

- Cell phones
- Multimedia monitors
- Portable and desktop computers
- Portable audio systems

Ordering Information

Ordering Number	Package Type
LN4888A	SOP-16/PP

Operating Ratings

Temperature Range

$T_{MIN} \leq T_A \leq T_{MAX}$ ----- $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$

Supply Voltage ----- $2.7\text{V} \leq V_{DD} \leq 5.5\text{V}$

Key Specifications

- Power Output @1% THD+N & VDD=5V
 $R_L=3\Omega$ 2.4W(TYP.)
 $R_L=4\Omega$ 2.1W(TYP.)
 $R_L=8\Omega$ 1.3W(TYP.)
- Single-ended mode THD+N@75mW into 32Ω (5V,1KHz) 0.01%(TYP.)
- Shutdown current 0.04μA(TYP.)
- Supply voltage range 2.7V~5.5V
- PSRR at $f_{IN}=217\text{Hz}$ 85dB(TYP.)


Features

- National 3D Enhancement
- Improved "click and pop" suppression circuitry
- Thermal shutdown protection circuitry
- PCB area-saving QFN package
- Micro power shutdown mode

Package


- SOP-16/PP

Pin Configuration

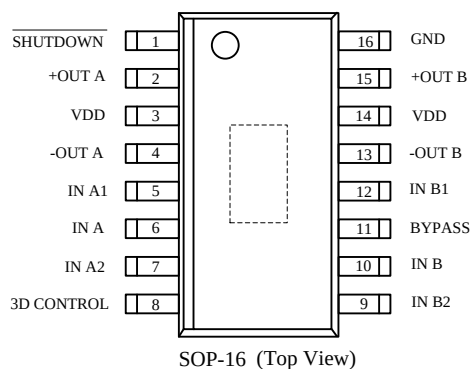

LN4888A
XXYY

Function Block Diagram

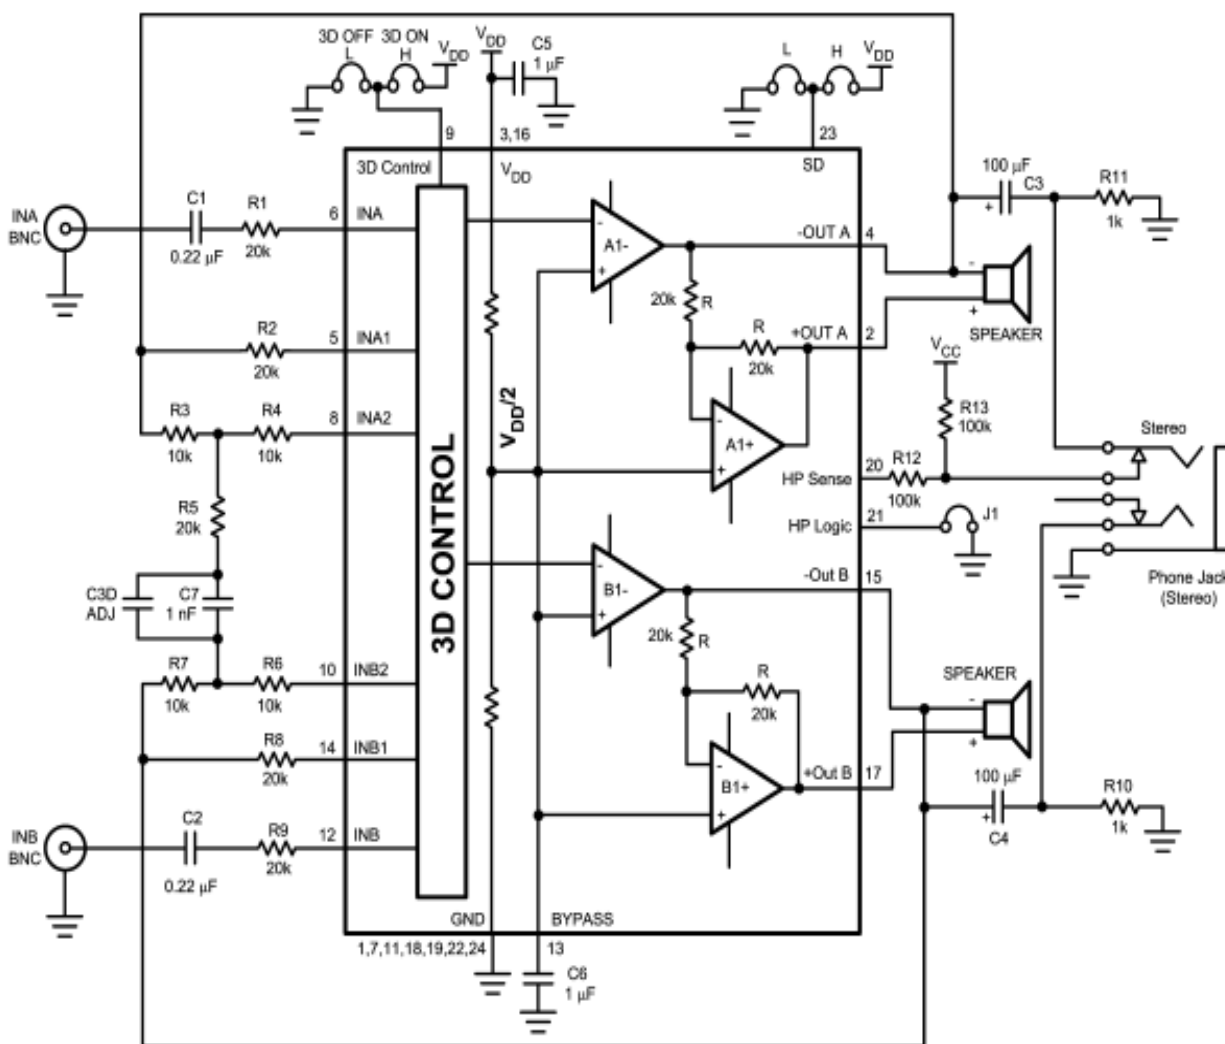

■ Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	V_{DD}	-0.3—6.0	V
Input Voltage	V_{IN}	-0.3— $V_{DD}+0.3$	V
Power Output	—	Internal limit	
Junction Temperature	—	-150	°C
Storage Temperature	T_{stg}	-65—150	°C
ESD Susceptibility	-	2000	V

■ Electrical Characteristics

(VDD = 5V Unless otherwise specified. Limits apply for TA = 25°C.)

Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Supply Voltage	—	2.7	—	5.5	V
I_{DD}	Quiescent Power Supply Current	$V_{IN} = 0V, I_o = 0A, \text{BTL Mode}$	—	6	10	mA
		$V_{IN} = 0V, I_o = 0A, \text{SE Mode}$	—	3	6	mA
I_{SD}	Shutdown Current	$V_{SHUTDOWN} = 0V$	—	0.04	2	μA
V_{IH}	Headphone Sense High Input Voltage	—	-	3.7	4.0	V
V_{IL}	Headphone Sense Low Input Voltage	—	0.8	2.6	-	V
V_{SDIH}	Shutdown, Headphone micro, 3D control High Input voltage	—	-	1.2	1.4	V
V_{SDIL}	Shutdown, Headphone micro, 3D control Low Input voltage	—	0.4	1	-	V
T_{WU}	Turn On Time	Bypass Cap CBP=1μF	—	140	—	ms

■ Electrical Characteristics For Bridged-Mode Operation

(VDD = 5V Unless otherwise specified. Limits apply for TA = 25°C.)

Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
V _{OS}	Output Offset Voltage	V _{IN} = 0V	—	5	25	mV
P _O	Output Power	THD+N = 1%; f = 1 kHz RL=3Ω	1.0	2.4	—	W
		RL=4Ω		2.1		
		RL=8Ω		1.3		
		THD+N = 10%; f = 1 kHz RL=3Ω	—	3.0	—	W
THD+N	Total Harmonic Distortion+Noise	RL=4Ω		2.5		
		RL=8Ω		1.7		
		AVD=2; f = 1kHz RL=4Ω, PO=1W	—	0.1	—	%
		RL=8Ω, PO=0.4W		0.06		
PSRR	Power Supply Rejection Ratio	Input unterminated, V _{ripple} = 200mV _{p-p} , 217Hz CBP=1μF, RL=8Ω	—	85	—	dB
		Input unterminated, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=8Ω		80		
		Input grounded, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=8Ω		65		
		Input grounded, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=8Ω		70		
XTALK	Channel Separation	f=1kHz, CBP=1μF, 3D Control = Low	—	82	—	dB
V _{NO}	Output Noise Voltage	1 kHz, A-weighted	—	21	—	μV

■ Electrical Characteristics For Single-Ended Operation

(VDD = 5V Unless otherwise specified. Limits apply for TA = 25°C.)

Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
P _O	Output Power	THD+N = 0.5%; f = 1 kHz RL=32Ω	75	90	—	mW
THD+N	Total Harmonic Distortion+Noise	f = 1kHz, RL=32Ω, PO=20mW	—	0.015	—	%
PSRR	Power Supply Rejection Ratio	Input unterminated, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=32Ω	—	70	—	dB
		Input unterminated, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=32Ω		72		
		Input grounded, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=32Ω		65		
		Input grounded, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=32Ω		70		
XTALK	Channel Separation	f=1kHz, CBP=1μF, 3D Input grounded	—	80	—	dB
V _{NO}	Output Noise Voltage	1 kHz, A-weighted	—	11	—	μV

■ Electrical Characteristics

(VDD = 3V Unless otherwise specified. Limits apply for TA = 25°C.)

Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
I _{DD}	Quiescent Power Supply Current	VIN = 0V, I _o = 0A, BTL Mode	—	4.5	—	mA
		VIN = 0V, I _o = 0A, SE Mode	—	2.5	—	mA
I _{SD}	Shutdown Current	V _{SHUTDOWN} = 0V	—	0.01	—	μA
V _{IH}	Headphone Sense High Input Voltage	—	—	2.2	—	V
V _{IL}	Headphone Sense Low Input Voltage	—	—	1.5	—	V
V _{SDIH}	Shutdown, Headphone micro, 3D control High Input voltage	—	-	1	1.4	V
V _{SDIL}	Shutdown, Headphone micro, 3D control Low Input voltage	—	0.4	0.8	-	V
T _{WU}	Turn On Time	Bypass Cap CBP=1μF	—	140	—	ms

■ Electrical Characteristics For Bridged-Mode Operation

(VDD =3V Unless otherwise specified. Limits apply for TA = 25°C.)







Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
V _{OS}	Output Offset Voltage	V _{IN} = 0V	—	5	—	mV
P _O	Output Power	THD+N = 1%; f = 1 kHz RL=3Ω	—	0.82	—	W
		RL=4Ω		0.70		
		RL=8Ω		0.43		
		THD+N = 10%; f = 1 kHz RL=3Ω RL=4Ω RL=8Ω	—	1.0 0.85 0.53	—	W
THD+N	Total Harmonic Distortion+Noise	AVD=2; f = 1kHz RL=4Ω, PO=1W RL=8Ω, PO=0.4W	—	0.1 0.05	—	%
PSRR	Power Supply Rejection Ratio	Input unterminated, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=8Ω	—	90	—	dB
		Input unterminated, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=8Ω		80		
		Input grounded, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=8Ω		65		
		Input grounded, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=8Ω		73		
XTALK	Channel Separation	f=1kHz, CBP=1μF, 3D Control = Low	—	85	—	dB
V _{NO}	Output Noise Voltage	1 kHz, A-weighted	—	21	—	μV







■ Electrical Characteristics For Single-Ended Operation







(VDD = 3V, Unless otherwise specified. Limits apply for TA = 25°C.)







Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
P _O	Output Power	THD+N = 0.5%; f = 1 kHz RL=32Ω	—	35	—	mW
THD+N	Total Harmonic Distortion+Noise	f = 1kHz, RL=32Ω, PO=20mW	—	0.015	—	%
PSRR	Power Supply Rejection Ratio	Input unterminated, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=32Ω	—	71	—	dB
		Input unterminated, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=32Ω		79		
		Input grounded, V _{ripple} = 200mV _{p-p} , 217Hz, CBP=1μF, RL=32Ω		65		
		Input grounded, V _{ripple} = 200mV _{p-p} , 1kHz, CBP=1μF, RL=32Ω		72		
XTALK	Channel Separation	f=1kHz, CBP=1μF, 3D Control = Low	—	80	—	dB
V _{NO}	Output Noise Voltage	1 kHz, A-weighted	—	11	—	μV

Typical Performance Characteristics

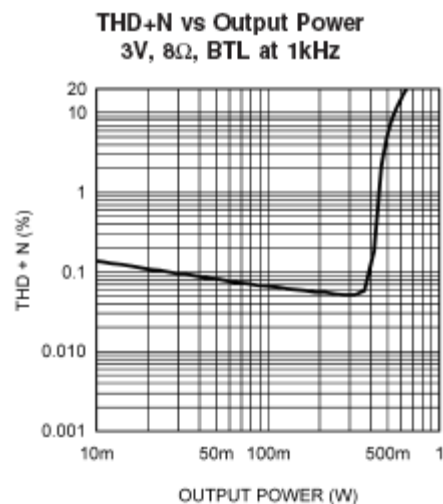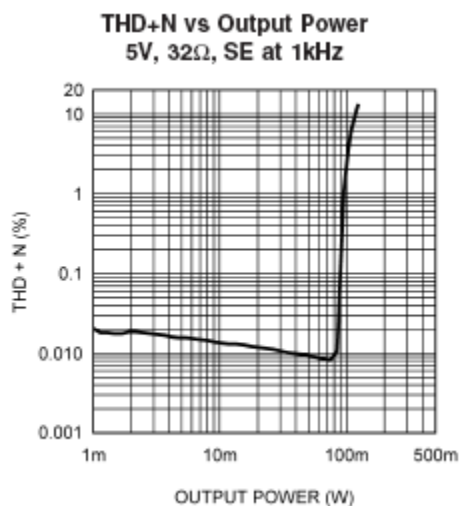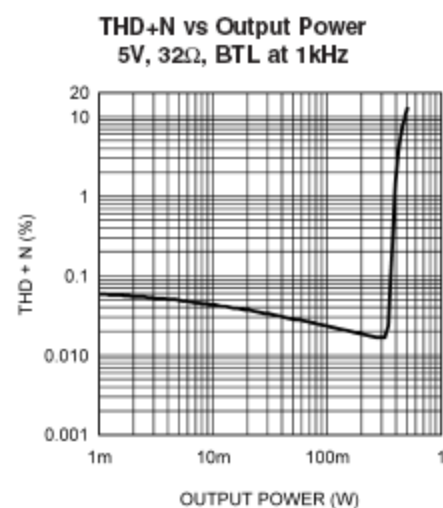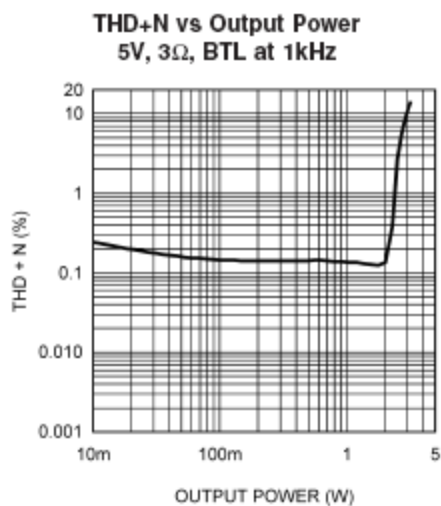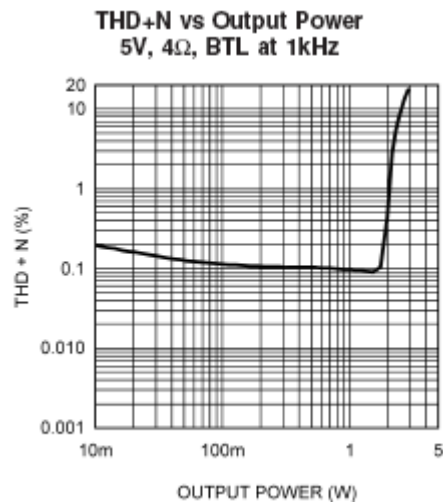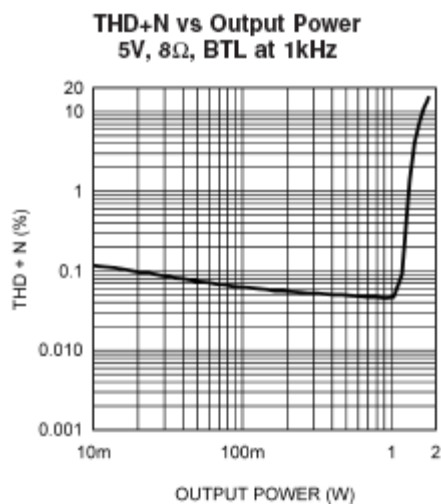


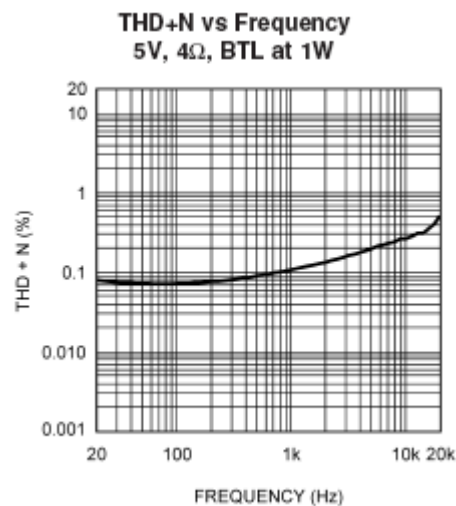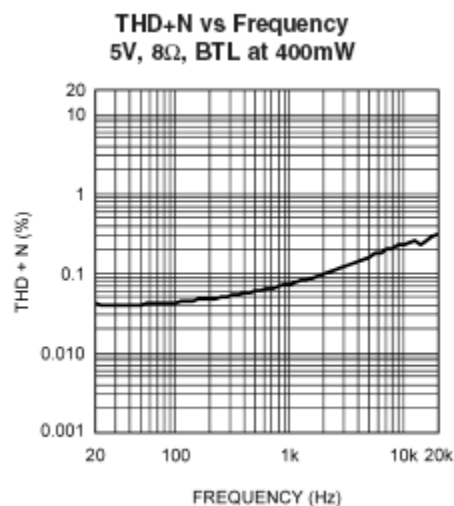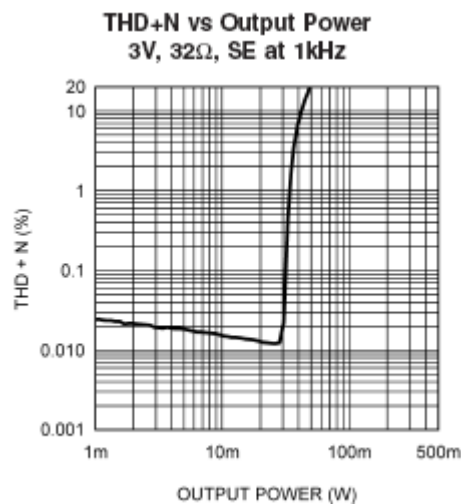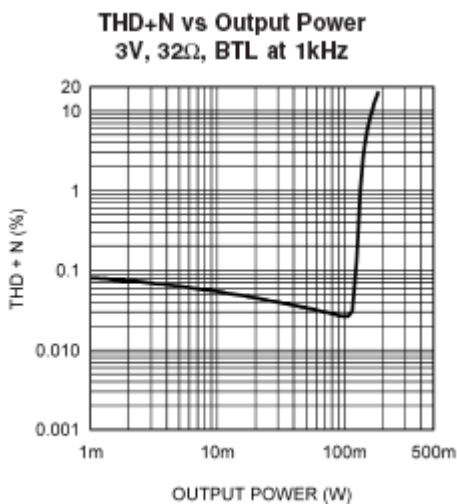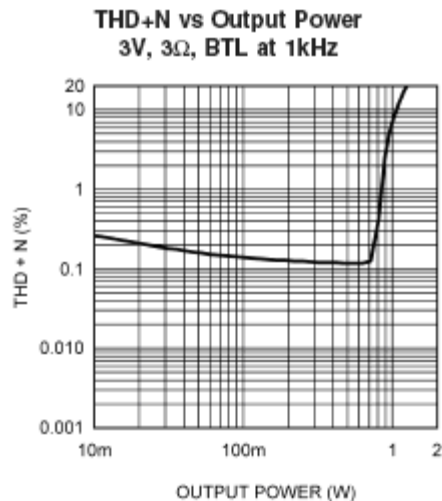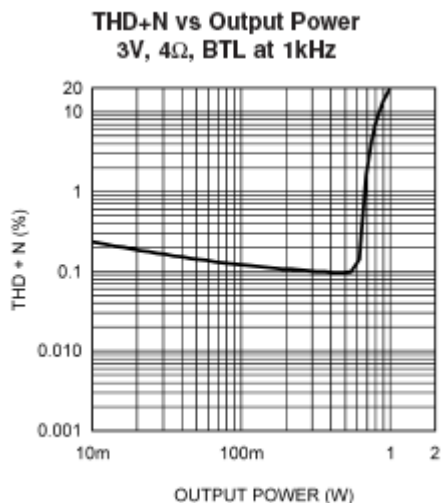

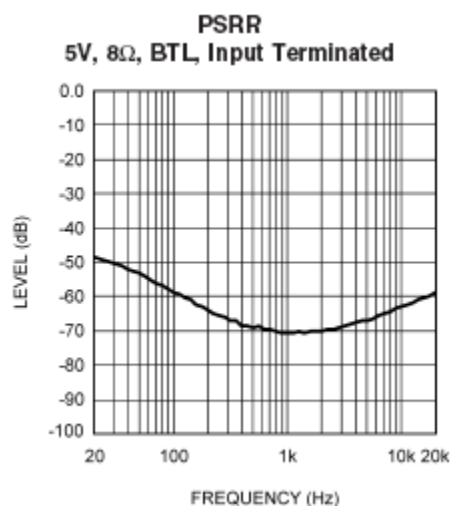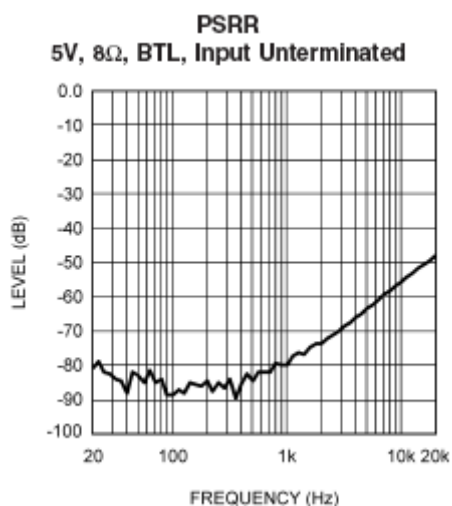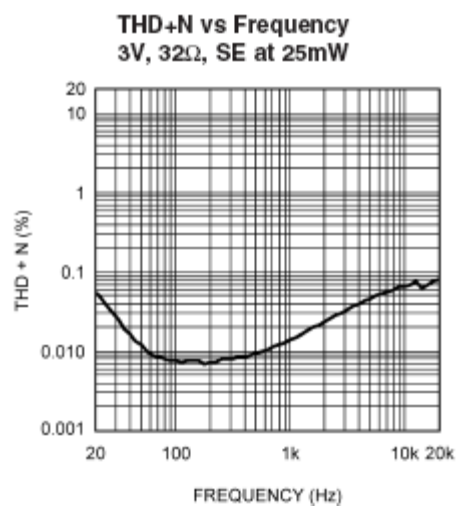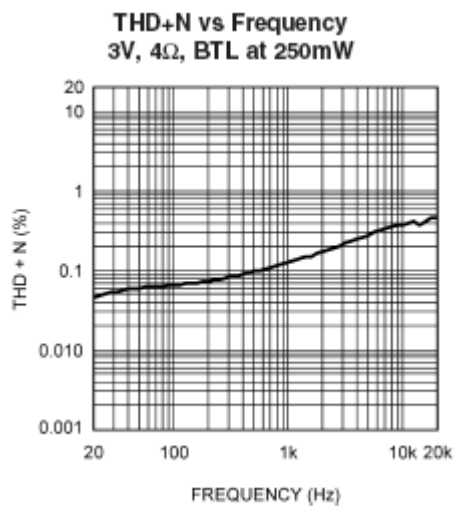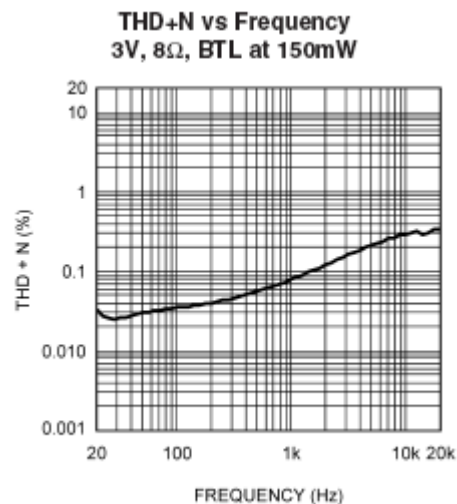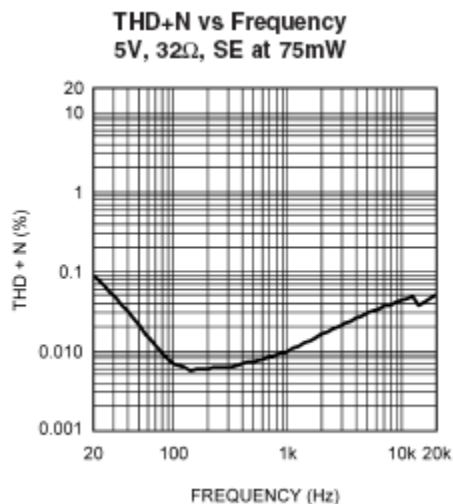


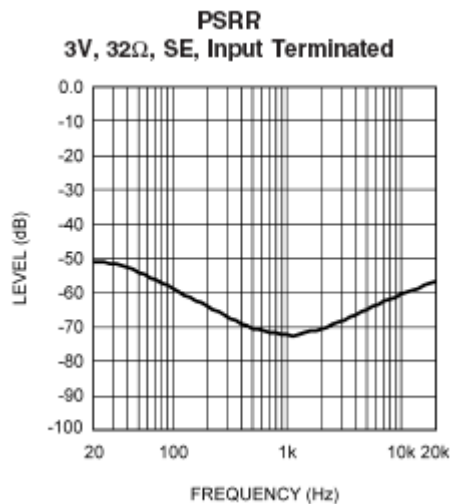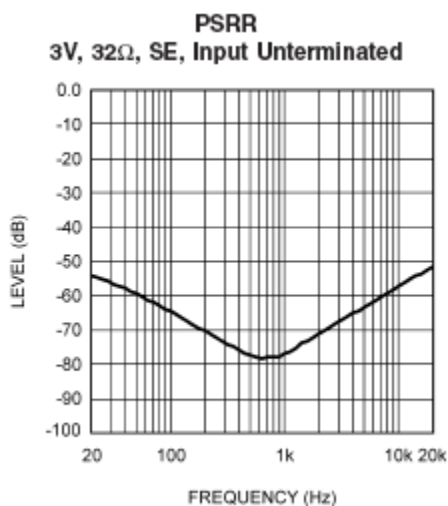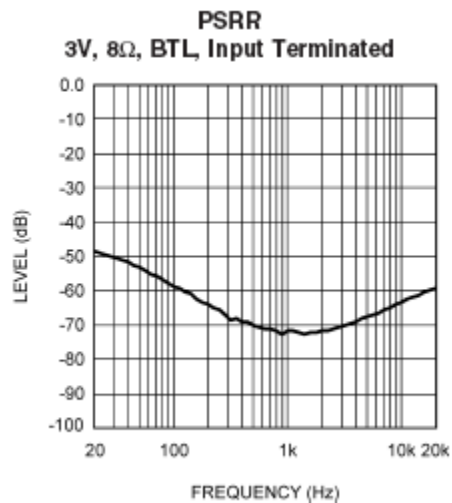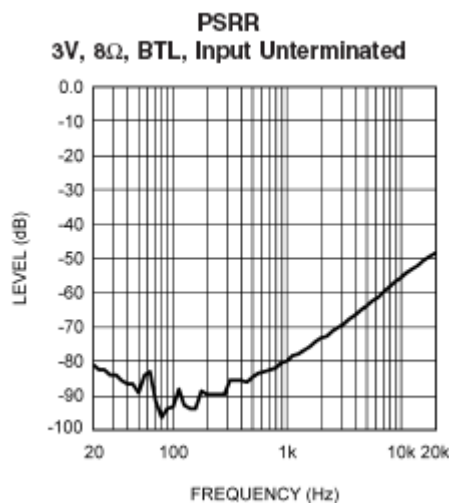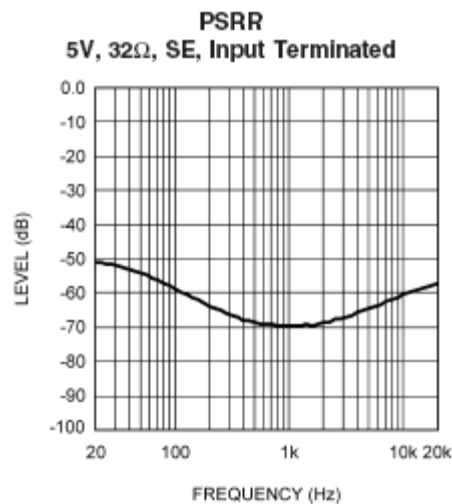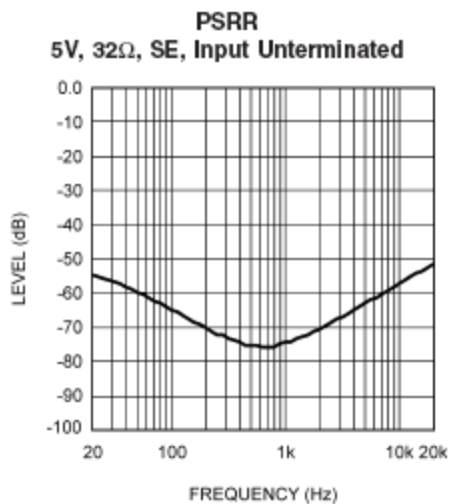


Frequency Response
5V, 8Ω, BTL

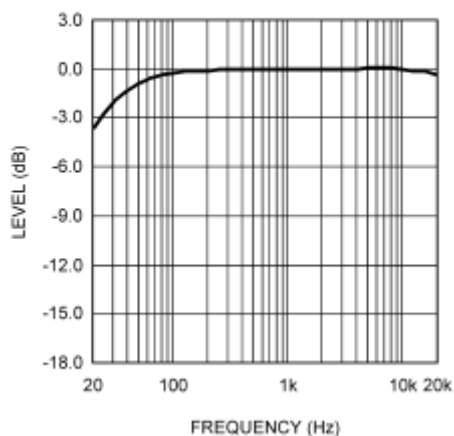


Frequency Response
3V, 8Ω, BTL

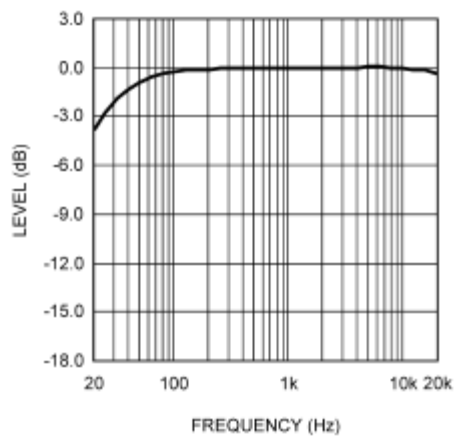


Frequency Response
5V, 32Ω, SE

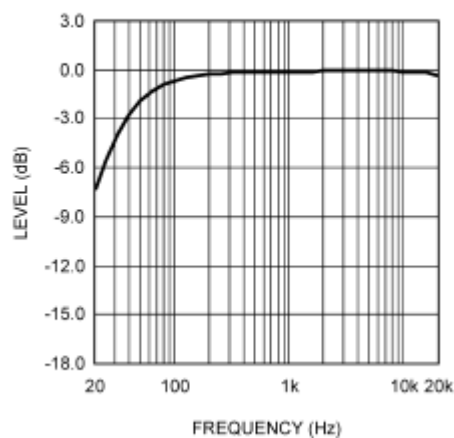


Frequency Response
3V, 32Ω, SE






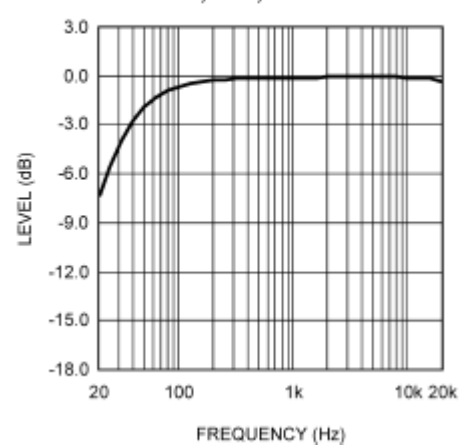





Crosstalk
5V, 8Ω, BTL

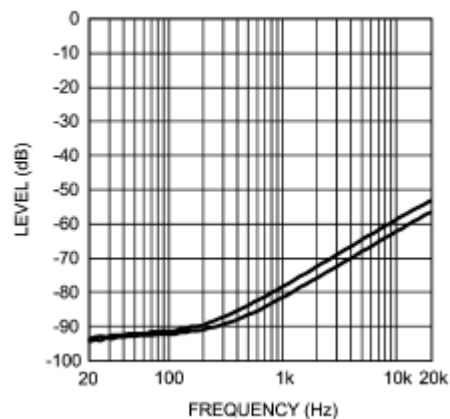

Crosstalk
3V, 8Ω, BTL





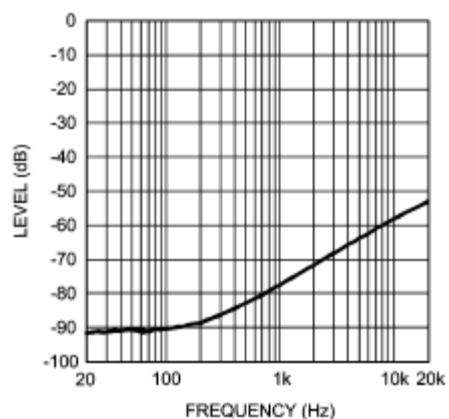


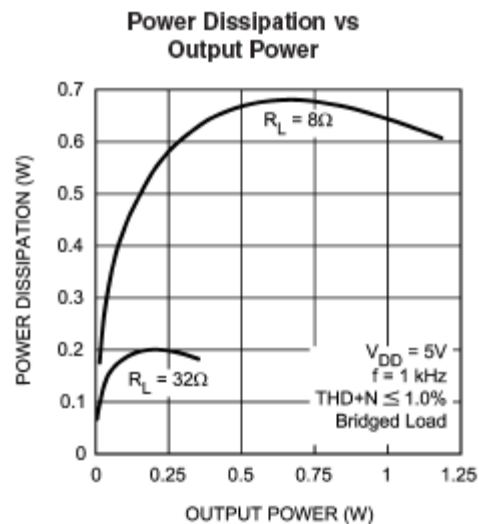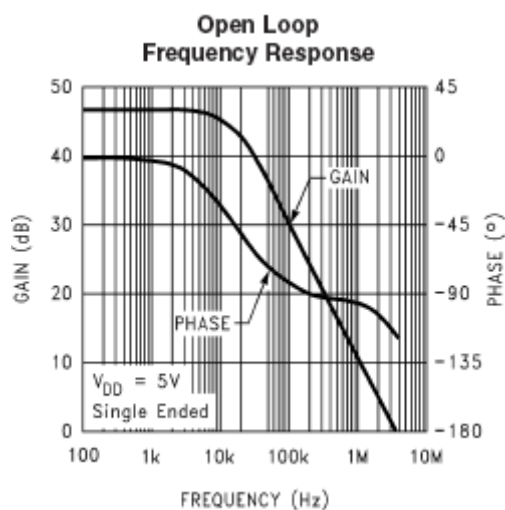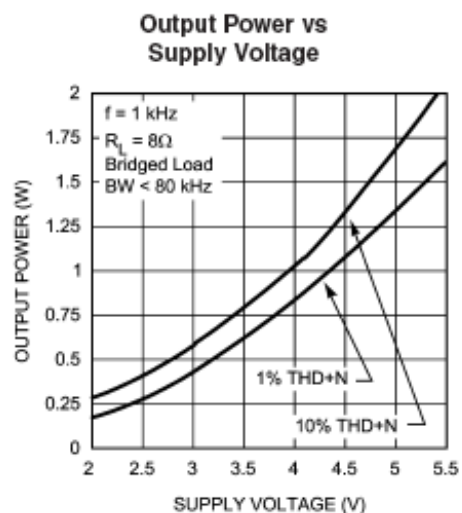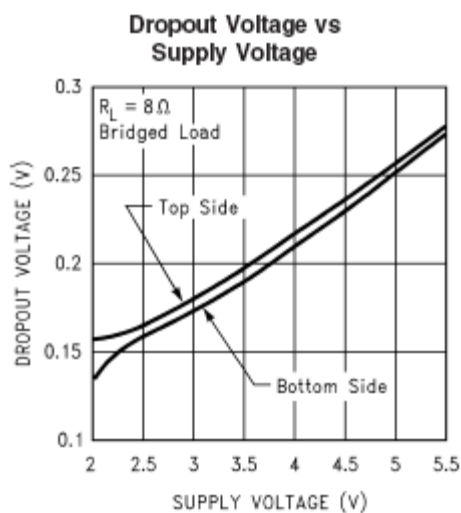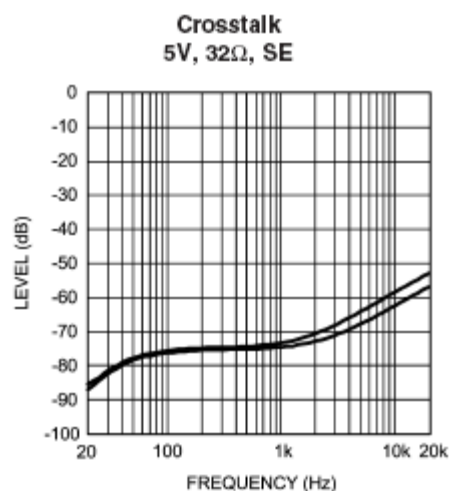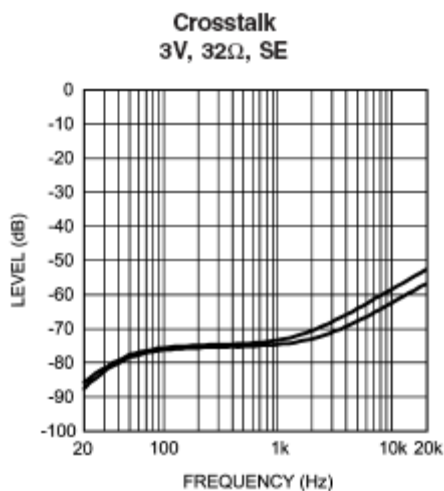

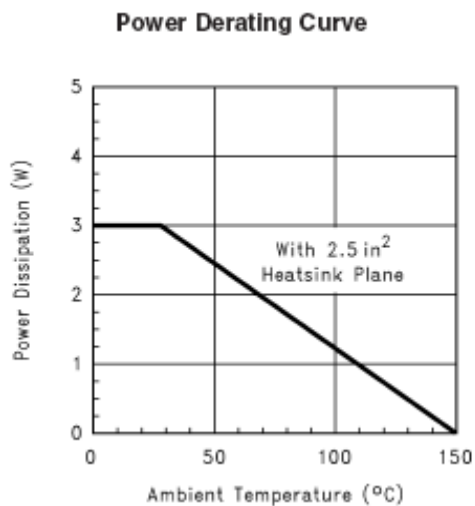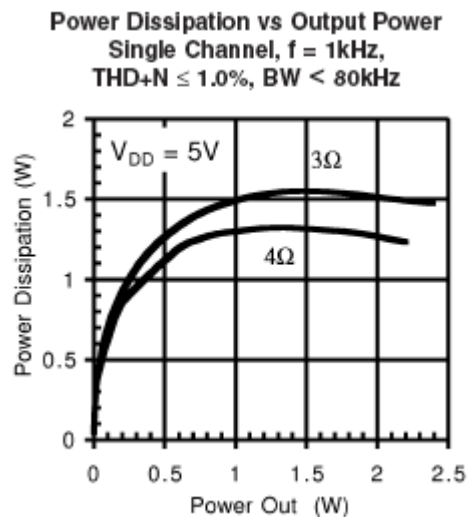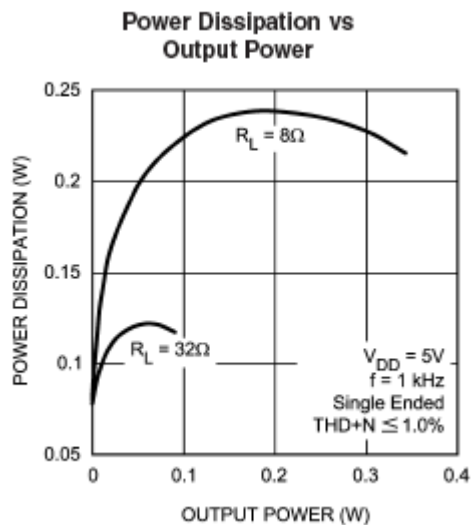

Package Information

SOP-16/PP

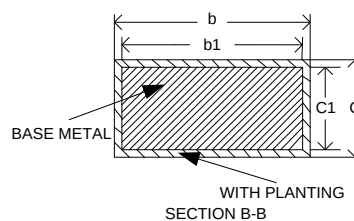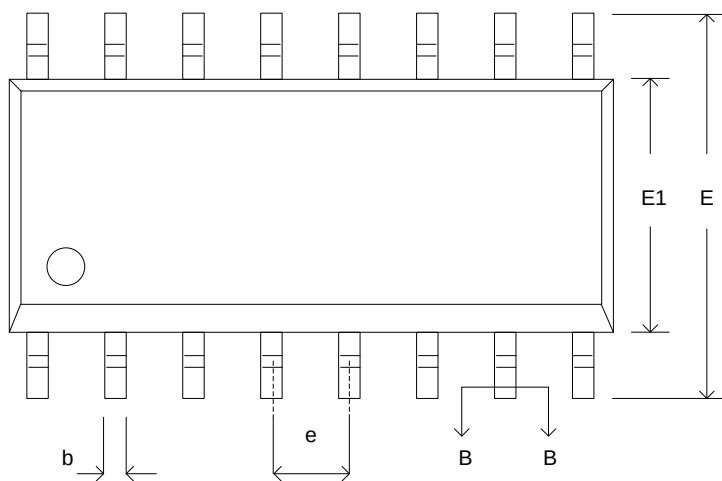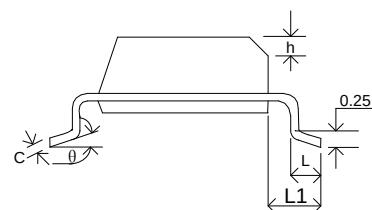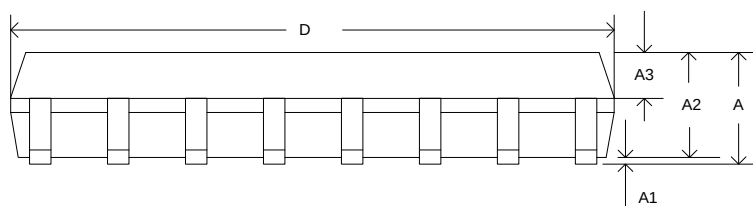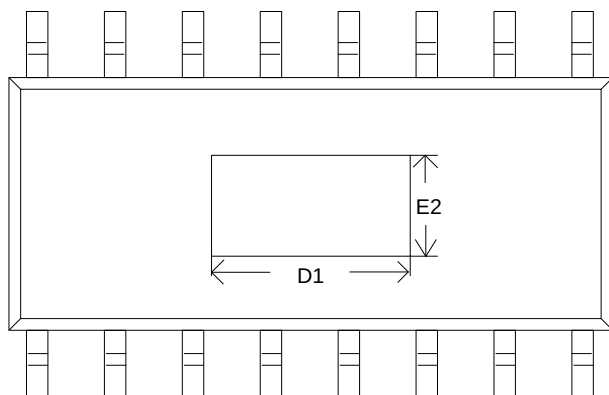

Symbol	Millimeter			Symbol	Millimeter			Symbol	Millimeter		
	Min	Nom	Max		Min	Nom	Max		Min	Nom	Max
A	—	—	1.75	C1	0.19	0.20	0.21	L1	1.05BSC		
A1	0.05	—	0.225	D	9.70	9.90	10.10	θ	0		8
A2	1.30	1.40	1.50	E	5.80	6.00	6.20	D1	3.96REF		
A3	0.60	0.65	0.70	E1	3.70	3.90	4.10	E2	1.67REF		
b	0.39	—	0.48	e	1.27BSC			L/下载体尺寸 (mil)	95*180		
b1	0.38	0.41	0.43	h	0.25	—	0.50				
c	0.21	—	0.26	L	0.50	—	0.80				