




GENERAL PURPOSE RECTIFIER 1N4001E~1N4007E

General Purpose Rectifier

Features

- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 260°C/10 seconds
/.0375" (9.5mm) lead length
- RoHS and REACH Compliance

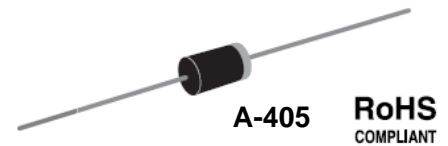

Mechanical Data

Case:	Transfer molded plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Plated axial leads, solderable per MIL-STD-202E, Method 208C
Polarity:	Color band denotes cathode end
Mounting position:	Any
Weight:	0.012 Ounce, 0. 33 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	1N4001E	1N4002E	1N4003E	1N4004E	1N4005E	1N4006E	1N4007E	Unit	Remark
V_{RRM}	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Max RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
$I_{F(AV)}$	Max Average Forward Rectified Current	1.0							A	
I_{FSM}	Peak Forward Surge Current	30							A	
$I_{R(AV)}$	Max Full Load Reverse Current	30							μA	
$T_J,$ T_{STG}	Operating and Storage Temperature	-65 to +175							$^{\circ}C$	

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	1N4001E	1N4002E	1N4003E	1N4004E	1N4005E	1N4006E	1N4007E	Unit	Conditions
V_F	Max Instantaneous Forward Voltage	1.1							V	$I_{F(AV)}=1.0A$
I_R	Max DC Reverse Current at Rated DC Blocking Voltage	5.0							μA	$T_A=25^{\circ}C$
		50								$T_A=100^{\circ}C$
C_J	Typical Junction Capacitance	15							pF	At 1MHz, reversed voltage of 4V
$R_{\theta-JA}$	Typical Thermal Resistance	50							$^{\circ}C/W$	Note 1

Note:

1. Thermal resistance from junction to ambient at .375" (9.5mm) lead length, PCB mounted with copper pad area of 0.2" x 0.2" (5x5mm).

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve

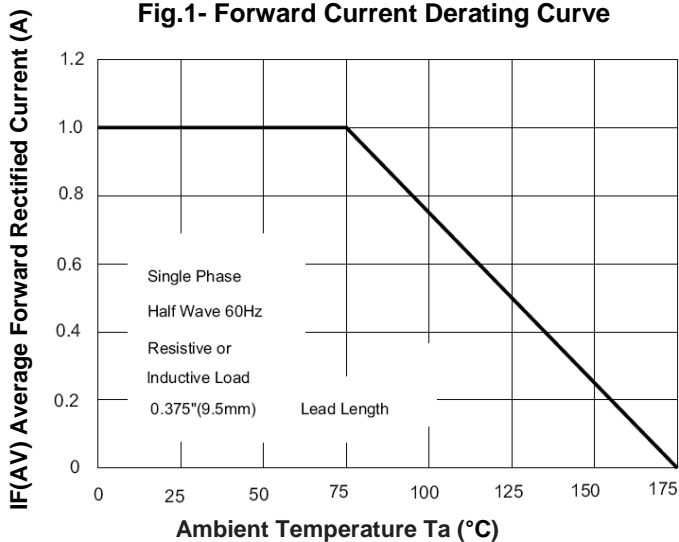


Fig.2- Max. Non-Repetitive Forward Surge Current

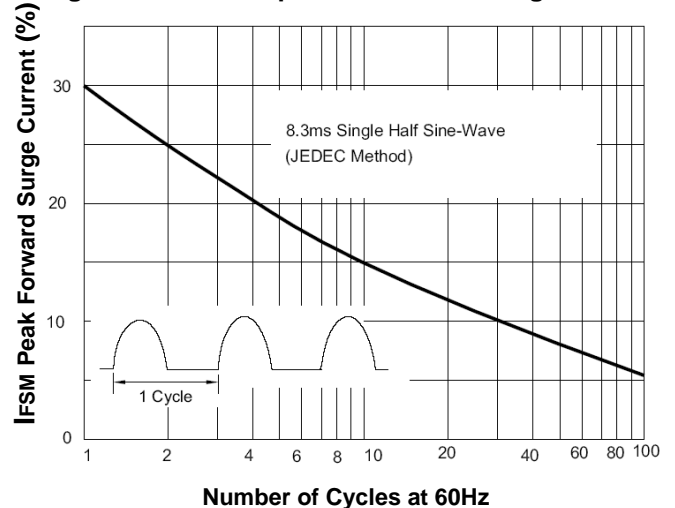


Fig.3- Typical Instantaneous Forward Characteristics

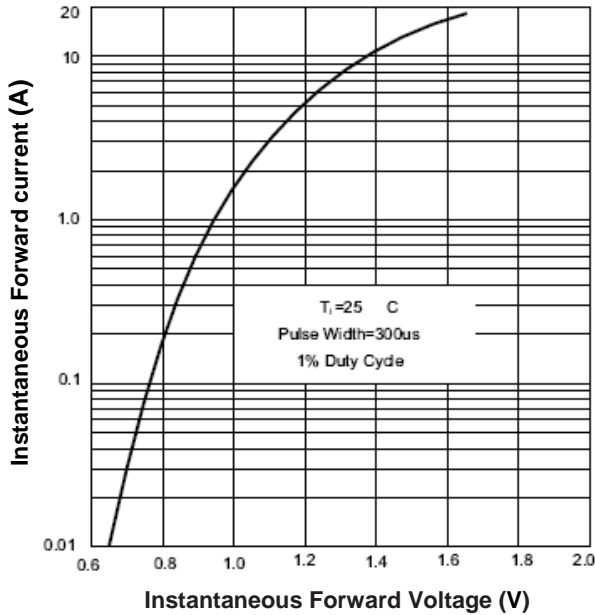


Fig.5- Typical Reverse Characteristics



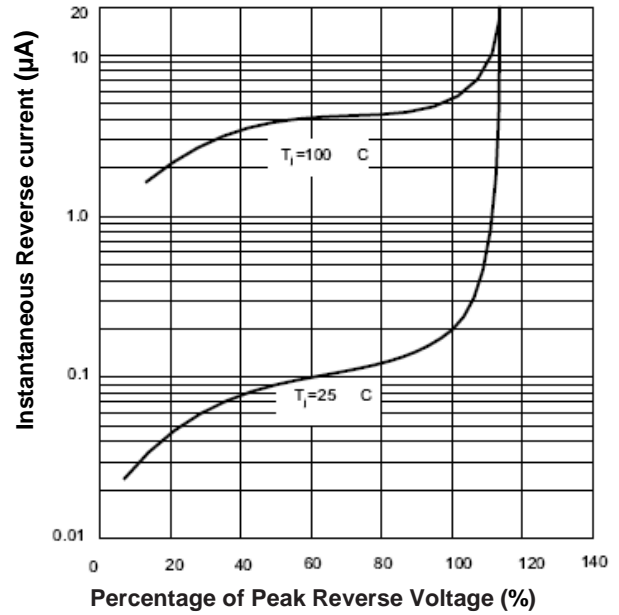


Fig.6- Typical Junction Capacitance

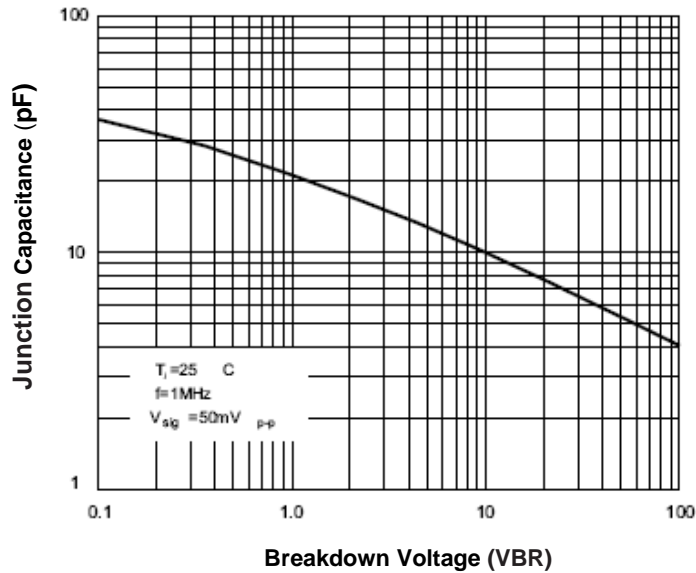


Radial-Taping Specifications For Rectifiers-Panasert

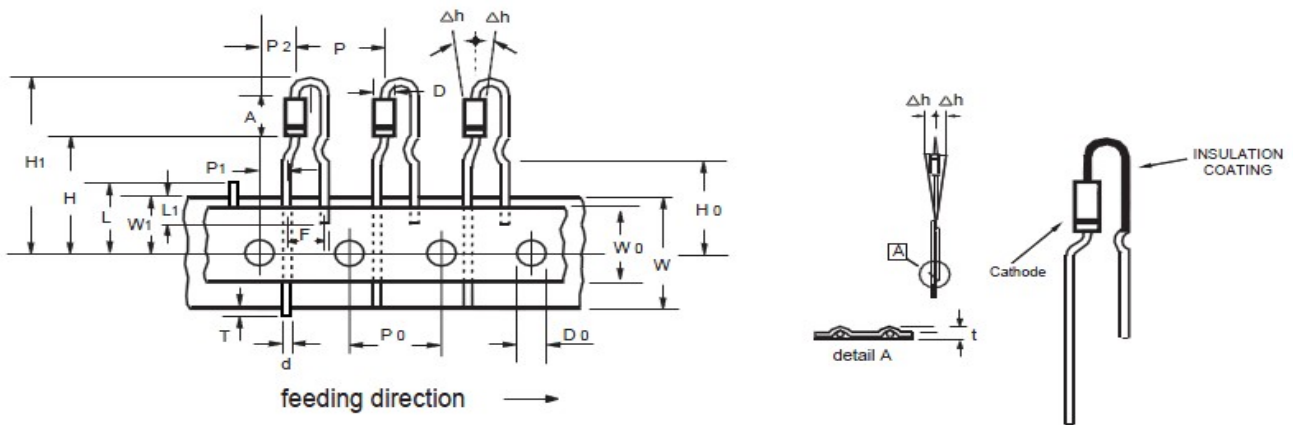

ITEM	SYMBOL	SPECIFICATIONS(mm)	SPECIFICATIONS(inch)
Body diameter	D	2.7 Max.	0.107 Max.
Body height	A	5.2± 0.5	0.205± 0.020
Lead-wire diameter	d	0.6± 0.1	0.024± 0.004
Component pitch	P	12.7± 1.0	0.500± 0.040
Feed hole pitch	P0	12.7± 0.3	0.500± 0.012
Component lead spacing	F	5.0+0.4/-0.1	0.197+0.016/-0.004
Deflection	Δh	0.0± 1.0	0.000± 0.040
Tape width	W	18.0± 0.5	0.790± 0.020
Hold-down tape width	W0	12.5 Min.	0.492 Min.
Hole position	W1	9.0+0.75/-0.50	0.354+0.030/-0.020
Length from seating plane	H	19.5± 1.0	0.768± 0.040
Component height	H1	32.25 Max.	1.27 Max.
Feed hole diameter	D0	4.0± 0.2	0.157± 0.008
Total tape thickness	t	1.5 Max.	0.059 Max.
Cut out length	L	11.0 Max.	0.433 Max.
Lead-wire (taped portion)	L1	2.5 Min.	0.098 Min.
Lead protrusion	T	0.8 Max.	0.031 Max.
Lead-wire clinch height	H0	16.0± 0.5	0.630± 0.020
Feedhole center to lead	P1	3.85± 0.7	0.125± 0.028
Center of seating plane location	P2	6.35± 1.0	0.250± 0.040
STANDARD PACKAGING/(EA), T/R	-	2.5K / REEL	
STANDARD PACKAGING/(EA)	-	2K / AMMO BOX,	

Dimensions in inch (mm)

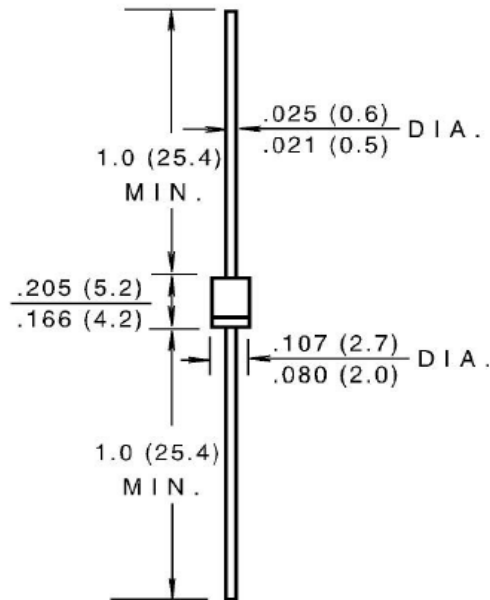**A-405****Contact us:****US HEADQUARTERS****MEI SEMI INC.**

2900 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828

CHINA FACTORY**MEI SEMI CO., LTD**

#259, South Hu Xi Road, Ma An Shan City, An Hui Province, 243000, China

Tel: 86-555-2109849 Fax: 86-555-3509998

#888, Guang Hua Road, Shanghai, 201108, China

Tel: 86-21-61509848 Fax: 86-21-64420756