


### Features

- \* Low noise
- \* Low reverse leakage



RoHS  
COMPLIANT

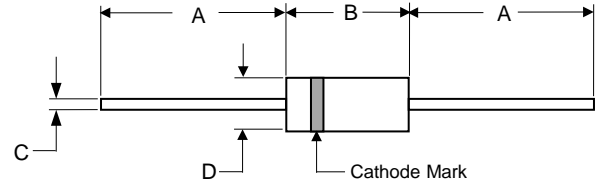

DO-35				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	1.083	---	27.50	---
B	---	0.154	---	3.90
C	---	0.020	---	0.50
D	---	0.075	---	1.90

### Maximum Ratings (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>tot</sub>	500 <sup>1)</sup>	mW
Junction Temperature	T <sub>j</sub>	175	°C
Storage Temperature Range	T <sub>stg</sub>	- 55 to + 175	°C

Note:

- 1) Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

### Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Max.	Unit
Forward Voltage at I <sub>F</sub> = 200 mA	V <sub>F</sub>	1.1	V


### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Type	Zener Voltage Range <sup>2)</sup>				Dynamic Resistance		Reverse Current		Maximum Zener Current
	V <sub>Znom</sub> <sup>1)</sup>	V <sub>Z</sub>		at I <sub>ZT</sub>	Z <sub>ZT</sub>	at I <sub>ZT</sub>	I <sub>R</sub>	at V <sub>R</sub>	I <sub>ZM</sub>
	(V)	Min. (V)	Max. (V)	(μA)	Max. (Ω)	(μA)	Max. (μA)	(V)	(mA)
1N4099	6.8	6.46	7.14	250	200	250	10	5.17	56
1N4100	7.5	7.125	7.875	250	200	250	10	5.7	51
1N4101	8.2	7.79	8.61	250	200	250	1	6.24	46
1N4103	9.1	8.65	9.55	250	200	250	1	6.92	42
1N4104	10	9.5	10.5	250	200	250	1	7.6	38
1N4105	11	10.45	11.55	250	200	250	0.05	8.44	35
1N4106	12	11.4	12.6	250	200	250	0.05	9.12	32
1N4107	13	12.35	13.65	250	200	250	0.05	9.87	29
1N4109	15	14.25	15.75	250	100	250	0.05	11.4	25
1N4110	16	15.2	16.8	250	100	250	0.05	12.15	24
1N4112	18	17.1	18.9	250	100	250	0.05	13.67	21
1N4114	20	19	21	250	150	250	0.01	15.2	19
1N4115	22	20.9	23.1	250	150	250	0.01	16.72	17
1N4116	24	22.8	25.2	250	150	250	0.01	18.25	16
1N4118	27	25.65	28.35	250	150	250	0.01	20.45	14
1N4120	30	28.5	31.5	250	200	250	0.01	22.8	13
1N4121	33	31.35	34.65	250	200	250	0.01	25.08	12
1N4122	36	34.2	37.8	250	200	250	0.01	27.38	11
1N4123	39	37.05	40.95	250	200	250	0.01	29.65	9.8
1N4124	43	40.85	45.15	250	250	250	0.01	32.65	8.9
1N4125	47	44.65	49.35	250	250	250	0.01	35.75	8.1
1N4126	51	48.45	53.55	250	300	250	0.01	38.76	7.5
1N4127	56	53.2	58.8	250	300	250	0.01	42.6	6.7
1N4129	62	58.9	65.1	250	500	250	0.01	47.1	6.1
1N4130	68	64.6	71.4	250	700	250	0.01	51.68	5.6
1N4131	75	71.25	78.75	250	700	250	0.01	57	5.1

Note:

- 1) The type numbers shown above have a standard tolerance of ±5% on the nominal Zener voltage. Also available in 2% and 1% tolerance suffix C and D respectively.
- 2) Tested with pulses t<sub>p</sub> = 20 ms.

### Ratings and Characteristic Curves

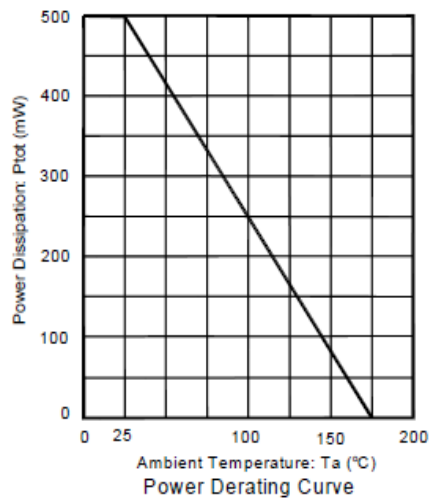

### Ordering Information

Part No.	Package	Packing Code	Packing
1N4099 THRU 1N4131	DO-35	A50	5000pcs/Ammo

### Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.