

MITSUBISHI MICROCOMPUTERS

M37102M8-XXXSP/FP

M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with **ON-SCREEN DISPLAY CONTROLLER**

DESCRIPTION

The M37102M8-XXXSP/FP is a single-chip microcomputer designed with CMOS silicon gate technology. It is housed in a 64-pin shrink plastic molded DIP or an 80-pin plastic molded QFP. This single-chip microcomputer is useful for the high-tech channel selection system for TVs.

In addition to their simple instruction sets, the ROM, RAM, and I/O addresses are placed on the same memory map to enable easy programming.

The differences between the M37102M8-XXXSP/FP and the M37201M6-XXXSP are noted below. The following explanations apply to the M37102M8-XXXSP. Specification variations for other chips are noted accordingly.

Type name	ROM size	RAM size
M37102M8-XXXSP/FP	16384 bytes	320 bytes
M37201M6-XXXSP	24576 bytes	384 bytes


FEATURES

- Number of basic instructions 69
- Memory size ROM 16384 bytes (M37102M8-XXXSP/FP)
24576 bytes (M37201M6-XXXSP)
RAM 320 bytes (M37102M8-XXXSP/FP)
384 bytes (M37201M6-XXXSP)
- Instruction execution time 1 μ s (minimum instructions at 4MHz frequency)
- Single power supply 5V \pm 10%
- Power dissipation
normal operation mode (at 4MHz frequency)
..... 110mW (V_{CC} =5.5V, CRT display)
- Subroutine nesting 96 levels (Max.)
- Interrupt 13types, 13vectors
- 8-bit timer 4
- Programmable I/O ports
(Ports P0, P1, P2, P3, P4, P6) 47
- Output port (Port P5) 5
- Serial I/O (8-bit) 2
- PWM function 14-bit \times 1
8-bit \times 10
- A-D converter (4-bit resolution) 2 channels
- 72-character on screen display function
Number of character 24 characters \times 3 lines
Kinds of character 126

APPLICATION

TV

PIN CONFIGURATION (TOP VIEW)

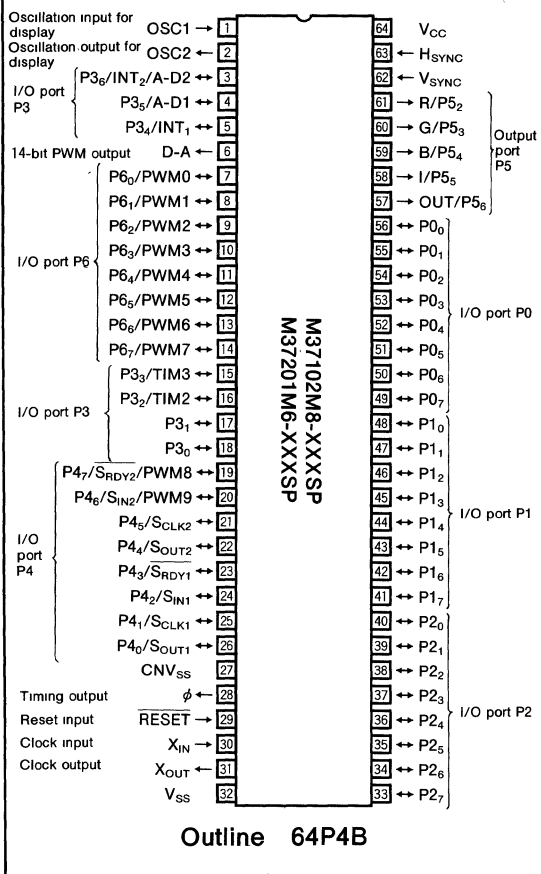


Outline 64P4B

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER


PIN CONFIGURATION (TOP VIEW)

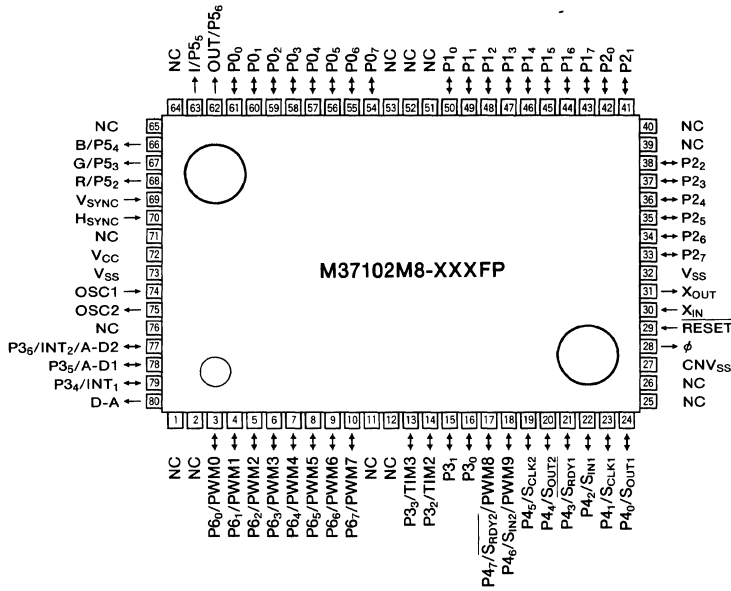

Outline 80P6N

NC : No connection

M37102M8-XXXSP BLOCK DIAGRAM

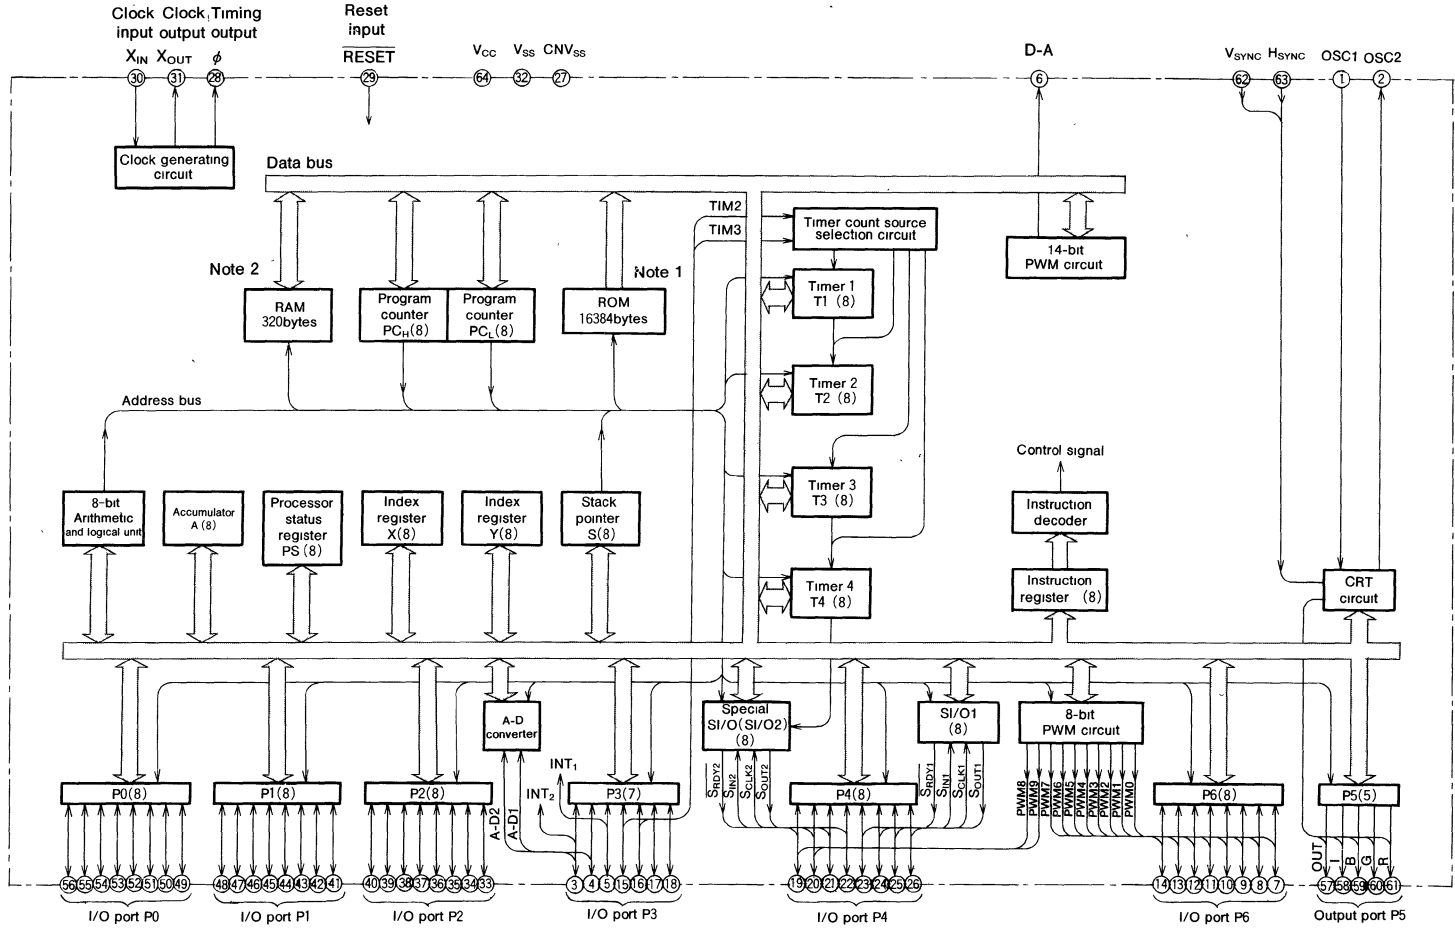

Note 1 : 24576 bytes for M37201M6-XXXSP
 2 : 384 bytes for M37201M6-XXXSP



MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROL

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

FUNCTIONS OF M37102M8-XXXSP

Parameter		Functions	
Number of basic instructions		69	
Instruction execution time		1 μ s (minimum instructions, at 4MHz frequency)	
Clock frequency		4MHz	
Memory size	M37102M8-XXXSP/FP	ROM	16384bytes
		RAM	320bytes
	M37201M6-XXXSP	ROM	24576bytes
		RAM	384bytes
Input/Output ports	P0, P1, P2	I/O	8-bitX3
	P3 ₀ , P3 ₁	I/O	2-bitX1
	P3 ₂ -P3 ₆	I/O	5-bitX1 (can be used as timer input pins, INT ₁ , INT ₂ input pins and A-D input pins)
	P4	I/O	8-bitX1 (can be used as serial I/O function pins and PWM output pins)
	P5	Output	5-bitX1 (can be used as R, G, B, I, OUT pins)
	P6	I/O	8-bitX1 (can be used as PWM output pins)
Serial I/O		8-bitX2 (Special serial I/O (8-bit)X1)	
Timers		8-bit timerX4	
Subroutine nesting		96levels (max)	
Interrupt		Two external interrupts, nine internal interrupts, one software interrupt	
Clock generating circuit		Two built-in circuits (externally connected ceramic or quartz crystal oscillator)	
Supply voltage		5V \pm 10%	
Power dissipation	at CRT display ON		110mW (clock frequency X _{IN} =4MHz, V _{CC} =5.5V, Typ.)
	at CRT display OFF		55mW (clock frequency X _{IN} =4MHz, V _{CC} =5.5V, Typ)
	at stop mode		1.65mW (Max)
Input/Output characteristics	Input/Output voltage		5V (Port P4 ₆ , P4 ₇ , P6 ₀ -P6 ₇)
	Output current		10mA (Port P2 ₄ -P2 ₇)
Operating temperature range		-10 to 70°C	
Device structure		CMOS silicon gate process	
Package	M37102M8-XXXSP, M37201M6-XXXSP		64-pin shrink plastic molded DIP
	M37102M8-XXXFP		80-pin plastic molded QFP
CRT display function	Number of character		24 charactersX3 lines
	Kinds of character		126 (12X16 dots)

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

PIN DESCRIPTION

Pin	Name	Input/ Output	Functions
V _{CC} , V _{SS}	Supply voltage		Power supply inputs 5V±10% to V _{CC} , and 0V to V _{SS}
CNV _{SS}	CNV _{SS}		This is connected to V _{SS} .
$\overline{\text{RESET}}$	Reset input	Input	To enter the reset state, the reset input pin must be kept at a "L" for more than 2 μ s (under normal V _{CC} conditions) If more time is needed for the crystal oscillator to stabilize, this "L" condition should be maintained for the required time.
X _{IN}	Clock input	Input	This chip has an internal clock generating circuit. To control generating frequency, an external ceramic or a quartz crystal oscillator is connected between the X _{IN} and X _{OUT} pins. If an external clock is used, the clock source should be connected the X _{IN} pin and the X _{OUT} pin should be left open.
X _{OUT}	Clock output	Output	
ϕ	Timing output	Output	This is the timing output pin.
P0 ₀ -P0 ₇	I/O port P0	I/O	Port P0 is an 8-bit I/O port with directional registers allowing each I/O bit to be individually programmed as input or output. At reset, this port is set to input mode. The output structure is CMOS output.
P1 ₀ -P1 ₇	I/O port P1	I/O	Port P1 is an 8-bit I/O port and has basically the same functions as port P0.
P2 ₀ -P2 ₇	I/O port P2	I/O	Port P2 is an 8-bit I/O port and has basically the same functions as port P0.
P3 ₀ -P3 ₆	I/O port P3	I/O	Port P3 is a 7-bit I/O port and has basically the same functions as port P0, but the output structure of P3 ₀ , P3 ₁ is CMOS output and the output structure of P3 ₂ -P3 ₆ is N-channel open drain. P3 ₂ , P3 ₃ are in common with external clock input pins of timer 2 and 3. P3 ₄ , P3 ₆ are in common with external interrupt input pins INT ₁ and INT ₂ . P3 ₅ , P3 ₆ are in common with analog input pins of A-D converter (A-D1, A-D2).
P4 ₀ -P4 ₇	I/O port P4	I/O	Port P4 is an 8-bit I/O port and has basically the same functions as port P0, but the output structure is N-channel open drain. When serial I/O1 is used, P4 ₀ , P4 ₁ , P4 ₂ and P4 ₃ work as S _{OUT1} , S _{CLK1} , S _{IN1} and $\overline{\text{SRDY1}}$ pins, respectively. When serial I/O2 is used, P4 ₄ , P4 ₅ , P4 ₆ and P4 ₇ work as S _{OUT2} , S _{CLK2} , S _{IN2} and $\overline{\text{SRDY2}}$ pins, respectively. Also P4 ₆ , P4 ₇ are in common with PWM output pins of PWM 8 and 9.
P6 ₀ -P6 ₇	I/O port P6	I/O	Port P6 is an 8-bit I/O port and has basically the same functions as port P0, but the output structure is N-channel open drain. This port is in common with PWM output pins PWM0-PWM7.
OSC1, OSC2	Clock input for CRT display Clock output for CRT display	Input Output	This is the I/O pins of the clock generating circuit for the CRT display function.
H _{SYNC}	H _{SYNC} input	Input	This is the horizontal synchronizing signal input for CRT display.
V _{SYNC}	V _{SYNC} input	Input	This is the vertical synchronizing signal input for CRT display.
R, G, B, I, OUT	CRT output	Output	This is a 5-bit output pin for CRT display. The output structure is CMOS output. This is in common with port P5 ₂ -P5 ₆ .
D-A	DA Output	Output	This is an output pin for 14-bit PWM.

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

FUNCTIONAL DESCRIPTION
Central Processing Unit (CPU)

The M37102 microcomputers use the standard MELPS 740 instruction set. For details of instructions, refer to the MELPS 740 CPU core basic functions, or the MELPS 740 Software Manual.

Machine-resident instructions are as follows:

The FST and SLW instructions are not provided.

The MUL and DIV instructions are not provided.

The WIT instruction can be used.

The STP instruction can be used.

CPU Mode Register

The CPU mode register is allocated to address 00FB₁₆. Bits 0 and 1 of this register are processor mode bits. This register also has a stack page selection bit.

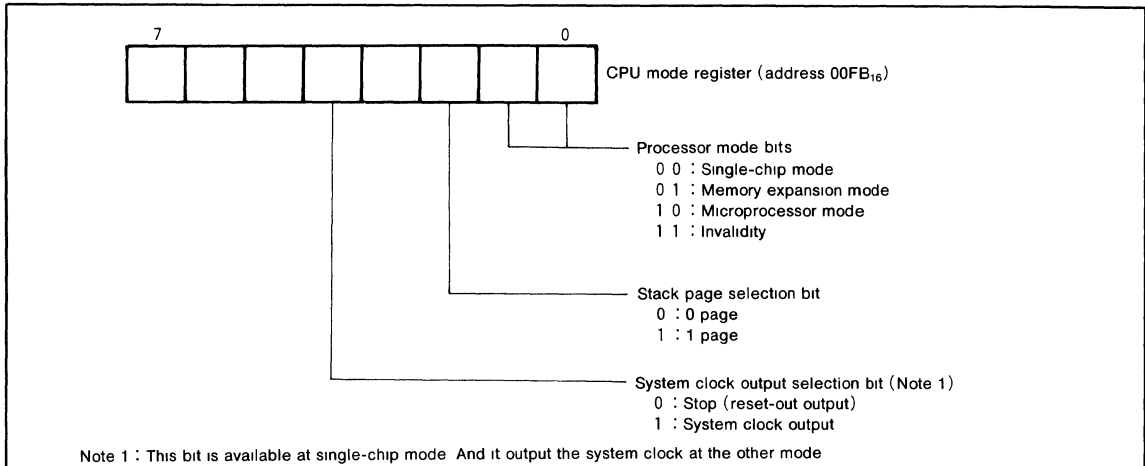


Fig. 1 Structure of CPU mode register

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

MEMORY

• **Special Function Register (SFR) Area**

The special function register (SFR) area contains the registers relating to functions such as I/O ports and timers.

• **RAM**

RAM is used for data storage as well as a stack area.

• **ROM**

ROM is used for storing user programs as well as the interrupt vector area.

• **RAM for display**

RAM for display is used for specifying the character codes and colors to display.

• **ROM for display**

ROM for display is used for storing character data.

• **Interrupt Vector Area**

The interrupt vector area is for storing jump destination addresses used at reset or when an interrupt is generated.

• **Zero Page**

Zero page addressing mode is useful because it enables access to this area with fewer instruction cycles.

• **Special Page**

Special page addressing mode is useful because it enables access to this area with fewer instruction cycles.

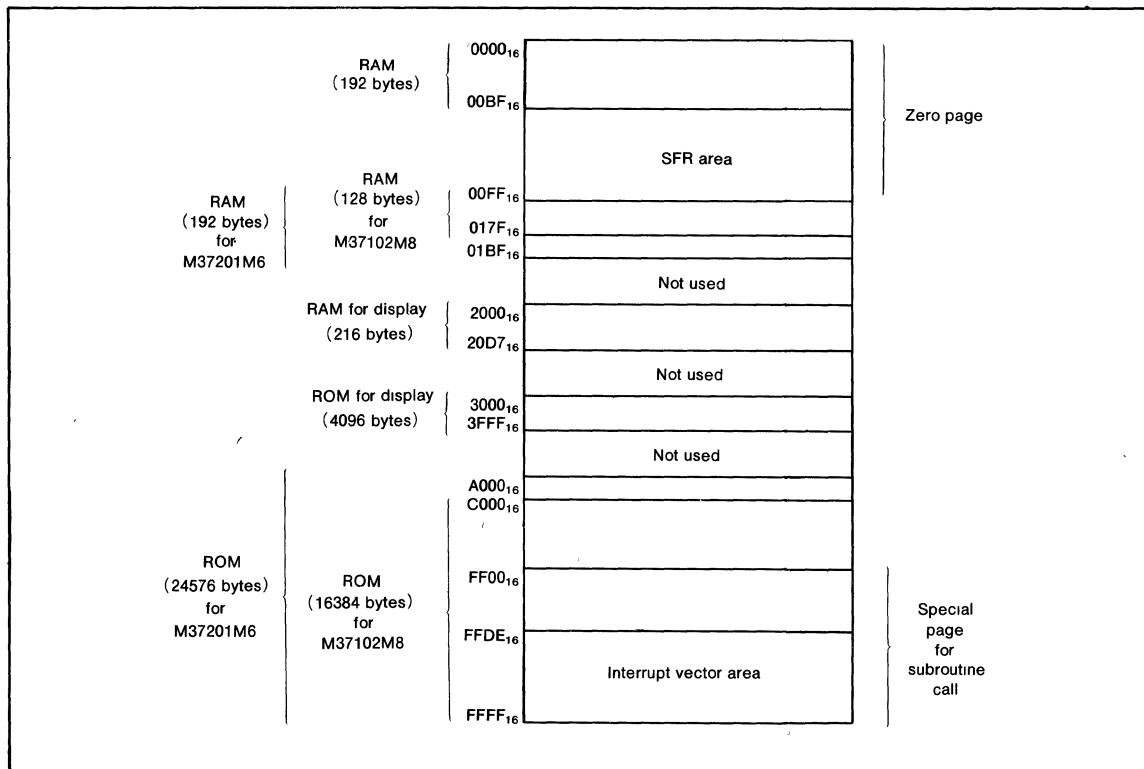


Fig. 2 Memory map

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

00C0 ₁₆	Port P0	00E0 ₁₆	Horizontal position register
00C1 ₁₆	Port P0 directional register	00E1 ₁₆	Vertical display start position register 1
00C2 ₁₆	Port P1	00E2 ₁₆	Vertical display start position register 2
00C3 ₁₆	Port P1 directional register	00E3 ₁₆	Vertical display start position register 3
00C4 ₁₆	Port P2	00E4 ₁₆	Character size register
00C5 ₁₆	Port P2 directional register	00E5 ₁₆	Border selection register
00C6 ₁₆	Port P3	00E6 ₁₆	Color register 0
00C7 ₁₆	Port P3 directional register	00E7 ₁₆	Color register 1
00C8 ₁₆	Port P4	00E8 ₁₆	Color register 2
00C9 ₁₆	Port P4 directional register	00E9 ₁₆	Color register 3
00CA ₁₆	Port P5	00EA ₁₆	CRT control register
00CB ₁₆	Port P5 directional register	00EB ₁₆	Display block counter
00CC ₁₆	Port P6	00EC ₁₆	CRT port control register
00CD ₁₆	Port P6 directional register	00ED ₁₆	Scroll control register
00CE ₁₆	DA-H register	00EE ₁₆	Scroll start register
00CF ₁₆	DA-L register	00EF ₁₆	A-D control register
00D0 ₁₆	PWM 0 register	00F0 ₁₆	Timer 1
00D1 ₁₆	PWM 1 register	00F1 ₁₆	Timer 2
00D2 ₁₆	PWM 2 register	00F2 ₁₆	Timer 3
00D3 ₁₆	PWM 3 register	00F3 ₁₆	Timer 4
00D4 ₁₆	PWM 4 register	00F4 ₁₆	Timer 12 mode register
00D5 ₁₆	PWM output control register 1	00F5 ₁₆	Timer 34 mode register
00D6 ₁₆	PWM output control register 2	00F6 ₁₆	PWM 5
00D7 ₁₆	Interrupt space distinguish register	00F7 ₁₆	PWM 6
00D8 ₁₆	Interrupt space distinguish control register	00F8 ₁₆	PWM 7
00D9 ₁₆	Special serial I/O register	00F9 ₁₆	PWM 8
00DA ₁₆	Special mode register 1	00FA ₁₆	PWM 9
00DB ₁₆	Special mode register 2	00FB ₁₆	CPU mode register
00DC ₁₆	Serial I/O1 mode register	00FC ₁₆	Interrupt request register 1
00DD ₁₆	Serial I/O1 register	00FD ₁₆	Interrupt request register 2
00DE ₁₆	Serial I/O2 mode register	00FE ₁₆	Interrupt control register 1
00DF ₁₆	Serial I/O2 register	00FF ₁₆	Interrupt control register 2

Fig. 3 SFR (Special Function Register) memory map

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

INTERRUPTS

Interrupts can be caused by 12 different events consisting of three external, eight internal, and one software events.

Interrupts are vectored interrupts with priorities shown in Table 1. Reset is also included in the table because its operation is similar to an interrupt.

When an interrupt is accepted, the registers are pushed, interrupt disable flag I is set, and the program jumps to the address specified in the vector table. The interrupt request bit is cleared automatically. The reset and BRK instruction interrupt can never be disabled. Other interrupts are disabled when the interrupt disable flag is set.

All interrupts except the BRK instruction interrupt have an interrupt request bit and an interrupt enable bit. The interrupt request bits are in interrupt request registers 1 and 2 and the interrupt enable bits are in interrupt control registers 1 and 2. Figure 4 shows the structure of the interrupt request registers 1 and 2 and interrupt control registers 1 and 2.

Interrupts other than the BRK instruction interrupt and reset are accepted when the interrupt enable bit is "1", interrupt request bit is "1", and the interrupt disable flag is "0". The interrupt request bit can be reset with a program, but not set. The interrupt enable bit can be set and reset with a program.

Reset is treated as a non-maskable interrupt with the highest priority. Figure 5 shows interrupts control.

Table 1. Interrupt vector address and priority.

Event	Priority	Vector addresses	Remarks
RESET	1	FFFF ₁₆ , FFFE ₁₆	Non-maskable
CRT interrupt	2	FFFD ₁₆ , FFFC ₁₆	
INT ₂ interrupt	3	FFFB ₁₆ , FFFA ₁₆	
INT ₁ interrupt	4	FFF9 ₁₆ , FFF8 ₁₆	
Serial I/O 2 interrupt	5	FFF7 ₁₆ , FFF6 ₁₆	
Timer 4 interrupt	6	FFF5 ₁₆ , FFF4 ₁₆	
1 ms interrupt	7	FFF3 ₁₆ , FFF2 ₁₆	
V _{SYNC} interrupt	8	FFF1 ₁₆ , FFF0 ₁₆	
Timer 3 interrupt	9	FFEF ₁₆ , FFEE ₁₆	
Timer 2 interrupt	10	FFED ₁₆ , FFEC ₁₆	
Timer 1 interrupt	11	FFEB ₁₆ , FFEA ₁₆	
Serial I/O 1 interrupt	12	FFE9 ₁₆ , FFE8 ₁₆	
BRK instruction interrupt	13	FFDF ₁₆ , FFDE ₁₆	Non-maskable software interrupt

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

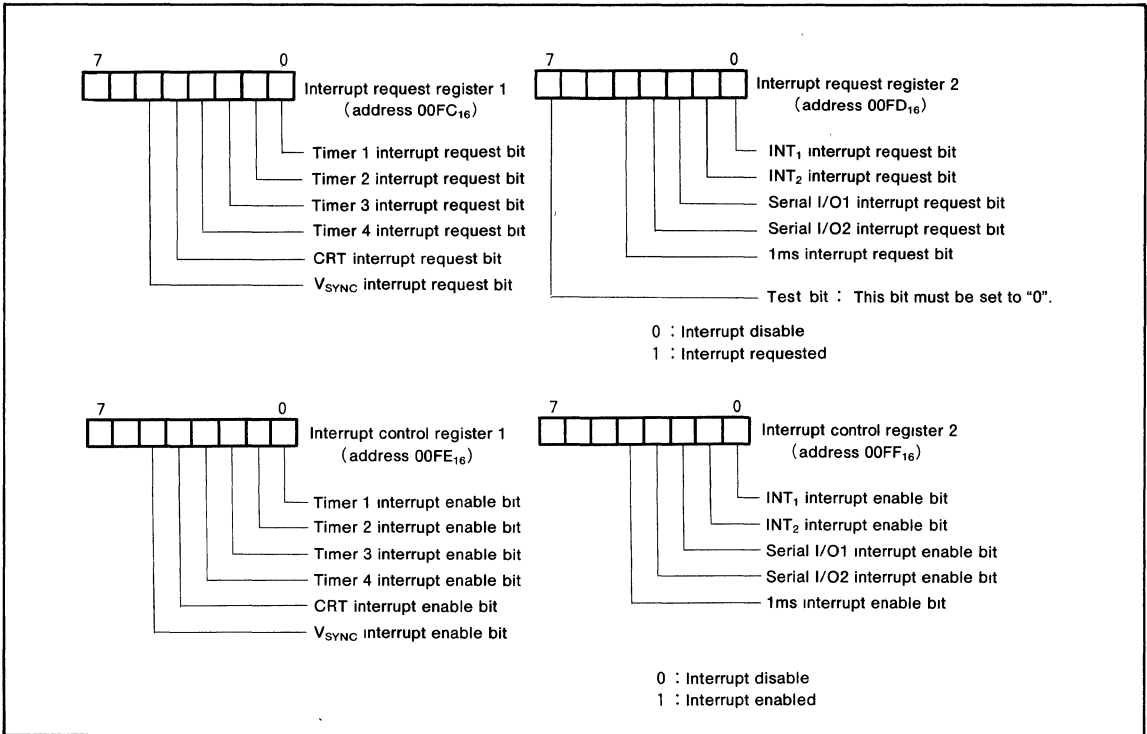


Fig. 4 Structure of registers related to interrupt

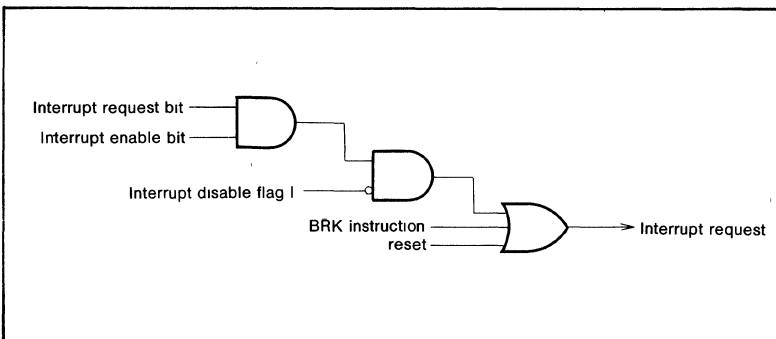


Fig. 5 Interrupt control

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

TIMER

The M37102M8-XXXSP has four timers; timer 1, timer 2, timer 3 and timer 4.

A block diagram of timer 1 through 4 is shown in Figure 7. The count source for timer 1 through 4 can be selected by using bit 0, 1, 4 of timer 12 mode register and timer 34 mode register (address $00F4_{16}$, $00F5_{16}$), as shown in Figure 6.

All of the timers are down count timers and have 8-bit latches. When a timer reaches " FF_{16} " and the next count pulse is input to a timer, a value which is subtracted 1 from the contents of the reload latch are loaded into the timer. The division ratio of the timer is $1/(n+1)$, where n is the contents of timer latch. The timer interrupt request bit is set at the next count pulse after the timer reaches " FF_{16} ".

The starting and stopping of the timer is controlled by bit 2, 3 of timer 12 mode register and timer 34 mode register.

At a reset or stop mode, FF_{16} is automatically set in timer 3 and 07_{16} in timer 4 and timer 4, timer 3 and the clock ($f(X_{IN})$ divided by 16) are connected in series.

When restarting oscillation or canceling a reset, the internal clock is not supplied to the CPU until timer 4 overflows.

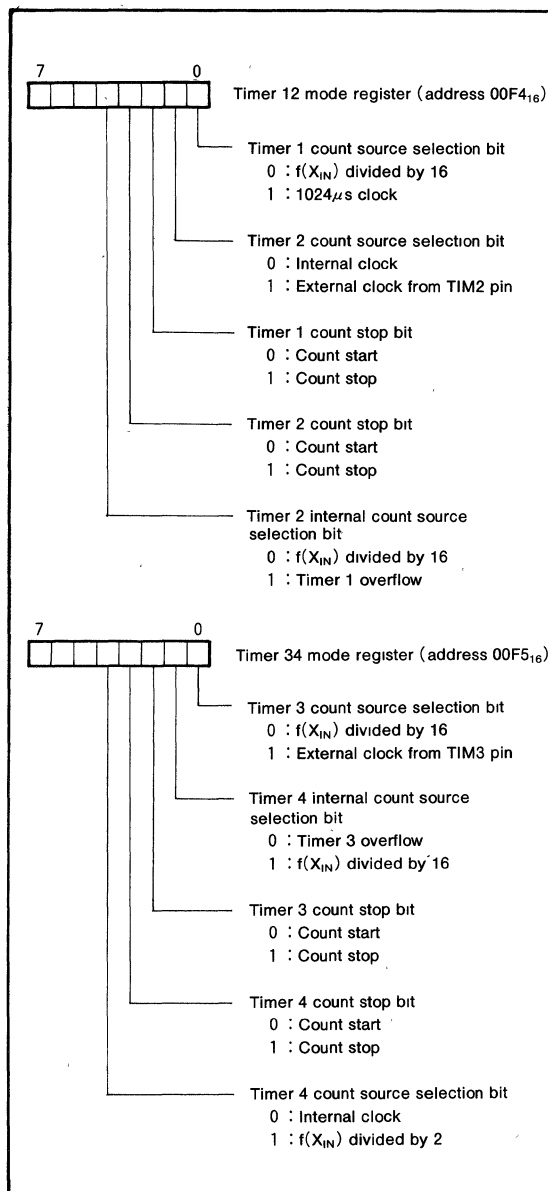


Fig. 6 Structure of timer 12 mode register and timer 34 mode register

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

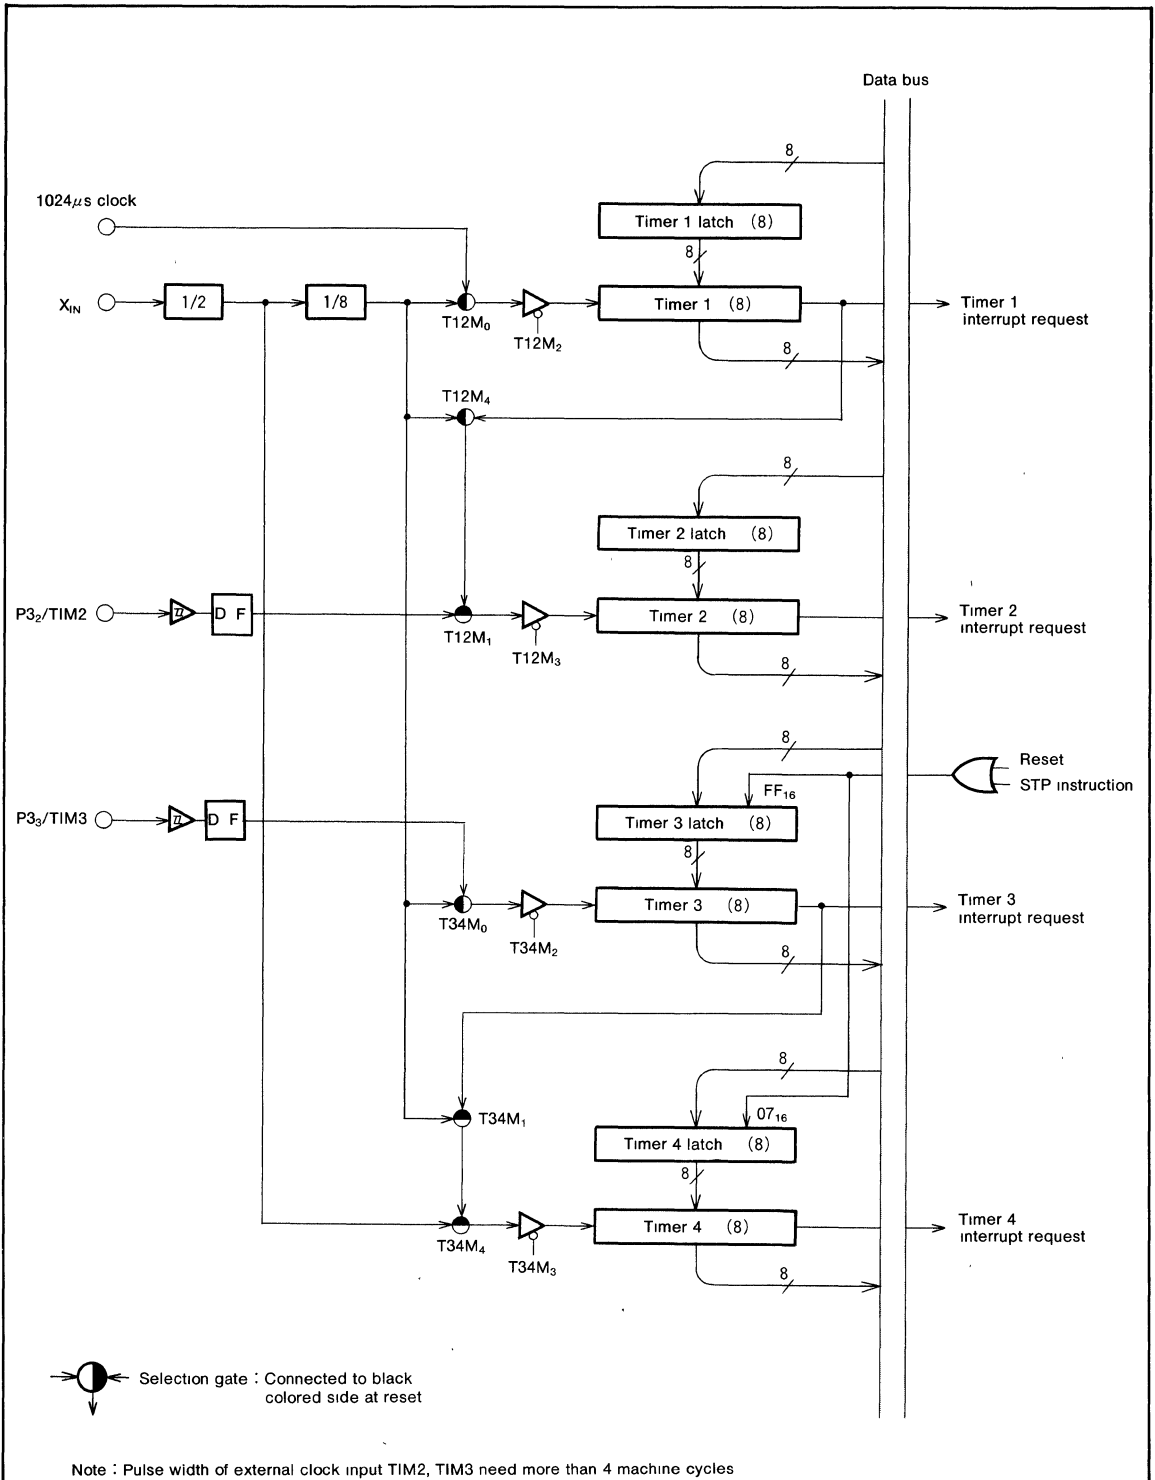


Fig. 7 Block diagram of timer 1, timer 2, timer 3 and timer 4

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

SERIAL I/O

M37102M8-XXXSP has two serial I/O (serial I/O 1, serial I/O 2). Serial I/O 1 has the same function as serial I/O 2.

A block diagram of the serial I/O is shown in Figure 8.

In the serial I/O mode the receive ready signal ($\overline{S_{RDYi}}$), synchronous input/output clock (S_{CLKi}), and the serial I/O pins (S_{OUTi} , S_{INi}) are used as port P4. The serial I/O_i mode registers (address 00DC₁₆, 00DE₁₆) are 8-bit registers. Bits 0, 1 and 2 of these registers are used to select a synchronous clock source.

Bit 3 and 4 decide whether parts of P4 will be used as a serial I/O or not.

To use P4₂ or P4₆ as a serial input, set the directional register bit which corresponds to P4₂ or P4₆ to "0". For more information on the directional register, refer to the I/O pin section.

Also to use internal clock of serial I/O 2, bit 1 of special mode register 1 (address 00DA₁₆) needs to be set to "1". The serial I/O function is discussed below. The function of the serial I/O differs depending on the clock source; external clock or internal clock.

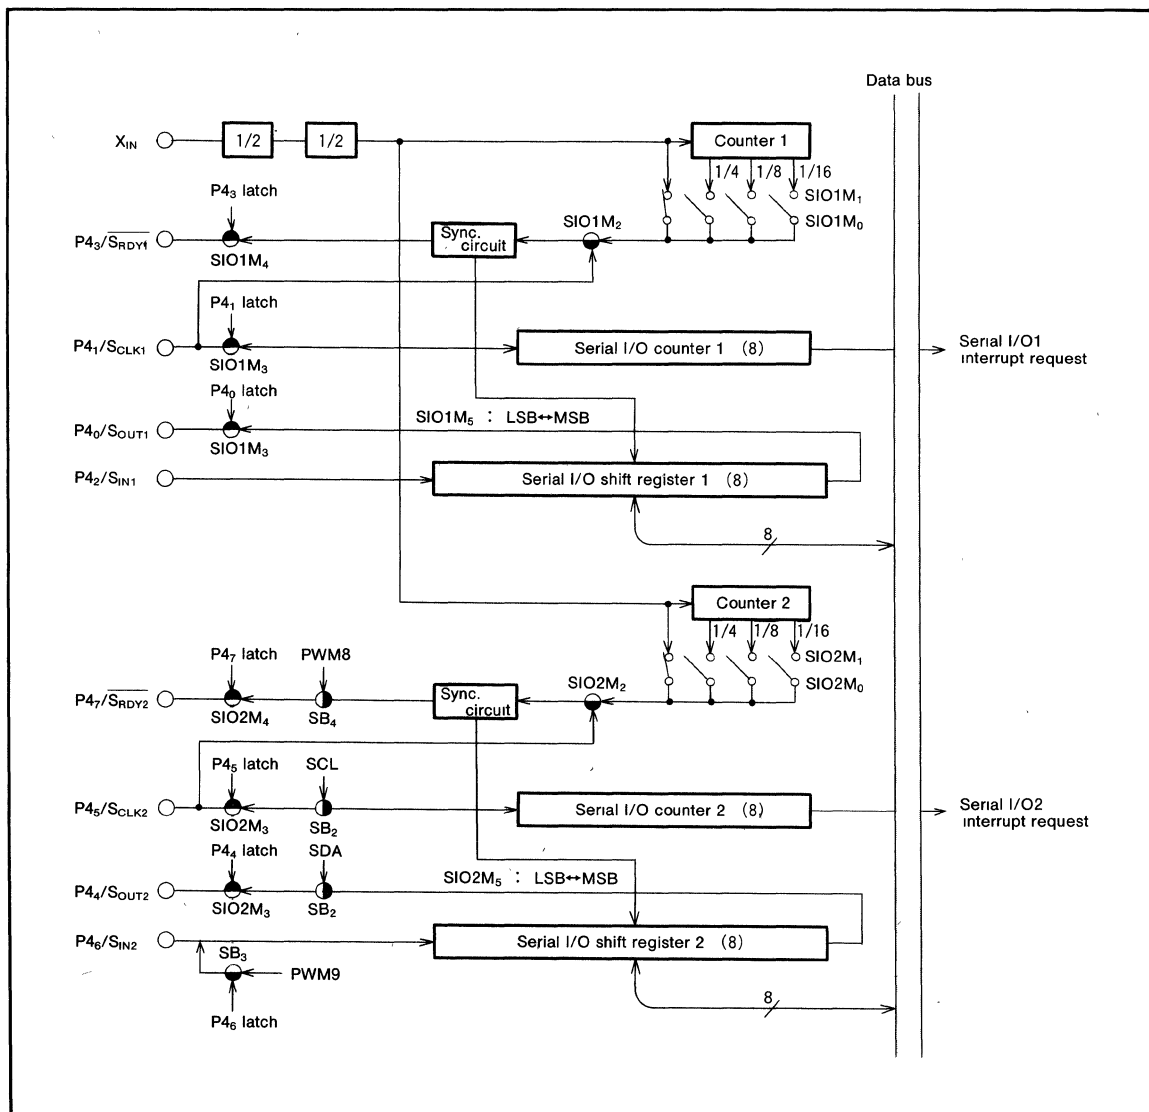


Fig. 8 Block diagram of serial I/O

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

Internal clock—The $\overline{S_{RDY}_i}$ signal becomes "H" during transmission or while dummy data is stored in the serial I/O_i register (address 00DD₁₆, 00DF₁₆). After the falling edge of the write signal, the $\overline{S_{RDY}_i}$ signal becomes low signaling that the M37102M8-XXXSP is ready to receive the external serial data. The $\overline{S_{RDY}_i}$ signal goes "H" at the next falling edge of the transfer clock. The serial I/O_i counter is set to 7 when data is stored in the serial I/O_i register. At each falling edge of the transfer clock, serial data is output to S_{OUT_i}. During the rising edge of this clock, data can be input from S_{IN_i} and the data in the serial I/O_i register will be shifted 1 bit.

Transfer direction can be selected by bit 5 of serial I/O_i mode register. After the transfer clock has counted 8 times, the serial I/O_i register will be empty and the transfer clock will remain at a high level. At this time the interrupt request

bit will be set.

External clock- If an external clock is used, the interrupt request will be sent after the transfer clock has counted 8 times but transfer clock will not stop.

Due to this reason, the external clock must be controlled from the outside. The external clock should not exceed 500kHz at a duty cycle of 50%. The timing diagram is shown in Figure 9. When using an external clock for transfer, the external clock must be held at "H" level when the serial I/O_i counter is initialized. When switching between the internal clock and external clock, the switching must not be performed during transfer. Also, the serial I/O counter must be initialized after switching.

An example of communication between two M37102M8-XXXSPs is shown in Figure 10.

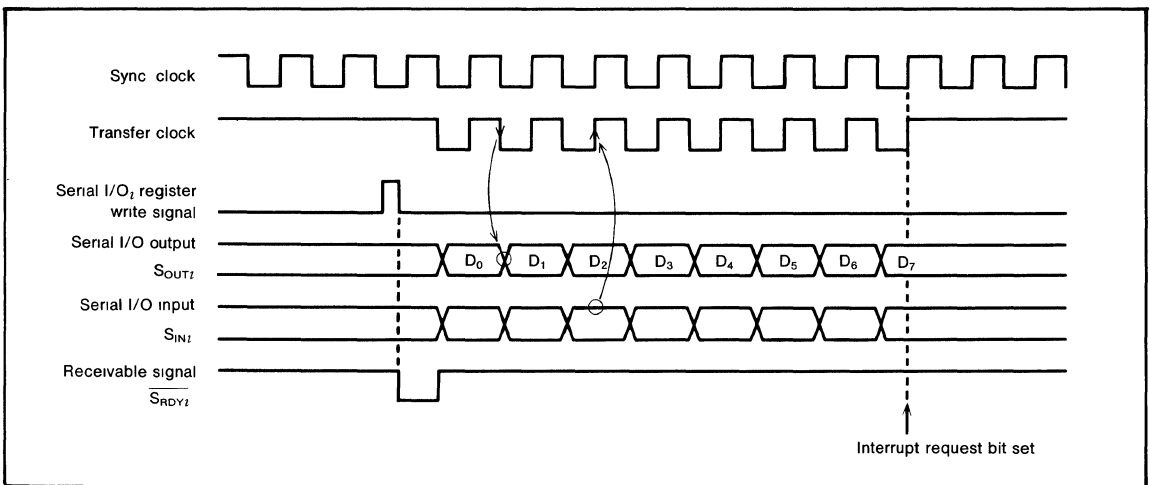


Fig. 9 Serial I/O timing

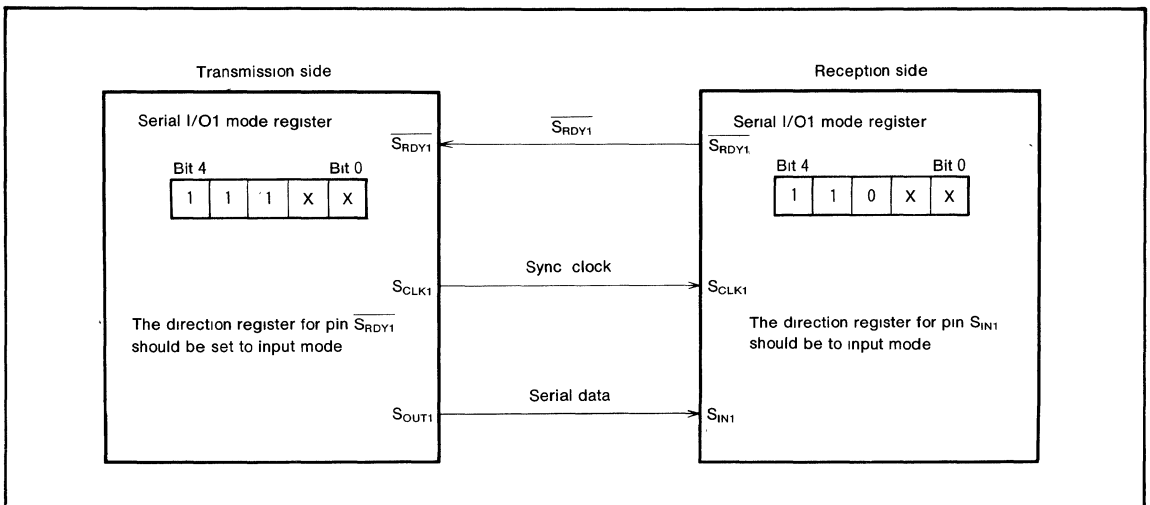


Fig. 10 Example of serial I/O connection

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

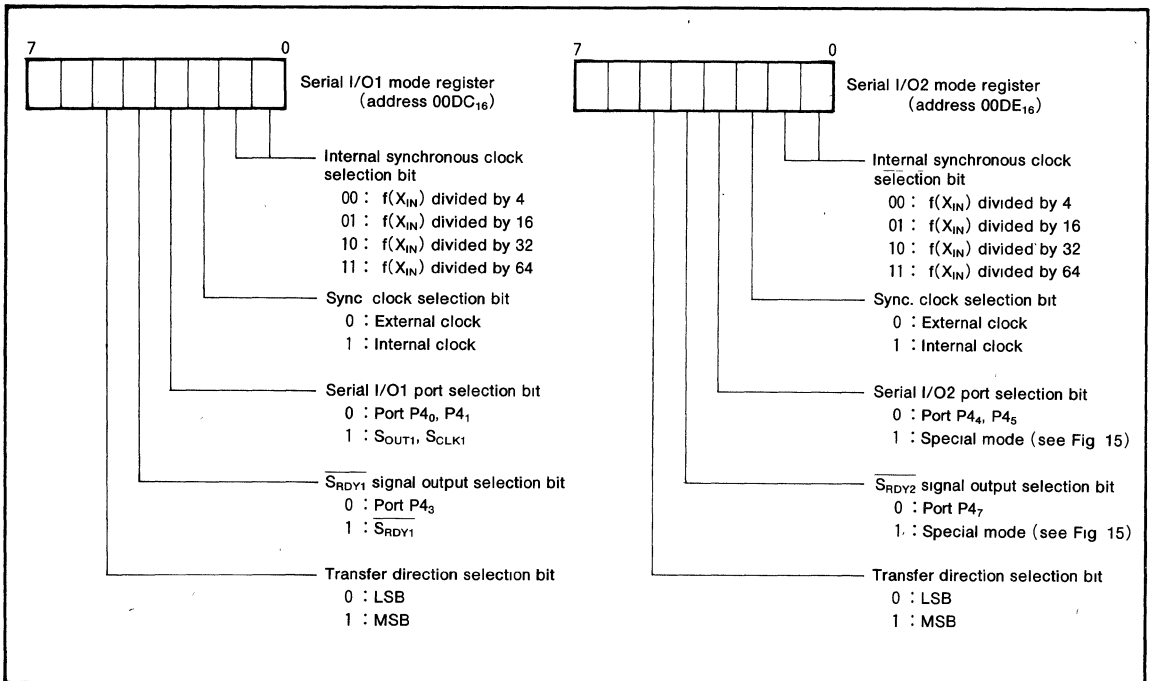


Fig. 11 Structure of serial I/O_i mode register

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

SPECIAL MODE (I²C BUS MODE*)

M37102M8-XXXSP has a special serial I/O circuit that can be reception or transmission of serial data in conformity with I²C (Inter IC) bus format.

I²C bus is a two line directional serial bus developed by Philips to transfer and control data among internal ICS of a machinery.

M37102M8-XXXSP's special serial I/O is not included the clock synchronisation function and the arbitration detectable function at multimaster.

Operations of master transmission and master reception with special serial I/O are explained in the following:

(1) Master transmission

To generate an interrupt at the end of transmission, set bit 7 of special mode register 2 (address 00DB₁₆) to "1" so as to special mode serial I/O interrupt is selected. Then set bit 3 of interrupt control register 2 (address 00FF₁₆) to "1" so as to special mode serial I/O interrupt is enabled. Clear the interrupt disable flag I to "0" by using the CLI instruction.

The output signals of master transmission SDA and SCL are output from ports P4₄ and P4₅. Set all bits (bits 4 and 5) corresponding to P4₄ and P4₅ of the port P4 register (address 00C8₁₆) and the port P4 direction register (address 00C9₁₆) to "1".

Set the transmission clock. The transmission clock uses the overflow signal of timer 4. Set appropriate value in timer 4. (For instance, if f(X_{IN})/16 is selected as the clock source of timer 4 and 4 is set in timer 4 when f(X_{IN}) is 4MHz, the master transmission clock frequency is 25kHz.)

Set contents of the special mode register 2 (address 00DB₁₆). (Usually, "83₁₆".)

Set the bit 3 of serial I/O mode register (address 00DE₁₆). After that set the special mode register 1 (address 00DA₁₆). Figure 15 shows the structure of special mode registers 1 and 2.

Initial setting is completed by the above procedure.

Write data to be transmitted in the special serial I/O regis-

ter (address 00D9₁₆). Immediately after this, clear bits 0 and 1 of special mode register 2 (to "0") to make both SDA and SCL output to "L". This is for arbitration. The start signal has been completed.

The hardware automatically sends out data of 9-clock cycle. The 9th clock is for ACK reception and the output level becomes "H" at this clock. If other master outputs the start signal to transmit data simultaneously with this 9th clock, it is not detected as an arbitration-lost.

When the ACK bit has been transmitted, bit 3 of the interrupt request register 2 is set to "1" (issue of interrupt request), notifying the end of data transmission.

To transmit data successively, write data to be sent to the special serial I/O register, and set the interrupt enabled state again. By repeating this procedure, unlimited number of bytes can be transmitted.

To terminate data transfer, clear bits 0 and 1 of the special mode register to "0", set bit 1 clock SCL to "1", then set bit 1 data SDA to "1". This procedure transmits the stop signal. Figure 13 shows master transmission timing explained above.

(2) Master reception

Master reception is carried out in the interrupt routine after data is transferred by master transmission. For master transmission and interrupt thereafter, see the preceding section (1) Master transmission.

In the interrupt routine, set master reception ACK provided (26₁₆) in the special mode register 1 (address 00DA₁₆), and write "FF₁₆" in the special serial I/O register (address 00D9₁₆). This sets data line SDA to "H" and to perform 8-clock master reception. Then, "L" is transmitted to data line SDA for ACK receiving. In the ACK provided mode, the above ACK is automatically sent out.

Repeat the above receiving operation for a necessary number of times. Then return to the master transmission mode and transmit the stop signal by the same procedure for the master transmission.

Figure 14 shows master reception timing.

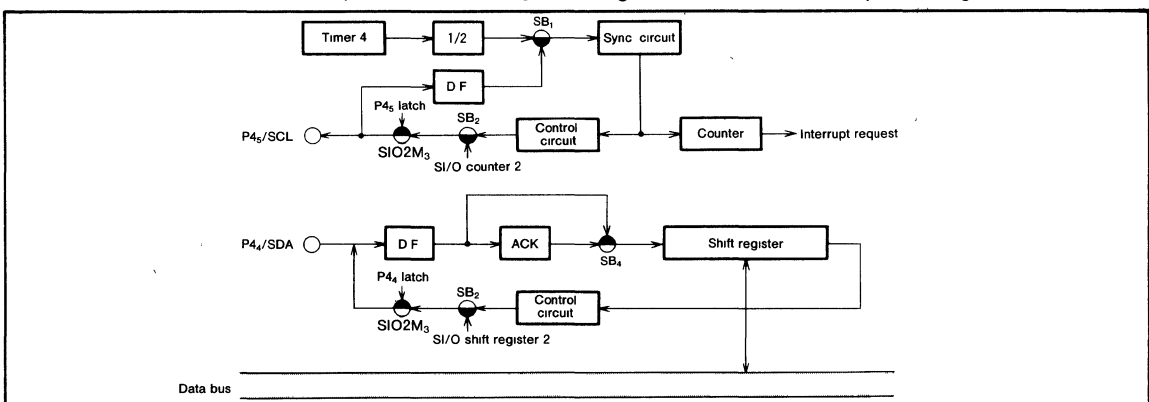


Fig. 12 Block diagram of special serial I/O

* : Purchase of Mitsubishi Electric Corporation's I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

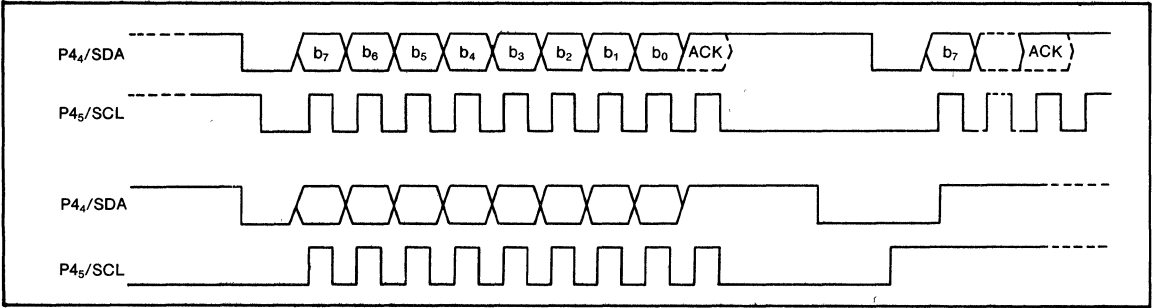


Fig. 13 Master transmission timing

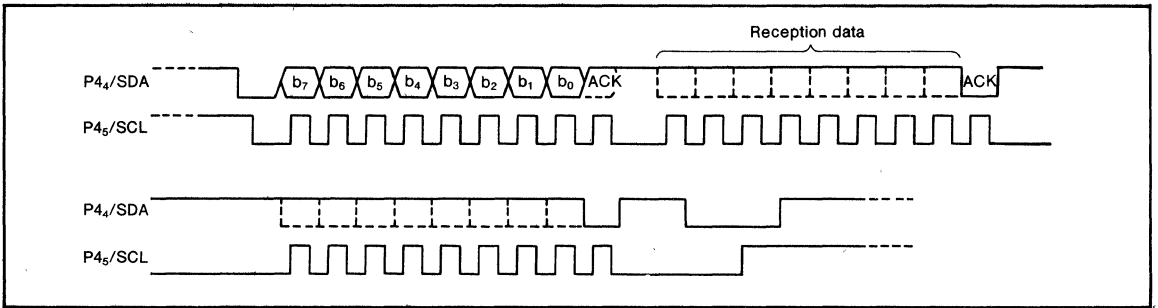


Fig. 14 Master reception timing

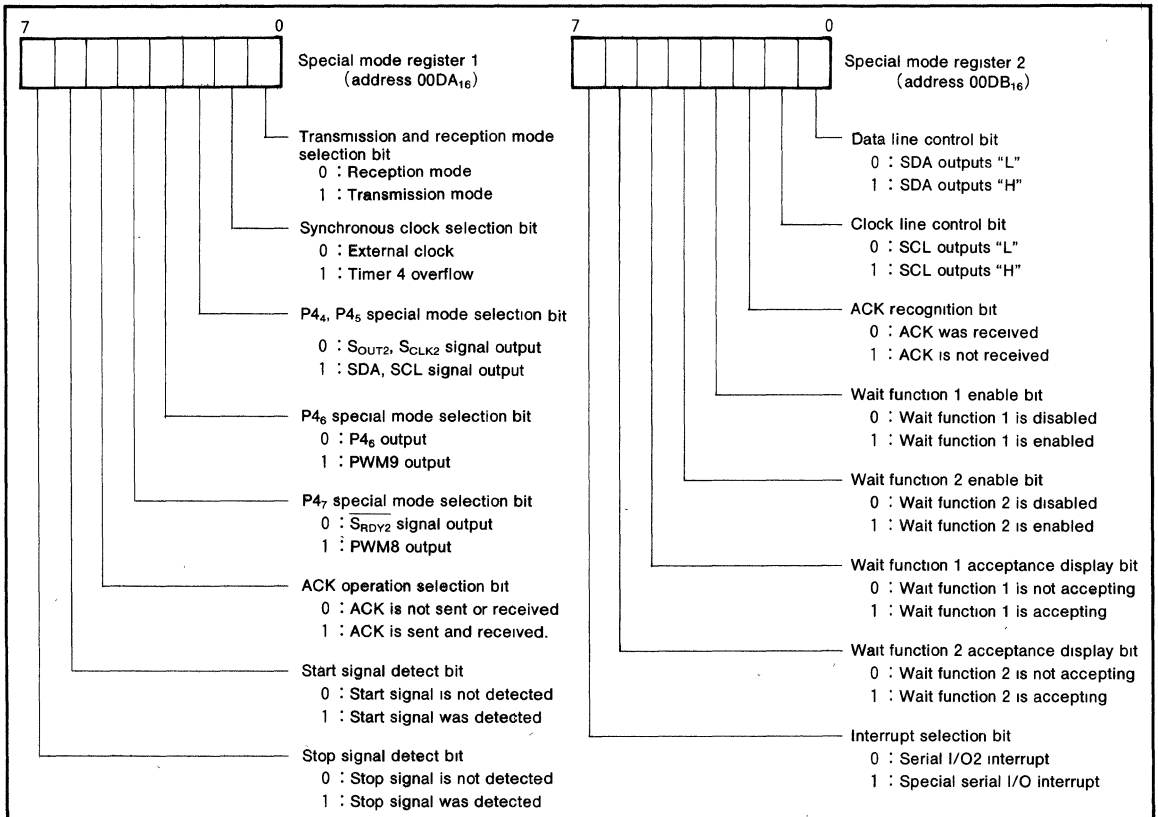


Fig. 15 Structure of special mode registers 1 and 2

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

PWM OUTPUT CIRCUIT

(1) Introduction

The M37102M8-XXXSP is equipped with one 14-bit PWM (DA) and ten 8-bit PWMs (PWM0-PWM9). The 14-bit resolution gives DA the minimum resolution bit width of 500ns (for $X_{IN}=4\text{MHz}$) and a repeat period of 8192 μs . PWM0-PWM9 have a 8-bit resolution with minimum resolution bit width of 8 μs and repeat period of 2048 μs .

Block diagram of the PWM is shown in Figure 16.

The PWM timing generator section applies individual control signals to DA and PWM0-9 using clock input X_{IN} divided by 2 as a reference signal.

(2) Data setting

The output pins PWM0-7 are in common with port P6 and PWM8, 9 are in common with port P4₆, P4₇.

For PWM output, each PWM output selection bit (bit 1 to 7 of PWM output control register 1, bit 0, 1 of PWM output control register 2, bit 3, 4 of special mode register 1 and bit 4 of serial I/O 2 mode register) should be set. When DA is used for output, first set the higher 8-bit of the DA-H register (address 00CE₁₆), then the lower 6-bit of the DA-L register (address 00CF₁₆).

When one of the PWM0-9 is used for output, set the 8-bit in the PWM0-9 register (address 00D0₁₆ to 00D4₁₆, 00F6₁₆ to 00FA₁₆), respectively.

(3) Transferring data from registers to latches

The data written to the PWM registers is transferred to the PWM latches at the repetition of the PWM period. The signals output to the PWM pins correspond to the contents of these latches. When data in each PWM register is read, data in these latches has already been read allowing the data output by the PWM to be confirmed. However, bit 7 of the DA-L register indicated the completion of the data transfer from the DA register to the DA latch. If bit 7 is "0", the transfer has been completed, if bit 7 is "1", the transfer has not yet begun.

(4) Operation of the 8-bit PWMs

The timing diagram of the ten 8-bit PWMs (PWM0-9) is shown in Figure 17. One period (T) is composed of 256 (2⁸) segments.

There are eight different pulse types configured from bits 0 to 7 representing the significance of each bit. These are output within one period in the circuit internal section. Refer to Figure 17 (a).

Eight different pulses can be output from the PWM. These can be selected by bits 0 through 7. Depending on the content of the 8-bit PWM latch, pulses from 7 to 0 is selected. The PWM output is the difference of the sum of each of these pulses. Several examples are shown in Figure 17 (b). Changes in the contents of the PWM latch allows the selection of 256 lengths of high-level area outputs varying from 0/256 to 255/256. An length of entirely high-level output cannot be output, i.e. 256/256.

(5) 14-bit PWM operation

The output example of the 14-bit PWM is shown in Figure 18. The 14-bit PWM divides the data within the PWM latch into the lower 6 bits and higher 8 bits.

A high-level area within a length D_H times τ is output every short area of $t=256 \tau=128\mu\text{s}$ as determined by data D_H of the higher 8 bits.

Thus, the time for the high-level area is equal to the time set by the lower 8 bits or that plus τ . As a result, the short-area period t (=128 μs , approx. 7.8kHz) becomes an approximately repetitive period.

(6) Output after reset

At reset the output of port P4, P6 is in the high impedance state and the contents of the PWM register and latch are undefined. Note that after setting the PWM register, its data is transferred to the latch.

Table 2. Relation between the 6 low-order bits of data and high-level area increase space

6 low-order bits of data	Area longer by τ than that of other t_m ($m = 0$ to 63)
0 0 0 0 0 0 ^{LSB}	Nothing
0 0 0 0 0 1	$m=32$
0 0 0 0 1 0	$m=16, 48$
0 0 0 1 0 0	$m=8, 24, 40, 56$
0 0 1 0 0 0	$m=4, 12, 20, 28, 36, 44, 52, 60$
0 1 0 0 0 0	$m=2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62$
1 0 0 0 0 0	$m=1, 3, 5, 7, \dots, 57, 59, 61, 63$

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

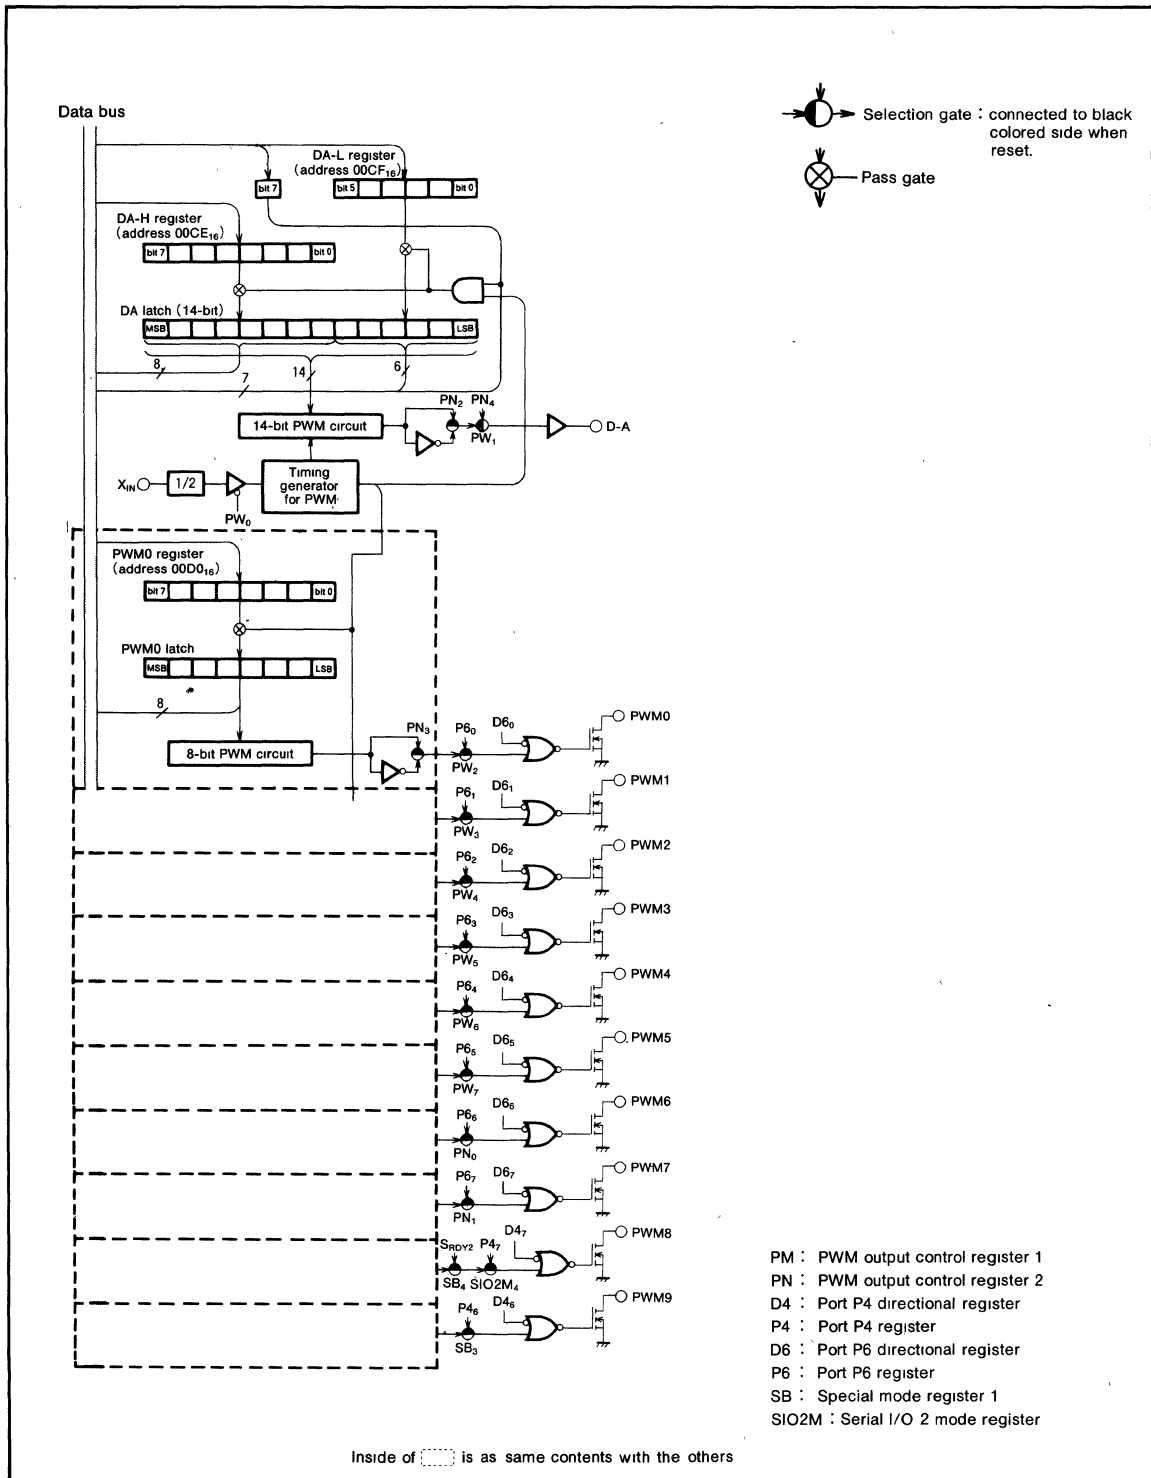


Fig. 16 Block diagram of the PWM circuit

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

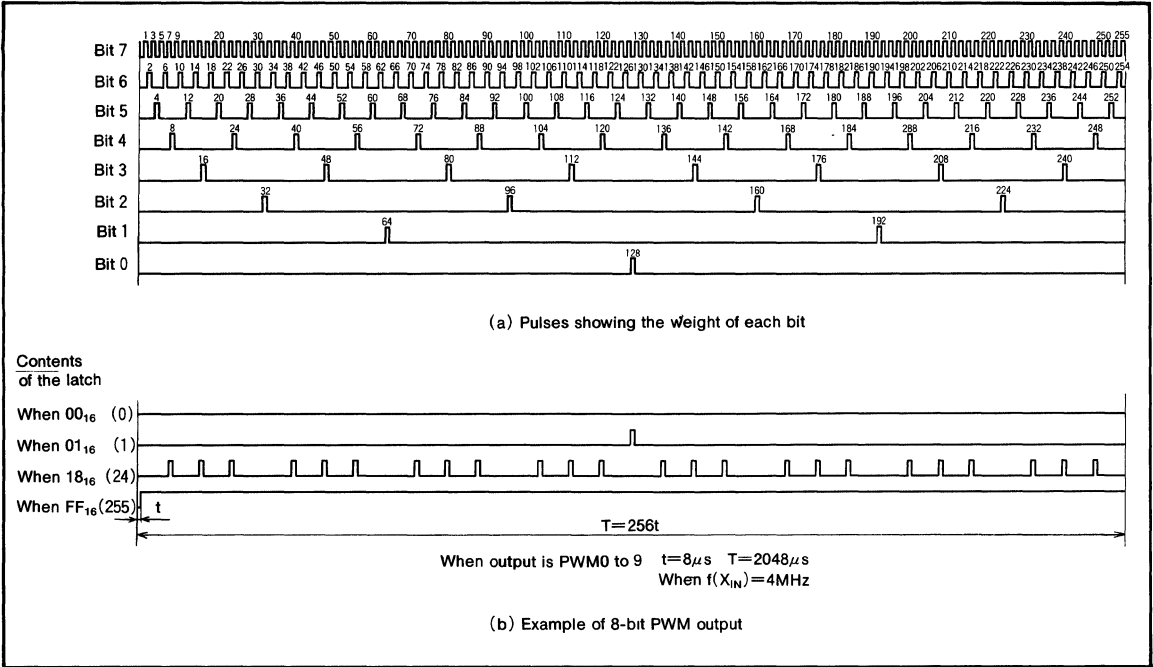


Fig. 17 8-bit PWM timing diagram

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with **ON-SCREEN DISPLAY CONTROLLER**

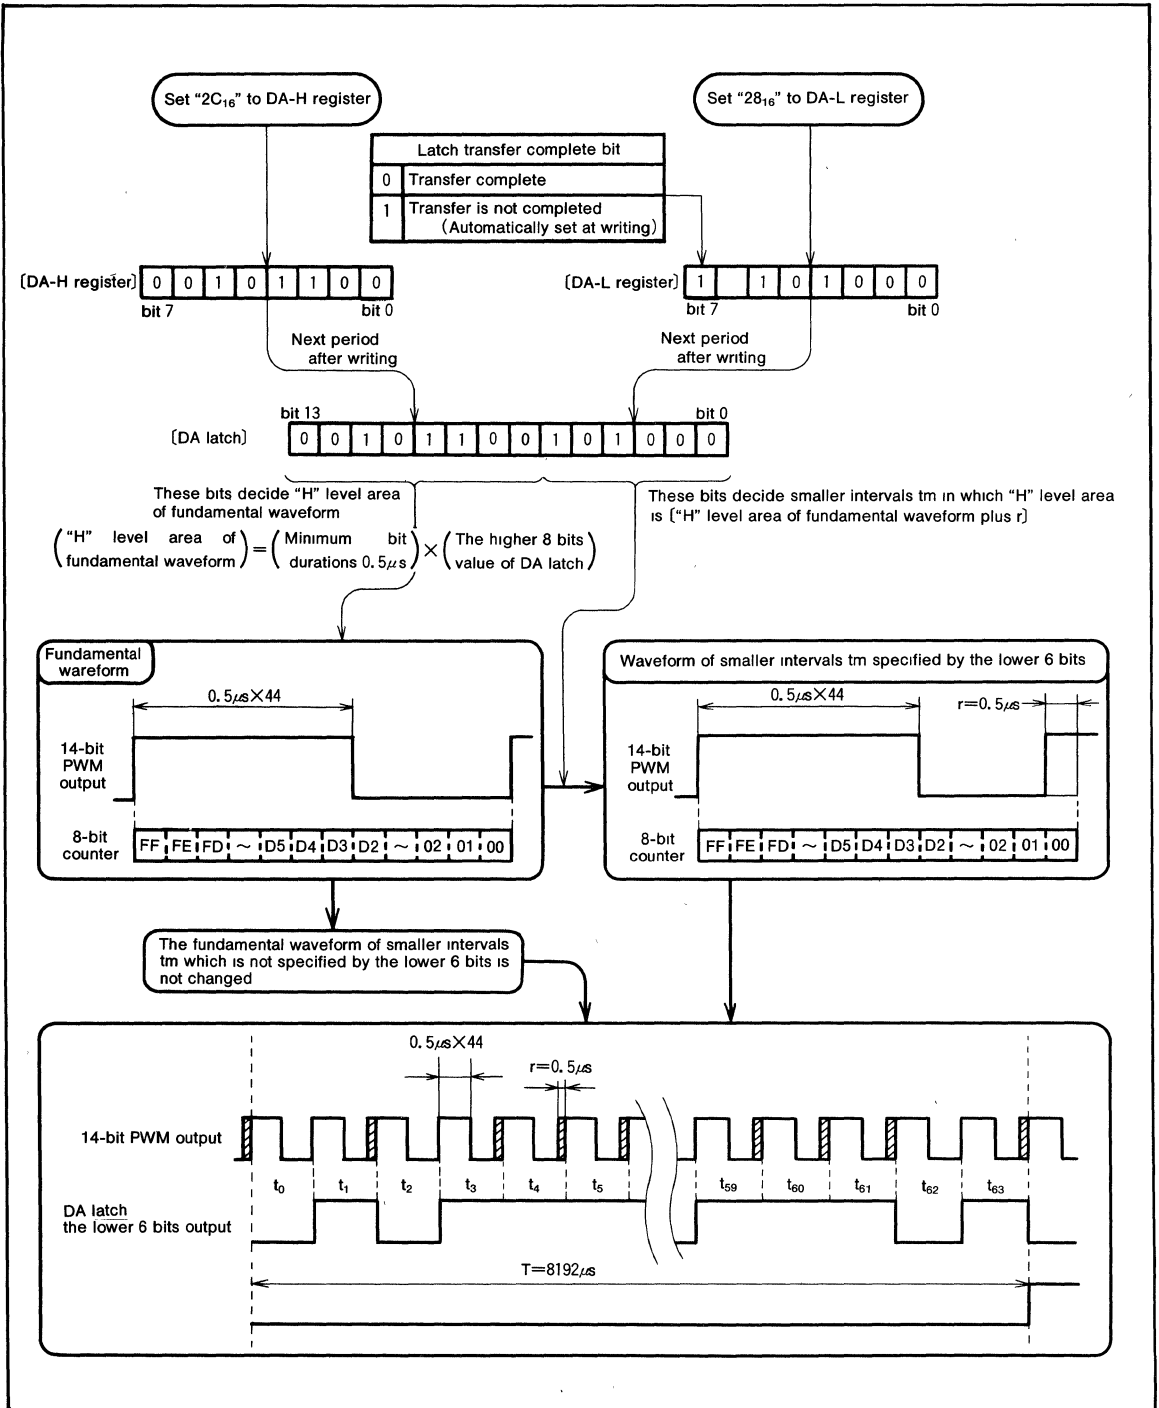


Fig. 18 14-bit PWM output example ($f(X_{IN}) = 4\text{MHz}$)

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

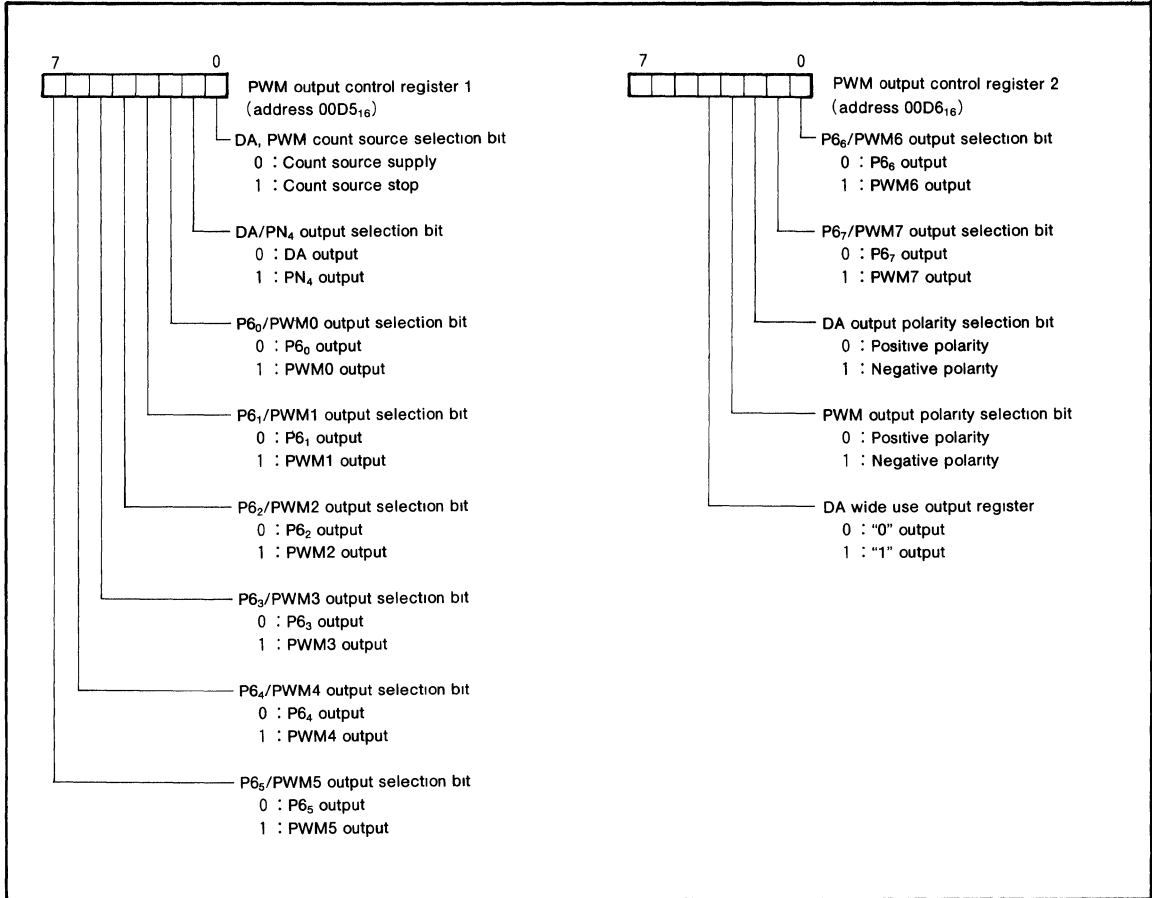


Fig. 19 Structure of PWM output control register 1 and 2

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

A-D CONVERTER

Block diagram of A-D converter is shown in Figure 21. A-D converter consists of 4-bit D-A converter and comparator. The A-D control register can generate 1/16 V_{CC} -step internal analog voltage based on the settings of bits 0 to 3.

Table 3 gives the relation between the descriptions of A-D control register bits 0 to 3 and the generated internal analog voltage. The comparison result of the analog input voltage and the internal analog voltage is stored in the A-D control register, bit 4.

The data is compared by setting the directional register corresponding to port $P3_5$, $P3_6$ to "0" (port $P3_5$, $P3_6$ enters the input mode), to allow port $P3_5/A-D1$, $P3_6/A-D2$ to be used as the analog input pin. The digital value corresponding to the internal analog voltage to be compared is then written in the A-D control register, bit 0 to 3 and an analog input pin is selected. After 16 machine cycle, the voltage comparison starts.

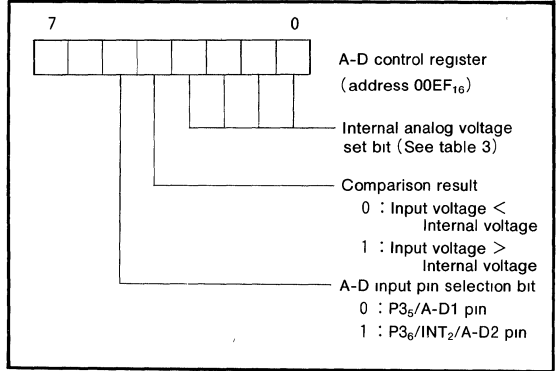


Fig. 20 Structure of A-D control register

Table 3. Relationship between the contents of A-D control register and internal analog voltage

A-D control register				Internal analog voltage
Bit 3	Bit 2	Bit 1	Bit 0	
0	0	0	0	1/32 V_{CC}
0	0	0	1	3/32 V_{CC}
0	0	1	0	5/32 V_{CC}
0	0	1	1	7/32 V_{CC}
0	1	0	0	9/32 V_{CC}
0	1	0	1	11/32 V_{CC}
0	1	1	0	13/32 V_{CC}
0	1	1	1	15/32 V_{CC}
1	0	0	0	17/32 V_{CC}
1	0	0	1	19/32 V_{CC}
1	0	1	0	21/32 V_{CC}
1	0	1	1	23/32 V_{CC}
1	1	0	0	25/32 V_{CC}
1	1	0	1	27/32 V_{CC}
1	1	1	0	29/32 V_{CC}
1	1	1	1	31/32 V_{CC}

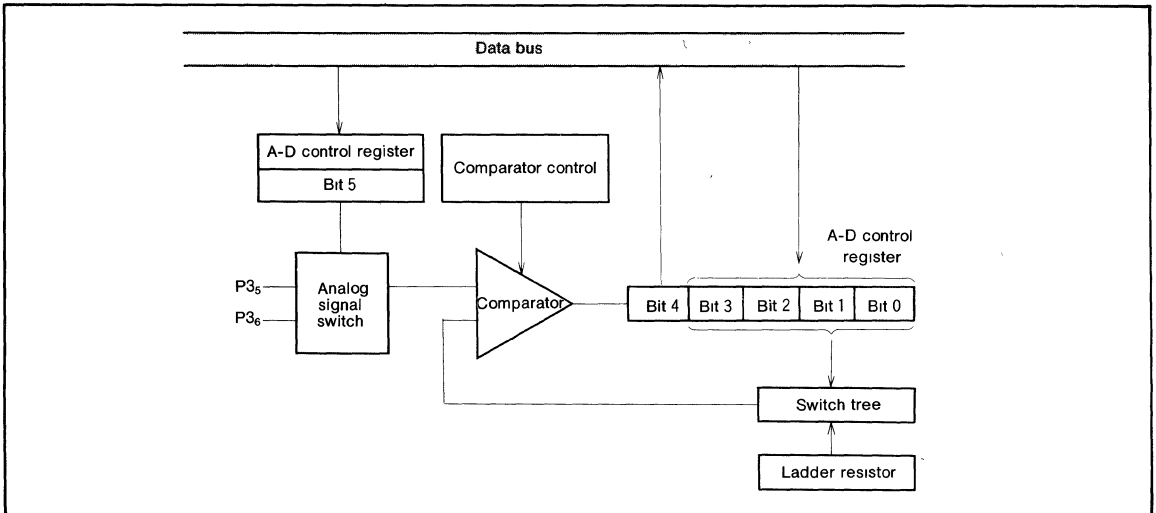


Fig. 21 Block diagram of A-D converter

CRT DISPLAY FUNCTIONS

(1) Outline of CRT Display Functions

Table 4 outlines the CRT display functions of the M37102M8-XXXSP. The M37102M8-XXXSP incorporates a 24 columns X 3 lines CRT display control circuit. CRT display is controlled by the CRT display control register.

Up to 126 kinds of characters can be displayed, and colors can be specified for each character. Four colors can be displayed on one screen. A combination of up to 15 colors can be obtained by using each output signal (R, G, B, and I).

Characters are displayed in a 12 X 16 dot configuration to obtain smooth character patterns. (See Figure 22)

The following shows the procedure how to display characters on the CRT screen.

Table 4. Outline of CRT display functions

Parameter		Functions
Number of display character		24 characters X 3 lines
Character configuration		12 X 16 dots (See Figure 22)
Kinds of character		126
Character size		4 size selectable
Color	Kinds of color	15 (max.)
	Coloring unit	a character
Display expansion		Possible (multiple lines)


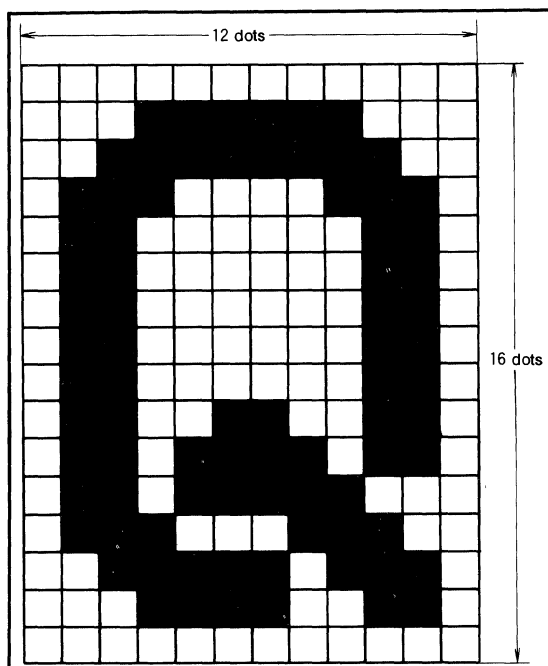


Fig. 22 CRT display character configuration

- ① Set the character to be displayed in display RAM.
- ② Set the display color by using the color register.
- ③ Specify the color register in which the display color is set by using the display RAM.
- ④ Specify the vertical position and character size by using the vertical position register and the character size register.
- ⑤ Specify the horizontal position by using the horizontal position register.
- ⑥ Write the display enable bit to the designated block display flag of the CRT control register. When this is done, the CRT starts operation according to the input of the V_{SYNC} signal.

The CRT display circuit has an extended display mode. This mode allows multiple lines (more than 4 lines) to be displayed on the screen by interrupting the display each time one line is displayed and rewriting data in the block for which display is terminated by software.

Figure 24 shows a block diagram of the CRT display control circuit. Figure 23 shows the structure of the CRT display control register.

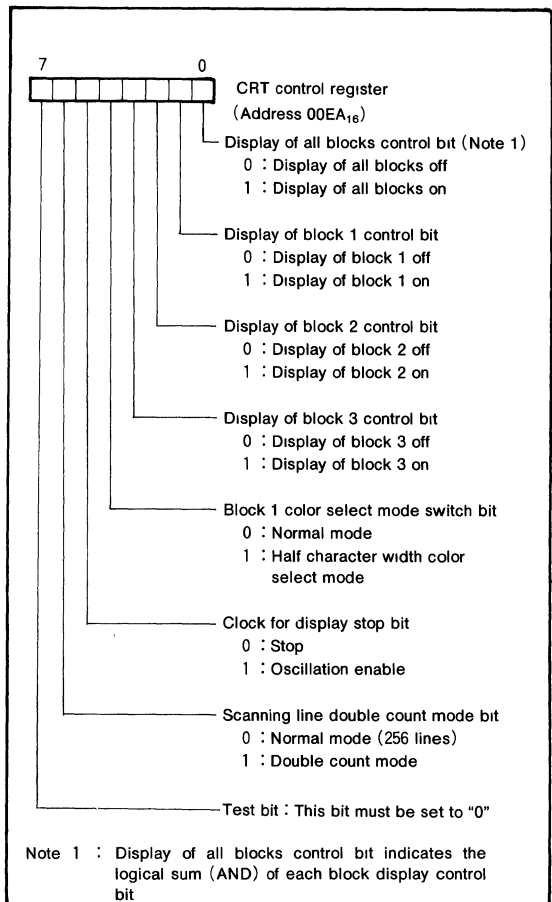

Note 1 : Display of all blocks control bit indicates the logical sum (AND) of each block display control bit

Fig. 23 Structure of CRT control register

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

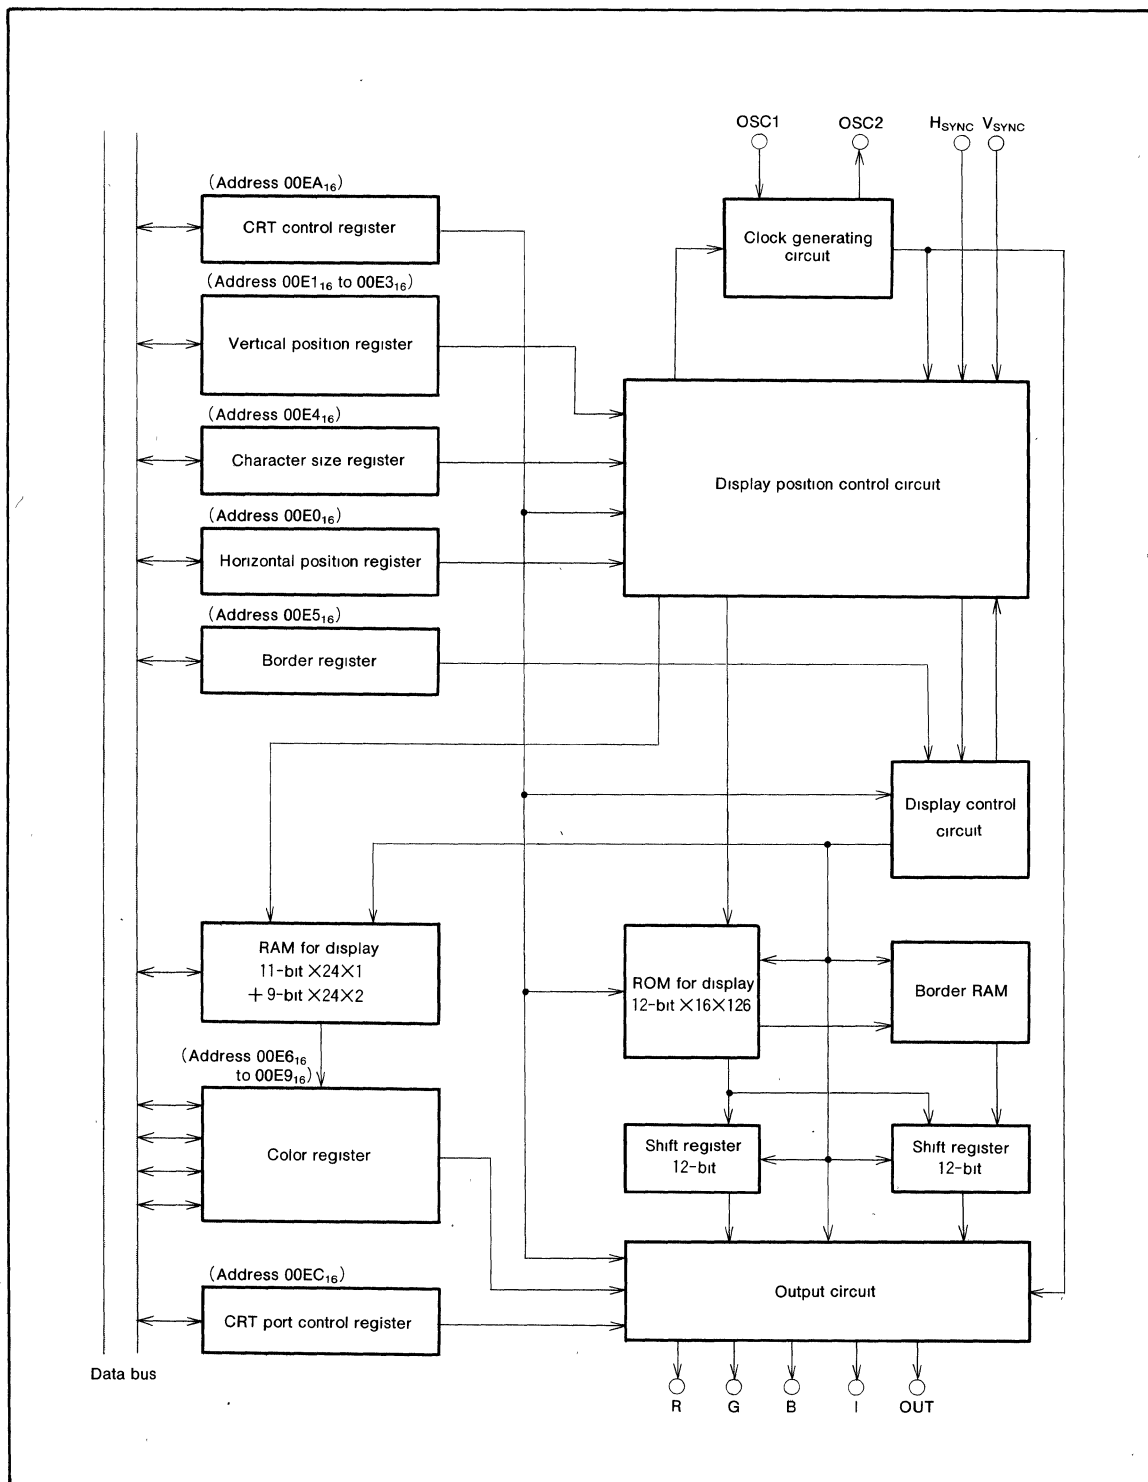


Fig. 24 Block diagram of CRT display control circuit

(2) Display Position

The display positions of characters are specified in units called a "block." There are three blocks, block 1 to block 3. Up to 24 characters can be displayed in one block. (See (4) Display Memory.)

The display position of each block in both horizontal and vertical directions can be set by software.

The horizontal direction is common to all blocks, and is selected from 64-step display positions in units of $4T_c$ (T_c = oscillation cycle for display).

The display position in the vertical direction is selected from 128-step display positions for each block in units of four scanning lines.

If the display start position of a block overlaps with some other block ((b) in Figure 27), a block of the smaller block No. (1 to 3) is displayed.

If when one block is displaying, some other block is displayed at the same display position ((c) in Figure 27), the former block is overridden and the latter is displayed.

The vertical position can be specified from 128-step positions (four scanning lines per step) for each block by setting values 00_{16} to $7F_{16}$ to bits 0 to 6 in the vertical position register (addresses $00E1_{16}$ to $00E3_{16}$). Figure 25 shows the structure of the vertical position register.

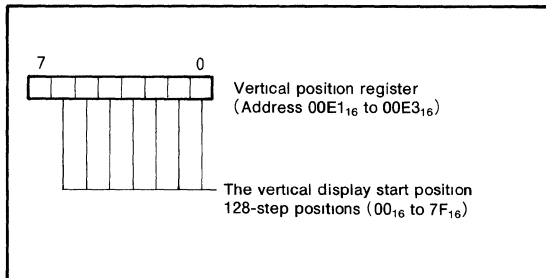


Fig. 25 Structure of vertical position registers

The horizontal direction is common to all blocks, and can be specified from 64 -step display positions ($4T_c$ per step (T_c = oscillation cycle for display) by setting values 00_{16} to $3F_{16}$ to bits 0 to 5 in the horizontal position register (address $00E0_{16}$). Figure 26 shows the structure of the horizontal position register.



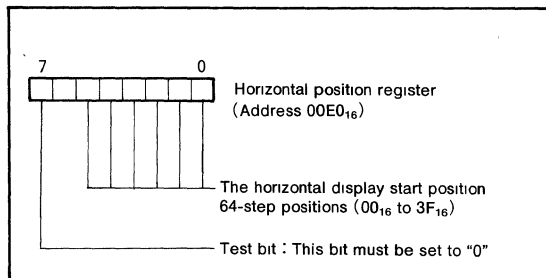


Fig. 26 Structure of horizontal position register


MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

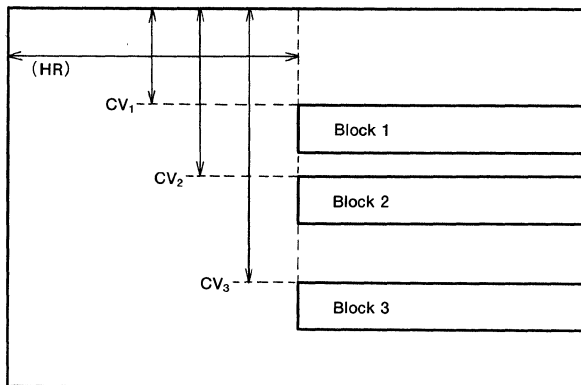

(a) Example when each block is separated

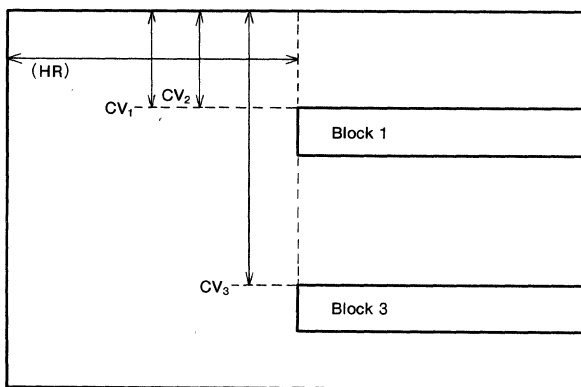

(b) Example when the display start position of a block overlaps with some other block

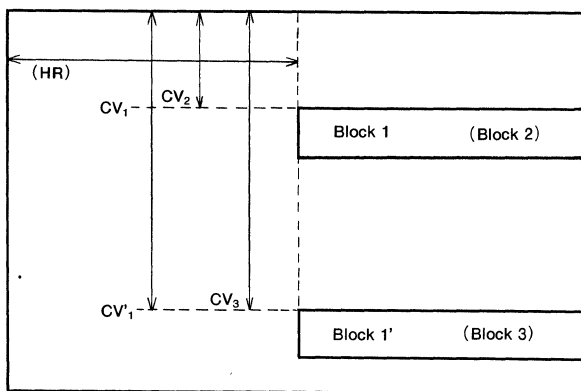

(c) Example when one block is displaying some other block is superimposed

Fig. 27 Display position

(3) Character Size

The size of characters to be displayed can be selected from four sizes for each block. Use the character size register (address $00E4_{16}$) to set a character size. The character size in block 1 can be specified by using bits 0 and 1 in the character size register; the character size in block 2 can be specified by using bits 2 and 3; the character size in block 3 can be specified by using bits 4 and 5. Figure 28 shows the structure of the character size register.

The character size can be selected from four sizes: small size, medium size, large size, and extra large size. Each character size is determined by the number of scanning lines in the height (vertical) direction and the cycle of display oscillation ($=T_c$) in the width (horizontal) direction. The small size consists of [one scanning line] \times [$1 T_c$]; the medium size consists of [two scanning lines] \times [$2 T_c$]; the large size consists of [three scanning lines] \times [$3 T_c$]; and the extra large size consists of [four scanning lines] \times [$4 T_c$]. Table 5 shows the relationship between the set values in the character size register and the character sizes.

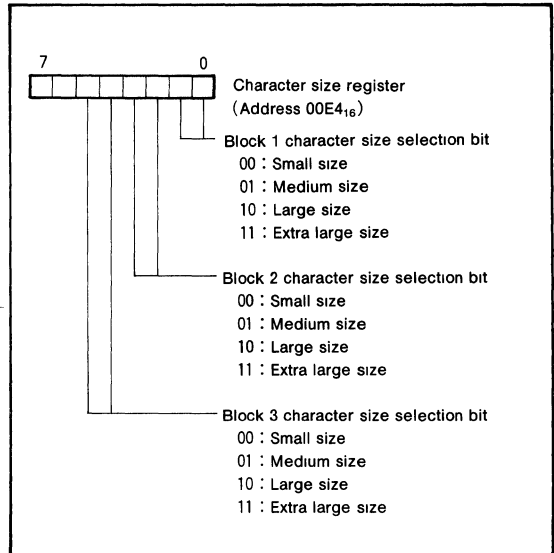


Fig. 28 Structure of character size register

Table 5. The relationship between the set values of the character size register and the character sizes

Set values of the character size register		Character size	Width (horizontal) direction	Height (vertical) direction
CS _{n1}	CS _{n0}			
0	0	Small	1 T_c	1
0	1	Medium	2 T_c	2
1	0	Large	3 T_c	3
1	1	Extra large	4 T_c	4

Note : The display start position in the horizontal direction is not affected by the character size. In other words, the horizontal start position is common to all blocks even when the character size varies with each block (See Figure 29)

(4) Display Memory

There are two types of display memory: ROM of CRT display (3000_{16} to $3FFF_{16}$) used to store character dot data (masked) and display RAM (2000_{16} to $20D7_{16}$) used to specify the colors of characters to be displayed. The following describes each type of display memory.

① ROM for CRT display (3000_{16} to $3FFF_{16}$)

The CRT display ROM contains dot pattern data for characters to be displayed. For characters stored in this ROM to be actually displayed, it is necessary to specify them by writing the character code inherent to each character (code determined based on the addresses in the CRT display ROM) into the CRT display RAM.

The CRT display ROM has a capacity of 4K bytes. Because 32 bytes are required for one character data, the ROM can contain up to 128 kinds of characters. Actually, however, because two characters are required for test pattern use, the ROM can contain up to 126 kinds of characters for display use.

The CRT display ROM space is broadly divided into two areas. The [vertical 16 dots] × [horizontal (left side) 8 dots] data of display characters are stored in addresses 3000_{16} to $37FF_{16}$; the [vertical 16 dots] × [horizontal (right side) 4 dots] data of display characters are stored in addresses 3800_{16} to $3FFF_{16}$. (See Figure 30) Note however that the four upper bits in the data to be written to addresses 3800_{16} to $3FFF_{16}$ must be set to "1" (by writing data $F0_{16}$ to FF_{16}).

Table 6. Character code list

Character code	Contained up address of character data	
	Left 8 dots lines	Right 4 dots lines
00_{16}	3000_{16} to $300F_{16}$	3800_{16} to $380F_{16}$
01_{16}	3010_{16} to $301F_{16}$	3810_{16} to $381F_{16}$
02_{16}	3020_{16} to $302F_{16}$	3820_{16} to $382F_{16}$
03_{16}	3030_{16} to $303F_{16}$	3830_{16} to $383F_{16}$
:	:	:
10_{16}	3100_{16} to $310F_{16}$	3900_{16} to $390F_{16}$
11_{16}	3110_{16} to $311F_{16}$	3910_{16} to $391F_{16}$
:	:	:
$4F_{16}$	$34F0_{16}$ to $34FF_{16}$	$3CF0_{16}$ to $3CFF_{16}$
50_{16}	3500_{16} to $350F_{16}$	$3D00_{16}$ to $3D0F_{16}$
:	:	:
$7D_{16}$	$37D0_{16}$ to $37DF_{16}$	$3FD0_{16}$ to $3FDF_{16}$
$7E_{16}$ *	$37E0_{16}$ to $37EF_{16}$	$3FE0_{16}$ to $3FEF_{16}$
$7F_{16}$ *	$37F0_{16}$ to $37FF_{16}$	$3FF0_{16}$ to $3FFF_{16}$

* For test pattern

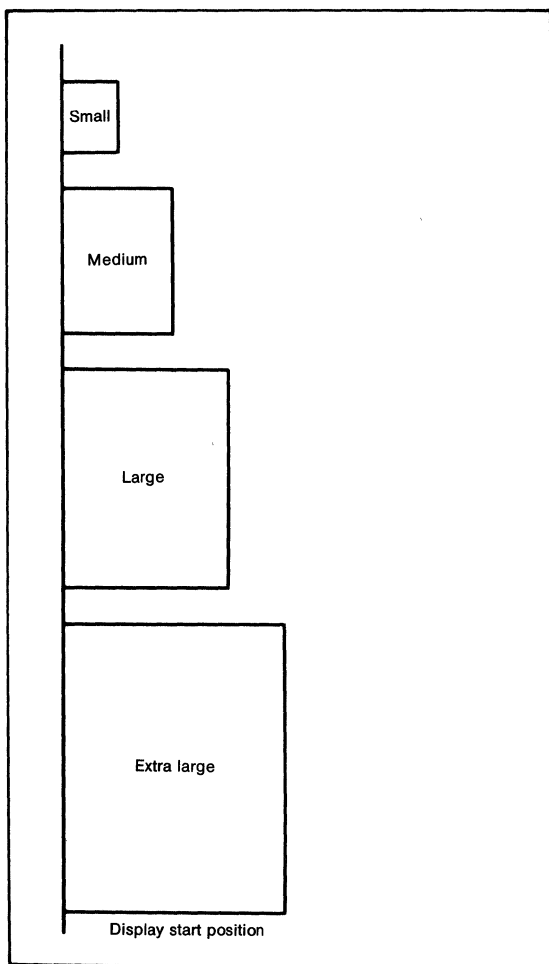


Fig. 29 Display start position of each character size (horizontal direction)

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

The character code used to specify a character to be displayed is determined based on the address in the CRT display ROM in which that character is stored.

Assume that data for one character is stored at $3XX0_{16}$ to $3XXF_{16}$ (XX denotes 00_{16} to $7F_{16}$) and $3YY0_{16}$ to $3YYF_{16}$ (YY denotes 80_{16} to FF_{16}), then the character code for it is "XX₁₆".

In other words, character code for any given character is configured with two middle digits of the four-digit (hex-notated) address (3000_{16} to $37FF_{16}$) where data for that character is stored.

Table 6 lists the character codes.

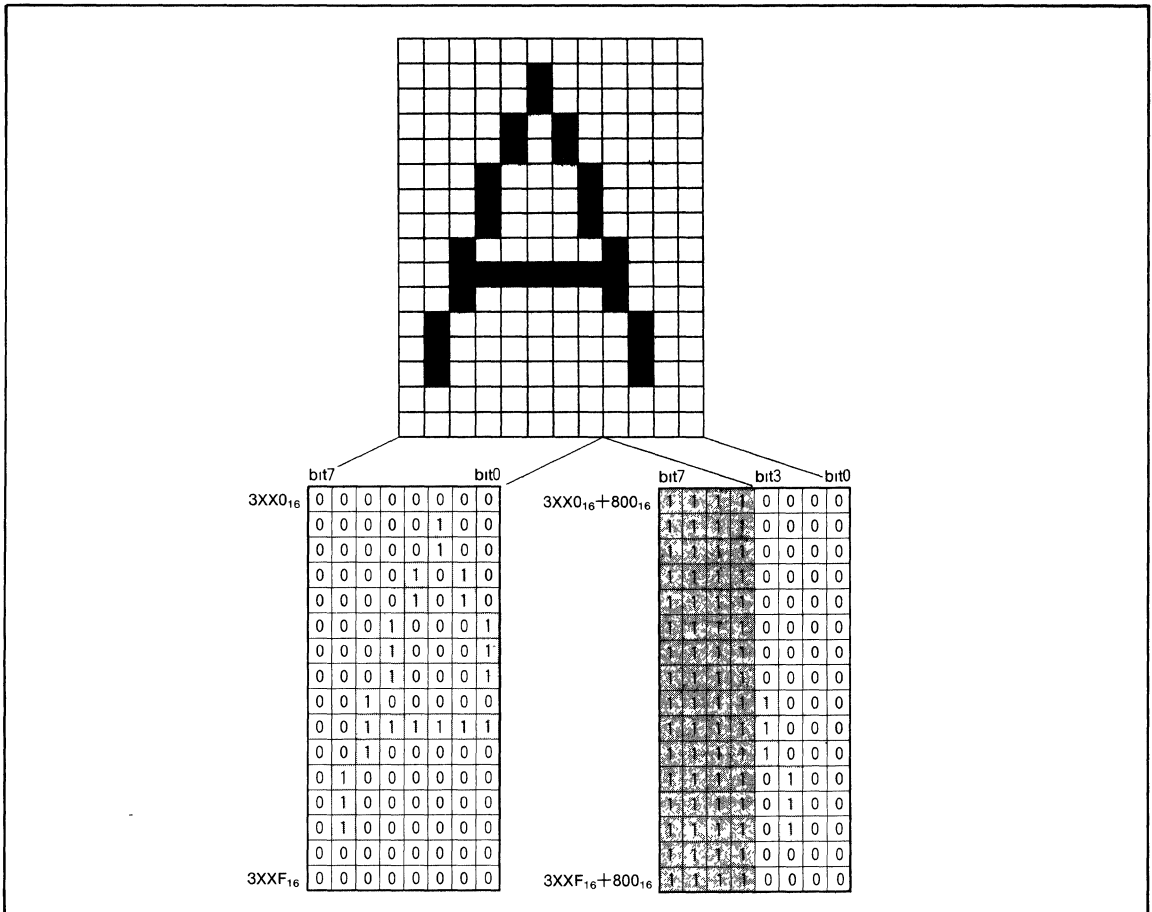


Fig. 30 Display character stored area

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

② CRT display RAM (2000₁₆ to 20D7₁₆)

The CRT display RAM is allocated at addresses 2000₁₆ to 20D7₁₆, and is divided into a display character code specifying part and display color specifying part for each block. Table 7 shows the contents of the CRT display RAM.

When a character is to be displayed at the first character (leftmost) position in block 1, for example, it is necessary to write the character code to the seven low-order bits (bits 0 to 6) in address 2000₁₆ and the color register No. to the two low-order bits (bits 0 and 1) in address 2080₁₆. The color register No. to be written here is one of the four color registers in which the color to be displayed is set in advance. For details on color registers, refer to (5) Color Registers.

The structure of the CRT display RAM is shown in Figure 30. Write the character patterns at Table 8 and 9, when M37102M8-XXXSP is mask-ordered.

Table 7. The contents of the CRT display RAM

Block	Display position (from left)	Character code specification	Color specification
Block 1	1st column	2000 ₁₆	2080 ₁₆
	2nd column	2001 ₁₆	2081 ₁₆
	3rd column	2002 ₁₆	2082 ₁₆
	⋮	⋮	⋮
	22th column	2015 ₁₆	2095 ₁₆
	23th column	2016 ₁₆	2096 ₁₆
	24th column	2017 ₁₆	2097 ₁₆
Not used		2018 ₁₆ to 201F ₁₆	2098 ₁₆ to 209F ₁₆
Block 2	1st column	2020 ₁₆	20A0 ₁₆
	2nd column	2021 ₁₆	20A1 ₁₆
	3rd column	2022 ₁₆	20A2 ₁₆
	⋮	⋮	⋮
	22th column	2035 ₁₆	20B5 ₁₆
	23th column	2036 ₁₆	20B6 ₁₆
	24th column	2037 ₁₆	20B7 ₁₆
Not used		2038 ₁₆ to 203F ₁₆	20B8 ₁₆ to 20BF ₁₆
Block 3	1st column	2040 ₁₆	20C0 ₁₆
	2nd column	2041 ₁₆	20C1 ₁₆
	3rd column	2042 ₁₆	20C2 ₁₆
	⋮	⋮	⋮
	22th column	2055 ₁₆	20D5 ₁₆
	23th column	2056 ₁₆	20D6 ₁₆
	24th column	2057 ₁₆	20D7 ₁₆
Not used		2058 ₁₆ to 207F ₁₆	

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

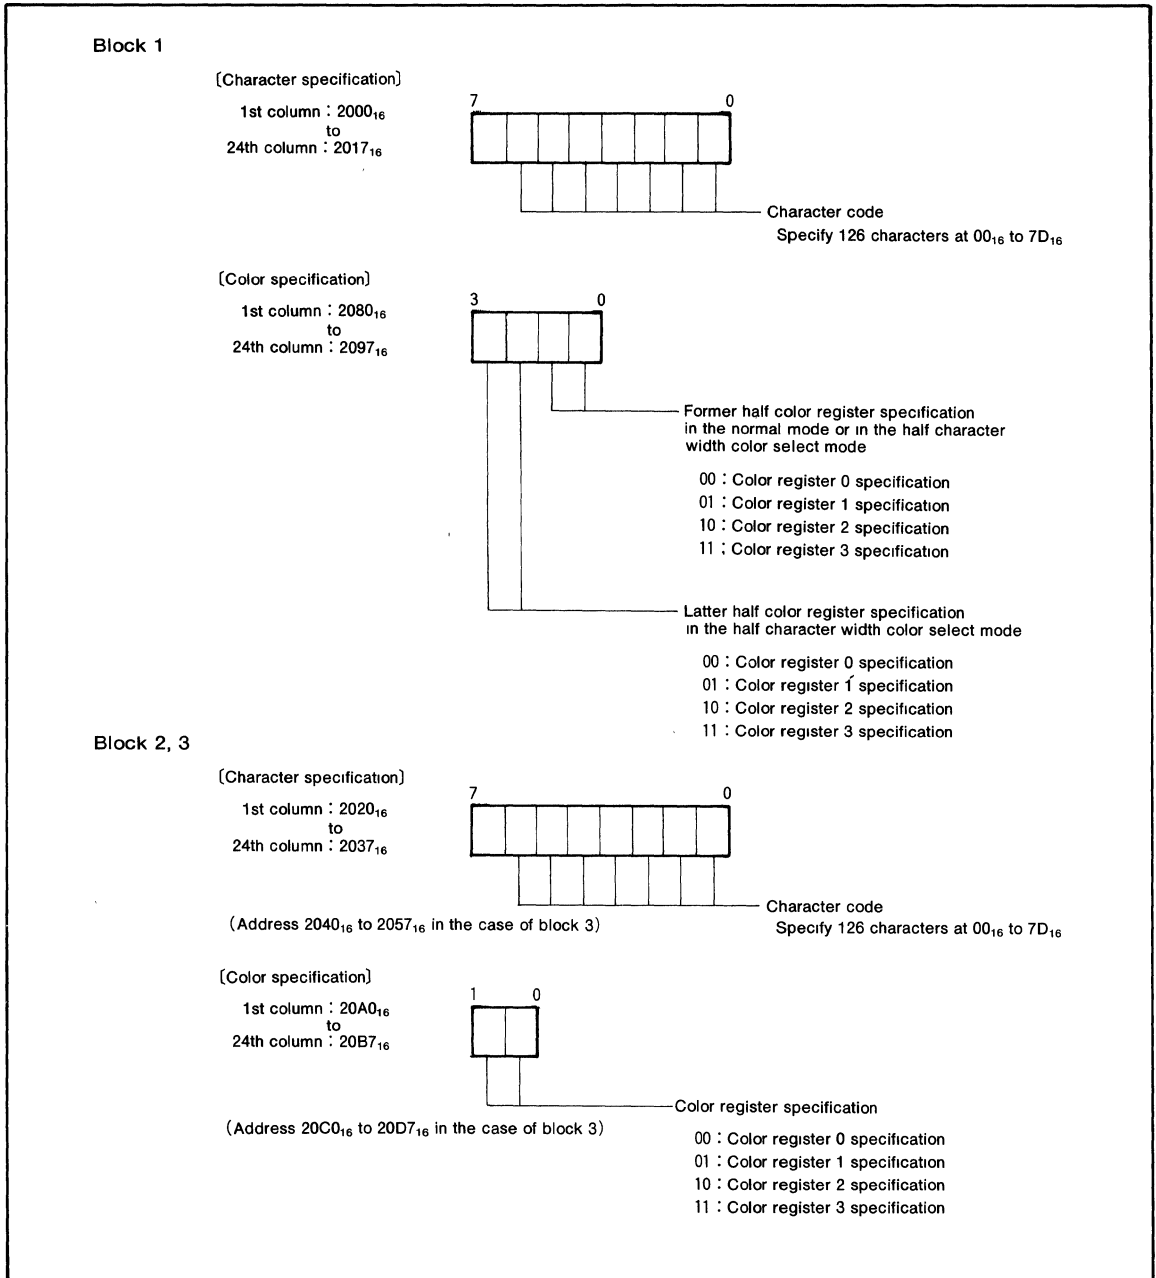


Fig. 31 Structure of the CRT display RAM

Table 8. Test character patterns 1

Address	Data	Address	Data
37E0 ₁₆	40 ₁₆	3FE0 ₁₆	F0 ₁₆
37E1 ₁₆	04 ₁₆	3FE1 ₁₆	F0 ₁₆
37E2 ₁₆	00 ₁₆	3FE2 ₁₆	F4 ₁₆
37E3 ₁₆	20 ₁₆	3FE3 ₁₆	F0 ₁₆
37E4 ₁₆	02 ₁₆	3FE4 ₁₆	F0 ₁₆
37E5 ₁₆	00 ₁₆	3FE5 ₁₆	F2 ₁₆
37E6 ₁₆	10 ₁₆	3FE6 ₁₆	F0 ₁₆
37E7 ₁₆	01 ₁₆	3FE7 ₁₆	F0 ₁₆
37E8 ₁₆	80 ₁₆	3FE8 ₁₆	F0 ₁₆
37E9 ₁₆	08 ₁₆	3FE9 ₁₆	F0 ₁₆
37EA ₁₆	00 ₁₆	3FEA ₁₆	F8 ₁₆
37EB ₁₆	40 ₁₆	3FEB ₁₆	F0 ₁₆
37EC ₁₆	04 ₁₆	3FEC ₁₆	F0 ₁₆
37ED ₁₆	00 ₁₆	3FED ₁₆	F4 ₁₆
37EE ₁₆	20 ₁₆	3FEE ₁₆	F0 ₁₆
37EF ₁₆	02 ₁₆	3FEF ₁₆	F0 ₁₆

Table 9. Test character patterns 2

Address	Data	Address	Data
37F0 ₁₆	00 ₁₆	3FF0 ₁₆	F0 ₁₆
37F1 ₁₆	00 ₁₆	3FF1 ₁₆	F0 ₁₆
37F2 ₁₆	00 ₁₆	3FF2 ₁₆	F0 ₁₆
37F3 ₁₆	00 ₁₆	3FF3 ₁₆	F0 ₁₆
37F4 ₁₆	00 ₁₆	3FF4 ₁₆	F0 ₁₆
37F5 ₁₆	00 ₁₆	3FF5 ₁₆	F0 ₁₆
37F6 ₁₆	00 ₁₆	3FF6 ₁₆	F0 ₁₆
37F7 ₁₆	00 ₁₆	3FF7 ₁₆	F0 ₁₆
37F8 ₁₆	00 ₁₆	3FF8 ₁₆	F0 ₁₆
37F9 ₁₆	00 ₁₆	3FF9 ₁₆	F0 ₁₆
37FA ₁₆	00 ₁₆	3FFA ₁₆	F0 ₁₆
37FB ₁₆	00 ₁₆	3FFB ₁₆	F0 ₁₆
37FC ₁₆	00 ₁₆	3FFC ₁₆	F0 ₁₆
37FD ₁₆	00 ₁₆	3FFD ₁₆	F0 ₁₆
37FE ₁₆	00 ₁₆	3FFE ₁₆	F0 ₁₆
37FF ₁₆	00 ₁₆	3FFF ₁₆	F0 ₁₆

(5) Color Registers

The color of a displayed character can be specified by setting the color to one of the four color registers (CO0 to CO3: addresses 00E6₁₆ to 00E9₁₆) and then specifying that color register with the CRT display RAM.

There are four color outputs: R, G, B, and I. By using a combination of these outputs, it is possible to set 2^4-1 (when no output) = 15 colors. However, because only four color registers are available, up to four colors can be displayed at one time.

R, G, B, and I outputs are set by using bits 0 to 3 in the color register. Bit 4 in the color register is used to set a character or blank output; bit 5 is used to specify whether a character output or blank output. Figure 32 shows the structure of the color register.

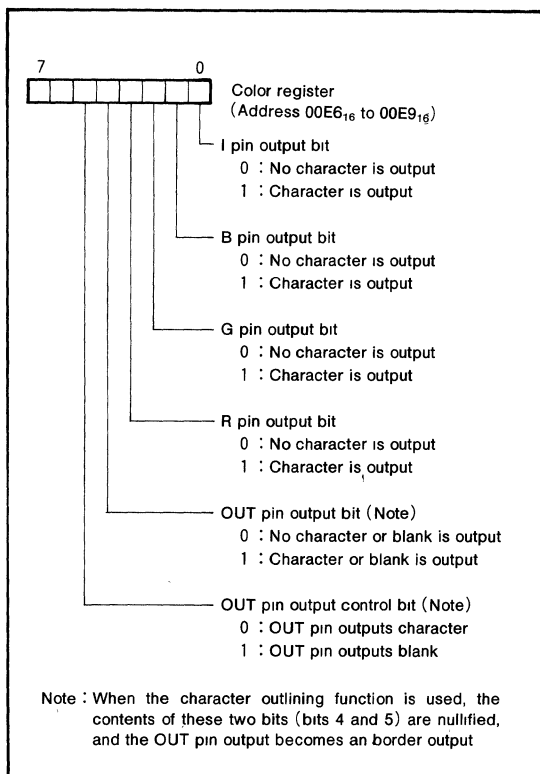


Fig. 32 Structure of color registers

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

(6) Half Character Width Color Select Mode

By setting "1" to bit 4 in the CRT control register (address 00EA₁₆) it is possible to specify colors in units of a half character size (vertical 16 dots×horizontal 6 dots) for characters in block 1 only.

In the half character width color select mode, colors of display characters in block 1 are specified as follows:

- ① The left half of the character is set to the color of the color register that is specified by bits 0 and 1 at the color register specifying addresses in the CRT display RAM (addresses 2080₁₆ to 2097₁₆).
- ② The right half of the character is set to the color of the color register that is specified by bits 2 and 3 at the color register specifying address in the CRT display RAM (addresses 2080₁₆ to 2097₁₆).

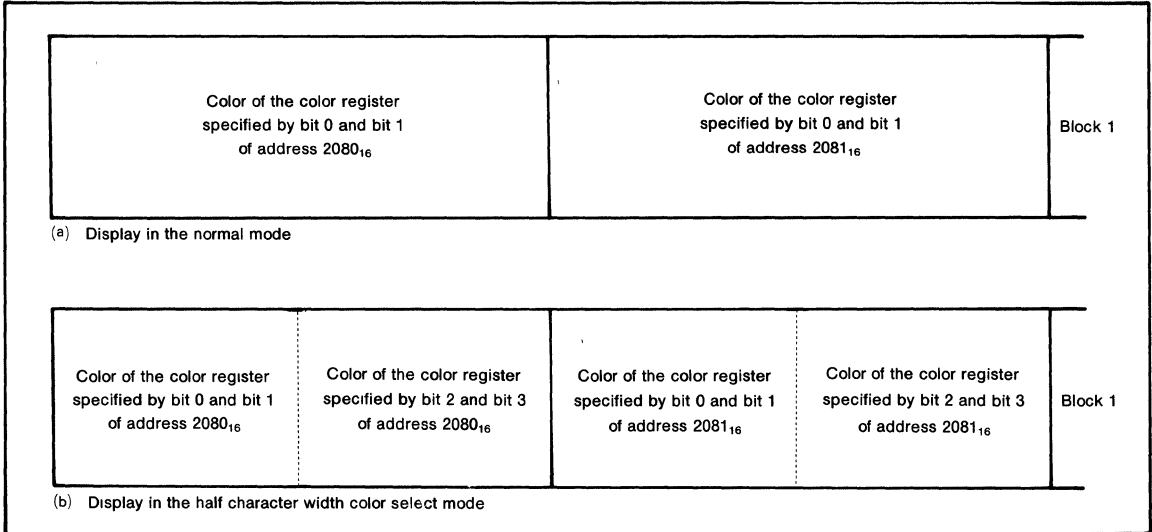


Fig. 33 Difference between normal color select mode and half character width color select mode

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

(7) Multiline Display

The M37102M8-XXXSP can normally display three lines on the CRT screen by displaying three blocks at different vertical positions.

In addition, it allows up to 16 lines to be displayed by using a CRT interrupt and display block counter.

The CRT interrupt works in such a way that when display of one block is terminated, an interrupt request is generated. In other words, character display for a certain block is initiated when the scanning line reaches the display position for that block (specified with vertical and horizontal position registers) and when the range of that block is exceeded, an interrupt is applied.

The display block counter is used to count the number of blocks that have just been displayed. Each time the display of one block is terminated, the contents of the counter are incremented by one.

For multiline display, it is necessary to enable the CRT interrupt (by clearing the interrupt disable flag to "0" and setting the CRT interrupt enable bit (bit 4 at address 00FE₁₆) to "1"), then execute the following processing in the CRT interrupt handling routine.

- ① Read the value of the display block counter.
- ② The block for which display is terminated (i.e., the cause of CRT interrupt generation) can be determined by the value read in ①.
- ③ Replace the display character data and display position of that block with the character data (contents of CRT display RAM) and vertical display position (contents of vertical position register) to be displayed next.

Figure 34 shows the structure of the display block counter.

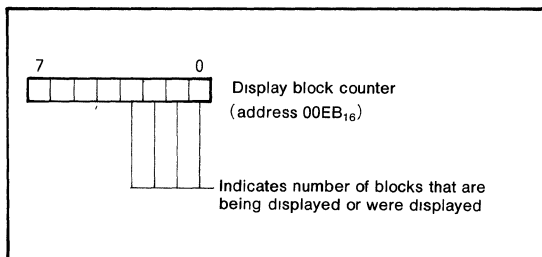


Fig. 34 Structure of display block counter

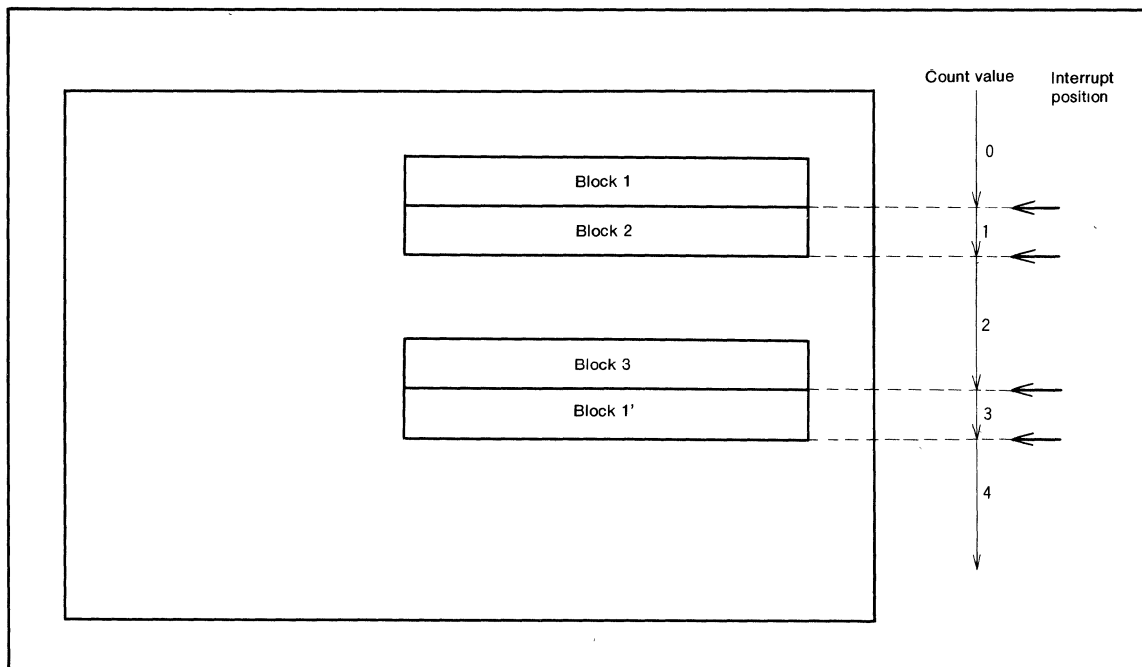


Fig. 35 Timing of CRT interrupt and count value of display block counter

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with **ON-SCREEN DISPLAY CONTROLLER**

(8) Scanning Line Double Count Mode

One dot in a displayed character is normally shown by one scanning line. In the scanning line double count mode, one dot can be shown by two scanning lines. As a result, the displayed dot is extended two times the normal size in the vertical direction only. (That is to say, the height of a character is extended twofold.)

In addition, because the scanning line count is doubled, the display start position of a character is also extended twofold in the vertical direction. In other words, whereas the contents set in the vertical position register in the normal mode are 128 steps from 00_{16} to $7F_{16}$, or four scanning lines per step, the number of steps in the scanning line double count mode is 64 from 00_{16} to $3F_{16}$, or eight scanning lines per step.

If the contents of the vertical position register for a block are set in the address range of 40_{16} to $7F_{16}$ in the scanning line double count mode, that block cannot be displayed (not output to the CRT screen).

In the scanning line double count mode can be specified by setting bit 6 in the CRT control register (address $00EA_{16}$) to "1".

Because this function works in units of screen, even when the mode is changed the mode about the scanning line count during display of one screen, the double count mode only becomes valid from the time the next screen is displayed.

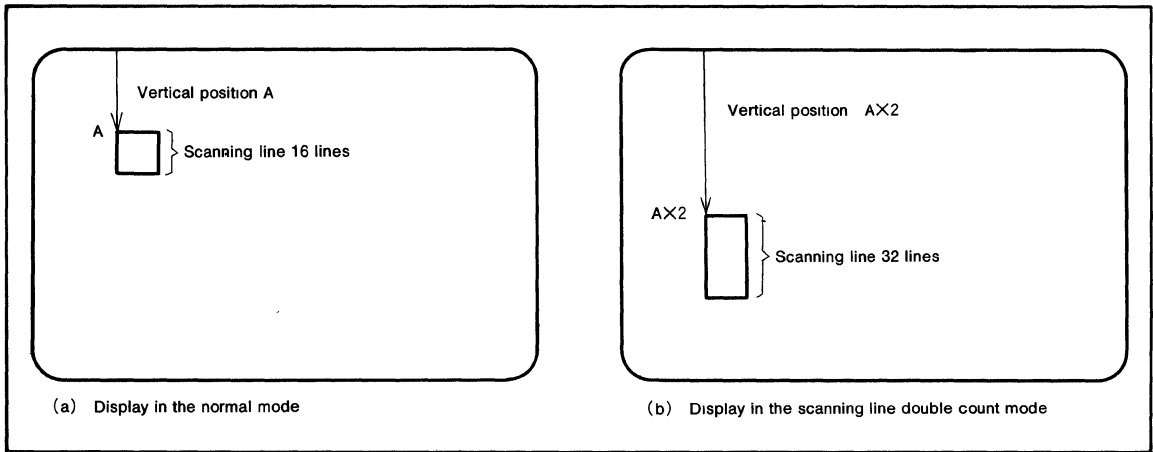


Fig. 36 Display in the normal mode and in the scanning line double count mode

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

(9) Character Border Function

An border of a one clock (one dot) equivalent size can be added to a character to be displayed in both horizontal and vertical directions.

The border is output from the OUT pin. In this case, bits 4 and 5 in the color register (contents output from the OUT pin) are nullified, and the border is output from the OUT pin instead.

Border can be specified in units of block by using the border select register (address 00E5₁₆). Table 10 shows the relationship between the values set in the border select register and the character border function. Figure 38 shows the structure of the border select register.

Table 10. The relationship between the value set in the border selection register and the character border function

Border selection register		Functions	Example of output
MDn1	MDn0		
X	0	Normal	R, G, B, I output OUT output
0	1	Border including character	R, G, B, I output OUT output
1	1	Border not including character	R, G, B, I output OUT output

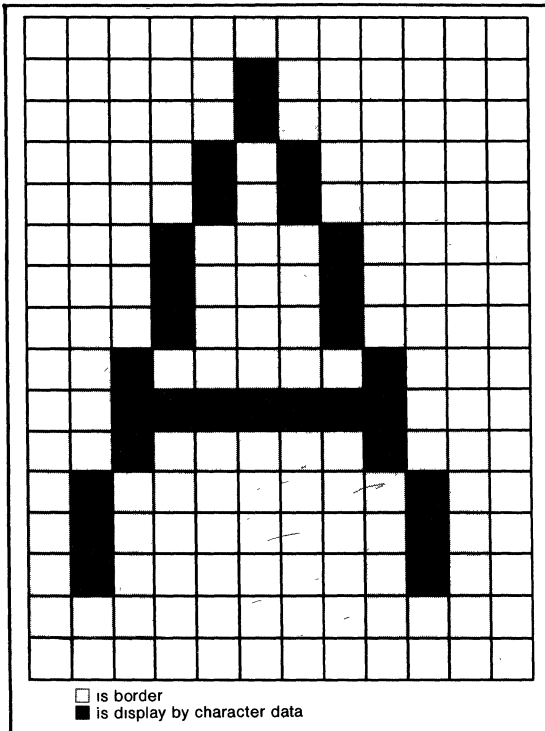


Fig. 37 Example of border

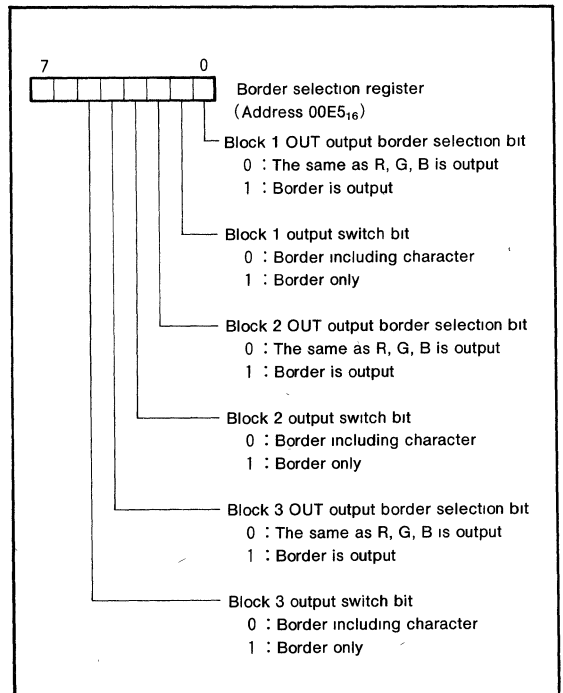


Fig. 38 Structure of border selection register

(10) CRT Output Pin Control

CRT output pins R, G, B, I, and OUT are respectively shared with port P5₂, P5₃, P5₄, P5₅, and P5₆. When the corresponding bits in the port P5 direction register are cleared to "0", the pins are set for CRT output; when the bits are set to "1", the pins function as port P5 (general-purpose output pins).

The polarities of CRT outputs (R, G, B, I, and OUT, as well as H_{SYNC} and V_{SYNC}) can be specified by using the CRT port control register (address 00EC₁₆).

Use bits 0 to 4 in the CRT port control register to set the output polarities of H_{SYNC}, V_{SYNC}, R/G/B, I, and OUT. When these bits are cleared to "0", a positive polarity is selected; when the bits are set to "1", a negative polarity is selected. Bits 5 to 7 in the CRT port control register are used to specify pin by pin whether normal video signals or R-MUTE, G-MUTE, and B-MUTE signals are output from each pin (R, G, B). When set for R-MUTE, G-MUTE, and B-MUTE outputs, the whole background colors of the screen become red, green, and blue.

Figure 39 shows the structure of the CRT port control register.

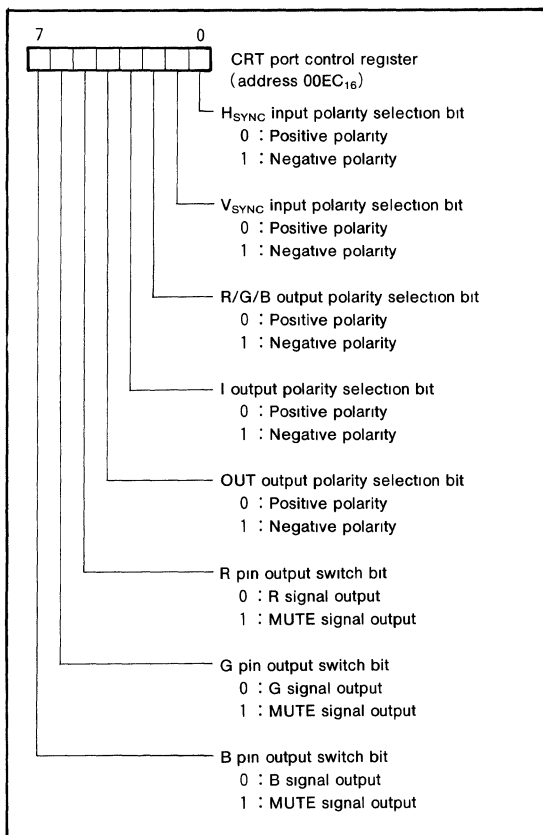


Fig. 39 Structure of CRT port control register

(11) Scroll Function

① Scroll mode

The M37102M8-XXXSP allows the display area to be gradually expanded or shrunk in the vertically direction in units of 1H (H: H_{SYNC} signal). There are three modes for this scroll method. Each mode has Down and UP modes, providing a total of six modes.

Table 11 shows the contents of each scroll mode.

② Scroll speed

The scroll speed is determined by the vertical synchronization (V_{SYNC}) signal. For the NTSC interlace method, assuming that

$$V = 16.7\text{ms} \quad 262.5 \text{ H}_{\text{SYNC}} \text{ signals per screen}$$

we obtain the scroll speed as shown in Table 12.

Scroll resolution varies with each scroll mode. In mode 1 and mode 2, one of three resolutions (1H, 2H, 4H) can be selected. In mode 3, scroll is done in units of 4H alone.

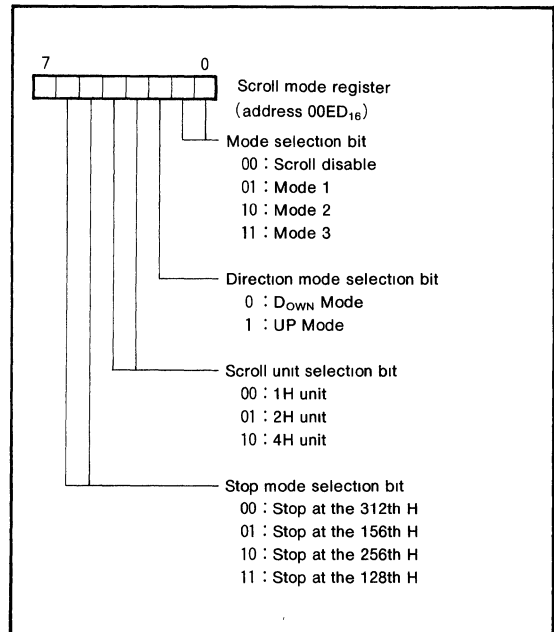


Fig. 40 Structure of scroll mode register

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

Table 11. Scroll operation in each mode and the values of scroll mode register

Mode		Scroll operation	Scroll mode register			
			Bit 2	Bit 1	Bit 0	
1	DOWN	Appear from upper side		0	0	1
	UP	Erase from lower side		1	0	1
2	DOWN	Erase from upper side		0	1	0
	UP	Appear from lower side		1	1	0
3	DOWN	Erase from both upper and lower side		0	1	1
	UP	Appear to both upper and lower side		1	1	1

Table 12. Scroll speed

Scroll resolution	Scroll speed (in all picture)
1 H unit	$16.7 \text{ (ms)} \times 262.5 \div 1 \approx 4 \text{ (s)}$
2 H unit	$16.7 \text{ (ms)} \times 262.5 \div 2 \approx 2 \text{ (s)}$
4 H unit	$16.7 \text{ (ms)} \times 262.5 \div 4 \approx 1 \text{ (s)}$

Table 13. Scroll mode and scroll resolution

Mode	Scroll resolution	Scroll speed
Mode 1	1 H Unit	about 4 second
	2 H Unit	about 2 second
Mode 2	4 H Unit	about 1 second
Mode 3	4 H Unit	about 1 second

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

INTERRUPT INTERVAL DETERMINATION FUNCTION

The M37102M8-XXXSP incorporates an interrupt interval determination circuit. This interrupt interval determination circuit has an 8-bit binary counter as shown in Figure 41. Using this counter, it determines a duration of time from the rising transition (falling transition) of an input signal pulse on the INT₁ or INT₂ to the rising transition (falling transition) of the signal pulse that is input next.

The following describes how the interrupt interval is determined.

1. The interrupt input to be determined (INT₁ input or INT₂ input) is selected by using bit 2 in the interrupt interval determination control register (address 00D8₁₆). When this bit is cleared to "0", the INT₁ input is selected; when the bit is set to "1", the INT₂ input is selected.
2. When the INT₁ input is to be determined, the polarity is selected by using bit 3 in the interrupt interval determination control register; when the INT₂ input is to be determined, the polarity is selected by using bit 4 in the interrupt interval determination control register. When the relevant bit is cleared to "0", determination is made of the interval of a positive polarity (rising

transition); when the bit is set to "1", determination is made of the interval of a negative polarity (falling transition).

3. The reference clock is selected by using bit 1 in the interrupt interval determination control register. When the bit is cleared to "0", a 64 μ s clock is selected; when the bit is set to "1", a 32 μ s clock is selected (based on an oscillation frequency of 4MHz in either case).
4. Simultaneously when the input pulse of the specified polarity (rising or falling transition) occurs on the INT₁ pin (or INT₂ pin), the 8-bit binary counter starts counting up with the selected reference clock (64 μ s or 32 μ s).
5. Simultaneously with the next input pulse, the value of the 8-bit binary counter is loaded into the determination register (address 00D7₁₆) and the counter is immediately reset (00₁₆). The reference clock is input in succession even after the counter is reset, and the counter restarts counting up from "00₁₆".
6. When count value "FE₁₆" is reached, the 8-bit binary counter stops counting. Then, simultaneously when the reference clock is input next, the counter sets value "FF₁₆" to the determination register.

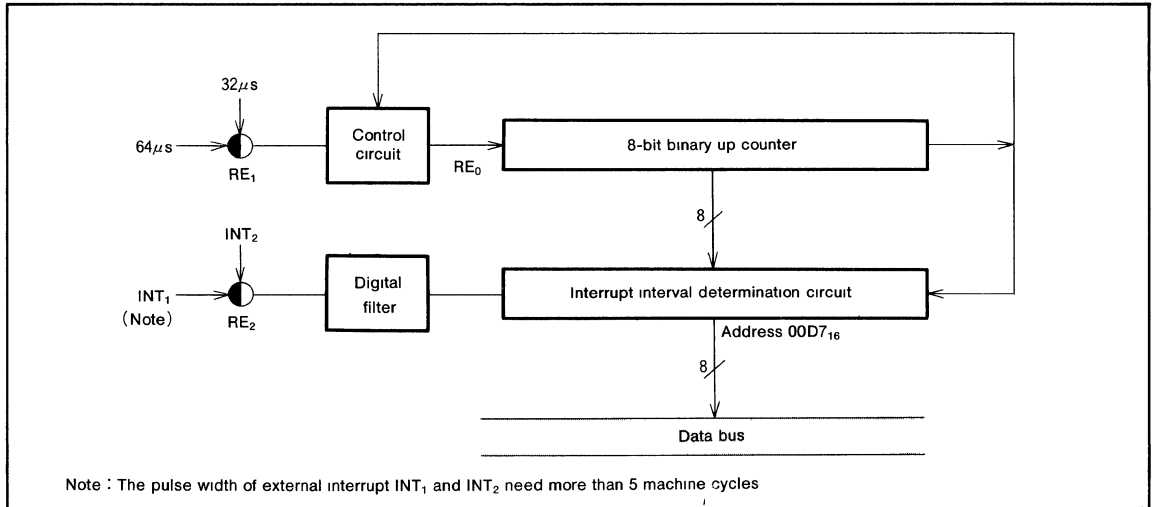


Fig. 41 Block diagram of interrupt interval determination circuit

mitsubishi MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

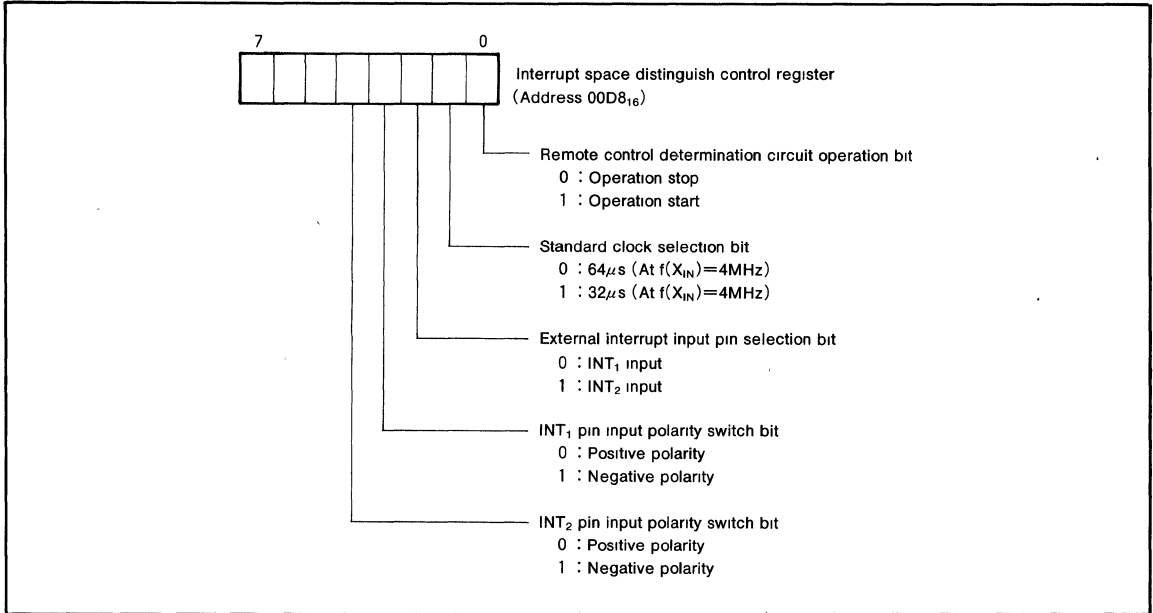


Fig. 42 Structure of interrupt space distinguish control register

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

RESET CIRCUIT

The M37102M8-XXXSP is reset according to the sequence shown in Figure 45. It starts the program from the address formed by using the content of address FFFF₁₆ as the high order address and the content of the address FFFE₁₆ as the low order address, when the RESET pin is held at "L" level for no less than 2μs while the power voltage is 5V ± 10%

	Address	
(1) Port P0 directional register	(00C1 ₁₆)	00 ₁₆
(2) Port P1 directional register	(00C3 ₁₆)	00 ₁₆
(3) Port P2 directional register	(00C5 ₁₆)	00 ₁₆
(4) Port P3 directional register	(00C7 ₁₆)	00000000
(5) Port P4 directional register	(00C9 ₁₆)	00 ₁₆
(6) Port P5 directional register	(00CB ₁₆)	00000000
(7) Port P6 directional register	(00CD ₁₆)	00 ₁₆
(8) PWM output control register 1	(00D5 ₁₆)	00 ₁₆
(9) PWM output control register 2	(00D6 ₁₆)	00000000
(10) Interrupt space distinguish register	(00D7 ₁₆)	00 ₁₆
(11) Interrupt space distinguish control register	(00D8 ₁₆)	00 ₁₆
(12) Special mode register 1	(00DA ₁₆)	00 ₁₆
(13) Special mode register 2	(00DB ₁₆)	00 ₁₆
(14) Serial I/O1 mode register	(00DC ₁₆)	00000000
(15) Serial I/O2 mode register	(00DE ₁₆)	00000000
(16) Horizontal position register	(00E0 ₁₆)	00000000
(17) Color register 0	(00E6 ₁₆)	00000000
(18) Color register 1	(00E7 ₁₆)	00000000
(19) Color register 2	(00E8 ₁₆)	00000000
(20) Color register 3	(00E9 ₁₆)	00000000
(21) CRT control register	(00EA ₁₆)	00 ₁₆
(22) Display block counter	(00EB ₁₆)	000000
(23) CRT port control register	(00EC ₁₆)	00 ₁₆
(24) Scroll control register	(00ED ₁₆)	00000000
(25) A-D control register	(00EF ₁₆)	00000000
(26) Timer 1	(00F0 ₁₆)	FF ₁₆
(27) Timer 2	(00F1 ₁₆)	07 ₁₆
(28) Timer 3	(00F2 ₁₆)	FF ₁₆
(29) Timer 4	(00F3 ₁₆)	07 ₁₆
(30) Timer 12 mode register	(00F4 ₁₆)	00000000
(31) Timer 34 mode register	(00F5 ₁₆)	00000000
(32) CPU mode register	(00FB ₁₆)	11111100
(33) Interrupt request register 1	(00FC ₁₆)	00000000
(34) Interrupt request register 2	(00FD ₁₆)	00000000
(35) Interrupt control register 1	(00FE ₁₆)	00000000
(36) Interrupt control register 2	(00FF ₁₆)	00000000
(37) Processor status register	(PS)	1
(38) Program counter	(PC _H)	Contents of address FFFF ₁₆
	(PC _L)	Contents of address FFFE ₁₆

Note : Since the contents of both registers other than those listed above and the RAM are undefined at reset, it is necessary to set initial values
 At reset, "0" is read from all bits which is not used

Fig. 43 Internal state of microcomputer at reset

and the crystal oscillator oscillation is stable and then returned to "H" level. The internal initializations following reset are shown in Figure 43.

An example of the reset circuit is shown in Figure 44. The reset input voltage must be kept below 0.6V until the supply voltage surpasses 4.5V.

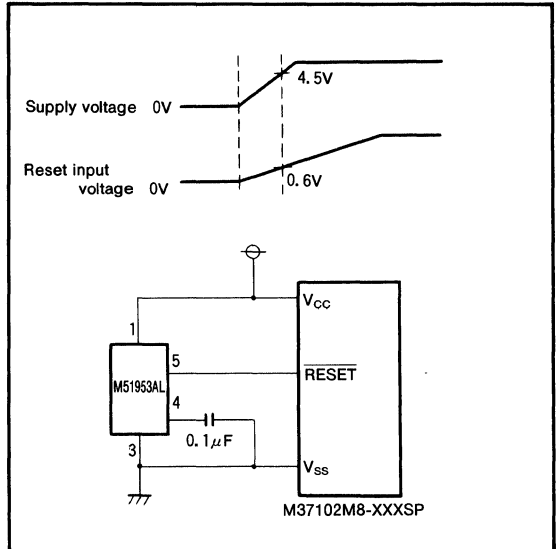


Fig. 44 Example of reset circuit

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

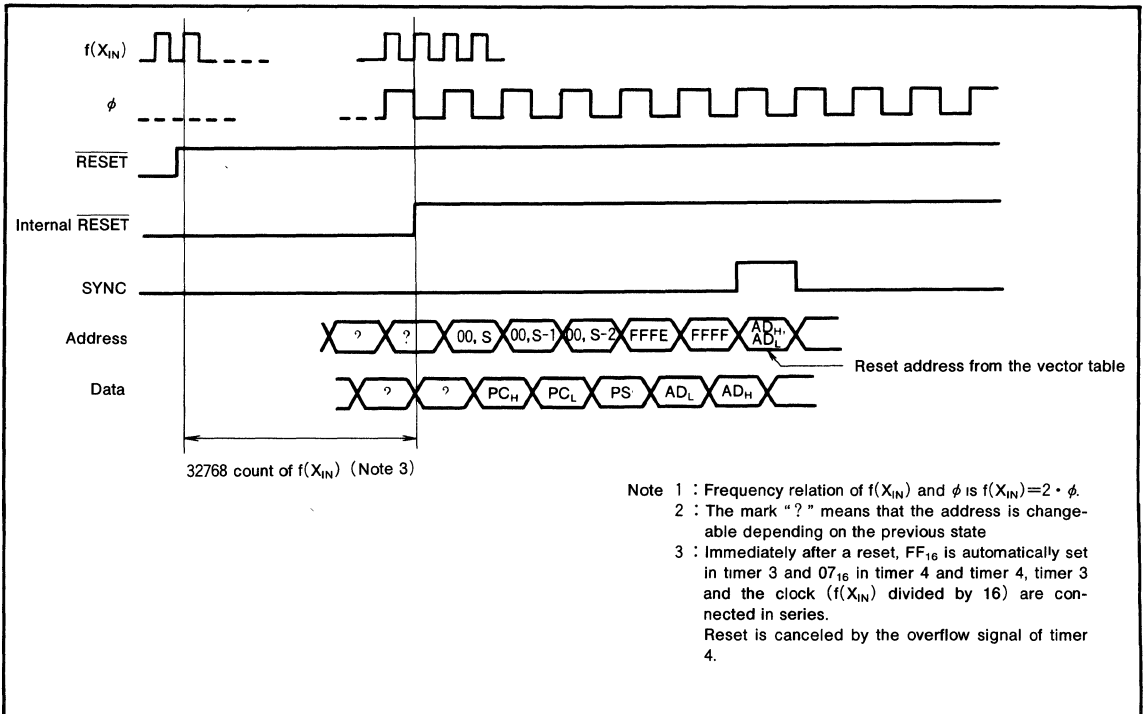


Fig. 45 Timing diagram at reset

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

I/O PORTS

(1) Port P0

Port P0 is an 8-bit I/O port with CMOS output.

As shown in the memory map (Figure 3), port P0 can be accessed at zero page memory address 00C0₁₆.

Port P0 has a directional register (address 00C1₁₆) which can be used to program each individual bit as input ("0") or as output ("1"). If the pins are programmed as output, the output data is latched to the port register and then output. When data is read from the output port the output pin level is not read, only the latched data in the port register is read. This allows a previously output value to be read correctly even though the output voltage level is shifted up or down. Pins set as input are in the floating state and the signal levels can thus be read. When data is written into the input port, the data is latched only to the port latch and the pin still remains in the floating state.

Depending on the contents of the processor mode bits (bit 0 and bit 1 at address 00FB₁₆), three different modes can be selected; single-chip mode, memory expansion mode and microprocessor mode.

In these modes it functions as address (A₇-A₀) output port (excluding single-chip mode). For more details, see the processor mode information.

(2) Port P1

In single-chip mode, port P1 has the same function as port P0. In other modes, it functions as address (A₁₅-A₈) output port.

Refer to the section on processor modes for details.

(3) Port P2

In single-chip mode, port P2 has the same function as port P0. In other modes, it functions as data (D₀-D₇) input/output port. Refer to the section on processor modes for details.

(4) Port P3

Port P3 is an 7-bit I/O port with function similar to port P0, but the output structure of P3₀, P3₁ is CMOS output and P3₂-P3₆ is N-channel open drain.

P3₂, P3₃ are in common with the external clock input pins of timer 2 and 3.

P3₄, P3₆ are in common with the external interrupt input pins INT₁, INT₂ and P3₅, P3₆ with the analog input pins of A-D converter A-D₁, A-D₂.

In the microprocessor mode or the memory expanding mode, P3₀, P3₁ works as R/W signal output pin and SYNC signal output pin.

(5) Port P4

Port P4 is an 8-bit I/O port with function similar to port P0, but the output structure is N-channel open drain output.

All pins have program selectable dual functions. When a serial I/O 1 function is selected, P4₀-P4₃ work as input/output pins of serial I/O1. When a serial I/O2 function is selected, P4₄-P4₇ work as input/output pins of serial I/O2.

In the special serial I/O mode, P4₄, P4₅ work as SDA, SCL pins. P4₆, P4₇ are in common with PWM8 and 9 output pins.

(6) OSC1, OSC2 pins

Clock input/output pins for CRT display function

(7) H_{SYNC}, V_{SYNC} pins

H_{SYNC} is a horizontal synchronizing signal input pin for CRT display.

V_{SYNC} is a vertical synchronizing signal input pin for CRT display.

(8) R, G, B, I, OUT pins

This is an 5-bit output pin for CRT display and in common with P5₂-P5₆.

(9) Port P6

Port P6 is an 8-bit I/O port with function similar to port P0, but the output structure is N-channel open drain output.

This port is in common with 8-bit PWM output pin PWM0-PWM7.

(10) D-A pin

This is a 14-bit PWM output pin.

(11) ϕ pin

The internal system clock (1/4 the frequency of the oscillator connected between the X_{IN} and X_{OUT} pins) is output from this pin. If an STP or WIT instruction is executed, output stops after going "H".

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

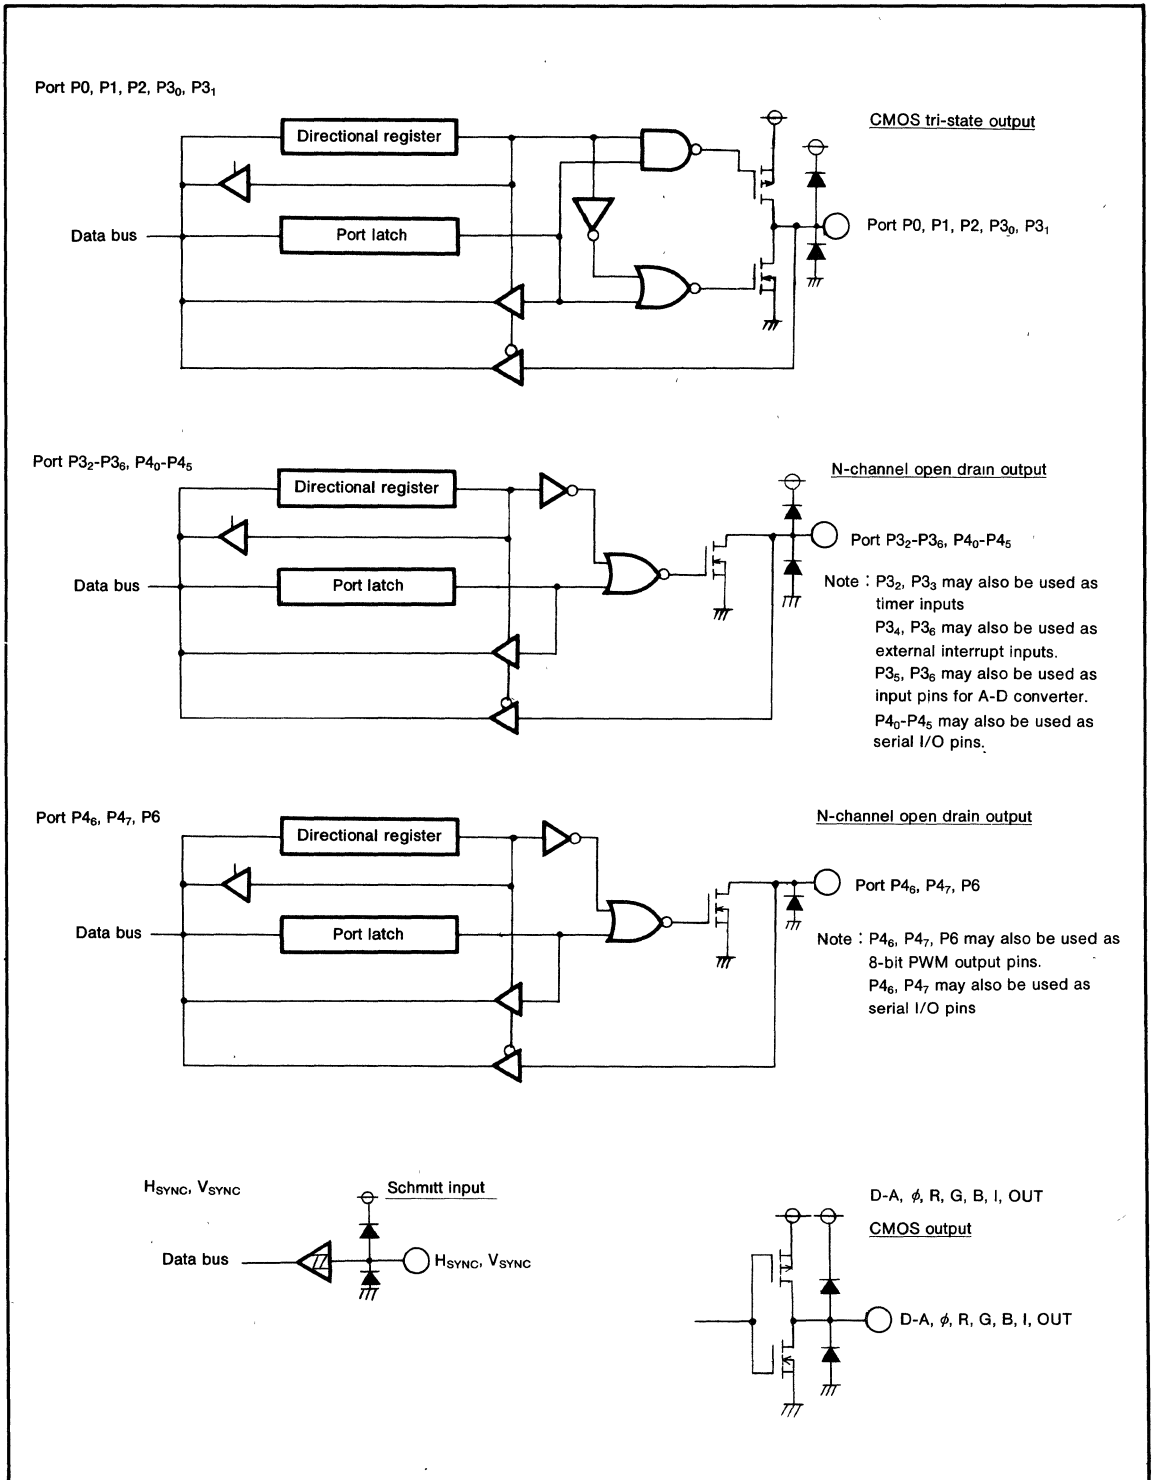


Fig. 46 Block diagram of ports P0-P6 (single-chip mode) and output format of D-A, ϕ , R, G, B, I OUT

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

PROCESSOR MODE

By changing the contents of the processor mode bit (bit 0 and 1 at address 00FB₁₆), three different operation modes can be selected; single-chip mode, memory expansion mode, and microprocessor mode.

In the memory expansion mode and the microprocessor mode, ports P0-P3 can be used as address, and data input/output pins.

Figure 48 shows the functions of ports P0-P3.

The memory map for the single-chip mode is shown in Figure 2 and for other modes, in Figure 47.

By connecting CNV_{SS} to V_{SS}, all three modes can be selected through software by changing the processor mode bits. Connecting CNV_{SS} to V_{CC} automatically forces the M37102M8-XXXSP/FP into memory expansion mode. Connecting CNV_{SS} to V_{CC} automatically forces the M37201M6-

XXXSP into microprocessor mode.

The three different modes are explained as follows:

(1) Single-chip mode [00]

The microcomputer will automatically be in the single-chip mode when started from reset, if CNV_{SS} is connected to V_{SS}. Ports P0-P3 will work as original I/O ports.

(2) Memory expansion mode [01]

The microcomputer will be placed in the memory expansion mode after connecting CNV_{SS} to V_{CC} and initiating a reset or connecting CNV_{SS} to V_{SS} and the processor mode bits are set to "01". This mode is used to add external memory when the internal memory is not sufficient.

In this mode, port P0 and port P1 are as a system address bus and its I/O port function is lost.

Port P2 becomes the data bus of D₇-D₀ (including instruction code) and loses its I/O port function. Port P₃₀ and P₃₁ works as R/W and φ.

(3) Microprocessor mode [10]

When CNV_{SS} is connected to V_{SS} and the processor mode bits are set to "10", the microcomputer will automatically default to microprocessor mode. In this mode, the internal ROM is inhibited so the external memory is required. Other functions are same as the memory expansion mode. The relationship between the input level of CNV_{SS} and the processor mode is shown in Table 14.

Note : Use the M37102M8-XXXSP in the microprocessor mode or the memory expansion mode only at program development.

The standards is assured only in the single-chip mode.

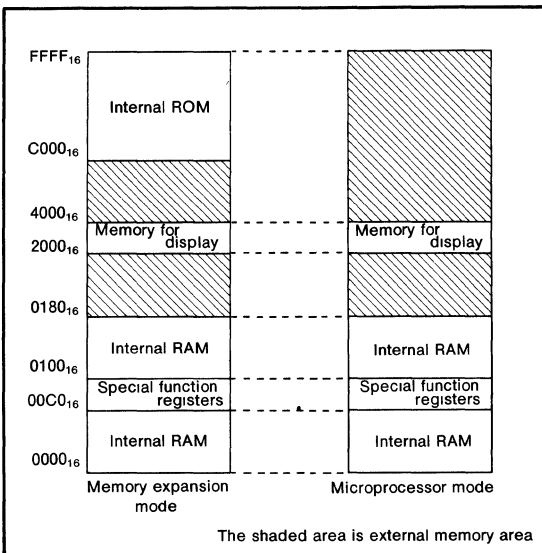


Fig. 47 External memory area at each processor mode

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

Port	CM ₁	0	0	1
	CM ₀	0	1	0
Mode		Single-chip mode	Memory expansion mode	Microprocessor mode
Port P0			Same as left	
Port P1			Same as left	
Port P2			Same as left	
Port P3			Same as left	

Fig. 48 Processor mode and function of port P0-P3

Table 14. Relationship between CNV_{SS} pin input level and processor mode

CNV _{SS}	Mode	Explanation
V _{SS}	<ul style="list-style-type: none"> • Single-chip mode • Memory expansion mode • Microprocessor mode 	The single-chip mode is set by the reset. All modes can be selected by changing the processor mode bit with the program.
V _{CC}	<ul style="list-style-type: none"> • Memory expansion mode • Microprocessor mode 	The memory expansion mode is set by the reset (M37102M8-XXXSP/FP). The microprocessor mode is set by the reset (M37201M6-XXXSP).

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP
SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

CLOCK GENERATING CIRCUIT

The built-in clock generating circuits are shown in Figure 51.

When an-STP instruction is executed, the internal clock ϕ stops oscillating at "H" level. At the same time, timer 3 and timer 4 are connected automatically and FF_{16} is set in the timer 3, 07_{16} is set in the timer 4, and timer 3 count source is forced to $f(X_{IN})$ divided by 16. This connection is cleared when an external interrupt is accepted or the reset is in, as discussed in the timer section.

The oscillator is restarted when an interrupt is accepted. However, the clock ϕ keeps its "H" level until timer 4 overflows.

This is because the oscillator needs a set-up period if a ceramic or a quartz crystal oscillator is used

When the WIT instruction is executed, the clock ϕ stops in the "H" level but the oscillator continues running. This wait state is cleared when an interrupt is accepted. Since the oscillation does not stop, the next instructions are executed at once.

To return from the stop or the wait status, the interrupt enable bit must be set to "1" before executing STP or WIT instruction.

The circuit example using a ceramic oscillator (or a quartz crystal oscillator) is shown in Figure 49.

The constant capacitance will differ depending on which oscillator is used, and should be set to the manufactures suggested value.

The example of external clock usage is shown in Figure 50
 X_{IN} is the input, and X_{OUT} is open.

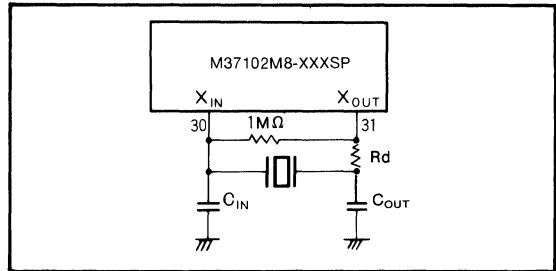


Fig. 49 External ceramic resonator circuit

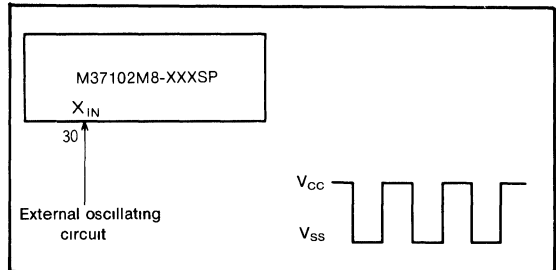


Fig. 50 External clock input circuit

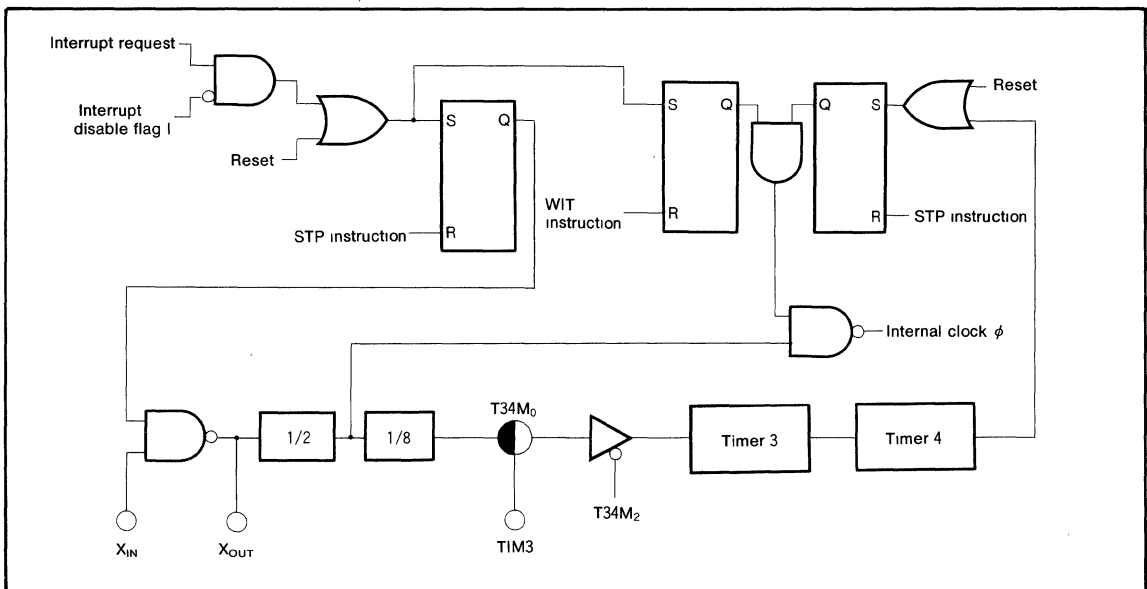


Fig. 51 Block diagram of clock generating circuit

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

PROGRAMMING NOTES

- (1) The frequency ratio of the timer is $1/(n+1)$.
- (2) Even though the BBC and BBS instructions are executed after the interrupt request bits are modified (by the program), those instructions are only valid for the contents before the modification. Also, at least one instruction cycle must be used (such as a NOP) between the modification of the interrupt request bits and the execution of the BBC and BBS instructions.
- (3) After the ADC and SBC instructions are executed (in decimal mode), one instruction cycle (such as a NOP) is needed before the SEC, CLC, or CLD instructions are executed.
- (4) An NOP instruction must be used after the execution of a PLP instruction.
- (5) In order to avoid noise and latch-up, connect a bypass capacitor ($\approx 0.1\mu F$) directly between the V_{CC} pin and V_{SS} pin using a heavy wire.

DATA REQUIRED FOR MASK ORDERING

Please send the following data for mask orders.

- (1) mask ROM order confirmation form
- (2) mask specification form
- (3) ROM data EPROM 3 sets

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
V _{CC}	Supply voltage	With respect to V _{SS} Output transistors are at "off" state	-0.3 to 6	V
V _I	Input voltage CNV _{SS}		-0.3 to 6	V
V _I	Input voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₇ , P6 ₀ -P6 ₇ , H _{SYNC} , V _{SYNC} , RESET		-0.3 to V _{CC} +0.3	V
V _O	Output voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₅ , R, G, B, I, OUT, D-A, X _{OUT} , OSC2		-0.3 to V _{CC} +0.3	V
V _O	Output voltage P4 ₆ , P4 ₇ , P6 ₀ -P6 ₇		-0.3 to 13	V
I _{OH}	Circuit current R, G, B, I, OUT, P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₃ , P3 ₀ , P3 ₁ , D-A		0 to 1 (Note 1)	mA
I _{OL1}	Circuit current R, G, B, I, OUT, P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₃ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₃ , D-A		0 to 2 (Note 2)	mA
I _{OL2}	Circuit current P6 ₀ -P6 ₇ , P4 ₆ , P4 ₇		0 to 1 (Note 2)	mA
I _{OL3}	Circuit voltage P2 ₄ -P2 ₇		0 to 10 (Note 3)	mA
I _{OL4}	Circuit current P4 ₄ , P4 ₅		0 to 3 (Note 2)	mA
P _d	Power dissipation	T _a =25°C	550	mW
T _{opr}	Operating temperature		-10 to 70	°C
T _{stg}	Storage temperature		-40 to 125	°C

RECOMMENDED OPERATING CONDITIONS (V_{CC}=5V±10%, T_a=-10 to 70°C unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V _{CC}	Supply voltage (Note 4) During the CRT operation	4.5	5.0	5.5	V
V _{SS}	Supply voltage	0	0	0	V
V _{IH}	"H" input voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₃ , P4 ₆ , P4 ₇ , P6 ₀ -P6 ₇ , H _{SYNC} , V _{SYNC} , RESET, X _{IN} , OSC1	0.8V _{CC}		V _{CC}	V
V _{IH}	"H" input voltage P4 ₄ , P4 ₅	0.7V _{CC}		V _{CC}	V
V _{IL}	"L" input voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ , P3 ₁ , P3 ₅ , P4 ₀ , P4 ₃ -P4 ₅ , P4 ₇	0		0.4V _{CC}	V
V _{IL}	"L" input voltage P3 ₂ -P3 ₄ , P3 ₆ , P4 ₁ , P4 ₂ , P4 ₆ , H _{SYNC} , V _{SYNC} , RESET, X _{IN} , OSC1	0		0.2V _{CC}	V
I _{OH}	"H" average output current (Note 1) R,G,B,I,OUT,P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ , P3 ₁			1	mA
I _{OL1}	"L" average output current (Note 2) R,G,B,I,OUT,P0 ₀ -P0 ₇ , P2 ₀ -P2 ₃ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₃ , D-A			2	mA
I _{OL2}	"L" average output current (Note 2) P6 ₀ -P6 ₇ , P4 ₆ , P4 ₇			1	mA
I _{OL3}	"L" average output current (Note 3) P2 ₄ -P2 ₇			10	mA
I _{OL4}	"L" average output current (Note 2) P4 ₄ , P4 ₅			3	mA
f _{CPU}	Oscillating frequency (for CRT operation) (Note 5)	3.6	4.0	4.4	MHz
f _{CRT}	Oscillating frequency (for CRT display)	6.0	7.0	8.0	MHz
f _{HS}	Input frequency P3 ₂ -P3 ₄ , P3 ₆ , P4 ₅			100	kHz
f _{HS}	Input frequency P4 ₁			1	MHz

- Note 1 : The total current that flows out of the IC should be 20mA (max.)
 2 : The total of I_{OL1}, I_{OL2} and I_{OL4} should be 30mA (max.)
 3 : The total of I_{OL} of port P2₄-P2₇ should be 20mA (max.)
 4 : Apply 0.022μF or greater capacitance externally between the V_{CC}-V_{SS} power supply pins so as to reduce power source noise
 Also apply 0.068μF or greater capacitance externally between the V_{CC}-CNV_{SS} pins
 5 : Use the crystal oscillator or ceramic resonator for CPU oscillation circuit

MITSUBISHI MICROCOMPUTERS
M37102M8-XXXSP/FP
M37201M6-XXXSP

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER for VOLTAGE SYNTHESIZER
with ON-SCREEN DISPLAY CONTROLLER

ELECTRIC CHARACTERISTICS ($V_{CC}=5V\pm 10\%$, $V_{SS}=0V$, $T_a=-10$ to $70^\circ C$, $f(X_{IN})=4MHz$ unless other wise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ	Max.	
I_{CC}	Supply current	$V_{CC}=5.5V$, $f(X_{IN})=4MHz$ CRT OFF		10	20	mA
		$V_{CC}=5.5V$, $f(X_{IN})=4MHz$ CRT ON		20	30	
		At stop mode			300	μA
V_{OH}	"H" output voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ , P3 ₁ , R, G, B, I, OUT	$V_{CC}=4.5V$ $I_{OH}=-0.5mA$	2.4			V
V_{OL}	"L" output voltage P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₃ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₃ , R, G, B, I, OUT, D-A	$V_{CC}=4.5V$ $I_{OL}=0.5mA$			0.4	V
	"L" output voltage P6 ₀ -P6 ₇ , P4 ₆ , P4 ₇	$V_{CC}=4.5V$ $I_{OL}=0.5mA$			0.4	
	"L" output voltage P2 ₄ -P2 ₇	$V_{CC}=4.5V$ $I_{OL}=10mA$			3.0	
	"L" output voltage P4 ₄ , P4 ₅	$V_{CC}=4.5V$ $I_{OL}=3mA$			0.4	
$V_{T+}-V_{T-}$	Hysteresis RESET	$V_{CC}=5.0V$		0.5	0.7	V
	Hysteresis (Note 1) H _{SYNC} , V _{SYNC} , P3 ₂ -P3 ₄ , P3 ₆ , P4 ₁ , P4 ₂ , P4 ₄ -P4 ₆	$V_{CC}=5.0V$		0.5	1.3	
I_{OZH}	"H" input leak current RESET, P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₅	$V_{CC}=5.5V$ $V_O=5.5V$			5	μA
	"H" input leak current P6 ₀ -P6 ₇ , P4 ₆ , P4 ₇	$V_{CC}=5.5V$ $V_O=12V$			10	
I_{OZL}	"L" input leak current RESET, P0 ₀ -P0 ₇ , P1 ₀ -P1 ₇ , P2 ₀ -P2 ₇ , P3 ₀ -P3 ₆ , P4 ₀ -P4 ₇ , P6 ₀ -P6 ₇	$V_{CC}=5.5V$ $V_O=0V$			5	μA

Note 1. P3₂-P3₄, P3₆ have the hysteresis when these pins are used as interrupt input pins or timer input pins
P4₁, P4₂, P4₄-P4₆ have the hysteresis when these pins are used as serial I/O ports.