

M52300BSP

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION

M52300BSP semiconductor integrated circuit has a built-in I²C interface, and processes video signals and color signals. It also has all necessary functions to process horizontal and vertical signals, except the vertical signal ramp voltage generation circuit.

This IC can be used in all kinds of television sets, including reasonably priced ones and high-grade ones. It also helps simplify TV set production lines, thanks to the I²C-bus control.

FEATURES

- With the built-in I²C interface, this IC requires fewer peripheral components than conventional ones, helping simplify production lines.
- Black signal expanding circuit ensures dynamic image reproduction.
- Built-in flesh color compensation circuit ensures improved color reproduction.
- Sharp images are reproduced thanks to the contour compensation system with a built-in delay line.
- Provided with IQ demodulation, this IC reproduces color difference signals precisely. It can be connected to external RGB input easily because an on-screen character display circuit is built in, reducing external components such as switch circuits.
- Horizontal and vertical signals are counted down by the 32f_H generator, therefore no adjustment is necessary.


APPLICATION

NTSC color televisions

RECOMMENDED OPERATING CONDITION


| | |
|---------------------------|---------------------------|
| Supply voltage range..... | 4.5~5.5V (pin 38) |
| | 8.5-9.5V (pins 24 and 46) |
| Rated supply voltage..... | 5.0V (pin 38) |
| | 9.0V (pins 24 and 46) |
| Supply current range..... | 11.0~21.0mA (pin 41) |
| Reted supply current..... | 16.0mA (pin 41) |

PIN CONFIGURATION (TOP VIEW)

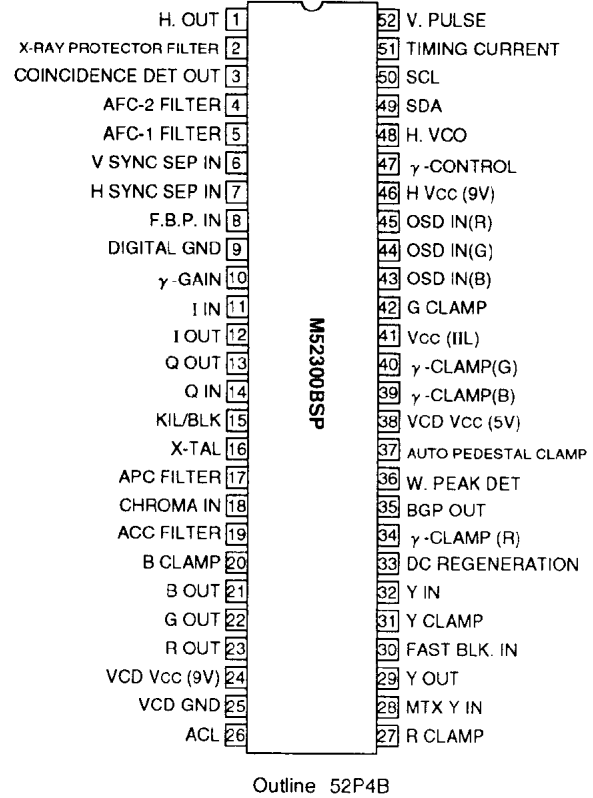

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

BLOCK DIAGRAM

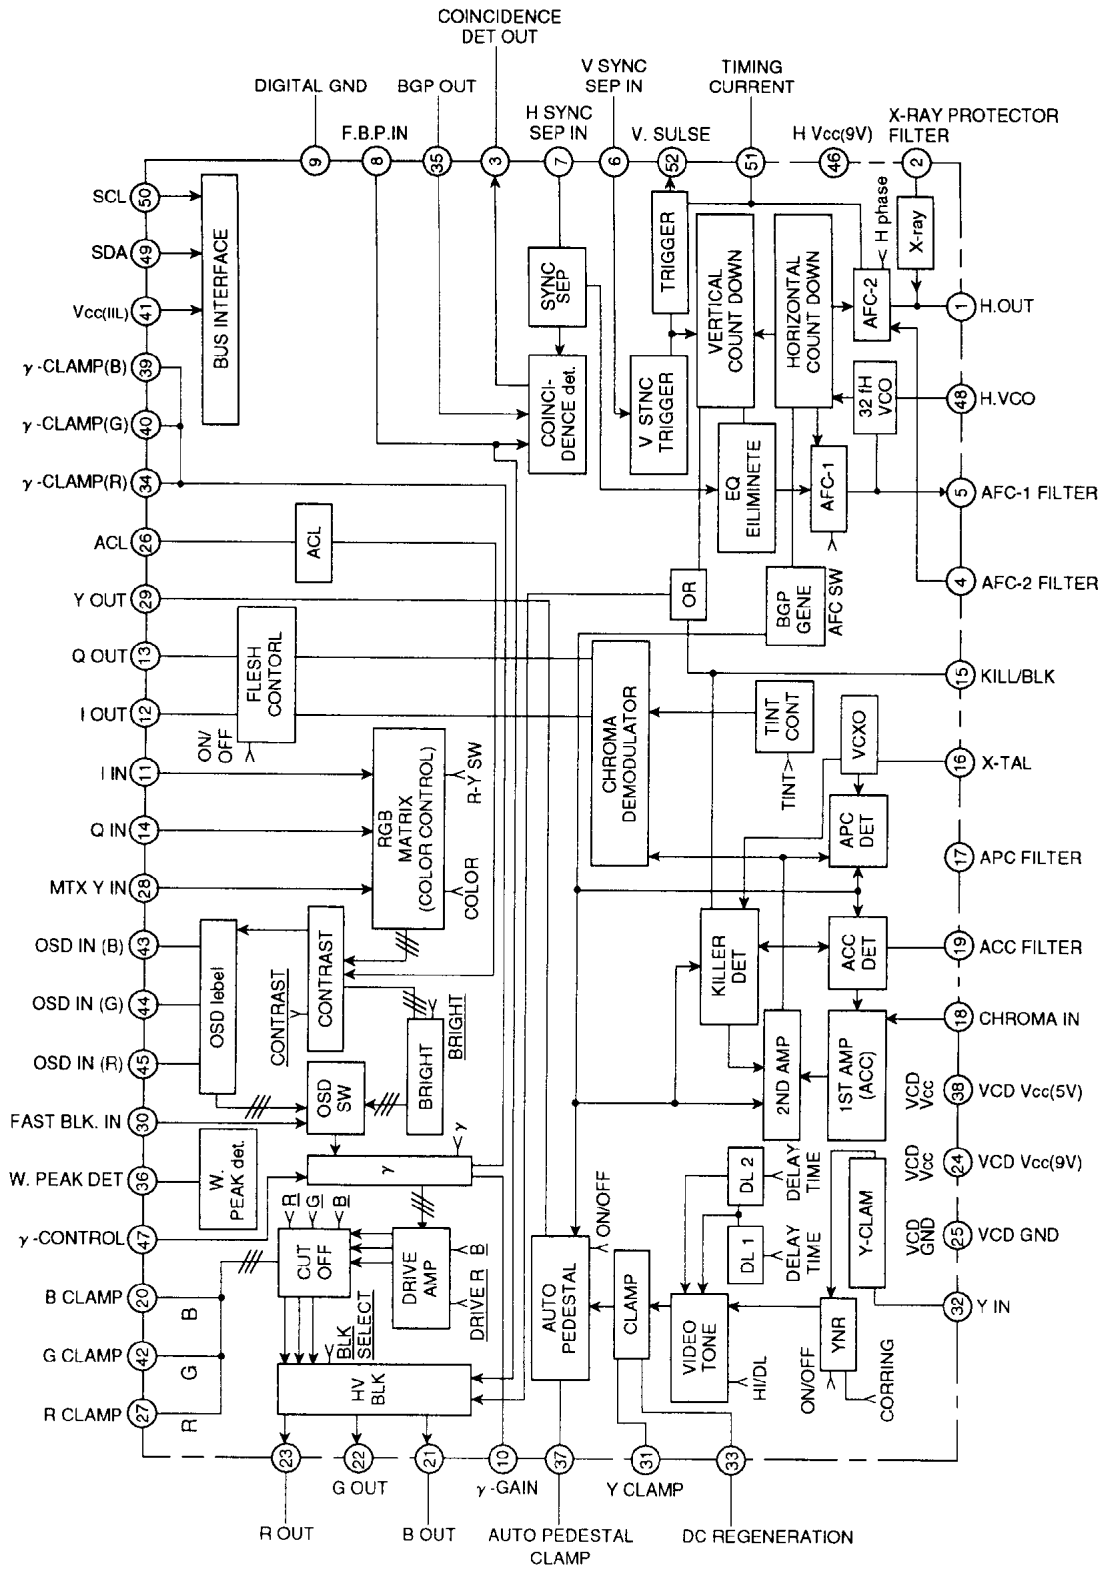

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

ELECTRICAL CHARACTERISTICS (cont.)

| Symbol | Parameter | Sub address | 02H | | 03H | 04H | 05H | 07H | 08H | 0AH | | 0BH | 0CH | 0DH | 0EH | 0FH | 10H | 11H | | | | 12H | | | | |
|--------|-------------------------------------|-------------|----------|----|-----|-----|-----|-----|-------|-----|----|-----|-----|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| | | | Function | D1 | D2 | SH | CON | COR | COL | TIM | HP | y | BR1 | D(R) | C(G) | C(R) | C(G) | C(B) | B(R) | B(G) | B(B) | FLE | DEM | SER | AF1 | AUT |
| ACC3 | ACC characteristic 3 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| KIL1 | Killer operation input level 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| KIL2 | Killer operation input level 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| DKIL | Killer color residual | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| T1 | Tint control 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 0 | | | | | | | | | | | | | | | | | |
| T2 | Tint control 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 127 | | | | | | | | | | | | | | | | | |
| TT | Tint control range | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| FL | FLESH | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 80/96 | | | | | | | | | | | | | | | | | |
| ALQ | Regeneration angle | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| RIQ | Regeneration ratio | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| - | Interface system standard condition | Sub address | | 0 | | | | | | 4 | | | | | | | | | | | | | | | | |
| | | Function | 0 | 0 | | 32 | 64 | 4 | 64 | 64 | 0 | 4 | 64 | 32 | 32 | 127 | 127 | 127 | OFF | OFF | OFF | ON | 90° | OFF | LO | OFF |
| MTX1 | Matrix gain 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX2 | Matrix gain 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX3 | Matrix gain 3 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX4 | Matrix gain 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX5 | Matrix gain 5 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX6 | Matrix gain 6 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| MTX7 | Matrix gain 7 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| CC1 | Color control characteristic 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| CC2 | Color control characteristic 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 0 | | | | | | | | | | | | | | | | | |
| CC3 | Color control characteristic 3 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 127 | | | | | | | | | | | | | | | | | |
| CC4 | Color control characteristic 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| CC5 | Color control characteristic 5 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 0 | | | | | | | | | | | | | | | | | |
| CC6 | Color control characteristic 6 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 127 | | | | | | | | | | | | | | | | | |



NTSC VIDEO CHROMA DEFLECTION PROCESSOR

ELECTRICAL CHARACTERISTICS (cont.)

| Symbol | Parameter | Sub address | 02H | | 03H | 04H | 05H | 07H | 08H | 0AH | | 0BH | 0CH | 0DH | 0EH | 0FH | 10H | 11H | | | | 12H | | | | |
|---------|-------------------------------------|-------------|----------|----|-----|------------|------|-----|-----|-----|----|-----|-----|------|------|------|------|------|------|------|------|----------|----------|----------|---------|---------|
| | | | Function | D1 | D2 | SH | CONC | COR | COL | TIM | HP | γ | BR1 | D(R) | C(G) | C(R) | C(G) | C(B) | B(R) | B(G) | B(B) | FLE | DEM | SER | AF1 | AUT |
| CCN1 | Contrast control characteristic 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | 0 | | | | | | | | | | | | | | | | | | | | |
| CCN4 | Contrast control characteristic 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | 64 | | | | | | | | | | | | | | | | | | | | |
| CCN7 | Contrast control characteristic 7 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | 126 | | | | | | | | | | | | | | | | | | | | |
| CCN10 | Contrast control characteristic 10 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | OFF 127 | | | | | | | | | | | | | | | | | | | | |
| BR1 | Brightness control characteristic 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| BR4 | Brightness control characteristic 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | 0 | | | | | | | | | | | | | | |
| BR7 | Brightness control characteristic 7 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | 127 | | | | | | | | | | | | | | |
| OSD4 | OSD level 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| OSD8 | OSD level 8 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| OSD12 | OSD level 12 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| ACL | ACL | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | 0 | | | | | | | | | | | | | | | | | | | |
| DAG1 | Drive amplifier gain 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 0 | 0 | | | | | | | | | | | | |
| DAG2 | Drive amplifier gain 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 0 | 0 | | | | | | | | | | | | |
| DAG3 | Drive amplifier gain 3 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 0 | 0 | | | | | | | | | | | | |
| DAG4 | Drive amplifier gain 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 63 | 63 | | | | | | | | | | | | |
| DAG5 | Drive amplifier gain 5 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 63 | 63 | | | | | | | | | | | | |
| DAG6 | Drive amplifier gain 6 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | 63 | 63 | | | | | | | | | | | | |
| CUT1 | Cutoff 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | 64 | 64 | 64 | | | | | | | | | | |
| CUT4 | Cutoff 4 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | 0 | 0 | 0 | | | | | | | | | | |
| CUT7 | Cutoff 7 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | 127 | 127 | 127 | | | | | | | | | | |
| RGB BW1 | RGB frequency characteristic 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | OFF 1 | OFF 1 | OFF 1 | ON 0 | ON 0 |
| OSD S1 | OSD speed 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| FAST S1 | FAST BLK speed 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| WP | White peak det. 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

ELECTRICAL CHARACTERISTICS (cont.)

| Symbol | Parameter | Sub address | 02H | | 03H | 04H | 05H | 07H | 08H | 0AH | | 0BH | 0CH | 0DH | 0EH | 0FH | 10H | 11H | | | | 12H | | | |
|-------------|---|-------------|-----|----|-----|-----|-----|-----|------|-----|---|-----|------|------|------|------|------|------|------|------|-----|-----|------|-----|-----|
| | | | D1 | D2 | SH | CON | COR | COL | TIM | HP | γ | BR1 | D(R) | C(G) | C(R) | C(G) | C(B) | B(R) | B(G) | B(B) | FLE | DEM | SER | AF1 | AUT |
| BLKK W1 | Blanking width 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| - | Deflection system standard conditions | Sub address | 0 | | | | | | 4 | | | | | | | | | | | | | | | | |
| | | Function | 0 | 0 | | 32 | 64 | 4 | 64 | 64 | 0 | 4 | 64 | 32 | 32 | 127 | 127 | 127 | OFF | OFF | OFF | ON | 100* | OFF | LO |
| FH | Horizontal signal oscillation frequency | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| V46 MINF | Horizontal signal oscillation starting voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| FPH1 | Horizontal signal pull-in range 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| FPH2 | Horizontal signal pull-in range 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| TH | Horizontal signal pulse width | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| VH | Horizontal signal output voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| FV | Vertical signal oscillation frequency | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| TV | Vertical signal pulse width | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| FPV | Vertical signal pull-in range | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| TGP | Burst gate pulse position | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| TBP1 | Burst gate timing 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| TB GP2 | Burst gate timing 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| FBP | FBP IN TH voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | ON | LO | ON |
| VOH | Vertical signal output HI voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| VOL | Vertical signal output LO voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| HISS | Horizontal signal sync separation input circuit current | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| VISS | Vertical signal sync separation input circuit current | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| X | X-ray protection voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| V3L | Coincidence detection LO voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |
| AFC | AFC gain | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | OFF | HI | ON |
| HP | Horizontal signal phase | Sub address | | | | | | | /120 | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | 15 | 0 | | | | | | | | | | | | | | | |
| VW | Minimum vertical signal sync detection width | Sub address | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

ELECTRICAL CHARACTERISTICS (cont.)

| Symbol | Parameter | Sub address | 02H | | 03H | 04H | 05H | 07H | 08H | 0AH | 0BH | 0CH | 0DH | 0EH | 0FH | 10H | 11H | | | 12H | | | | | | |
|--------|--|-------------|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|
| | | Function | D1 | D2 | SH | CON | COR | COL | TIM | HP | γ | BR1 | D(R) | C(G) | C(R) | C(G) | C(B) | B(R) | B(G) | B(B) | FLE | DEM | SER | AF1 | AUT | YNR |
| VV | Minimum vertical signal sync input voltage | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | | | |
| SSI | Service SW 1 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | ON | LO | OFF |
| SS2 | Service SW 2 | Sub address | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Function | | | | | | | | | | | | | | | | | | | | | | ON | LO | OFF |


ELECTRICAL CHARACTERISTICS TEST METHODS

YMAX 1

- Set signal a to 100kHz and 1.0V_{P-P}, and input it via SG32.
- Measure pin 29 output amplitude(P-P), as shown below:




- Calculate BLST_n as follows: $BLST_n = V_B / V_w \times 100$ [IRE]

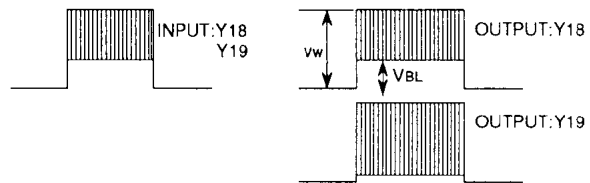

GY1

- Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG32.
- Measure pin 29 output amplitude(P-P). It is called G1.

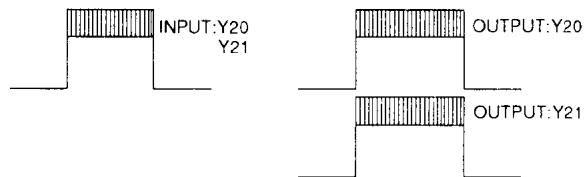

(3) $GY1 = 20 \log(G1(V_{P-P}) / 0.35(V_{P-P}))$ [dB]

YTMAX

- Input signal a (f=3MHz) via SG32.
- Measure pin 29 output amplitude. It is called YT1.
- $YTMID1 = 20 \log(YT1 / \text{input amplitude})$ [dB]

YTMIN

- Input signal a (f=3MHz) via SG32.
- Measure pin 29 output amplitude. It is called YT2.
- $YTMID2 = 20 \log(YT2 / \text{input amplitude})$ [dB]

BLST3 and BLST4

- Set signal c to 100kHz, $V_1 = 0.15V$ and $V_2 = 0.2V$, and input it via SG32.
- Input signal n via SG15.
- Measure pin 29 output amplitude (voltage from pedestal to "white" peak). It is called V_w . Measure setup voltage (voltage from pedestal and sine wave bottom.) It is called V_{BL} .

YBW


- Set signal a to 7 MHz and 0.35V_{P-P}, and input it via SG32.
- Measure pin 29 output amplitude (sine-wave portion). It is called YB.
- $YBW = 20 \log[YB(V_{P-P}) / GY1(V_{P-P})]$ [dB]

DC REG1

- Set signal b to sync level 0, and input it via SG32.
- Measure DC voltage at where pin 29 output is lowest.

DC REG2

- Set signal b to sync level 0, and input it via SG32.
- Measure DC voltage at where pin 29 output is lowest. This voltage is called DCR2.
- $DCREG2 = DCREG1 - DCR2$

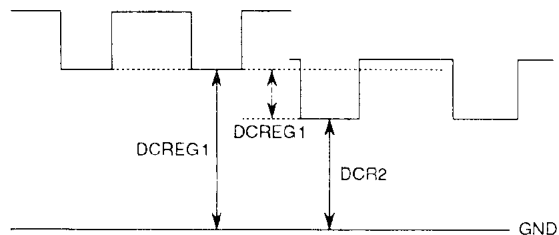

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

YLIN

- (1) Set signal a to 100kHz and 0.7V_{P-P}, and input it via SG32.
- (2) Measure pin ⑳ output amplitude(sine wave portion). It is called YL.
- (3) $YLIN=20\log (1-YL/2G1)[dB]$

NRC1

- (1) Set signal a to 100kHz and 50mV_{P-P}, and input it via SG32.
- (2) Measure pin ㉑ output amplitude. It is called NR1.
- (3) $NRC1=20\log [NR1 (mV_{P-P})/50 (mV_{P-P})][dB]$

ACC1

- (1) Input signal e via SG18.
- (2) Measure pin ㉒ output amplitude.

ACC2

- (1) Set signal e to -20dB, and input it via SG18.
- (2) Measure pin ㉒ output amplitude. It is called AC2.
- (3) $ACC2=20\log [AC2(mV_{P-P})/ACC1(mV_{P-P})][dB]$

ACC3

- (1) Set signal e to +6dB, and input it via SG18.
- (2) Measure pin ㉒ output amplitude. It is called AC3.
- (3) $ACC3=20\log [AC3(mV_{P-P})/ACC1(mV_{P-P})][dB]$

KIL1

- (1) Set signal e to -20dB, and input it via SG18.
- (2) Measure pin ㉓ DC voltage.

KIL2

- (1) Set signal e to -51dB, and input it via SG18.
- (2) Measure pin ㉓ DC voltage.

DKIL

- (1) Set eb of signal e (burst portion) to $-\infty$ dB, and input it via SG18.
- (2) Measure pin ㉒ output amplitude.

T1

- (1) Set eb of signal e (burst portion) to $-\infty$ dB, and input it via SG18.
- (2) Obtain the angle based on pin ㉒ output waveform, in the same way as for TCEN. This angle is called IT1.
- (3) $T1=IT1-A1$

T2

- (1) Set eb of signal e (burst portion) to $-\infty$ dB, and input it via SG18.
- (2) Obtain the angle based on pin ㉒ output waveform, in the same way as for TCEN. This angle is called IT2.
- (3) $T2=IT2-A1$

TT

- (1) $TT=IT1-IT2$

FL

- (1) Input signal 0 via SG18.
- (2) Obtain the angle based on pin ㉒ output waveform, in the same way as for TCEN. This angle is called IF.
- (3) $FL=AI-IF$

AIQ

- (1) $AIQ=AI-AQ$

RIQ

- (1) Set signal h fsc to 3.679545MHz (100kHz higher than normal), and input it via SG18.
- (2) Measure pin ㉔ output amplitude. It is called RI.
- (3) Measure pin ㉕ output amplitude. It is called RQ.
- (4) $RIQ=RI/RQ$

MTX1 through MTX7

- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it SG12.
- (2) Measure output amplitude (sine-wave portion) under appropriate switch/data conditions. The amplitude is called MTn (n=1, 2, ... or 7).
- (3) $MTX1 \text{ through } MTX7=20\log (MTn(V_{P-P})/0.35(V_{P-P}))[dB]$

CC1

- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG12.
- (2) Measure pin ㉖ output amplitude (sine-wave portion). It is called Vcc1.
- (3) Calculate CC1 as follows: $CC1=20\log (V_{cc1}/input)[dB]$

CC2


- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG12.
- (2) Measure pin ㉗ output amplitude (sine-wave portion). It is called CR1.
- (3) $CC2=20\log (CB1/CC1)[dB]$

CC3

- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG12.
- (2) Measure pin ㉘ output amplitude (sine-wave portion). It is called CR2.
- (3) $CC3=20\log (CB2/CC1)[dB]$

CC4

- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG12.
- (2) Measure pin ㉙ output amplitude (sine-wave portion). It is called Vcc4.
- (3) $CC4=20\log (V_{cc4}/input)$

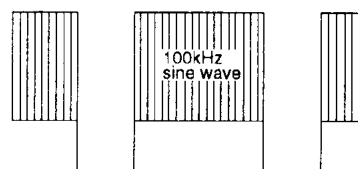

COMMON OUTPUT WAVEFORM

CC5

- (1) Set signal a to 100kHz and 0.35, and input it via SG12.
- (2) Measure pin ㉚ output amplitude (sine-wave portion). It is called CR3.
- (3) $CC5=20\log (CR3/V_{cc4})[dB]$

CC6

- (1) Set signal a to 100kHz and 0.35V_{P-P}, and input it via SG12.
- (2) Measure pin ㉛ output amplitude (sine-wave portion). It is called CR4.
- (3) $CC6=20\log (CR4/V_{cc4})[dB]$

CON1

- (1) Set signal a to 100kHz and 0.5V_{P-P}, and input it via SG28.
- (2) Measure pin ㉜, ㉝ and ㉞ output amplitudes (sine-wave portion).
- (3) Measure pin ㉞ voltage, It is called Vcon1.

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

CON4

- (1) Set signal a to 100kHz and 0.5V P-P, and input via SG28.
- (2) Measure pin ①, ② and ③ output amplitudes (sine-wave portion). The amplitudes are called, respectively, COB1, COG1 and COR1.
- (3) $CON4B=20\log (COB1/CON1B)[dB]$
- (4) $CON4G=20\log (COG1/CON1B)[dB]$
- (5) $CON4R=20\log (COR1/CON1B)[dB]$

CON7


- (1) Set signal a to 100kHz and 0.5V P-P, and input it via SG28.
- (2) Measure pin ①, ② and ③ output amplitudes (sine-wave portion). The amplitudes are called, respectively, COB2, COG2 and COR2.
- (3) $CON7B=20\log (COB2/CON1B)[dB]$
- (4) $CON7G=20\log (COG2/CON1B)[dB]$
- (5) $CON7R=20\log (COR2/CON1B)[dB]$
- (6) Measure pin ⑥. This is called VCON2.

CON10

- (1) Set signal a to 100kHz and 0.5V P-P, And input it via SG28.
- (2) Measure pin ①, ② and ③ output amplitudes (sine-wave portion). The amplitudes are called, respectively, COB3, COG3 and COR3.
- (3) $CON10B=20\log (COB3/CON1B)[dB]$
- (4) $CON10G=20\log (COG3/CON1B)[dB]$
- (5) $CON10R=20\log (COR3/CON1B)[dB]$

BR1 through BR9

- (1) Input SG6 sync signal only.
- (2) Measure pin ①, ② and ③ output DC voltage, except at blanking portions.

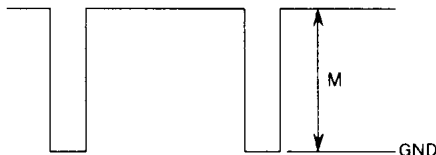

OSD4 through DC12

- (1) Input SG6 sync signal only.
- (2) Measure pin ①, ② and ③ output DC voltages, except at blanking portions.

ACL

- (1) $ACL=V_{CON1}-V_{CON2} [mV]$

DAG1 and DAG4

- (1) Set signal a to 100kHz and 0.5V P-P, and input it via SG28.
- (2) Measure pin ② output amplitudes (sine-wave portion) twice.

Drive Amplifier Gains: DAG2, DAG3, DAG5 and DAG6

- (1) Set signal a to 100 kHz and 0.5V P-P, and input it via SG28.
- (2) Measure pin ① (B OUT) and pin ③ (R OUT) output amplitudes (sine-wave portion). Repeat the measurement. The amplitudes are called DAGB1, DAGR1, DAGB2 and DAGR2.
- (3) $DAG2=20\log (DAGB1/DAG1)[dB]$
 $DAG3=20\log (DAGR1/DAG1)[dB]$
 $DAG5=20\log (DAGB2/DAG4)[dB]$
 $DAG6=20\log (DAGR2/DAG4)[dB]$

CUT1 through CUT9


- (1) Input SG6 sync signal only.
- (2) Measure pin ①, ② and ③ output DC voltage, except at blanking portions.

RGB BW1 through BW3

- (1) Set signal a to 4MHz and 0.5 V P-P, and input it via SG28.
- (2) Measure ①, ② and ③ output amplitudes (sine-wave portion). They are called, respectively, BWB, BWG and BWR.
- (3) $RGB BW1=20\log (BWB/CON4)[dB]$
 $RGB BW2=20\log (BWB/CON5)[dB]$
 $RGB BW3=20\log (BWB/CON6)[dB]$

OSD S1

- (1) Set signal n to 5 V O-P, and input it via SG43.
- (2) Measure pin ①, ② and ③ output rise time and fall time, as shown below:



FAST S1


- (1) Set signal n to 5V O-P, and input it via SG30.
- (2) Measure pin ①, ② and ③ output rise time and fall time, in the same way as for I43.

W and P

- (1) Set signal a to 100kHz and 0.5V P-P, and input it via SG28.
- (2) Measure pin ⑥ output DC voltage.

BLKW1 to BLKW3

- (1) Measure pin ①, ② and ③ horizontal signal blanking width.

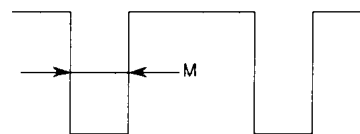

FH

- (1) Apply no input.
- (2) Measure pin ① output frequency.

V46MIN

- (1) Apply no input.
- (2) Set pin ④ voltage to 7.5V
- (3) Measure pin ① output frequency.

FPH1


- (1) Set signal k to 14.0kHz and input it via SG6. Check if pin ③ DC voltage is no more than 4.0V.
- (2) Increase signal k frequency gradually. Measure it when pin ③ DC voltage exceeds 5.0V. This frequency is called PL.
- (3) $FPH1=PL-15.734 [kHz]$

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

FPH2

- (1) Set signal k to 17.5kHz, and input it via SG6. Check if pin ③ DC voltage is no more than 4.0V.
- (2) Decrease signal k frequency gradually. Measure it when pin ③ DC voltage exceeds 5.0V. This frequency is called PH.
- (3) $FPH2 = PH - 15.734$ [kHz]


TH and VH



PIN ① OUTPUT WAVEFORM

FV


- (1) Apply no input.
- (2) Measure pin ⑤ frequency.



FPV

- (1) Set signal 1 to 100Hz. Input via SG6.
- (2) Monitoring pin ⑤ output frequency, lower signal 1 frequency.
- (3) Measure the frequency when pin ⑤ output frequency meets signal 1 frequency.

TGP, TBGP1 and TBGP2

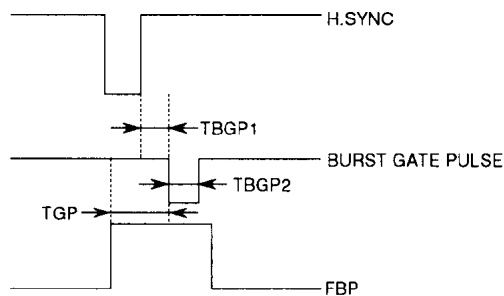


FBP

- (1) Pin ② output DC voltage.

VOH, VOL and HISS

- (1) Flow 1μA current out of pin ⑦, and increase the current.
- (2) Measure pin ① output frequency, and measure pin ⑦ outflow current when the frequency reaches a level that is below FH by 50Hz or more.



VISS

- (1) Flow 1μA current out of pin ⑥, and increase the current.
- (2) Measure pin ⑤ output frequency, and measure pin ⑥ outflow current when the frequency reaches a level that is above FV by 5Hz or more.

X


- (1) Apply 1.0V to pin ②.
- (2) Check if pin ① output is LO.

V3L

- (1) Apply no input.
- (2) Measure pin ③ DC voltage.

AFC

- (1) Measure pin ⑤ output amplitude difference when AFC SW setting is changed. (Sub-address 12 data is changed to C6 and C2.)



HP

- (1) Shift horizontal signal phase from the maximum to the minimum (by switching from A3 to B6 at sub-address 0A), and measure the change in the period between pin 1 pulse rise and sync fall.

VW










- (1) Input signal 1 to 20μsec 60Hz, and input it via SG6.
- (2) Measure pin ⑤ output frequency.



VV

- (1) Set signal 1 to 60Hz and 100mV P-P, and input it via SG6.
- (2) Measure pin ⑤ output frequency.

NTSC VIDEO CHROMA DEFLECTION PROCESSOR


INPUT SIGNALS
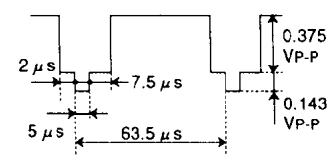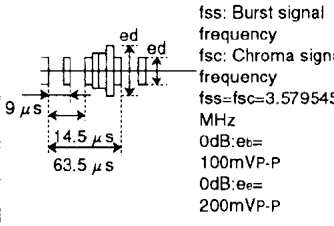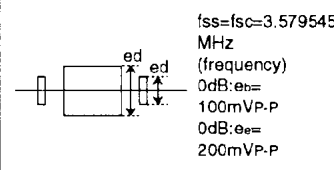
| Symbol | Name | Description |
|--------|------------------------------------|--|
| a | Video signal (sine wave) |  |
| b | APL 100% reference signal |  |
| c | Video signal (sine wave) |  |
| d | Sine wave | 200mVP-P=0dB Frequency should be variable. |
| e | Chroma standard signal (color bar) |  |
| f | Chroma signal-1 |  |
| g | Chroma signal-2 | Compared with chroma signal-1(f), both burst and chroma frequencies are variable with this signal. |
| h | Chroma signal-3 | The same as chroma signal1-1 (f), except that fsc=5.529545MHz. (fss=3.579545MHz) |
| i | Standard reference signal |  |
| j | APL 50% reference signal |  |
| k | Periodic signal 1 |  |
| l | Periodic signal 2 |  |
| m | 5MHz sine wave | 0dB→100mVP-P |
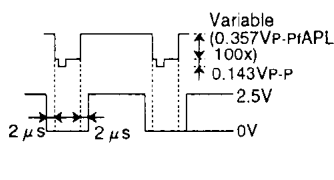
| Symbol | Name | Description |
|--------|----------------------|---|
| n | Blanking pulse |  |
| o | 0° 90° chroma signal |  |


NTSC VIDEO CHROMA DEFLECTION PROCESSOR

TYPICAL CHARACTERISTICS

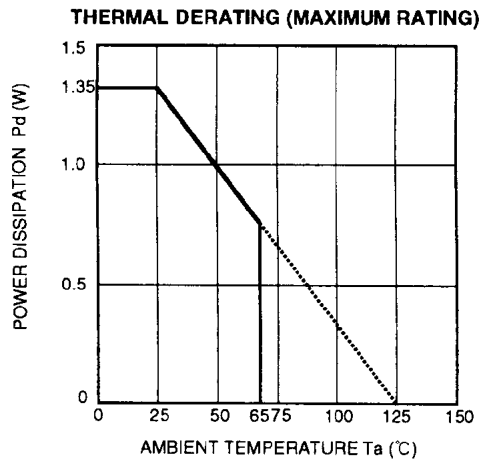

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

APPLICATION EXAMPLE

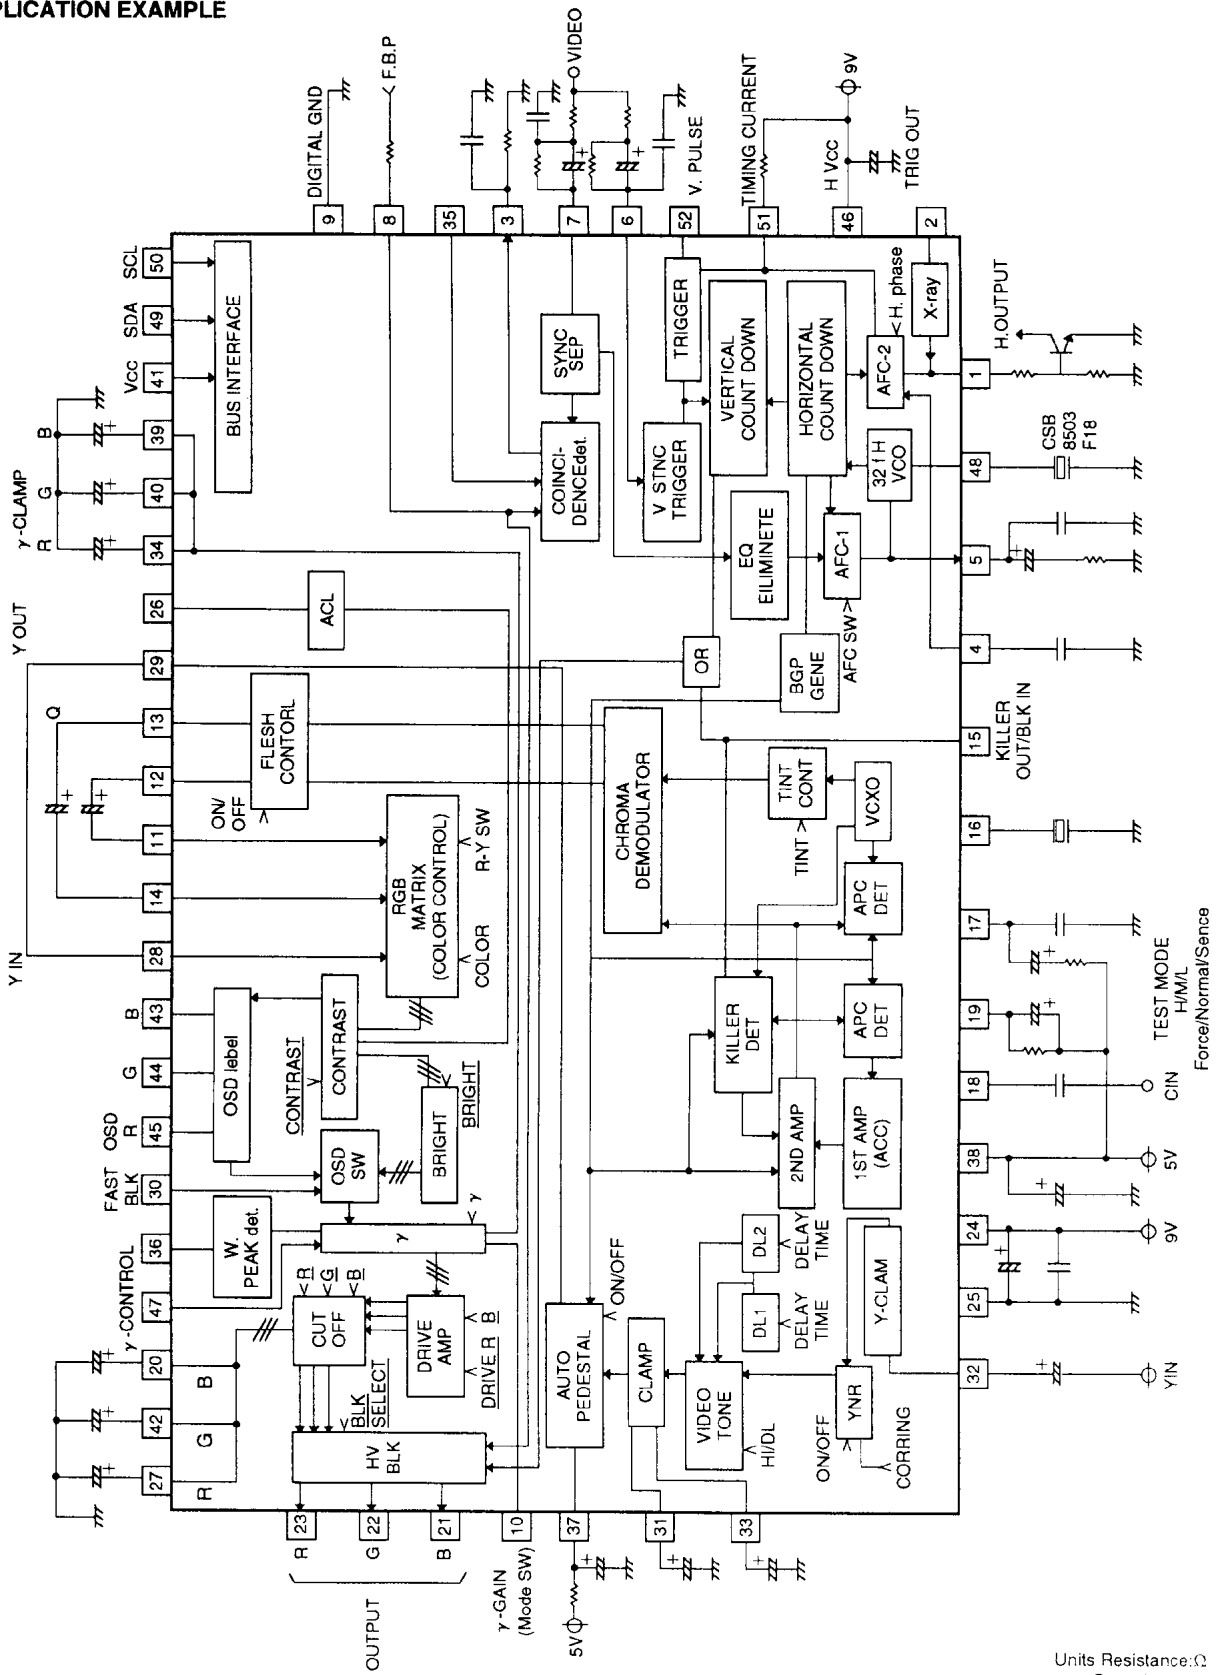

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|------------------------|------------------------------|----------------------------|------------|
| ① | H.OUT | — | | — |
| ② | X-RAY PROTECTOR FILTER | — | | — |
| ③ | COINCIDENCE DET.OUT | — | | — |
| ④ | AFC-2 FILTER | — | | 4.5V |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|---------------|------------------------------|----------------------------|------------|
| ⑤ | AFC-1 FILTER | — | | 6.3V |
| ⑥ | V.SYNC SEP.IN | — | | 6.8V |
| ⑦ | H.SYNC SEP.IN | — | | 6.5V |
| ⑧ | FBP IN | — | | — |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|--------------|------------------------------|----------------------------|------------|
| ⑨ | DIGITAL GND | — | — | — |
| ⑩ | γ-GAIN | — | | 3.0V |
| ⑪ ⑭ | I IN Q IN | — | | 3.0V |
| ⑫ | I OUT | — | | 2.5V |
| ⑬ | Q OUT | — | | 2.5V |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|------------|------------------------------|----------------------------|------------|
| ⑮ | KILL/BLK | — | | 2.5V |
| ⑯ | X-TAL | 3.58MHz of X-TAL | | 3.0V |
| ⑰ | APC FILTER | — | | 3.0V |
| ⑱ | CHROMA IN | — | | — |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|------------------|-------------------------------|------------------------------|----------------------------|------------|
| ①9 | ACC FILTER | — | | 3.6V |
| ⑳ ㉑ ㉒ ㉓ | B CLAMP R CLAMP G CLAMP | — | | 3.5V |
| ㉑ ㉒ ㉓ | B OUT G OUT R OUT | — | | 2.75V |
| ㉔ | VCD Vcc (9V) | — | — | — |
| ㉕ | VCD GND | — | — | — |
| ㉖ | ACL | — | | 3.0V |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|-----------------|------------------------------|----------------------------|------------|
| 29 | MTX Y IN | — | | — |
| 28 | Y OUT | — | | 3.0V |
| 30 | FAST BLK. IN | — | | 5.3V |
| 31 | Y CLAMP | — | | — |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|----------------|---|------------------------------|----------------------------|------------|
| 32 | Y IN | — | | 2.5V |
| 33 | DC REGENERATION | — | | 2.5V |
| 34 39 40 | γ-CLAMP (R) γ-CLAMP (B) γ-CLAMP (G) | — | | 3.5V |
| 35 | BGP OUT | — | | 3.7V |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|----------------|---|------------------------------|----------------------------|------------|
| ③⑥ | W.PEAK DET. | — | | 6.8V |
| ③⑦ | AUTO PEDESTAL CLAMP | — | | 2.9V |
| ③⑧ | VCD Vcc 5V | — | — | — |
| ④① | IIL GND | — | — | — |
| ④③ ④④ ④⑤ | OSD IN (B) OSD IN (G) OSD IN (R) | — | | — |
| ④⑥ | H Vcc (9V) | — | — | — |
| ④⑦ | γ-CONTROL | — | | — |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)

| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|----------------|------------------------------|----------------------------|------------|
| 48 | H VCO | f=Approx. 500kHz | | — |
| 49 | SDA | — | | 4.4V |
| 50 | SCL | — | | 4.4V |
| 51 | TIMING CURRENT | — | | — |

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

DESCRIPTION OF PIN (cont.)


| Pin No. | Name | Voltage and wave information | Peripheral circuit of pins | DC voltage |
|---------|---------|------------------------------|----------------------------|------------|
| 52 | V PULSE | — | | 8.0V |

I²C-BUS ADDRESS LIST

(1) Slave address

A6 A5 A4 A3 A2 A1 A0 R/W
 1 0 1 1 1 0 1 0 (=BAH)

(2) Data format

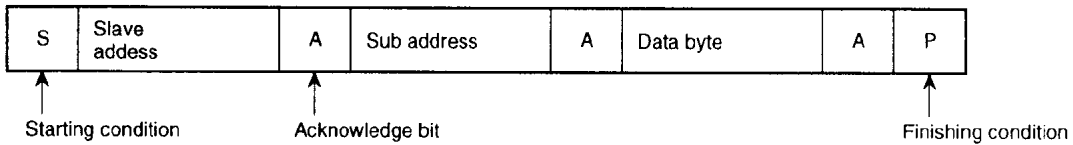

NTSC VIDEO CHROMA DEFLECTION PROCESSOR

FUNCTIONS AND SUB ADDRESSED CONTROLLED BY I²C-BUS SYSTEM

| No. | Parameter | Sub address | DC voltage | | | | | | | |
|-----|----------------------|-------------|------------|--------|--------|--------|------------|-------|------------|------|
| | | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 1 | DL aperture cont. 1 | 02H | 0 | 0 | A25 | A24 | — | — | 0 | 0 |
| 2 | DL aperture cont. 2 | 02H | 0 | 0 | — | — | A23 | A22 | 0 | 0 |
| 3 | sharpness | 03H | 0 | 0 | A35 | A34 | A33 | A32 | A31 | A30 |
| 4 | contrast cont | 04H | 0 | A46 | A45 | A44 | A43 | A42 | A41 | A40 |
| 5 | NR corring level | 05H | 0 | 0 | 0 | 0 | 0 | A52 | A51 | A50 |
| 6 | color cont | 07H | 0 | A76 | A75 | A74 | A73 | A72 | A71 | A70 |
| 7 | tint cont | 08H | 0 | A86 | A85 | A84 | A83 | A82 | A81 | A80 |
| 8 | AFC-2 H phase | 0AH | 0 | AA6 | AA5 | AA4 | AA3 | — | — | — |
| 9 | r-position | 0AH | 0 | — | — | — | — | AA2 | AA1 | AA0 |
| 10 | bright cont | 0BH | 0 | AB6 | AB5 | AB4 | AB3 | AB2 | AB1 | AB0 |
| 11 | drive (R) | 0CH | 0 | 0 | AC5 | AC4 | AC3 | AC2 | AC1 | AC0 |
| 12 | drive (B) | 0DH | 0 | 0 | AD5 | AD4 | AD3 | AD2 | AD1 | AD0 |
| 13 | cut off (R) | 0EH | 0 | AE6 | AE5 | AE4 | AE3 | AE2 | AE1 | AE0 |
| 14 | cut off (G) | 0FH | 0 | AF6 | AF5 | AF4 | AF3 | AF2 | AF1 | AF0 |
| 15 | cut off (B) | 10H | 0 | A106 | A105 | A104 | A103 | A102 | A101 | A100 |
| 16 | BLK select (R) | 11H | | B-s(R) | | | | | | |
| 17 | BLK select (G) | 11H | | | B-s(G) | | | | | |
| 18 | BLK select (B) | 11H | | | | B-s(B) | | | | |
| 19 | fresh cont on/off | 11H | | | | | | | fresh cont | |
| 20 | demod axis | 11H | | | | | | | | demo |
| 21 | Service SW | 12H | | | | | Service SW | | | |
| 22 | AFC-1 speed | 12H | | | | | | AFC-1 | | |
| 23 | auto pedestal on/off | 12H | | | | | | | auto ped | |
| 24 | YNR on/off | 12H | | | | | | | | YNR |