

M51802 / M5F741P

OPERATIONAL AMPLIFIER

DESCRIPTION

The M51802L/M51802P is a semiconductor integrated circuit consisting of a differential amplifier and output circuit. It is designed for a wide range of analog applications.

The high gain and wide range of operating voltage provides excellent performance in summing amplifier, integrator, and general feedback applications.

FEATURES

- No frequency compensation required
- Short-circuit protection
- No latch up
- Offset voltage null capability
- Large common mode and differential voltage ranges
- Low power dissipation


APPLICATION

General feedback applications

RECOMMENDED OPERATING CONDITIONS

Supply voltage range..... $V_{CC}(+V)$, $V_{EE}(-V)$ 4~18V
 Rated supply voltage..... $V_{CC}(+V)$, $V_{EE}(-V)$ 15V


PIN CONFIGURATION (TOP VIEW)

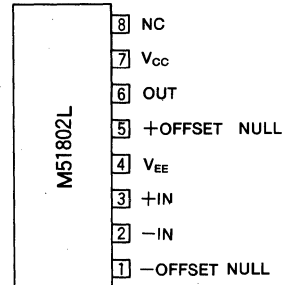

Outline 8P5



NC : NO CONNECTION

PIN CONFIGURATION (TOP VIEW)

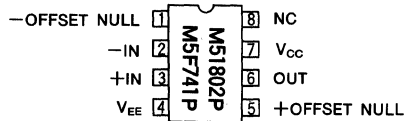


Outline 8P4

NC : NO CONNECTION



8-pin molded plastic DIP 8-pin molded plastic SIP

EQUIVALENT CIRCUIT

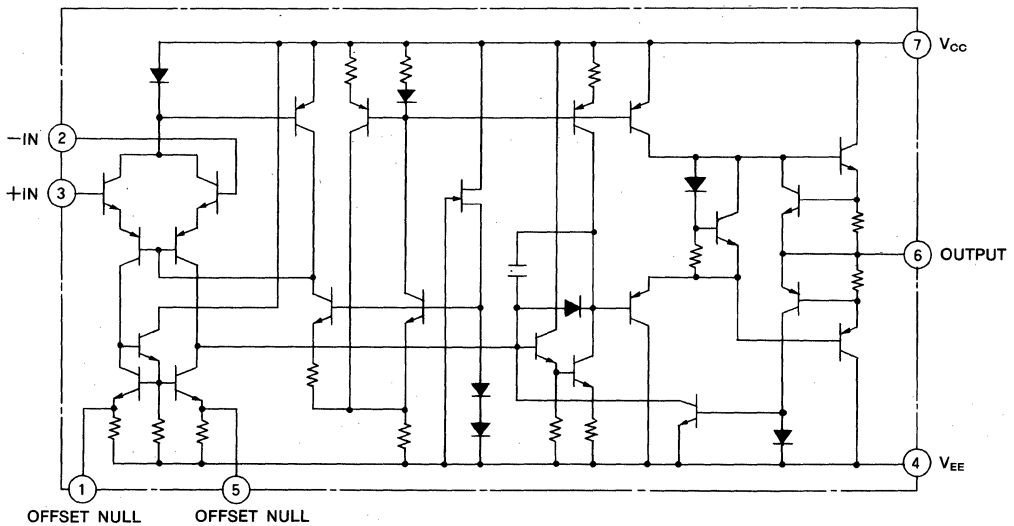

MITSUBISHI LINEAR ICs
M51802 / M5F741P

OPERATIONAL AMPLIFIER

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Limits	Unit
V_{CC}	Supply voltage		18	V
V_{EE}			-18	V
V_{id}	Differential input voltage		± 30	V
V_{ic}	Common mode input voltage	(Note 1)	± 15	V
P_d	Power dissipation		360(SIL)	mW
			625(DIL)	
K_θ	Thermal derating	$T_a \geq 25^\circ\text{C}$	3.6(SIL)	mW/ $^\circ\text{C}$
			6.25(DIL)	
T_{opr}	Operating temperature		-20~+75	$^\circ\text{C}$
T_{stg}	Storage temperature		-40~+125	$^\circ\text{C}$

Note : 1. For supply voltages less than $\pm 15\text{V}$, the absolute maximum input voltage is equal to the supply voltage.


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V_{CC}=+15\text{V}$, $V_{EE}=-15\text{V}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{IO}	Input offset voltage	$R_g \leq 10\text{k}\Omega$		1.0	5.0	mV
I_{IB}	Input bias current			150	500	nA
I_{IO}	Input offset current			30	200	nA
R_{in}	Input resistance	Input frequency $f=1\text{kHz}$		1.0		M Ω
G_V	Voltage gain	$R_L \geq 2\text{k}\Omega$, $V_O = \pm 10\text{V}$	86	100		dB
V_{OPP}	Output voltage swing	$R_g \geq 10\text{k}\Omega$	± 12	± 14		V
		$R_g \geq 2\text{k}\Omega$	± 10	± 13		V
V_{ic}	Input voltage range		± 12	± 13		V
CMRR	Common mode rejection ratio	$R_g \leq 10\text{k}\Omega$	70	90		dB
SVRR	Supply voltage rejection ratio	$R_g \leq 10\text{k}\Omega$		80	150	$\mu\text{V}/\text{V}$
P_d	Power dissipation	$R_L = \infty$		50	85	mW
t_r	Transient response	Rise time		0.3		μs
K_{OV}		Over shoot	$V_{in}=20\text{mV}$, $R_L=2\text{k}\Omega$, $C_L \leq 100\text{pF}$		5.0	
SR	Slew rate	$R_L=2\text{k}\Omega$		0.5		V/ μs


OPERATIONAL AMPLIFIER

TYPICAL CHARACTERISTICS


**THERMAL DERATING
(MAXIMUM RATING)**

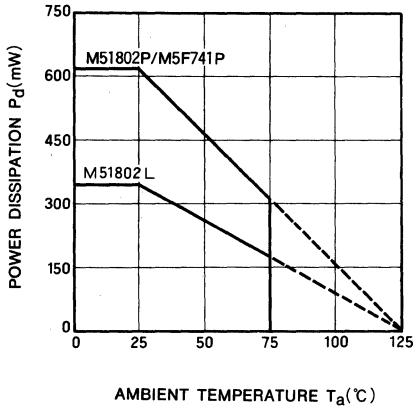


**INPUT VOLTAGE OFFSET
VS AMBIENT TEMPERATURE**

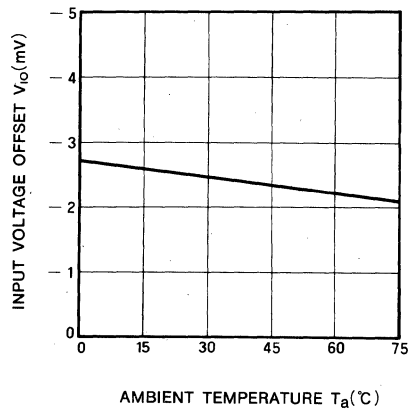


**INPUT BIAS CURRENT VS
AMBIENT TEMPERATURE**

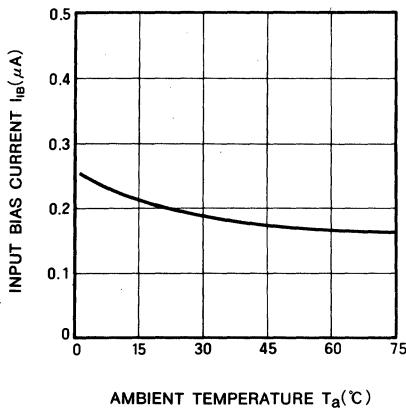


**VOLTAGE GAIN VS
FREQUENCY**

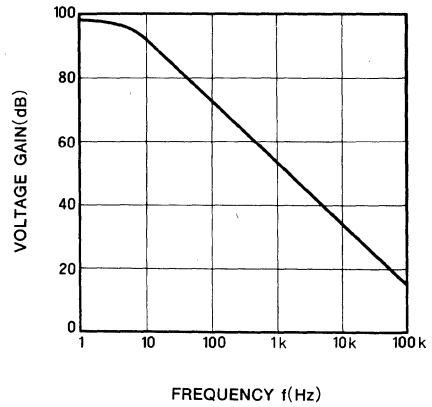

**OUTPUT VOLTAGE SWING
VS FREQUENCY**

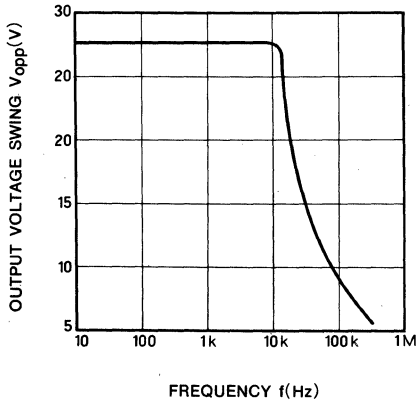


**OUTPUT VOLTAGE SWING
VS LOAD RESISTANCE**

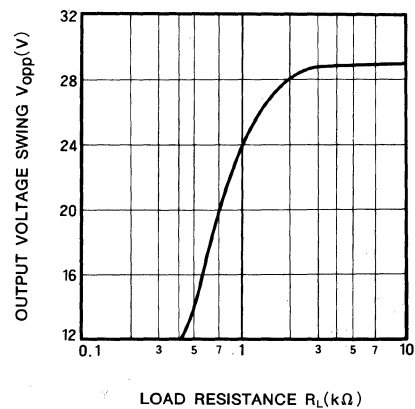


OPERATIONAL AMPLIFIER


**POWER DISSIPATION VS
 SUPPLY VOLTAGE**

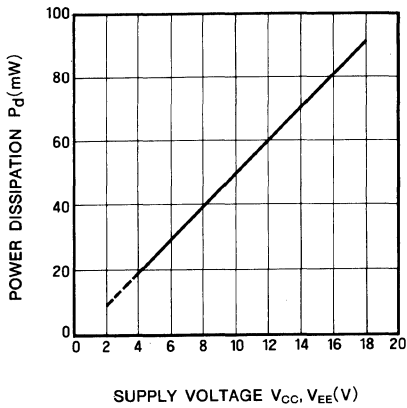


**VOLTAGE GAIN VS
 SUPPLY VOLTAGE**

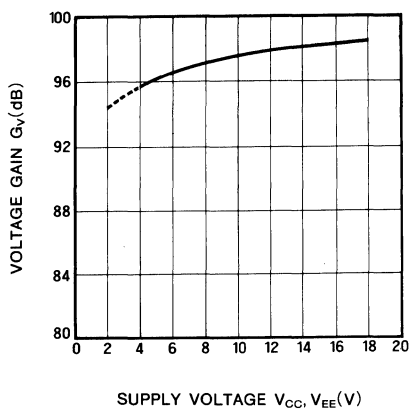


**INPUT BIAS CURRENT
 VS SUPPLY VOLTAGE**

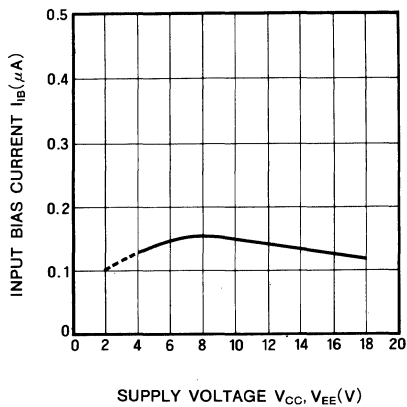

**INPUT OFFSET VOLTAGE
 VS SUPPLY VOLTAGE**

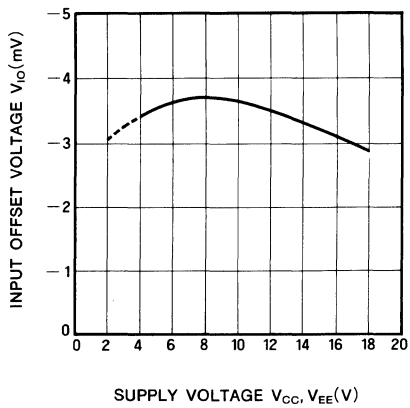


**INPUT OFFSET CURRENT
 VS SUPPLY VOLTAGE**

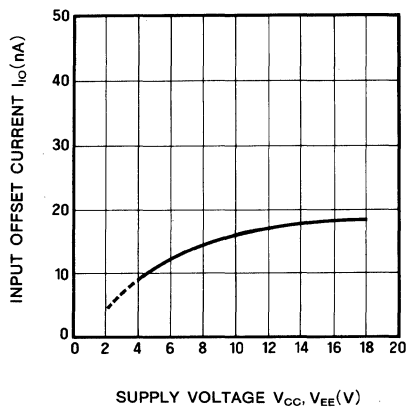

OPERATIONAL AMPLIFIER


APPLICATION EXAMPLES

(1) INVERSE POLARITY AMP

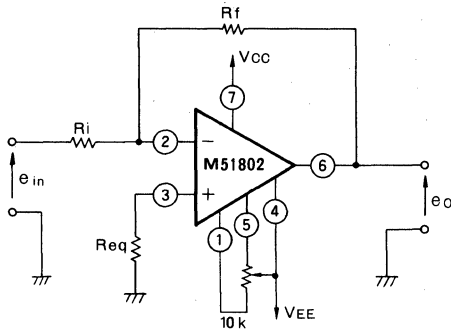


$$R_{eq} = \frac{R_f \cdot R_i}{R_f + R_i} \quad A_{vo} = \frac{R_f}{R_i}$$

(2) INTEGRATOR

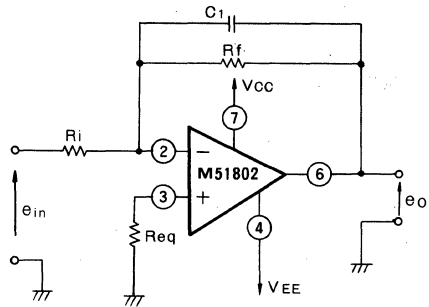

$$R_{eq} = \frac{R_f \cdot R_i}{R_f + R_i} \quad e_o = \frac{1}{R_i C_1} \int e_{in} dt$$

(3) DIFFERENTIATOR

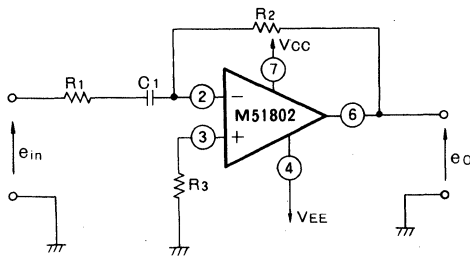

$$e_o = R_2 C_1 \frac{de_{in}}{dt}$$