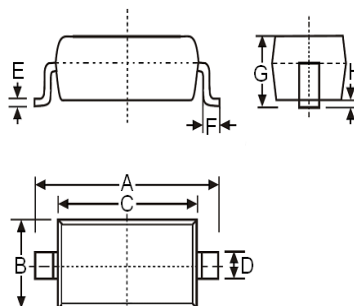


**SURFACE MOUNT
FAST SWITCHING DIODE**
**REVERSE VOLTAGE – 75 Volts
FORWARD CURRENT – 0.15 Ampere**
FEATURES

- Fast switching speed
- Ideally suited for automatic insertion
- For general purpose switching applications

MECHANICAL DATA

- Case: SOD-323 Plastic
- Case material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Moisture sensitivity: Level 1 per J-STD-020D
- Lead free in RoHS 2002/95/EC compliant

SOD-323


SOD-323		
Dim.	Min.	Max.
A	2.50	2.70
B	1.20	1.40
C	1.60	1.80
D	0.25	0.35
E	0.08	0.15
F	0.25	0.40
G	---	1.0
H	0.00	0.10
Dimensions in millimeter		

Maximum Ratings & Thermal Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	1N4148WS	Units
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Repetitive Peak Reverse Voltage	V_{RRM}	75	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R		
Non-repetitive Peak Forward Surge Current	I_{FM}	500	mA
Peak Forward Surge Current	I_{FSM}	2 1	A
Power Dissipation * $T_A=25^\circ\text{C}$	P_D	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	635	$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-55~+150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Test Condition	Symbol	1N4148WS	Unit
Maximum Forward Voltage	$I_F = 10\text{mA}$	V_F	1000	mV
Maximum DC Reverse Current at Rated DC Blocking Voltage	$V_R = 75\text{V}$ $V_R = 20\text{V}$	I_R	5 25	μA nA
Typical Diode Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C_D	4	pF
Reverse Recovery time	$I_R = I_F = 10\text{mA}$ (Figure1)	t_{rr}	4	ns


* FR-4 Minimum Pad.

REV.3, Aug-2017, KSYR94

RATING AND CHARACTERISTIC CURVES



Fig.1 Recovery Time Equivalent Test Circuit

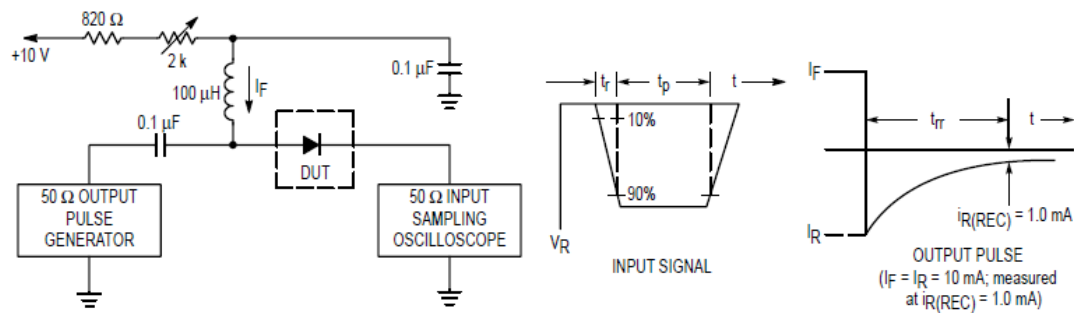

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10mA.
2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10mA.
3. $t_p \gg t_{rr}$

Fig.2 Typical Forward Characteristics

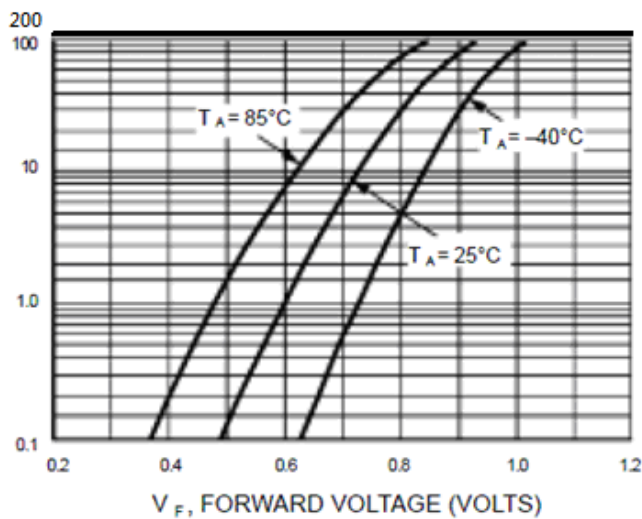


Fig.3 Typical Reverse Characteristics


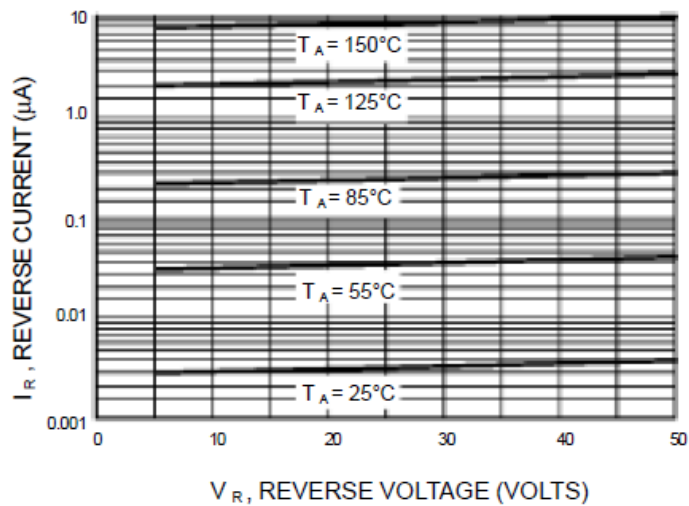


Fig.4 Typical Capacitance Characteristics

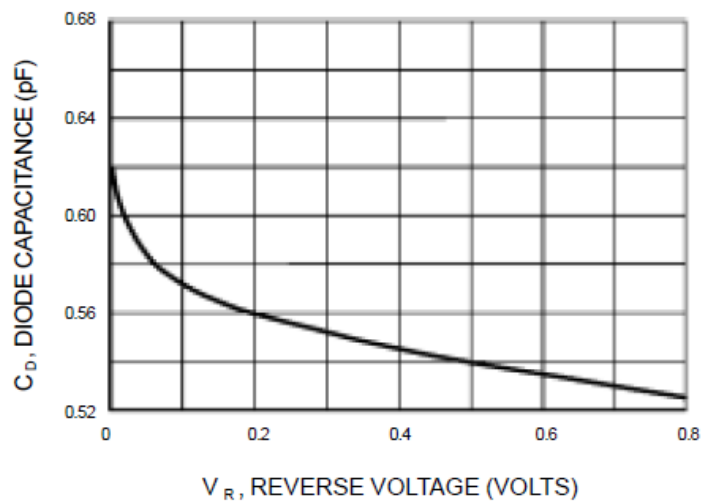

1N4148WS

Device Marking :

Device P/N	Marking code	Equivalent Circuit Diagram
1N4148WS	5D	1  2

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.