


## 1N4148WT FAST SWITCHING DIODE

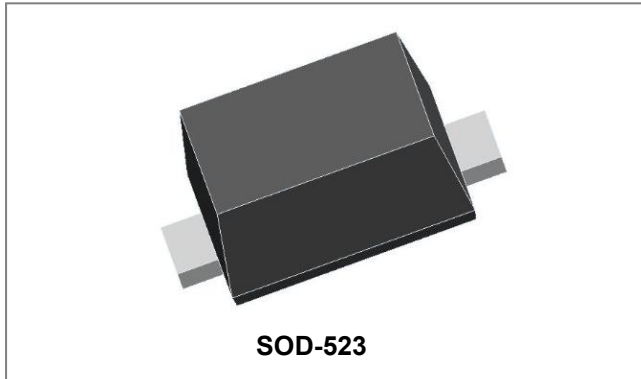

### Features

- Low Forward Voltage Drop
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection

### Circuit Diagram



### Maximum Ratings@T<sub>A</sub>=25°C unless otherwise specified





Parameter	Symbol	Value	Unit
Non-repetitive Peak Reverse Voltage	V <sub>RM</sub>	100	V
Peak Repetitive Reverse Voltage	V <sub>R(RM)</sub>	75	V
Working Peak Reverse Voltage	V <sub>R(WM)</sub>		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	53	V
Average Rectified Output Current	I <sub>O</sub>	0.15	A
Non-repetitive Peak Forward Surge Current @ t=8.3ms	I <sub>FSM</sub>	300	mA
Power Dissipation	P <sub>D</sub>	150	mW
Thermal Resistance from Junction to Ambient	R <sub>ΘJA</sub>	833	°C/W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55~+150	°C

### Electrical Characteristics@T<sub>A</sub>=25°C unless otherwise specified


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	V <sub>(BR)</sub>	I <sub>R</sub> =1μA	75	-	-	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =75V	-	-	1	μA
		V <sub>R</sub> =20V	-	-	25	nA
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =1mA	-	-	0.715	V
		I <sub>F</sub> =10mA	-	-	0.855	
		I <sub>F</sub> =50mA	-	-	1	
		I <sub>F</sub> =150mA	-	-	1.25	
Total capacitance	C <sub>tot</sub>	V <sub>R</sub> =0V, f=1MHz	-	-	2	pF
Reverse recovery time	T <sub>rr</sub>	I <sub>F</sub> =I <sub>R</sub> =10mA, I <sub>rr</sub> =0.1×I <sub>R</sub> , R <sub>L</sub> =100Ω	-	-	4	ns

\* Pulse width < 300 μs, duty cycle < 2%

**Ratings and Characteristics Curves**

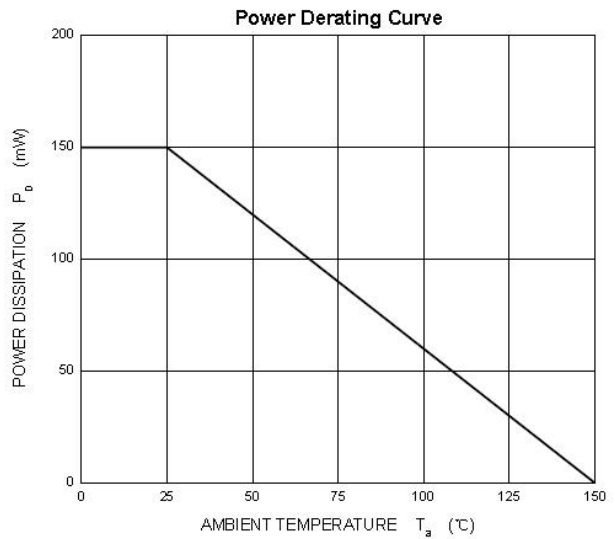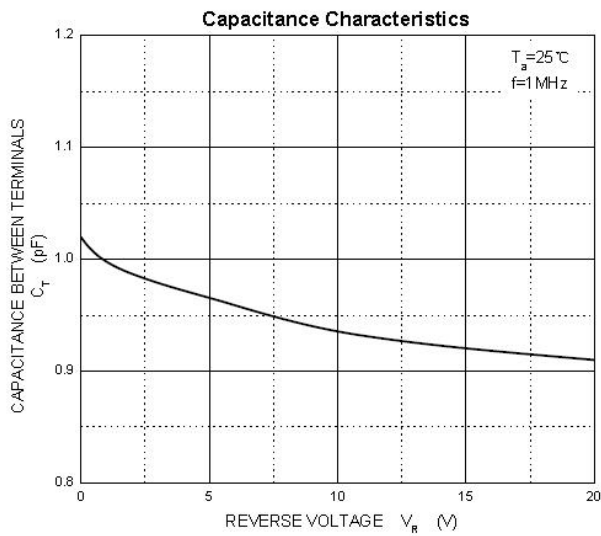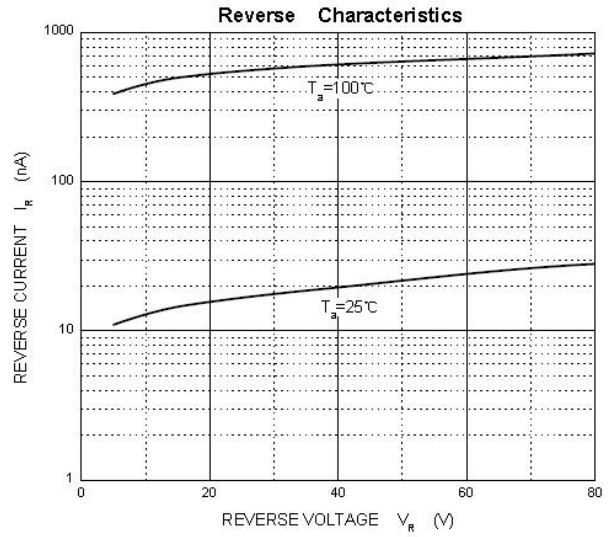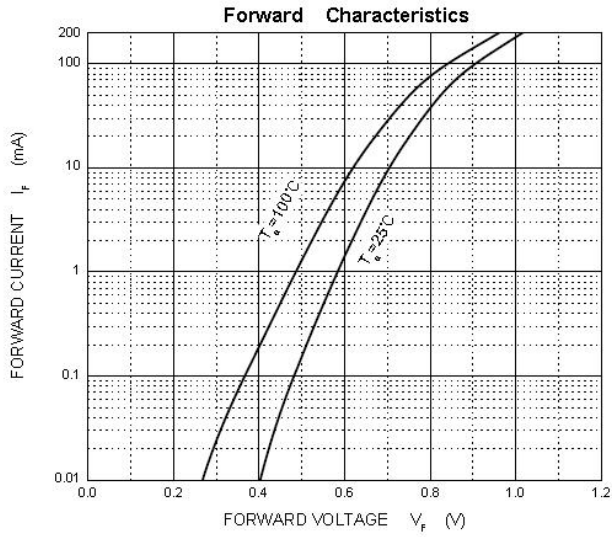

**Mechanical Dimensions SOD-523**

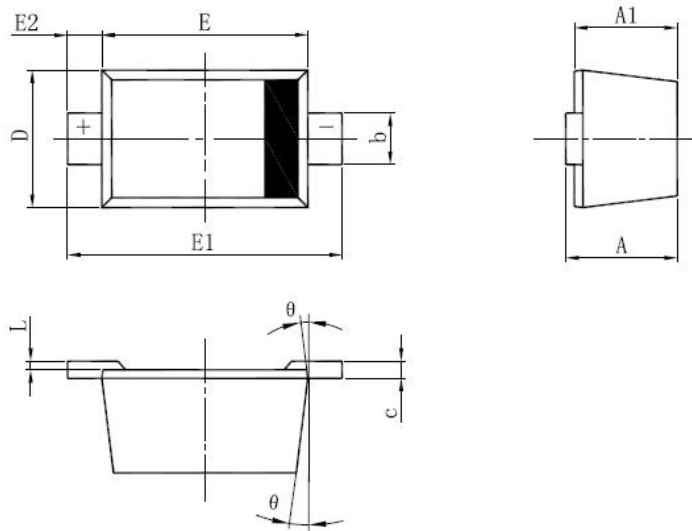


SYMBOL	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	0.750	0.850	0.030	0.033
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF.	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	

**Ordering Information**

Device	Package	Shipping
1N4148WT	SOD-523 (Pb-Free)	8000pcs / reel


For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

**Marking Diagram**



Solid dot = Green molding compound device, if none, the normal device.

**Carrier Tape & Reel Specification SOD-523**

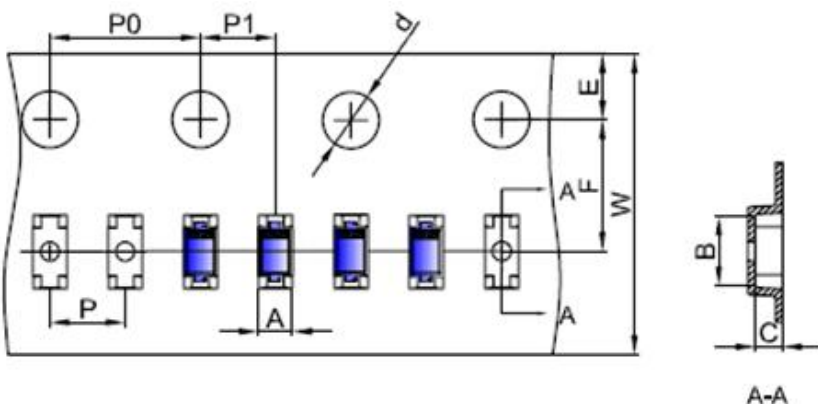

SYMBOL	Millimeters	
	Min.	Max.
A	0.85	0.95
B	1.89	1.99
C	0.68	0.78
d	1.40	1.60
E	1.65	1.85
F	3.40	3.60
P	1.90	2.10
P0	3.90	4.10
P1	1.90	2.10
W	7.90	8.30

**DISCLAIMER:**

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..