

Technical Data

MBC13900/D
Rev. 0, 06/2002

NPN Silicon
Low Noise Transistor



MBC13900



(Scale 2:1)

Package Information

Plastic Package
Case 318M
(SOT-343)

Ordering Information

| Device | Marking | Package |
|------------|---------|---------|
| MBC13900T1 | 900 | SOT-343 |

The MBC13900 is a high performance transistor fabricated using Motorola's 15 GHz f_t bipolar IC process. It is housed in the 4-lead SC-70 (SOT-343) surface mount plastic package resulting in a parasitic effect reduction and RF performance enhancements. The high performance at low power makes the MBC13900 suitable for front-end applications in portable wireless systems such as pagers, cellular and cordless phones.

- Low Noise Figure, $NF_{min} = 0.8$ dB (Typ) @ 0.9 GHz, 2.0 V and 5.0 mA
- Maximum Stable Gain, 22 dB @ 0.9 GHz, 2.0 V and 5.0 mA
- Output Third Order Intercept, $OIP3 = 18$ dBm (Typ) @ 2.0 V and 5.0 mA
- Ultra small SOT-343 Surface Mount Package
- Available Only in Tape and Reel Packaging

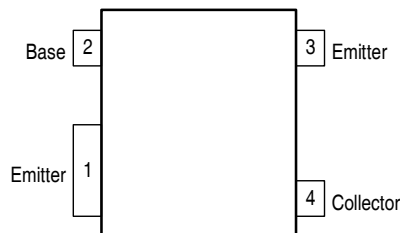


Figure 1. Pin Connections

Definitive Data: Motorola reserves the right to change the Production detail specifications as may be required to permit improvements in the design of its product. © Motorola, Inc., 2002. All rights reserved.

1 Electrical Specifications

Table 1. Maximum Ratings

| Rating | Symbol | Value | Unit |
|---|--------------|--------------|------------|
| Collector-Emitter Voltage | V_{CEO} | 6.5 | Vdc |
| Collector-Base Voltage | V_{CBO} | 8.0 | Vdc |
| Emitter-Base Voltage | V_{EBO} | 3.0 | Vdc |
| Power Dissipation @ $T_C = 75\text{ C}$ Derate Linearly above $T_C = 75\text{ C}$ at | $P_{D(max)}$ | 0.188 2.5 | W mW/ C |
| Collector Current-Continuous | I_C | 20 | mA |
| Maximum Junction Temperature | $T_{J(max)}$ | 150 | C |
| Storage Temperature | T_{stg} | -55 to 150 | C |

NOTES: 1. Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics or Recommended Operating Conditions tables.
2. ESD (electrostatic discharge) immunity meets Human Body Model (HBM) $\leq 400\text{ V}$ and Machine Model (MM) $\leq 50\text{ V}$. Additional ESD data available upon request.

Table 2. Thermal Characteristic

| Characteristic | Symbol | Max | Unit |
|--------------------------------------|-----------------|-----|------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 400 | C/W |

NOTES: To calculate the junction temperature use $T_J = (P_D \times R_{\theta JC}) + T_C$. The case temperature measured on collector lead adjacent to the package body.

Table 3. Electrical Characteristics

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|---------------|-----|-----|-----|-------------------|
| OFF Characteristic [Note 1] | | | | | |
| Collector-Emitter Breakdown Voltage ($I_C = 0.1\text{ mA}$, $I_B = 0$) | $V_{(BR)CEO}$ | 6.5 | 7.5 | - | Vdc |
| Collector-Base Breakdown Voltage ($I_C = 0.1\text{ mA}$, $I_E = 0$) | $V_{(BR)CBO}$ | 8.0 | 12 | - | Vdc |
| Emitter-Base Breakdown Voltage ($I_E = 0.1\text{ mA}$, $I_C = 0$) | $V_{(BR)EBO}$ | 3.0 | 4.0 | - | Vdc |
| Collector Cutoff Current ($V_{CB} = 7.0\text{ V}$, $I_E = 0$) | I_{CBO} | - | - | 0.1 | $\infty\text{ A}$ |
| Emitter Cutoff Current ($V_{EB} = 2.0\text{ V}$, $I_C = 0$) | I_{EBO} | - | - | 0.1 | $\infty\text{ A}$ |
| Base Cutoff Current ($V_{CE} = 5.0\text{ V}$, $I_B = 0$) | I_{CEO} | - | - | 0.1 | $\infty\text{ A}$ |
| ON Characteristic [Note 1] | | | | | |
| DC Current Gain ($V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$) | h_{FE} | 100 | - | 200 | - |

Table 3. Electrical Characteristics (Continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|--------------|------------------------------|------------------------------|--------------------------|------|
| Dynamic Characteristics | | | | | |
| Current Gain Bandwidth Product ($V_{CE} = 2.0\text{ V}$, $I_C = 15\text{ mA}$, $f = 0.9\text{ GHz}$) | f_t | - | 15 | - | GHz |
| Performance Characteristic | | | | | |
| Insertion Gain $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 1.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 1.9\text{ GHz}$ | $ S_{21} ^2$ | 18.5 13.5 16.5 12.5 | 19.5 14.5 17.5 13.5 | - - - - | dB |
| Maximum Stable Gain and/or Maximum Available Gain [Note 2] $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 1.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 1.9\text{ GHz}$ | MSG, MAG | 22 18 21 17.5 | 23 19 22 18.5 | - - - - | dB |
| Minimum Noise Figure $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 1.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 1.9\text{ GHz}$ | NF_{min} | - - - - | 0.8 0.9 0.8 0.9 | 0.9 1.1 0.9 1.1 | dB |
| Associated Gain at Minimum Noise Figure $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 1.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 0.9\text{ GHz}$ $V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 1.9\text{ GHz}$ | G_{NF} | - - - - | 22 16 21 15 | - - - - | dB |
| Output Third Order Intercept [Note 3] ($V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 0.9\text{ GHz}$) ($V_{CE} = 2.0\text{ V}$, $I_C = 5.0\text{ mA}$, $f = 1.9\text{ GHz}$) ($V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 0.9\text{ GHz}$) ($V_{CE} = 3.0\text{ V}$, $I_C = 3.0\text{ mA}$, $f = 1.9\text{ GHz}$) | OIP3 | - - - - | 18 21 13.5 19 | - - - - | dBm |

NOTES: 1. Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$ pulsed.
2. Maximum Available Gain and Maximum Stable Gain are defined by the K factor as follows:

$$MAG = \left| \frac{S_{21}}{S_{12}} (K \pm \sqrt{K^2 - 1}) \right|, \text{ if } K > 1, \text{ MSG} = \left| \frac{S_{21}}{S_{12}} \right|, \text{ if } K < 1$$

3. Z_{in} and Z_{out} matched for optimum IP3.

2 Typical Performance Characteristics

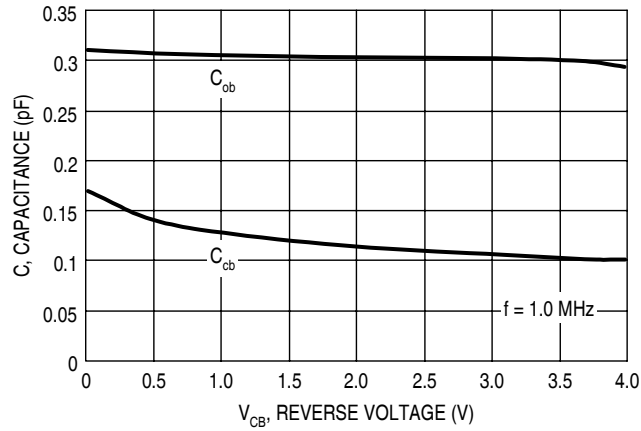


Figure 2. Capacitance versus Voltage

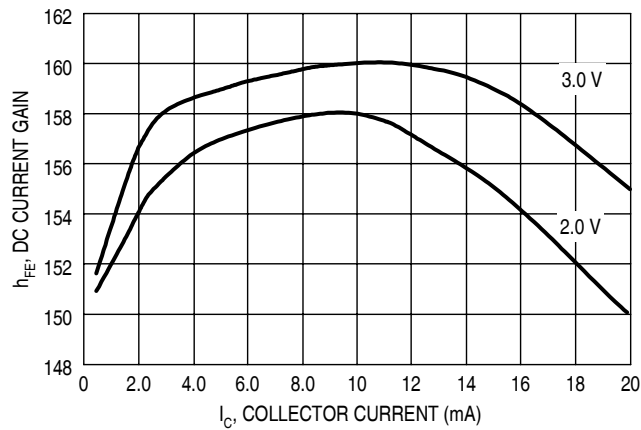


Figure 3. h_{FE} , DC Current Gain versus Collector Current

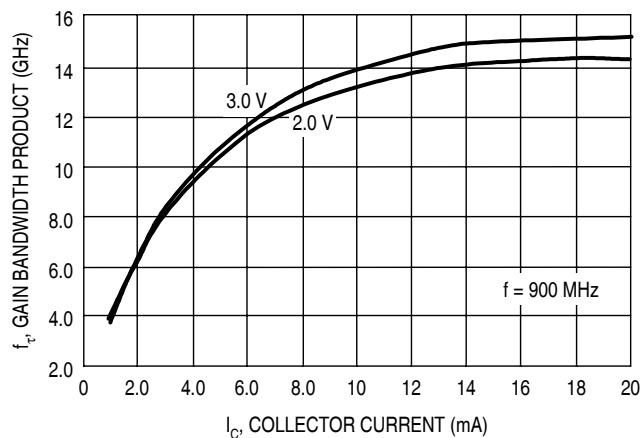


Figure 4. Gain-Bandwidth Product versus Collector Current

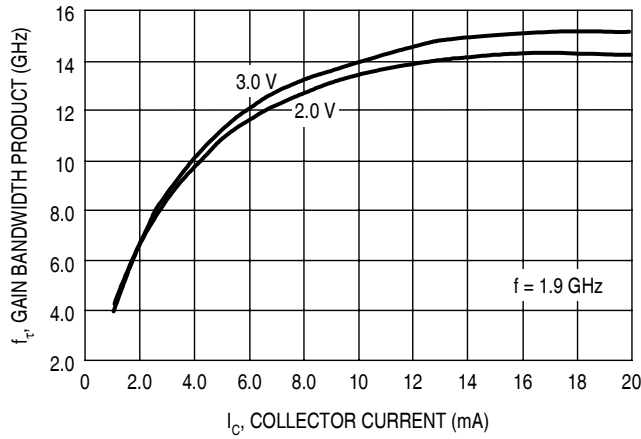


Figure 5. Gain-Bandwidth Product versus Collector Current

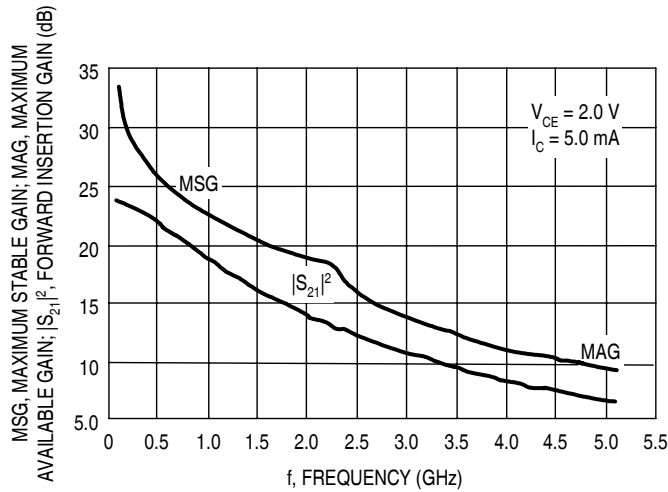


Figure 6. Maximum Stable/Available gain and Forward Insertion Gain versus Frequency

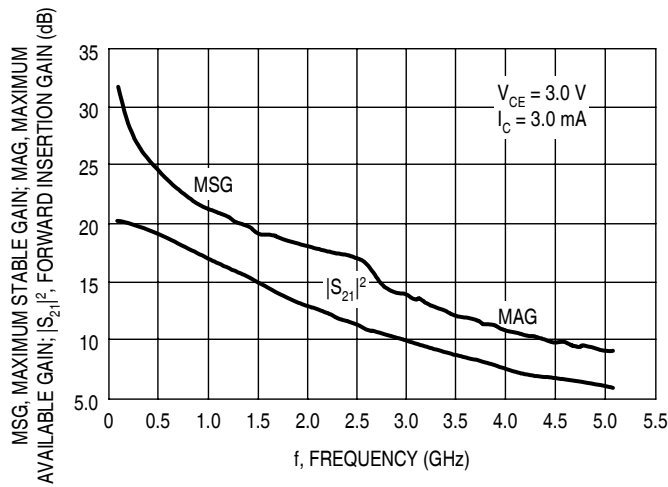


Figure 7. Maximum Stable/Available gain and Forward Insertion Gain versus Frequency

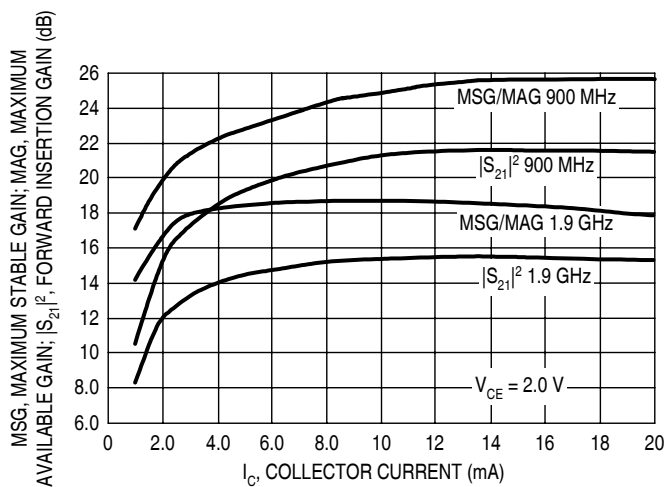


Figure 8. Maximum Stable/Available gain and Forward Insertion Gain versus Collector Current

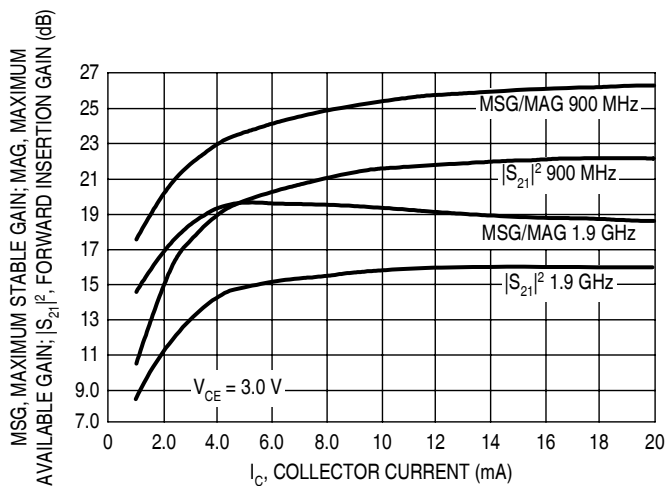


Figure 9. Maximum Stable/Available gain and Forward Insertion Gain versus Collector Current

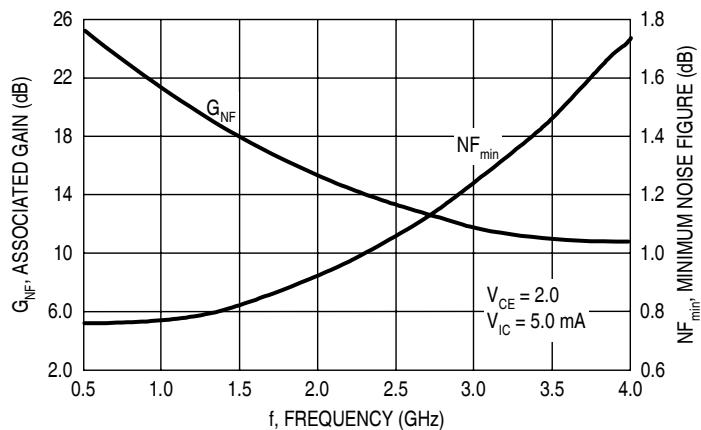


Figure 10. Minimum Noise Figure and Associated Gain versus Frequency

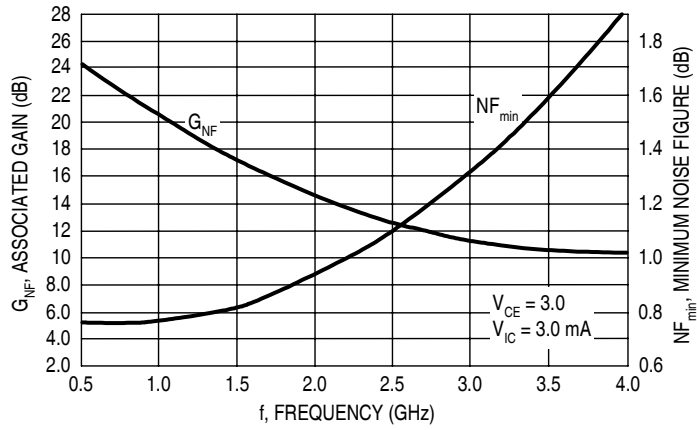


Figure 11. Minimum Noise Figure and Associated Gain versus Frequency

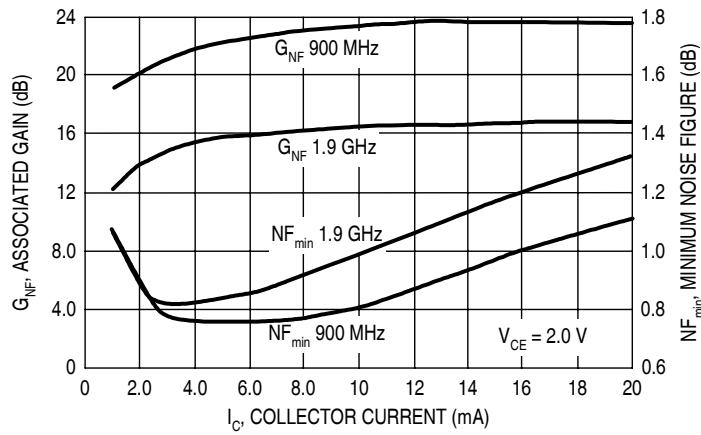


Figure 12. Minimum Noise Figure and Associated Gain versus Collector Current

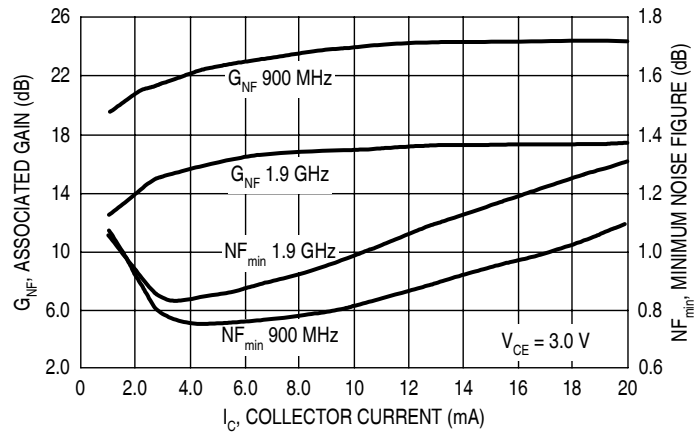


Figure 13. Minimum Noise Figure and Associated Gain versus Collector Current

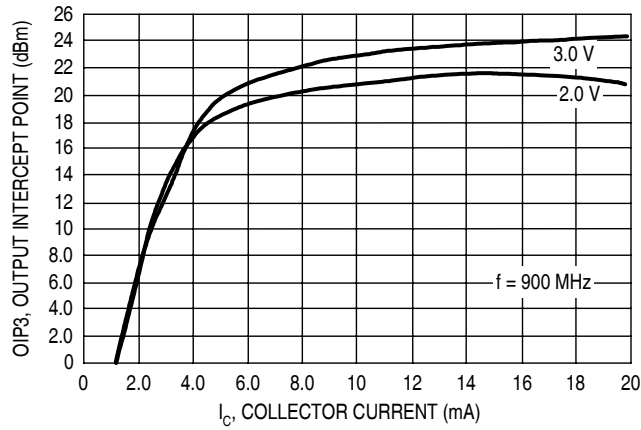


Figure 14. Output Third Order Intercept versus Collector Current

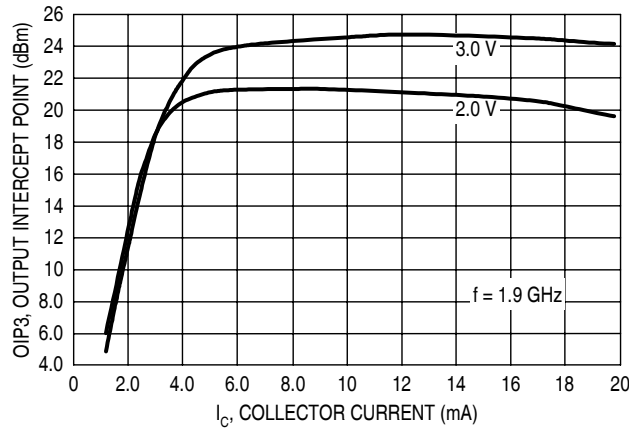


Figure 15. Output Third Order Intercept versus Collector Current

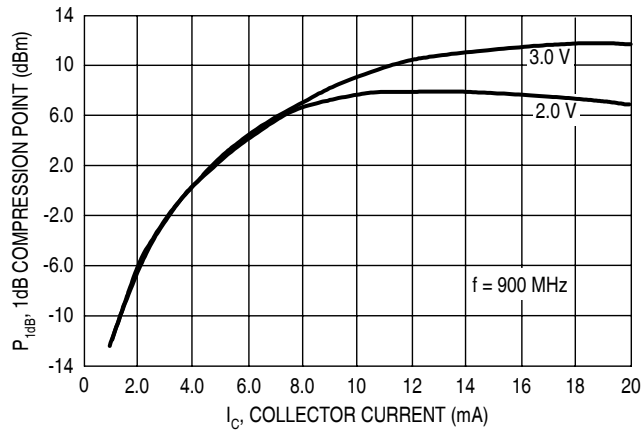


Figure 16. One dB Compression Point versus Collector Current

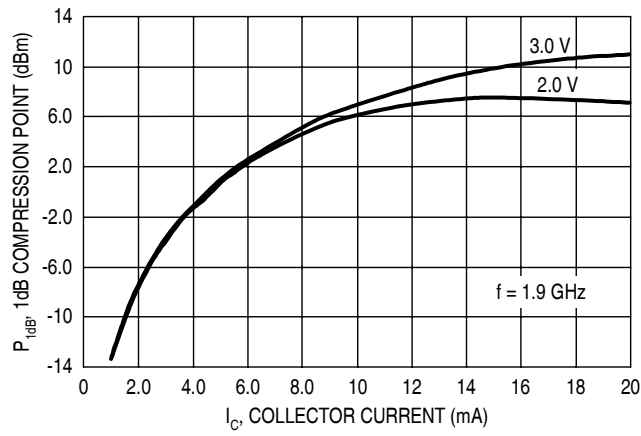


Figure 17. One dB Compression Point versus Collector Current

3 Applications Information

A flexible applications board topology has been developed to demonstrate the performance of the MBC13900 at 900 and 1900 MHz. The designs are a compromise of the competing performance requirements of gain, noise figure, input third-order intercept point (IIP3) and return losses. PCB, samples and assembly information are available from Motorola under part number KITMBC13900/D.

3.1 900 MHz LNA

Figure 18 shows the schematic and Figure 19 shows the component placement for a 900 MHz LNA. The design goals for the circuit are:

NF < 1.2 dB

Gain > 19 dB

Return Loss > 10 dB, input and output

Unconditional stability from 100 MHz to 6 GHz.

Typical performance that can be expected from this circuit at 3.0 and 3.5 V V_{CC} is listed in Table 4. The component values can be changed to enhance the performance of a particular parameter but usually at the expense of another. Gain can be improved by sacrificing stability (R3 and R5). Input return loss can be sacrificed to improve noise figure. IIP3 can be improved by increasing emitter degeneration (L3) and bias current (R2). Unused traces are available on the PCB to add emitter degeneration at leads 1 and 3 of the device.


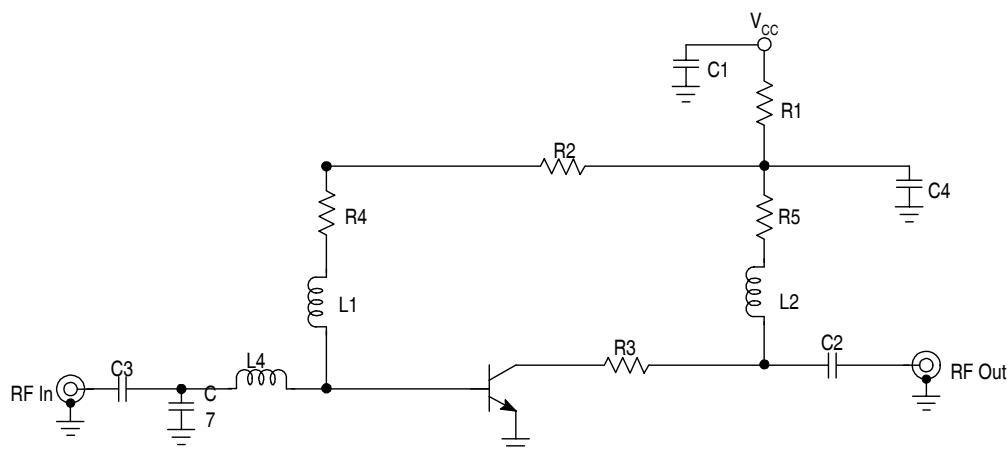


Figure 18. 900 MHz LNA Schematic

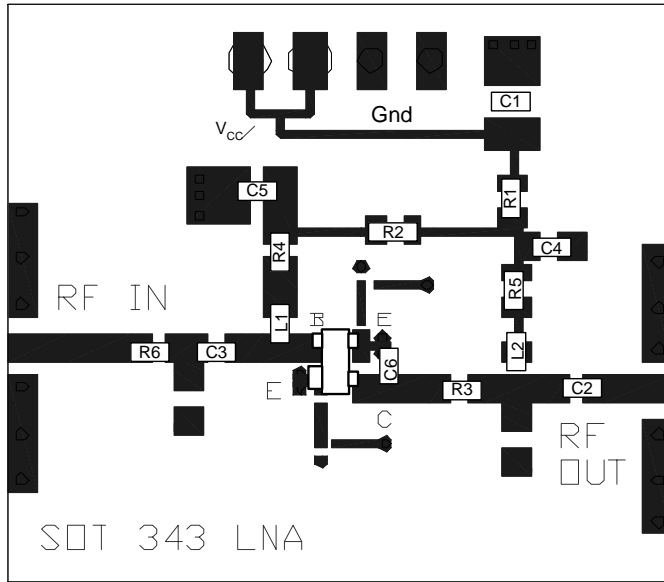

| Component | Value | Comments |
|-----------|-----------------|---|
| C1 | 1.0 μ F | Optional Bypassing |
| C2 | 3.3 pF | DC Block and S_{22} |
| C3 | 12 pF | DC Block and S_{11} |
| C4 | 0.01 μ F | Broadband bypass |
| C5 | 1.0 μ F | Broadband bypass |
| C6 | 0.3 pF | IIP3 improvement |
| L1 | 6.8 nH | Toko LL1608-FS, match, bias |
| L2 | 5.6 nH | Toko LL1608-FH, match, bias |
| L3 | <0.5 nH | Emitter L on board (distance to GND vias) |
| R1 | 133 Ω | Bias |
| R2 | 49.9 k Ω | Bias |
| R3 | 16.5 Ω | Stability, S_{22} |
| R4 | 0 Ω | Jumper |
| R5 | 3.9 Ω | Stability, S_{22} |
| R6 | 0 Ω | Jumper |
| Vias | D = 15 mil | |
| PCB | FR4 | $\epsilon_r=4.5$, h=25 mil, t=1.75 mil |

Figure 19. 900 MHz LNA Board Layout

Table 4. Typical 900 MHz LNA Performance

| V_{CC} | I_C (mA) | NF (dB) | 50 Ω Insertion Gain (dB) | Output IP3 (dBm) | Input Return Loss (dB) | Output Return Loss (dB) |
|----------|------------|---------|---------------------------------|------------------|------------------------|-------------------------|
| 3.0 | 5.0 | 1.2 | 19.7 | 15 | 10.1 | 10.2 |
| 3.5 | 6.1 | 1.21 | 20.2 | 17.6 | 10.8 | 10.8 |

3.2 1900 MHz LNA

Figure 20 shows the schematic and Figure 21 shows the component placement for a 1900 MHz LNA. The design goals for the circuit are:

NF < 1.35 dB

Gain > 14 dB

Return Loss > 10 dB, input and output

Unconditional stability from 100 MHz to 6 GHz.

Typical performance that can be expected from this circuit at 3.0 V V_{CC} and 5.0 mA is listed in Table 5. The component values can be changed to enhance the performance of a particular parameter but usually at the expense of another. Gain can be improved by sacrificing stability (R3 and R5). Input return loss can be sacrificed to improve noise figure. Input return loss can be improved at the expense of noise figure (C3, C7, L4). IIP3 can be improved by increasing emitter degeneration (L3) and bias current (R2). Unused traces are available on the PCB to add emitter degeneration at leads 1 and 3 of the device.


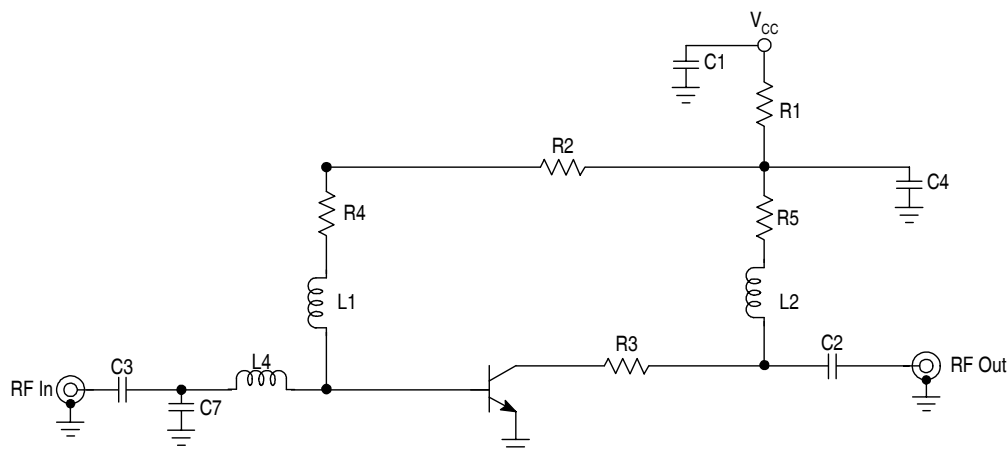


Figure 20. 1900 MHz LNA Schematic

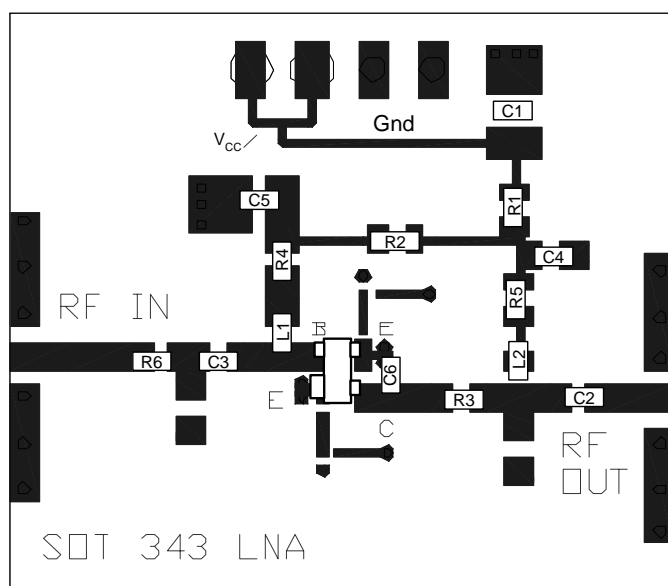

| Component | Value | Comments |
|-----------|-----------------|---|
| C1 | 1.0 μ F | Optional Bypassing |
| C2 | 22 pF | DC Block and output match |
| C3 | 22 pF | DC Block and input match |
| C4 | 0.01 μ F | RF and IM subharmonic short to ground |
| C5 | 1.0 μ F | RF and IM subharmonic short to ground |
| C7 | 0.6 pF | Input match, RF / S_{11} compromise |
| L1 | 8.2 nH | Bias decoupling, input match |
| L2 | 3.3 nH | Output match, bias decoupling |
| L3 | <0.5 nH | Emitter L on board (distance to GND vias) |
| L4 | 1.2 nH | S_{11} |
| R1 | 133 Ω | Bias |
| R2 | 49.9 k Ω | Bias |
| R3 | 8.2 Ω | Stability and S_{22} improvement |
| R4 | 0 Ω | Jumper |
| R5 | 4.7 Ω | Stability, Gain, S_{22} |
| Vias | D = 15 mil | |
| PCB | FR4 | $\epsilon_r=4.5$, h=25 mil, t=1.75 mil |

Figure 21. 1900 MHz LNA Board Layout

Table 5. Typical 1900 MHz LNA Performance

| V_{cc} | I_c (mA) | NF (dB) | 50 Ω Insertion Gain (dB) | Output IP3 (dBm) | Input Return Loss (dB) | Output Return Loss (dB) |
|----------|------------|---------|---------------------------------|------------------|------------------------|-------------------------|
| 3.0 | 5.0 | 1.28 | 14 | 19 | 10.4 | 10.7 |
| 3.5 | 6.1 | 1.29 | 14.4 | 20.2 | 10.8 | 11 |

Table 6. Common Emitter S-Parameters

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|-----|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| 2.0 | 1.0 | 0.1 | 0.973 | -6 | 3.754 | 175 | 0.008 | 86 | 0.997 | -3 |
| | | 0.5 | 0.961 | -33 | 3.366 | 153 | 0.038 | 71 | 0.968 | -12 |
| | | 0.9 | 0.895 | -57 | 3.341 | 135 | 0.065 | 56 | 0.910 | -22 |
| | | 1.0 | 0.868 | -63 | 3.256 | 131 | 0.070 | 53 | 0.915 | -24 |
| | | 1.5 | 0.766 | -91 | 2.688 | 111 | 0.091 | 38 | 0.851 | -33 |
| | | 1.9 | 0.721 | -114 | 2.610 | 94 | 0.100 | 26 | 0.788 | -39 |
| | | 2.0 | 0.706 | -119 | 2.501 | 91 | 0.102 | 23 | 0.780 | -41 |
| | | 2.4 | 0.649 | -140 | 2.280 | 77 | 0.104 | 15 | 0.731 | -47 |
| | | 3.0 | 0.628 | -166 | 1.984 | 58 | 0.105 | 2 | 0.667 | -56 |
| | | 3.5 | 0.606 | 173 | 1.717 | 45 | 0.099 | -3 | 0.650 | -62 |
| | | 4.0 | 0.606 | 155 | 1.478 | 33 | 0.094 | -10 | 0.640 | -68 |
| | | 4.5 | 0.611 | 138 | 1.421 | 21 | 0.089 | -12 | 0.604 | -74 |
| | | 5.0 | 0.610 | 122 | 1.309 | 9 | 0.085 | -11 | 0.581 | -81 |
| | 2.0 | 0.1 | 0.948 | -8 | 7.181 | 173 | 0.008 | 86 | 0.993 | -4 |
| | | 0.5 | 0.907 | -41 | 6.508 | 146 | 0.037 | 67 | 0.937 | -15 |
| | | 0.9 | 0.796 | -70 | 5.770 | 126 | 0.059 | 52 | 0.843 | -27 |
| | | 1.0 | 0.763 | -77 | 5.533 | 121 | 0.062 | 49 | 0.842 | -29 |
| | | 1.5 | 0.638 | -107 | 4.304 | 101 | 0.076 | 36 | 0.753 | -37 |
| | | 1.9 | 0.585 | -131 | 3.904 | 86 | 0.082 | 27 | 0.675 | -42 |
| | | 2.0 | 0.571 | -136 | 3.716 | 83 | 0.083 | 25 | 0.667 | -44 |
| | | 2.4 | 0.532 | -156 | 3.272 | 70 | 0.085 | 20 | 0.616 | -48 |
| | | 3.0 | 0.520 | 179 | 2.745 | 53 | 0.087 | 13 | 0.554 | -57 |
| | | 3.5 | 0.511 | 159 | 2.360 | 41 | 0.088 | 10 | 0.542 | -62 |
| | | 4.0 | 0.518 | 143 | 2.046 | 30 | 0.088 | 7 | 0.530 | -67 |
| | | 4.5 | 0.529 | 128 | 1.907 | 19 | 0.091 | 5 | 0.500 | -72 |
| | | 5.0 | 0.536 | 114 | 1.747 | 8 | 0.096 | 5 | 0.474 | -78 |
| 3.0 | 0.1 | 0.926 | -10 | 10.121 | 172 | 0.008 | 84 | 0.990 | -4 | |
| | 0.5 | 0.853 | -48 | 8.944 | 141 | 0.035 | 65 | 0.906 | -18 | |

Table 6. Common Emitter S-Parameters (Continued)

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|-----|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| | | 0.9 | 0.716 | -80 | 7.393 | 120 | 0.053 | 49 | 0.786 | -30 |
| | | 1.0 | 0.680 | -87 | 7.000 | 115 | 0.056 | 47 | 0.780 | -31 |
| | | 1.5 | 0.556 | -118 | 5.248 | 95 | 0.068 | 36 | 0.685 | -38 |
| | | 1.9 | 0.507 | -141 | 4.579 | 81 | 0.073 | 31 | 0.609 | -43 |
| | | 2.0 | 0.497 | -147 | 4.359 | 78 | 0.074 | 29 | 0.601 | -44 |
| | | 2.4 | 0.472 | -166 | 3.778 | 66 | 0.077 | 25 | 0.554 | -48 |
| | | 3.0 | 0.468 | 170 | 3.120 | 51 | 0.082 | 21 | 0.495 | -56 |
| | | 3.5 | 0.466 | 152 | 2.680 | 39 | 0.086 | 18 | 0.485 | -61 |
| | | 4.0 | 0.476 | 137 | 2.333 | 28 | 0.091 | 15 | 0.476 | -66 |
| | | 4.5 | 0.491 | 123 | 2.148 | 18 | 0.096 | 12 | 0.447 | -70 |
| | 5.0 | 0.503 | 109 | 1.963 | 8 | 0.104 | 11 | 0.423 | -75 | |
| | 5.0 | 0.1 | 0.884 | -13 | 15.377 | 170 | 0.007 | 83 | 0.982 | -6 |
| | | 0.5 | 0.753 | -59 | 12.586 | 134 | 0.032 | 61 | 0.846 | -22 |
| | | 0.9 | 0.595 | -94 | 9.434 | 111 | 0.046 | 49 | 0.699 | -33 |
| | | 1.0 | 0.561 | -102 | 8.786 | 106 | 0.048 | 47 | 0.689 | -34 |
| | | 1.5 | 0.457 | -134 | 6.309 | 88 | 0.058 | 39 | 0.596 | -39 |
| | | 1.9 | 0.421 | -156 | 5.291 | 75 | 0.064 | 36 | 0.531 | -42 |
| | | 2.0 | 0.416 | -161 | 5.033 | 72 | 0.065 | 36 | 0.525 | -43 |
| | | 2.4 | 0.408 | -178 | 4.295 | 62 | 0.072 | 34 | 0.485 | -47 |
| | | 3.0 | 0.418 | 160 | 3.505 | 48 | 0.080 | 30 | 0.435 | -54 |
| 3.5 | | 0.424 | 143 | 3.012 | 37 | 0.088 | 26 | 0.426 | -58 | |
| 10 | 0.1 | 0.785 | -19 | 25.691 | 165 | 0.007 | 78 | 0.961 | -8 | |
| | 0.5 | 0.575 | -79 | 17.485 | 122 | 0.027 | 59 | 0.750 | -28 | |
| | 0.9 | 0.438 | -118 | 11.534 | 99 | 0.037 | 51 | 0.595 | -35 | |
| | 1.0 | 0.421 | -126 | 10.545 | 95 | 0.038 | 51 | 0.567 | -35 | |

Table 6. Common Emitter S-Parameters (Continued)

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-----|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| | | 1.5 | 0.366 | -156 | 7.311 | 80 | 0.050 | 48 | 0.500 | -38 |
| | | 1.9 | 0.356 | -176 | 5.901 | 69 | 0.058 | 46 | 0.454 | -39 |
| | | 2.0 | 0.354 | -180 | 5.625 | 67 | 0.060 | 46 | 0.449 | -40 |
| | | 2.4 | 0.362 | 166 | 4.737 | 57 | 0.069 | 44 | 0.417 | -43 |
| | | 3.0 | 0.392 | 148 | 3.842 | 45 | 0.082 | 38 | 0.372 | -49 |
| | | 3.5 | 0.399 | 134 | 3.307 | 35 | 0.092 | 34 | 0.357 | -54 |
| | | 4.0 | 0.414 | 120 | 2.907 | 25 | 0.103 | 29 | 0.345 | -59 |
| | | 4.5 | 0.434 | 109 | 2.613 | 16 | 0.113 | 25 | 0.328 | -65 |
| | | 5.0 | 0.453 | 98 | 2.374 | 6 | 0.124 | 18 | 0.307 | -69 |
| | 15 | 0.1 | 0.708 | -25 | 32.559 | 161 | 0.007 | 83 | 0.938 | -10 |
| | | 0.5 | 0.480 | -94 | 19.200 | 115 | 0.024 | 58 | 0.679 | -29 |
| | | 0.9 | 0.381 | -133 | 11.991 | 94 | 0.033 | 54 | 0.538 | -34 |
| | | 1.0 | 0.371 | -141 | 10.889 | 90 | 0.035 | 54 | 0.515 | -33 |
| | | 1.5 | 0.344 | -169 | 7.466 | 76 | 0.047 | 53 | 0.460 | -36 |
| | | 1.9 | 0.345 | 174 | 5.959 | 66 | 0.056 | 51 | 0.424 | -37 |
| | | 2.0 | 0.345 | 170 | 5.683 | 64 | 0.059 | 50 | 0.420 | -38 |
| | | 2.4 | 0.358 | 157 | 4.765 | 55 | 0.069 | 47 | 0.392 | -41 |
| | | 3.0 | 0.392 | 142 | 3.852 | 43 | 0.084 | 42 | 0.349 | -47 |
| | | 3.5 | 0.403 | 129 | 3.324 | 33 | 0.095 | 37 | 0.336 | -52 |
| | | 4.0 | 0.418 | 116 | 2.924 | 24 | 0.105 | 31 | 0.323 | -57 |
| | | 4.5 | 0.438 | 106 | 2.618 | 14 | 0.117 | 26 | 0.307 | -63 |
| | 5.0 | 0.460 | 95 | 2.375 | 5 | 0.128 | 20 | 0.288 | -67 | |
| | 20 | 0.1 | 0.639 | -31 | 37.220 | 158 | 0.007 | 75 | 0.919 | -12 |
| | | 0.5 | 0.430 | -107 | 19.608 | 110 | 0.022 | 58 | 0.629 | -30 |
| | | 0.9 | 0.365 | -146 | 11.885 | 91 | 0.032 | 58 | 0.504 | -32 |
| | | 1.0 | 0.360 | -153 | 10.741 | 87 | 0.034 | 58 | 0.483 | -32 |
| | | 1.5 | 0.350 | -178 | 7.337 | 73 | 0.047 | 55 | 0.438 | -34 |
| 1.9 | | 0.357 | 167 | 5.815 | 64 | 0.056 | 54 | 0.408 | -35 | |

Table 6. Common Emitter S-Parameters (Continued)

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|-------|-----------------|-------|-----------------|-----|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| | | 2.0 | 0.357 | 164 | 5.555 | 62 | 0.060 | 52 | 0.403 | -36 |
| | | 2.4 | 0.371 | 152 | 4.641 | 53 | 0.069 | 49 | 0.378 | -39 |
| | | 3.0 | 0.408 | 138 | 3.746 | 42 | 0.084 | 44 | 0.338 | -45 |
| | | 3.5 | 0.419 | 126 | 3.239 | 32 | 0.096 | 39 | 0.323 | -51 |
| | | 4.0 | 0.435 | 113 | 2.849 | 23 | 0.109 | 32 | 0.312 | -56 |
| | | 4.5 | 0.453 | 104 | 2.545 | 13 | 0.119 | 27 | 0.295 | -61 |
| | | 5.0 | 0.475 | 94 | 2.306 | 4 | 0.131 | 20 | 0.276 | -66 |
| 3.0 | 1.0 | 0.1 | 0.970 | -7 | 3.745 | 175 | 0.007 | 86 | 0.999 | -3 |
| | | 0.5 | 0.949 | -31 | 3.341 | 154 | 0.034 | 73 | 0.989 | -12 |
| | | 0.9 | 0.892 | -55 | 3.339 | 136 | 0.059 | 59 | 0.939 | -21 |
| | | 1.0 | 0.878 | -61 | 3.275 | 132 | 0.065 | 54 | 0.919 | -23 |
| | | 1.5 | 0.778 | -89 | 2.724 | 112 | 0.084 | 39 | 0.869 | -31 |
| | | 1.9 | 0.730 | -111 | 2.648 | 96 | 0.093 | 28 | 0.808 | -37 |
| | | 2.0 | 0.714 | -116 | 2.543 | 93 | 0.095 | 26 | 0.801 | -39 |
| | | 2.4 | 0.652 | -137 | 2.326 | 80 | 0.098 | 17 | 0.755 | -44 |
| | | 3.0 | 0.634 | -164 | 2.040 | 61 | 0.098 | 5 | 0.689 | -53 |
| | | 3.5 | 0.604 | 175 | 1.765 | 48 | 0.093 | -1 | 0.670 | -60 |
| | 4.0 | 0.599 | 157 | 1.521 | 35 | 0.091 | -8 | 0.660 | -66 | |
| | 4.5 | 0.604 | 140 | 1.466 | 23 | 0.084 | -10 | 0.626 | -73 | |
| | 5.0 | 0.602 | 124 | 1.348 | 12 | 0.080 | -9 | 0.606 | -79 | |
| | 2.0 | 0.1 | 0.951 | -8 | 6.981 | 173 | 0.007 | 88 | 0.992 | -3 |
| | | 0.5 | 0.913 | -39 | 6.335 | 147 | 0.033 | 69 | 0.944 | -14 |
| | | 0.9 | 0.807 | -67 | 5.710 | 128 | 0.054 | 54 | 0.859 | -25 |
| | | 1.0 | 0.774 | -74 | 5.488 | 123 | 0.057 | 51 | 0.860 | -27 |
| | | 1.5 | 0.647 | -104 | 4.306 | 103 | 0.071 | 37 | 0.777 | -35 |
| | | 1.9 | 0.591 | -127 | 3.935 | 87 | 0.077 | 28 | 0.704 | -40 |
| | | 2.0 | 0.576 | -132 | 3.750 | 85 | 0.077 | 26 | 0.697 | -42 |
| 2.4 | | 0.531 | -152 | 3.316 | 72 | 0.080 | 22 | 0.647 | -47 | |

Table 6. Common Emitter S-Parameters (Continued)

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|------|-----------------|-----|-----------------|----|-----------------|-----|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| | | 3.0 | 0.516 | -178 | 2.790 | 55 | 0.082 | 14 | 0.584 | -55 |
| | | 3.5 | 0.505 | 162 | 2.402 | 43 | 0.081 | 12 | 0.574 | -60 |
| | | 4.0 | 0.508 | 146 | 2.078 | 32 | 0.083 | 8 | 0.563 | -65 |
| | | 4.5 | 0.521 | 130 | 1.943 | 21 | 0.084 | 7 | 0.535 | -70 |
| | | 5.0 | 0.526 | 115 | 1.782 | 10 | 0.089 | 7 | 0.511 | -76 |
| | 3.0 | 0.1 | 0.928 | -9 | 10.077 | 172 | 0.007 | 84 | 0.991 | -4 |
| | | 0.5 | 0.859 | -46 | 8.948 | 142 | 0.032 | 66 | 0.917 | -17 |
| | | 0.9 | 0.725 | -77 | 7.487 | 121 | 0.049 | 51 | 0.806 | -28 |
| | | 1.0 | 0.687 | -84 | 7.105 | 116 | 0.052 | 50 | 0.803 | -30 |
| | | 1.5 | 0.559 | -115 | 5.356 | 97 | 0.063 | 38 | 0.711 | -37 |
| | | 1.9 | 0.505 | -138 | 4.701 | 82 | 0.067 | 31 | 0.638 | -41 |
| | | 2.0 | 0.493 | -143 | 4.473 | 79 | 0.068 | 31 | 0.631 | -42 |
| | | 2.4 | 0.462 | -162 | 3.886 | 68 | 0.072 | 27 | 0.585 | -47 |
| | | 3.0 | 0.458 | 173 | 3.218 | 52 | 0.077 | 22 | 0.529 | -54 |
| | | 3.5 | 0.452 | 154 | 2.763 | 41 | 0.082 | 20 | 0.518 | -59 |
| | | 4.0 | 0.460 | 139 | 2.403 | 30 | 0.085 | 17 | 0.509 | -64 |
| | | 4.5 | 0.476 | 125 | 2.216 | 20 | 0.090 | 14 | 0.483 | -69 |
| | | 5.0 | 0.486 | 110 | 2.025 | 10 | 0.098 | 13 | 0.460 | -74 |
| | 5.0 | 0.1 | 0.884 | -12 | 15.441 | 170 | 0.007 | 82 | 0.985 | -5 |
| | | 0.5 | 0.756 | -55 | 12.831 | 135 | 0.029 | 64 | 0.882 | -22 |
| | | 0.9 | 0.598 | -90 | 9.722 | 112 | 0.042 | 50 | 0.743 | -31 |
| | | 1.0 | 0.570 | -98 | 9.076 | 107 | 0.045 | 48 | 0.711 | -32 |
| | | 1.5 | 0.458 | -129 | 6.576 | 89 | 0.054 | 42 | 0.629 | -38 |
| | | 1.9 | 0.415 | -152 | 5.514 | 76 | 0.060 | 38 | 0.564 | -40 |
| | | 2.0 | 0.408 | -157 | 5.251 | 74 | 0.061 | 37 | 0.557 | -41 |
| | | 2.4 | 0.395 | -174 | 4.489 | 63 | 0.067 | 35 | 0.517 | -45 |
| | | 3.0 | 0.407 | 163 | 3.680 | 49 | 0.076 | 31 | 0.464 | -51 |
| | | 3.5 | 0.407 | 146 | 3.158 | 39 | 0.083 | 28 | 0.450 | -56 |

Table 6. Common Emitter S-Parameters (Continued)

| V _{CE} (Vdc) | I _C (mA) | f (MHz) | S ₁₁ | | S ₂₁ | | S ₁₂ | | S ₂₂ | |
|--------------------------|------------------------|------------|-----------------|-------|-----------------|--------|-----------------|-------|-----------------|-------|
| | | | S ₁₁ | ∠φ | S ₂₁ | ∠φ | S ₁₂ | ∠φ | S ₂₂ | ∠φ |
| | | 4.0 | 0.417 | 131 | 2.768 | 29 | 0.090 | 25 | 0.438 | -61 |
| | | 4.5 | 0.434 | 118 | 2.517 | 19 | 0.098 | 21 | 0.419 | -67 |
| | | 5.0 | 0.450 | 105 | 2.294 | 9 | 0.108 | 17 | 0.398 | -72 |
| | 10 | 0.1 | 0.795 | -18 | 25.574 | 165 | 0.007 | 79 | 0.970 | -7 |
| | | 0.5 | 0.587 | -74 | 17.871 | 123 | 0.025 | 60 | 0.780 | -26 |
| | | 0.9 | 0.438 | -112 | 11.957 | 101 | 0.034 | 54 | 0.631 | -33 |
| | | 1.0 | 0.417 | -119 | 10.950 | 97 | 0.036 | 52 | 0.602 | -33 |
| | | 1.5 | 0.351 | -150 | 7.620 | 81 | 0.047 | 50 | 0.536 | -37 |
| | | 1.9 | 0.334 | -171 | 6.171 | 70 | 0.054 | 47 | 0.490 | -38 |
| | | 2.0 | 0.332 | -175 | 5.878 | 68 | 0.056 | 47 | 0.485 | -39 |
| | | 2.4 | 0.336 | 169 | 4.960 | 59 | 0.065 | 45 | 0.454 | -42 |
| | | 3.0 | 0.363 | 151 | 4.029 | 46 | 0.076 | 40 | 0.408 | -48 |
| | | 3.5 | 0.371 | 136 | 3.465 | 36 | 0.087 | 36 | 0.393 | -53 |
| | | 4.0 | 0.385 | 122 | 3.048 | 27 | 0.097 | 31 | 0.383 | -58 |
| | | 4.5 | 0.405 | 110 | 2.743 | 17 | 0.107 | 26 | 0.368 | -63 |
| | | 5.0 | 0.425 | 99 | 2.493 | 8 | 0.117 | 20 | 0.348 | -68 |
| | | 15 | 0.1 | 0.723 | -22 | 32.706 | 163 | 0.006 | 79 | 0.949 |
| | 0.5 | | 0.487 | -88 | 19.861 | 116 | 0.021 | 60 | 0.695 | -26 |
| | 0.9 | | 0.373 | -127 | 12.612 | 96 | 0.031 | 55 | 0.556 | -32 |
| | 1.0 | | 0.355 | -134 | 11.492 | 92 | 0.033 | 55 | 0.555 | -32 |
| | 1.5 | | 0.317 | -164 | 7.867 | 77 | 0.044 | 53 | 0.494 | -34 |
| | 1.9 | | 0.312 | 177 | 6.309 | 67 | 0.053 | 52 | 0.460 | -37 |
| | 2.0 | | 0.315 | 173 | 6.004 | 65 | 0.055 | 51 | 0.454 | -37 |
| | 2.4 | | 0.327 | 159 | 5.044 | 56 | 0.064 | 48 | 0.429 | -41 |
| | 3.0 | | 0.354 | 142 | 4.069 | 44 | 0.078 | 43 | 0.390 | -47 |
| | 3.5 | | 0.371 | 128 | 3.507 | 35 | 0.089 | 38 | 0.384 | -52 |
| | | 4.0 | 0.383 | 116 | 3.073 | 25 | 0.099 | 33 | 0.376 | -57 |
| | 4.5 | 0.400 | 105 | 2.757 | 16 | 0.109 | 27 | 0.361 | -61 | |

Table 6. Common Emitter S-Parameters (Continued)

| V_{CE} (Vdc) | I_C (mA) | f (MHz) | S_{11} | | S_{21} | | S_{12} | | S_{22} | |
|-------------------|---------------|------------|------------|---------------|------------|---------------|------------|---------------|------------|---------------|
| | | | $ S_{11} $ | $\angle \phi$ | $ S_{21} $ | $\angle \phi$ | $ S_{12} $ | $\angle \phi$ | $ S_{22} $ | $\angle \phi$ |
| 20 | 5.0 | 0.427 | 95 | 2.500 | 7 | 0.120 | 21 | 0.341 | -65 | |
| | 0.1 | 0.660 | -27 | 37.408 | 160 | 0.006 | 79 | 0.933 | -10 | |
| | 0.5 | 0.430 | -98 | 20.678 | 112 | 0.021 | 60 | 0.672 | -27 | |
| | 0.9 | 0.343 | -137 | 12.691 | 93 | 0.030 | 59 | 0.548 | -31 | |
| | 1.0 | 0.335 | -144 | 11.493 | 89 | 0.032 | 59 | 0.526 | -31 | |
| | 1.5 | 0.313 | -172 | 7.854 | 75 | 0.044 | 57 | 0.479 | -33 | |
| | 1.9 | 0.317 | 171 | 6.249 | 66 | 0.052 | 55 | 0.450 | -34 | |
| | 2.0 | 0.318 | 168 | 5.963 | 64 | 0.055 | 54 | 0.446 | -35 | |
| | 2.4 | 0.332 | 155 | 4.996 | 55 | 0.065 | 51 | 0.421 | -38 | |
| | 3.0 | 0.365 | 140 | 4.042 | 43 | 0.080 | 45 | 0.381 | -44 | |
| | 3.5 | 0.379 | 127 | 3.486 | 34 | 0.090 | 40 | 0.366 | -50 | |
| | 4.0 | 0.393 | 115 | 3.068 | 25 | 0.102 | 34 | 0.356 | -55 | |
| | 4.5 | 0.411 | 105 | 2.747 | 16 | 0.112 | 29 | 0.342 | -61 | |
| 5.0 | 0.434 | 94 | 2.492 | 6 | 0.123 | 23 | 0.324 | -66 | | |

Table 7. Common Emitter Noise Parameters

| V _{CE} (V) | I _C (mA) | freq (Ghz) | NFmin (dB) | Gamma Opt | | R _n Ω | r _n Ω | G _{NF} (dB) | K |
|------------------------|------------------------|---------------|---------------|-----------|------|---------------------|---------------------|-------------------------|------|
| | | | | Mag | Ang | | | | |
| 2.0 | 5.0 | 0.5 | 0.76 | 0.26 | 3 | 9.0 | 0.18 | 25.27 | 0.29 |
| | | 0.7 | 0.76 | 0.25 | 14 | 8.5 | 0.17 | 23.60 | 0.37 |
| | | 0.9 | 0.77 | 0.24 | 25 | 8.5 | 0.17 | 22.03 | 0.48 |
| | | 1.0 | 0.77 | 0.24 | 31 | 8.0 | 0.16 | 21.29 | 0.51 |
| | | 1.5 | 0.82 | 0.23 | 60 | 7.0 | 0.14 | 17.94 | 0.74 |
| | | 1.9 | 0.90 | 0.22 | 85 | 6.5 | 0.13 | 15.73 | 0.90 |
| | | 2.0 | 0.92 | 0.22 | 91 | 6.5 | 0.13 | 15.24 | 0.93 |
| | | 2.4 | 1.03 | 0.22 | 116 | 5.5 | 0.11 | 13.54 | 1.03 |
| | | 3.0 | 1.24 | 0.23 | 155 | 5.0 | 0.10 | 11.75 | 1.17 |
| | | 3.5 | 1.47 | 0.25 | -172 | 5.0 | 0.10 | 10.96 | 1.23 |
| | | 4.0 | 1.74 | 0.27 | 137 | 6.5 | 0.13 | 10.81 | 1.29 |
| 3.0 | 3.0 | 0.5 | 0.76 | 0.38 | 8 | 12.0 | 0.24 | 24.32 | 0.22 |
| | | 0.7 | 0.76 | 0.37 | 17 | 11.5 | 0.23 | 22.70 | 0.28 |
| | | 0.9 | 0.76 | 0.37 | 26 | 11.0 | 0.22 | 21.19 | 0.36 |
| | | 1.0 | 0.77 | 0.36 | 31 | 11.0 | 0.22 | 20.47 | 0.38 |
| | | 1.5 | 0.82 | 0.35 | 56 | 9.5 | 0.19 | 17.24 | 0.59 |
| | | 1.9 | 0.91 | 0.34 | 77 | 8.5 | 0.17 | 15.10 | 0.76 |
| | | 2.0 | 0.94 | 0.34 | 83 | 8.0 | 0.16 | 14.63 | 0.79 |
| | | 2.4 | 1.06 | 0.33 | 105 | 6.5 | 0.13 | 12.98 | 0.94 |
| | | 3.0 | 1.32 | 0.31 | 141 | 5.0 | 0.10 | 11.27 | 1.12 |
| | | 3.5 | 1.59 | 0.30 | 173 | 4.5 | 0.09 | 10.52 | 1.24 |
| | | 4.0 | 1.92 | 0.29 | -153 | 6.5 | 0.13 | 10.39 | 1.34 |

Table 8. SPICE Parameters (MBC13900 Die Parameters)

| Name | Value | Name | Value | Name | Value |
|------|----------|------|----------|------|----------|
| IS | 2.77E-16 | IRB | 0.006 | TF | 6.34E-12 |
| BF | 181.6 | RBM | 0.047 | XTF | 3.051 |
| NF | 1.012 | RE | 4.431 | VTF | 1.336 |
| VAF | 40.66 | RC | 5.845 | ITF | 0.202 |
| IKF | 0.237 | XTB | 0.6 | PTF | 0 |
| ISE | 3.79E-14 | EG | 1.195 | TR | 1.02E-09 |
| NE | 2.00 | XTI | 0.8 | FC | 0.95 |
| BR | 4.547 | CJE | 4.52E-13 | | |
| NR | 1.00 | VJE | 1.95 | | |
| VAR | 2.722 | MJE | 0.58 | | |
| IKR | 9.98E-04 | CJC | 1.56E-13 | | |
| ISC | 3.78E-15 | VJC | 0.424 | | |
| NC | 2.00 | MJC | 0.232 | | |
| RB | 9.055 | XCJC | 0.187 | | |


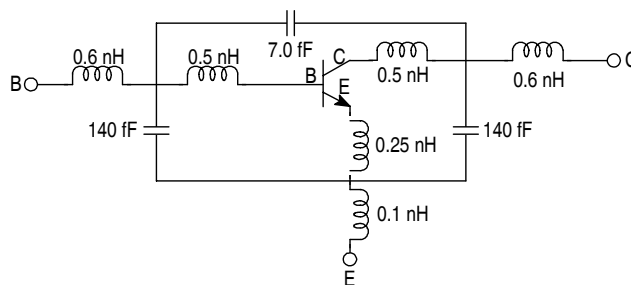



Figure 22. Simplified Package Model

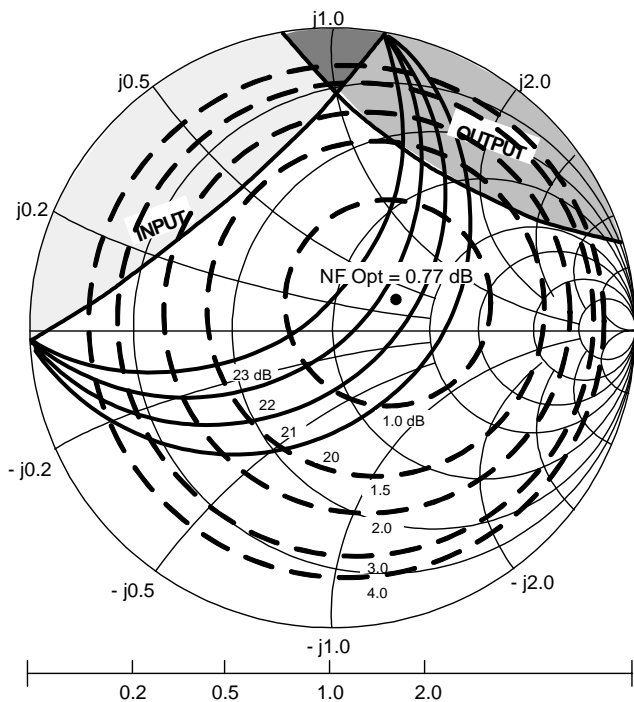

$V_{CE} = 2.0\text{ V}$
 $I_C = 5.0\text{ mA}$
 ---Potentially Unstable

| f (GHz) | NF Opt (dB) | Γ_O | Rn | K |
|---------|-------------|--------------------------|-----|------|
| 0.9 | 0.77 | $0.24 \angle 25.2^\circ$ | 8.5 | 0.48 |


Figure 23. Constant Gain and Noise Figure Contours (f = 900 MHz)

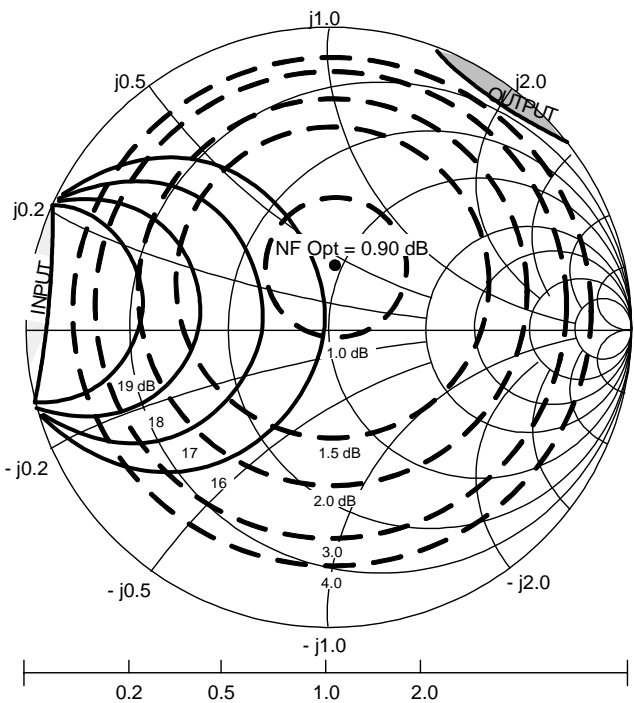

$V_{CE} = 2.0\text{ V}$
 $I_C = 5.0\text{ mA}$
 ---Potentially Unstable

| f (GHz) | NF Opt (dB) | Γ_O | Rn | K |
|---------|-------------|--------------------------|-----|------|
| 1.9 | 0.90 | $0.22 \angle 84.5^\circ$ | 6.5 | 0.90 |


Figure 24. Constant Gain and Noise Figure Contours (f = 1.9 GHz)

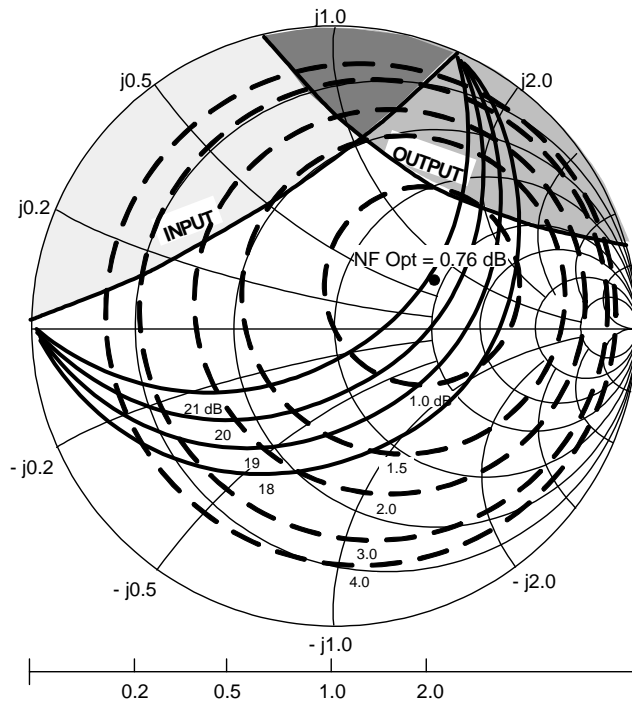

$V_{CE} = 3.0\text{ V}$
 $I_C = 3.0\text{ mA}$
 ---Potentially Unstable

| f (GHz) | NF Opt (dB) | Γ_O | Rn | K |
|---------|-------------|--------------------------|----|------|
| 0.9 | 0.76 | $0.37 \angle 26.3^\circ$ | 11 | 0.36 |

Figure 25. Constant Gain and Noise Figure Contours (f = 900 MHz)

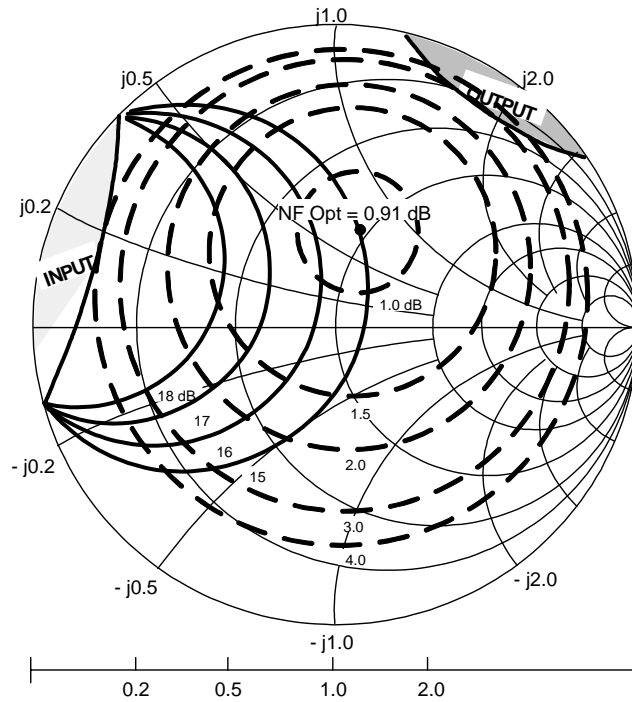

$V_{CE} = 3.0\text{ V}$
 $I_C = 3.0\text{ mA}$
 ---Potentially Unstable

| f (GHz) | NF Opt (dB) | Γ_O | Rn | K |
|---------|-------------|--------------------------|-----|------|
| 1.9 | 0.91 | $0.34 \angle 77.2^\circ$ | 8.5 | 0.76 |

Figure 26. Constant Gain and Noise Figure Contours (f = 1.9 GHz)

4 Packaging

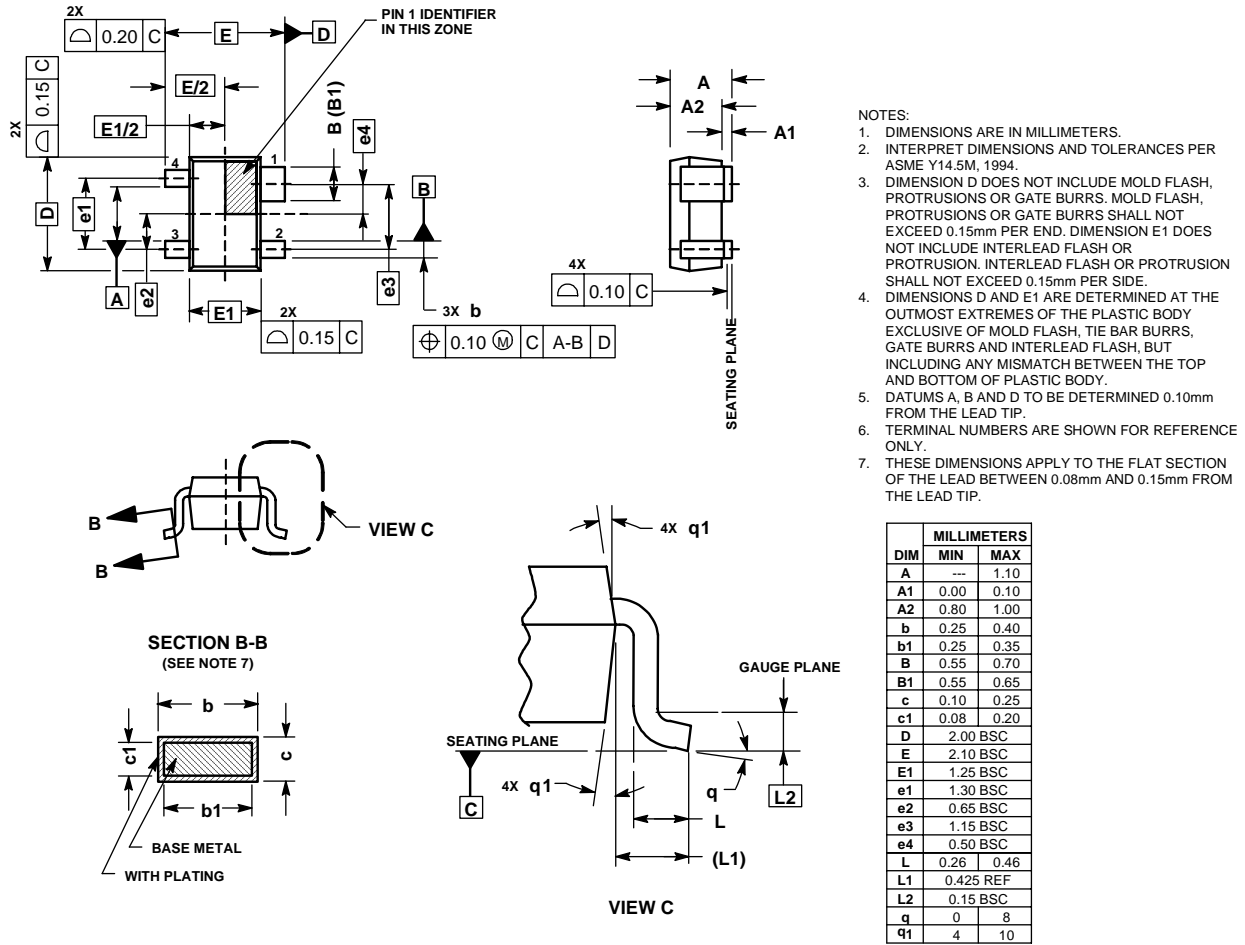


Figure 27. Outline Dimensions for SOT-343
(Case 318M-01, Issue 0)

NOTES

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:

Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217
1-303-675-2140 or 1-800-441-2447

JAPAN:

Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu Minato-ku, Tokyo 106-8573 Japan
81-3-3440-3569

ASIA/PACIFIC:

Motorola Semiconductors H.K. Ltd.; Silicon Harbour
Centre, 2 Dai King Street, Tai Po Industrial Estate,
Tai Po, N.T., Hong Kong
852-26668334

TECHNICAL INFORMATION CENTER:

1-800-521-6274

HOME PAGE:

<http://www.motorola.com/semiconductors>

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including typicals must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.



MOTOROLA

Motorola and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola, Inc. 2002

MBC13900/D

**For More Information On This Product,
Go to: www.freescale.com**