

ABOV SEMICONDUCTOR Co., Ltd.  
8-BIT MICROCONTROLLERS

# MC97F1204S

User's Manual (Ver1.2)



## REVISION HISTORY

VERSION	COMMENT	DATE
1.0	Upload Initial version	2013/07/04
1.1	Add ISP interface guide Add PGMplusLC connection picture	2013/09/12
1.2	Add a way to handle the ADC zero offset value Set the default function of the P02 port to GPIO Divide IRC SPEC according to the temperature condition	2013/10/03

---

Published by ABOV Semiconductor

©2013 ABOV Semiconductor Co., Ltd. All rights reserved.

---

Additional information of this manual may be served by ABOV Semiconductor offices in Korea or Distributors.

ABOV Semiconductor reserves the right to make changes to any information here in at any time without notice. The information, diagrams and other data in this manual are correct and reliable;

however, ABOV Semiconductor is in no way responsible for any violations of patents or other rights of the third party generated by the use of this manual.

# Table of Contents

REVISION HISTORY .....	2
Table of Contents.....	4
MC97F1204S .....	8
1. Overview .....	8
1.1 Description.....	8
1.2 Features.....	9
1.3 Ordering Information .....	10
1.4 Development Tools.....	11
2. Block Diagram.....	15
3. Pin Assignment.....	16
4. Package Diagram.....	17
5. Pin Description .....	24
6. Port Structures .....	25
6.1 General Purpose I/O Port.....	25
6.2 Second Function I/O Port.....	26
6.3 Analog Input I/O Port .....	27
6.4 Reset I/O Port.....	28
7. Electrical Characteristics .....	29
7.1 Absolute Maximum Ratings .....	29
7.2 Recommended Operating Conditions .....	29
7.3 A/D CONVERTER CHARACTERISTICS .....	30
7.4 Voltage Dropout Converter Characteristics .....	30
7.5 Power-On Reset Characteristics.....	30
7.6 Brown Out Detector Characteristics .....	31
7.7 Internal RC Oscillator Characteristics .....	31
7.8 Internal WDT Oscillator Characteristics.....	31
7.9 DC Characteristics .....	32
7.10 AC Characteristics .....	33
7.11 SPI Characteristics.....	34
7.12 Typical Characteristics.....	35
8. Memory .....	36
8.1 Program Memory .....	36
8.2 Data Memory .....	38
8.3 SFR Map.....	40
9. I/O Ports.....	43
9.1 I/O Ports.....	43
9.2 PORT P0.....	44
9.3 PORT P1 .....	45
9.4 PORT P2.....	47
9.5 PORT SELECT REGISTER PSR0, 2, 3.....	48
10. Interrupt Controller.....	51
10.1 Overview.....	51
10.2 External Interrupt.....	52
10.3 Block Diagram.....	53

10.4	Interrupt Vector Table.....	54
10.5	Interrupt Sequence .....	55
10.6	Effective Timing after Controlling Interrupt bit .....	56
10.7	Multi Interrupt.....	57
10.8	Interrupt Enable Accept Timing .....	58
10.9	Interrupt Service Routine Address.....	58
10.10	Saving/Restore General-Purpose Registers.....	58
10.11	Interrupt Timing.....	59
10.12	Interrupt Register Description.....	59
11.	Peripheral Hardware .....	66
11.1	Clock Generator.....	66
11.2	BIT.....	69
11.3	WDT .....	71
11.4	Timer/PWM.....	74
11.5	SPI.....	83
11.6	12-Bit A/D Converter .....	88
12.	Power Down Operation .....	94
12.1	Overview.....	94
12.2	Peripheral Operation in IDLE/STOP Mode.....	94
12.3	IDLE mode .....	95
12.4	STOP mode.....	96
12.5	Release Operation of STOP1, 2 Mode.....	97
13.	RESET .....	99
13.1	Overview.....	99
13.2	Reset source .....	99
13.3	Block Diagram.....	99
13.4	RESET Noise Canceller.....	100
13.5	Power ON RESET .....	100
13.6	External RESETB Input.....	103
13.7	Brown Out Detector Processor .....	104
14.	On-chip Debug System.....	108
14.1	Overview.....	108
14.2	Two-pin external interface .....	109
15.	Configure option.....	113
15.1	Configure option Control Register.....	113
16.	APPENDIX .....	114

# List of Figures

Figure 1-1 On Chip Debugger 2 and Pin description (ocd2 mode) .....	11
Figure 1-2 On Chip Debugger 2 and Pin description (ocd2 mode 1) .....	11
Figure 1-3 Single Programmer .....	12
Figure 1-4 PGMplusLC Writer.....	12
Figure 1-5 ADAM OTP/MTP GANG WRITER.....	13
Figure 1-6 ISP Interface.....	14
Figure 2-1 MC97F1204S Block Diagram.....	15
Figure 4-1 20 pin SOP package .....	17
Figure 4-2 20 pin PDIP package.....	18
Figure 4-3 20 pin TSSOP package .....	19
Figure 4-4 16 pin SOP package .....	20
Figure 4-5 16 pin TSSOP package .....	21
Figure 4-6 10 pin SSOP package.....	22
Figure 4-7 8 pin SOP package .....	23
Figure 6-1 General Purpose I/O Port .....	25
Figure 6-2 Second Function I/O Port.....	26
Figure 6-3 Analog Input I/O Port .....	27
Figure 6-4 Reset I/O Port.....	28
Figure 7-1 AC Timing .....	33
Figure 7-2 SPI Timing .....	34
Figure 8-1 Program Memory .....	37
Figure 8-2 Data Memory map .....	38
Figure 8-3 Low 128bytes RAM.....	39
Figure 10-1 Interrupt Priority Level .....	51
Figure 10-2 External Interrupt Description.....	52
Figure 10-3 Block Diagram of Interrupt.....	53
Figure 10-4 Interrupt Execution Sequence .....	55
Figure 10-5 Interrupt Enable Register effective Timing.....	56
Figure 10-6 Execution of Multi Interrupt .....	57
Figure 10-7 Interrupt Response Timing Diagram.....	58
Figure 10-8 Correspondence between vector table address and the entry address of ISR.....	58
Figure 10-9 Saving/Restore Process Diagram & Sample Source .....	58
Figure 10-10 Timing chart of Interrupt Acceptance and Interrupt Return Instruction.....	59
Figure 11-1 Clock Generator Block Diagram.....	66
Figure 11-2 BIT Block Diagram.....	69
Figure 11-3 WDT Block Diagram .....	71
Figure 11-4 WDT Interrupt Timing Waveform .....	73
Figure 11-5 Timer x 16-bit Mode Block Diagram.....	74
Figure 11-6 Timer x 16bit Capture Mode.....	75
Figure 11-7 PWM Mode.....	76
Figure 11-8 Example of PWM at 8MHz.....	77

Figure 11-9 Example of PWM at 8MHz (Period = Duty) .....	77
Figure 11-10 SPI Block Diagram .....	83
Figure 11-11 SPI Transmit/Receive Timing Diagram at CPHA = 0 .....	85
Figure 11-12 SPI Transmit/Receive Timing Diagram at CPHA = 1 .....	85
Figure 11-13 ADC Block Diagram.....	89
Figure 11-14 A/D Analog Input Pin Connecting Capacitor.....	89
Figure 11-15 A/D Power(AVDD) Pin Connecting Capacitor .....	89
Figure 11-16 ADC Operation for Align bit .....	90
Figure 11-17 Converter Operation Flow.....	91
Figure 12-1 IDLE Mode Release Timing by External Interrupt.....	95
Figure 12-2 IDLE Mode Release Timing by /RESET .....	95
Figure 12-3 STOP Mode Release Timing by External Interrupt .....	96
Figure 12-4 STOP Mode Release Timing by /RESET .....	96
Figure 12-5 STOP1, 2 Mode Release Flow .....	97
Figure 13-1 RESET Block Diagram.....	99
Figure 13-2 Reset noise canceller time diagram.....	100
Figure 13-3 Fast VDD rising time .....	100
Figure 13-4 Internal RESET Release Timing On Power-Up.....	101
Figure 13-5 Configuration timing when Power-on (at 8Mhz).....	101
Figure 13-6 Boot Process Wave Form.....	102
Figure 13-7 Timing Diagram after RESET.....	103
Figure 13-8 Oscillator generating waveform example.....	103
Figure 13-9 Block Diagram of BOD .....	104
Figure 13-10 Internal Reset at the power fail situation.....	104
Figure 13-11 Configuration timing when BOD RESET.....	105
Figure 14-1 Block Diagram of On-chip Debug System.....	109
Figure 14-2 10-bit transmission packet.....	110
Figure 14-3 Data transfer on the twin bus.....	110
Figure 14-4 Bit transfer on the serial bus.....	111
Figure 14-5 Start and stop condition.....	111
Figure 14-6 Acknowledge on the serial bus.....	111
Figure 14-7 Clock synchronization during wait procedure.....	112
Figure 14-8 Connection of transmission.....	112

# MC97F1204S

## CMOS SINGLE-CHIP 8-BIT MICROCONTROLLER WITH 12-BIT ANALOG TO DIGITAL CONVERTER

### 1. Overview

#### 1.1 Description

The MC97F1204S is an advanced CMOS 8-bit microcontroller with 4Kbytes of FLASH. This is a powerful microcontroller which provides a highly flexible and cost effective solution to many embedded control applications. This provides the following features: 4Kbytes of FLASH, 256bytes of IRAM, 16-bit timer/counter, Watchdog timer with WDTOSC, 12-bit ADC, SPI, On-chip POR, BOD and LVR, 16-bit PWM output, Internal RC-Oscillator, Internal WDT-Oscillator and clock circuitry. The MC97F1204S also supports Power saving modes to reduce Power Consumption.

Device Name	FLASH	RAM	Package
MC97F1204S	4Kbytes	SRAM : 256bytes	20/16/10/8 pins
MC97F1104S			



## 1.2 Features

MC97F1204S	
CPU	8-Bit CISC Core(8051 Compatible, 2 clocks per cycle)
ROM	4Kbytes On-chip FLASH
	Endurance(1,000 times), Retention(10 years)
RAM	IRAM : 256bytes
GPIO	18 Ports (P0[7:0], P1[7:0], P2[0:1]) : 20Pin
	14 Ports (P0[6:0], P1[7:3], P2[1:0]) : 16Pin
	8 Ports (P0[5], P0[2:0], P1[7:5], P1[3]) : 10Pin
	6 Ports (P0[2:0], P1[6:5], P1[3]) : 8Pin
BIT	On Chip
Timer	16-bit 3ch, PWM Output (using Timer0,1,2)
WDT	On Chip
SPI	1ch
ADC	12-bit, 16-ch (External 15-ch, Internal reference 1-ch)
PCI	(Wake-up from Pin-Change) On Chip
INT Sources	External (3: INT0/1, PCI), Timer (3: Timer0/1/2) ADC (1), SPI (1), WDT (1), BIT (1), BOD (1)
IRC	16/8/4/2MHz (8MHz Default)
WDTOSC	64kHz
POR	1.4V @1ms VDD rising
LVR	1-level (1.65V)
BOD	6 level (2.1V/2.3V/2.5V/3.0V/3.5V/4.0V)
PGK Type	20/16/10/8-SOP

### Minimum Instruction Execution Time

250ns (@8MHz, NOP Instruction)

### Power down mode

IDLE, STOP1, STOP2 mode

### Operating Voltage

2.2V ~ 5.5V

### Operating Temperature

-40 ~ +85 °C

### Operating Frequency

0.25MHz ~ 16MHz (IRC)

### 1.3 Ordering Information

**Table 1-1 Ordering Information of MC97F1204S**

Device name	ROM size	SRAM size	Package	OCD name
MC97F1204SDBN	4Kbytes FLASH	l:256bytes	20SOP	MC97F1204OD
MC97F1204SRBN			20 TSSOP	MC97F1204OR
MC97F1204SB			20 PDIP	
MC97F1204SMBN			16 SOP	MC97F1204OM
MC97F1204SHBN			16 TSSOP	MC97F1204OH
MC97F1104SSB			10 SSOP	MC97F1104OS
MC97F1104SMB			8 SOP	MC97F1104OM

## 1.4 Development Tools

### 1.4.1 Compiler

We do not provide the compiler. Please contact third parties.

The MC97F1204S core is Mentor Graphic 8051. Anyway, device ROM size is smaller than 64Kbytes. Developer can use all kinds of third party's standard 8051 compiler.

### 1.4.2 OCD2 emulator and debugger

The OCD2 emulator supports ABOV Semiconductor's 8051 series MCU emulation.

The OCD2 interface uses two wires interfacing between PC and MCU which is attached to user's system. The OCD2 can read or change the value of MCU internal memory and I/O peripherals. And also the OCD2 controls MCU internal debugging logic, it means OCD2 controls emulation, step run, monitoring, RAM breakneck.

The OCD2 Debugger program works on Microsoft-Windows NT, 2000, XP, Vista (32bit) operating system. If you want to see more details, please refer OCD2 debugger manual. You can download debugger S/W and manual from our web-site.

Only MC97F1204OCD has OCD2 Interface(DSCL, DSDA, DSCL1, DSDA1).

There are two types of OCD2 mode connection

#### Connection 1

- P01 (MC97F1204OCD DSCL pin)
- P00 (MC97F1204OCD DSDA pin)



Figure 1-1 On Chip Debugger 2 and Pin description (ocd2 mode)

#### Connection 2(alternative connection when P01 and P00 are used as SPI ...)

- P14 (MC97F1204OCD DSCL1 pin)
- P17 (MC97F1204OCD DSDA1 pin)

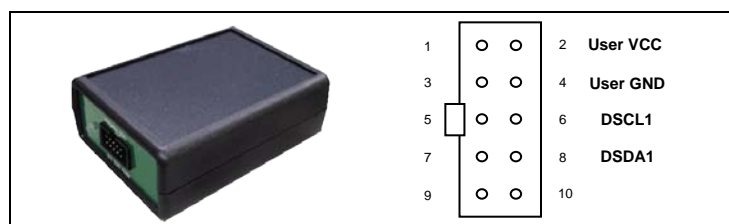


Figure 1-2 On Chip Debugger 2 and Pin description (ocd2 mode 1)

### 1.4.3 Programmer

Single programmer:

ADAM Single Writer II : It programs MCU device directly and be supplied high voltage over 19V.



Figure 1-3 Single Programmer

PGMplusLC Writer:

On Board Programming with PGMplusLC Writer available at MC97F1204S main chip only, not available at OCD chip.

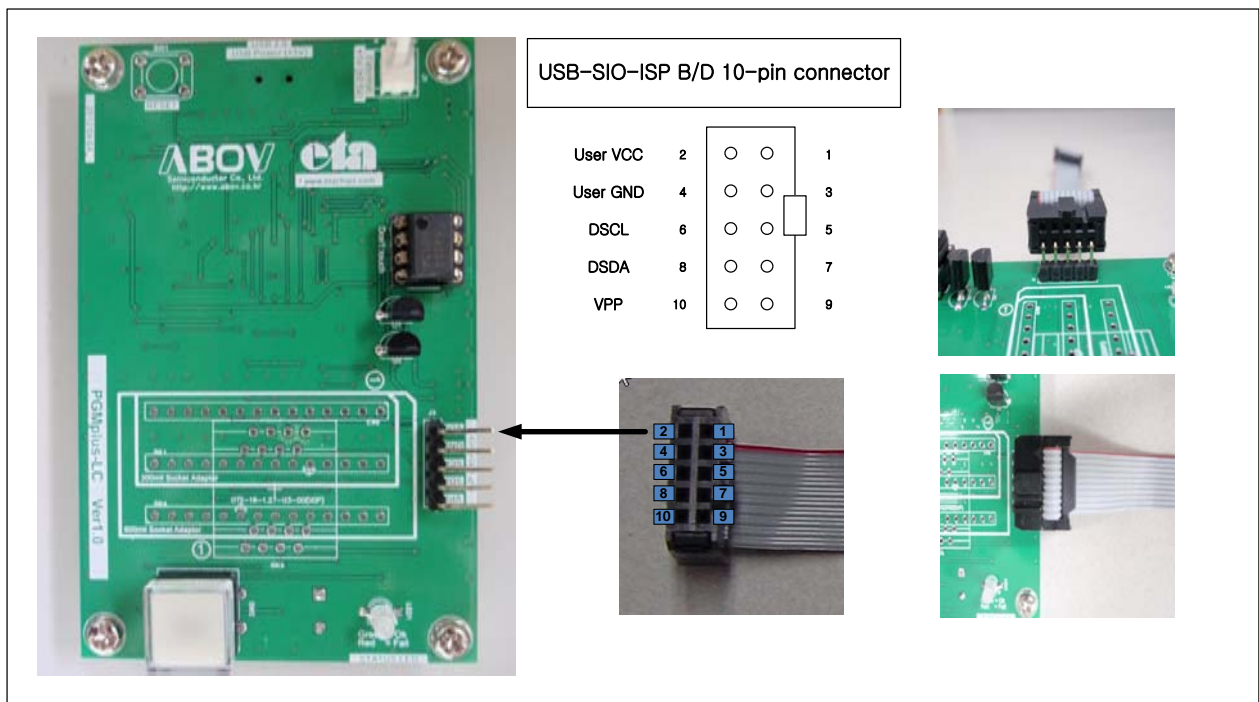


Figure 1-4 PGMplusLC Writer

**ADAM OTP/MTP GANG Writer:**

It programs 8 MCU devices at once.

So, it is mainly used in mass production line.

Gang programmer is standalone type, it means it does not require host PC.



**Figure 1-5 ADAM OTP/MTP GANG WRITER**

### 1.4.4 ISP Interface guide

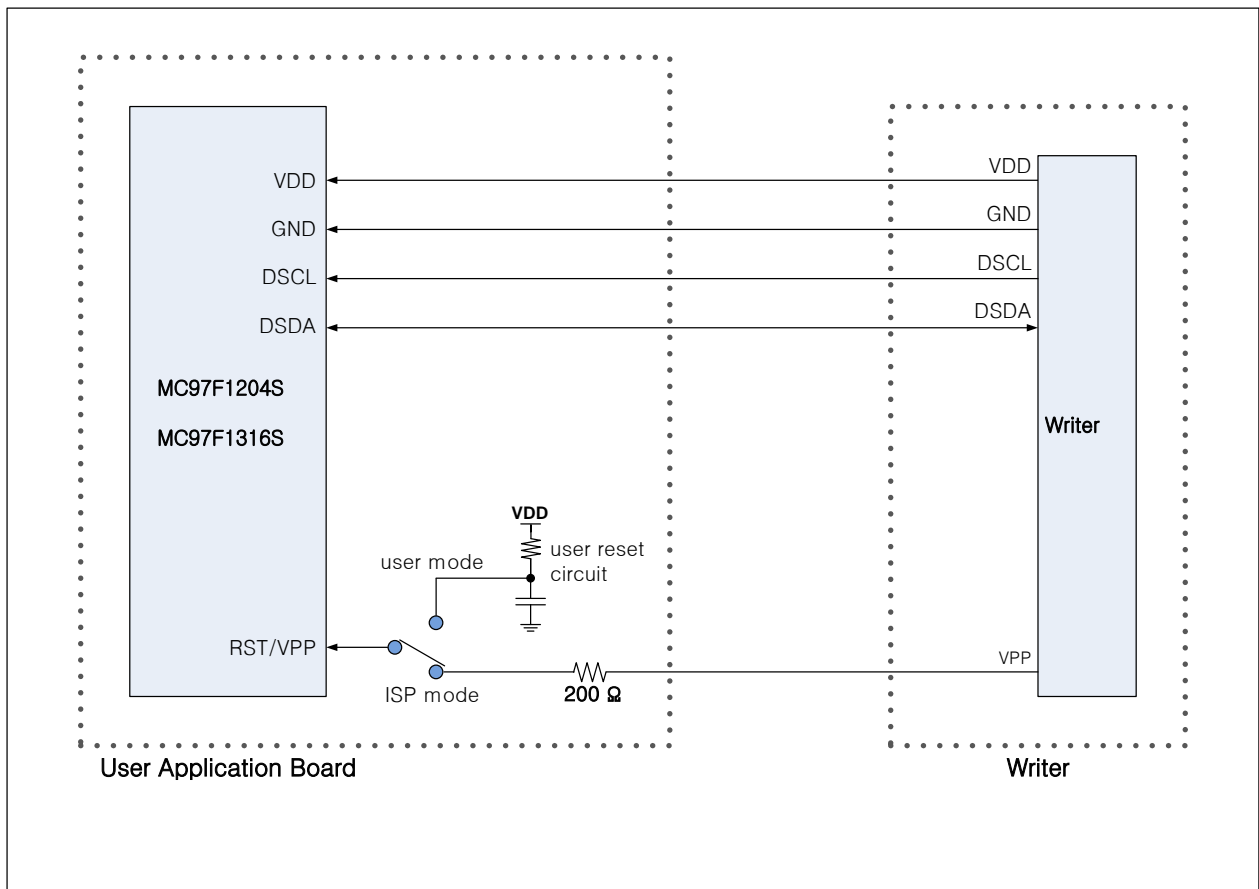


Figure 1-6 ISP Interface

Note)

1. If other signals affect the communication in ISP mode, disconnect them with pins(DSDA/DSCL) by using jumper or switch. VPP is 16.75V.
2. The 200 Ω resistor must be located in a target B/D. Without it, the MCU could be damaged by high-voltage.
3. The Single Writer, power of 19V or more is required.

## 2. Block Diagram

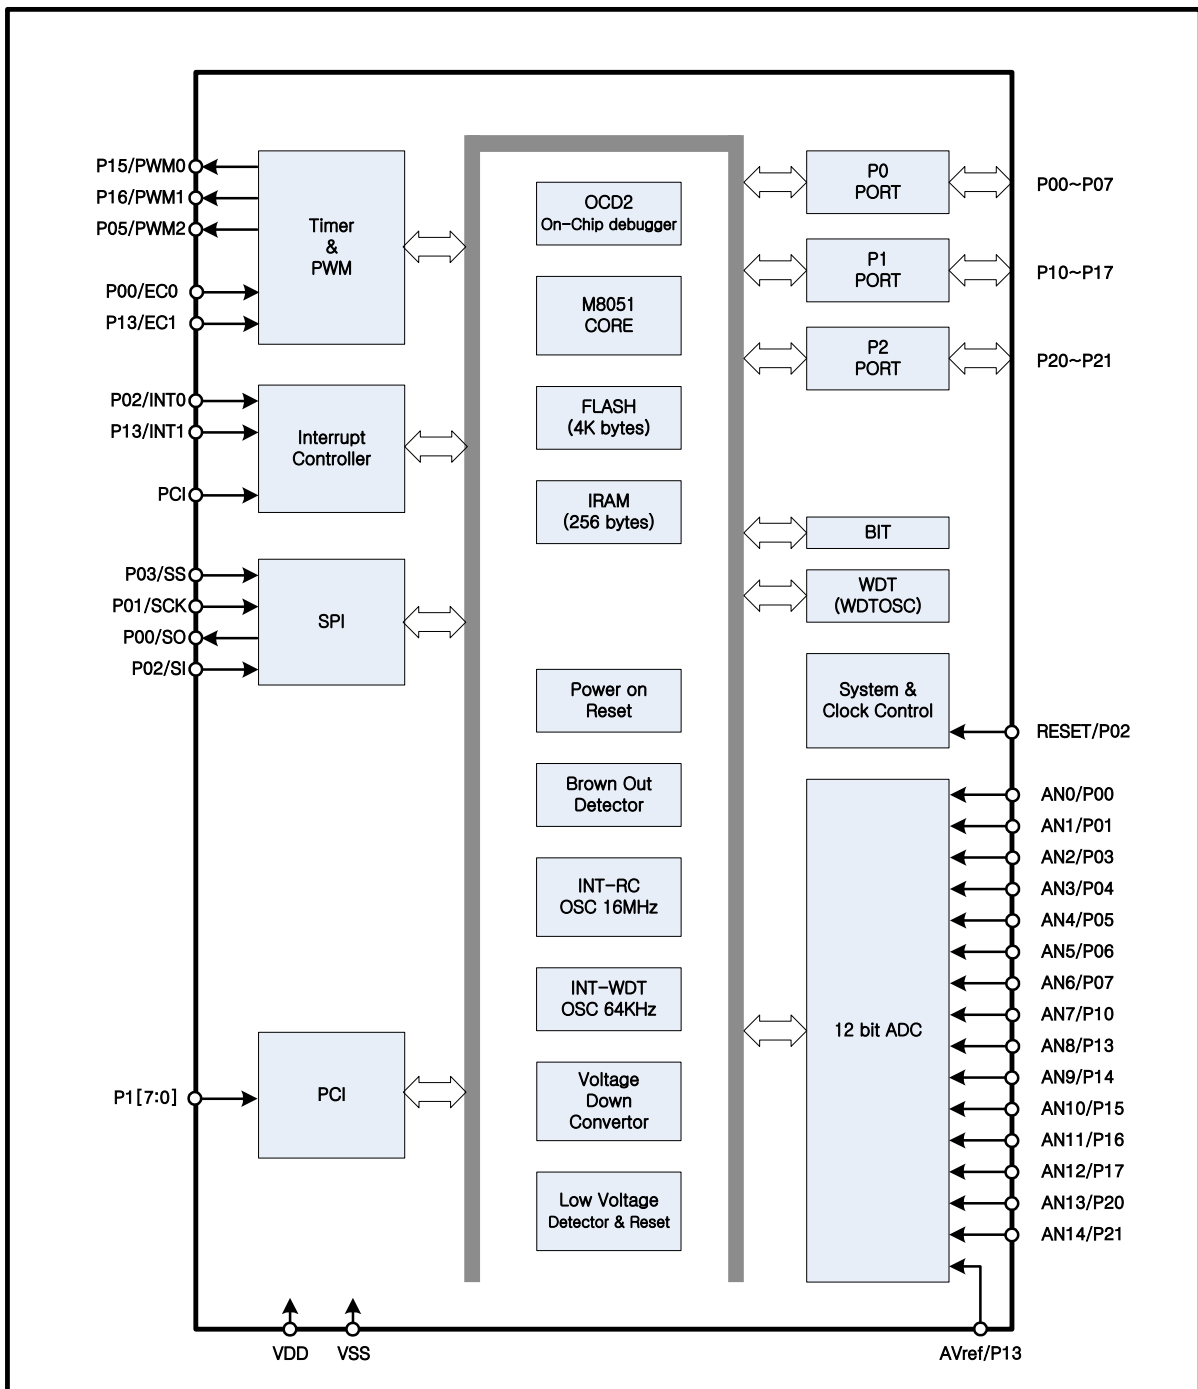


Figure 2-1 MC97F1204S Block Diagram

### 3. Pin Assignment

VDD	1	20	VSS
(DSDAT) DSDA/SO/EC0/AIN0/P00	2	19	P21/AIN14
(DSCK) DSCL/SCK/AIN1/P01	3	18	P20/AIN13
(Vpp) RESETB/SI/INT0/P02	4	17	P17/AIN12/DSDA1
SS/AIN2/P03	5	16	P16/AIN11/PWM1
AIN3/P04	6	15	P15/AIN10/PWM0
PWM2/AIN4/P05	7	14	P14/AIN9/DSCL1
AIN5/P06	8	13	P13/AIN8/Avref/INT1/EC1
AIN6/P07	9	12	P12
AIN7/P10	10	11	P11

VDD	1	16	VSS
(DSDAT) DSDA/SO/EC0/AIN0/P00	2	15	P21/AIN14
(DSCK) DSCL/SCK/AIN1/P01	3	14	P20/AIN13
(Vpp) RESETB/SI/INT0/P02	4	13	P17/AIN12/DSDA1
SS/AIN2/P03	5	12	P16/AIN11/PWM1
AIN3/P04	6	11	P15/AIN10/PWM0
PWM2/AIN4/P05	7	10	P14/AIN9/DSCL1
AIN5/P06	8	9	P13/AIN8/Avref/INT1/EC1

VDD	1	10	VSS
(DSDAT) DSDA/SO/EC0/AIN0/P00	2	9	P17/AIN12
(DSCK) DSCL/SCK/AIN1/P01	3	8	P16/AIN11/PWM1
(Vpp) RESETB/SI/INT0/P02	4	7	P15/AIN10/PWM0
PWM2/AIN4/P05	5	6	P13/AIN8/Avref/INT1/EC1

VDD	1	8	VSS
(DSDAT) DSDA/SO/EC0/AIN0/P00	2	7	P16/AIN11/PWM1
(DSCK) DSCL/SCK/AIN1/P01	3	6	P15/AIN10/PWM0
(Vpp) RESETB/SI/INT0/P02	4	5	P13/AIN8/Avref/INT1/EC1

DSDAT, DSCK, Vpp	-> ISP
DSDA, DSCL	-> OCD2 mode
DSDA1, DSCL1	-> OCD2 mode1

\* OCD2 mode pins are for MC97F1204OCD only



4. Package Diagram

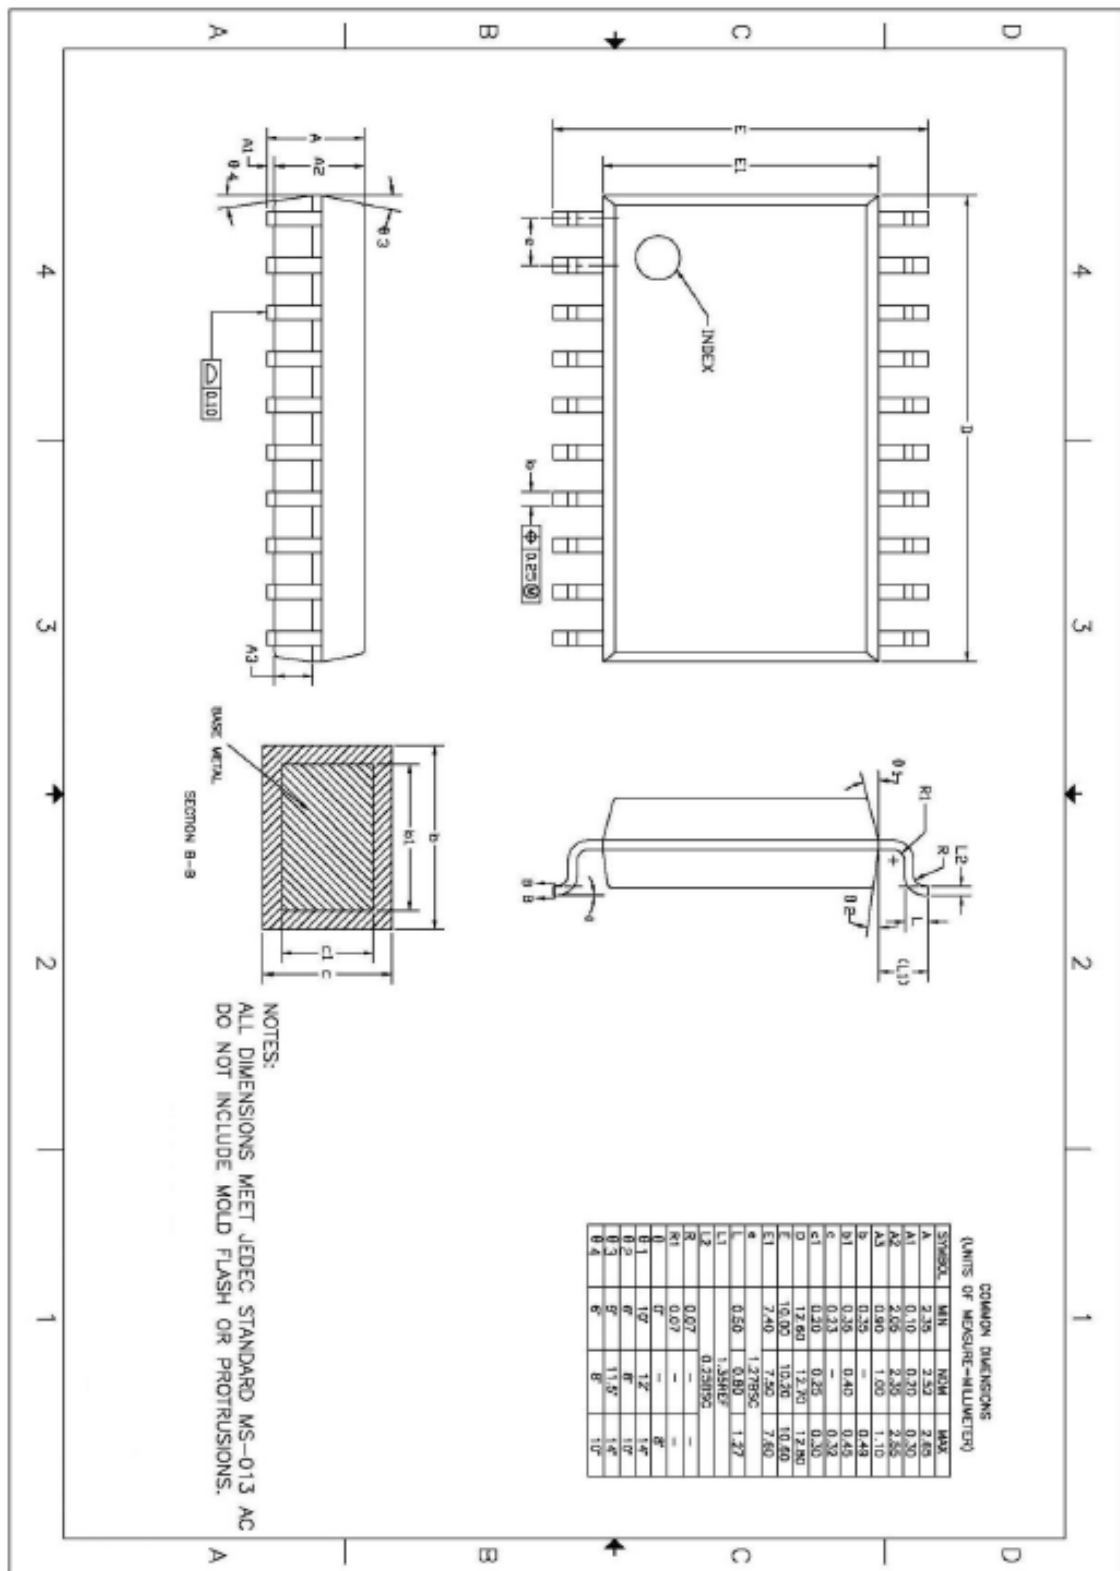


Figure 4-1 20 pin SOP package



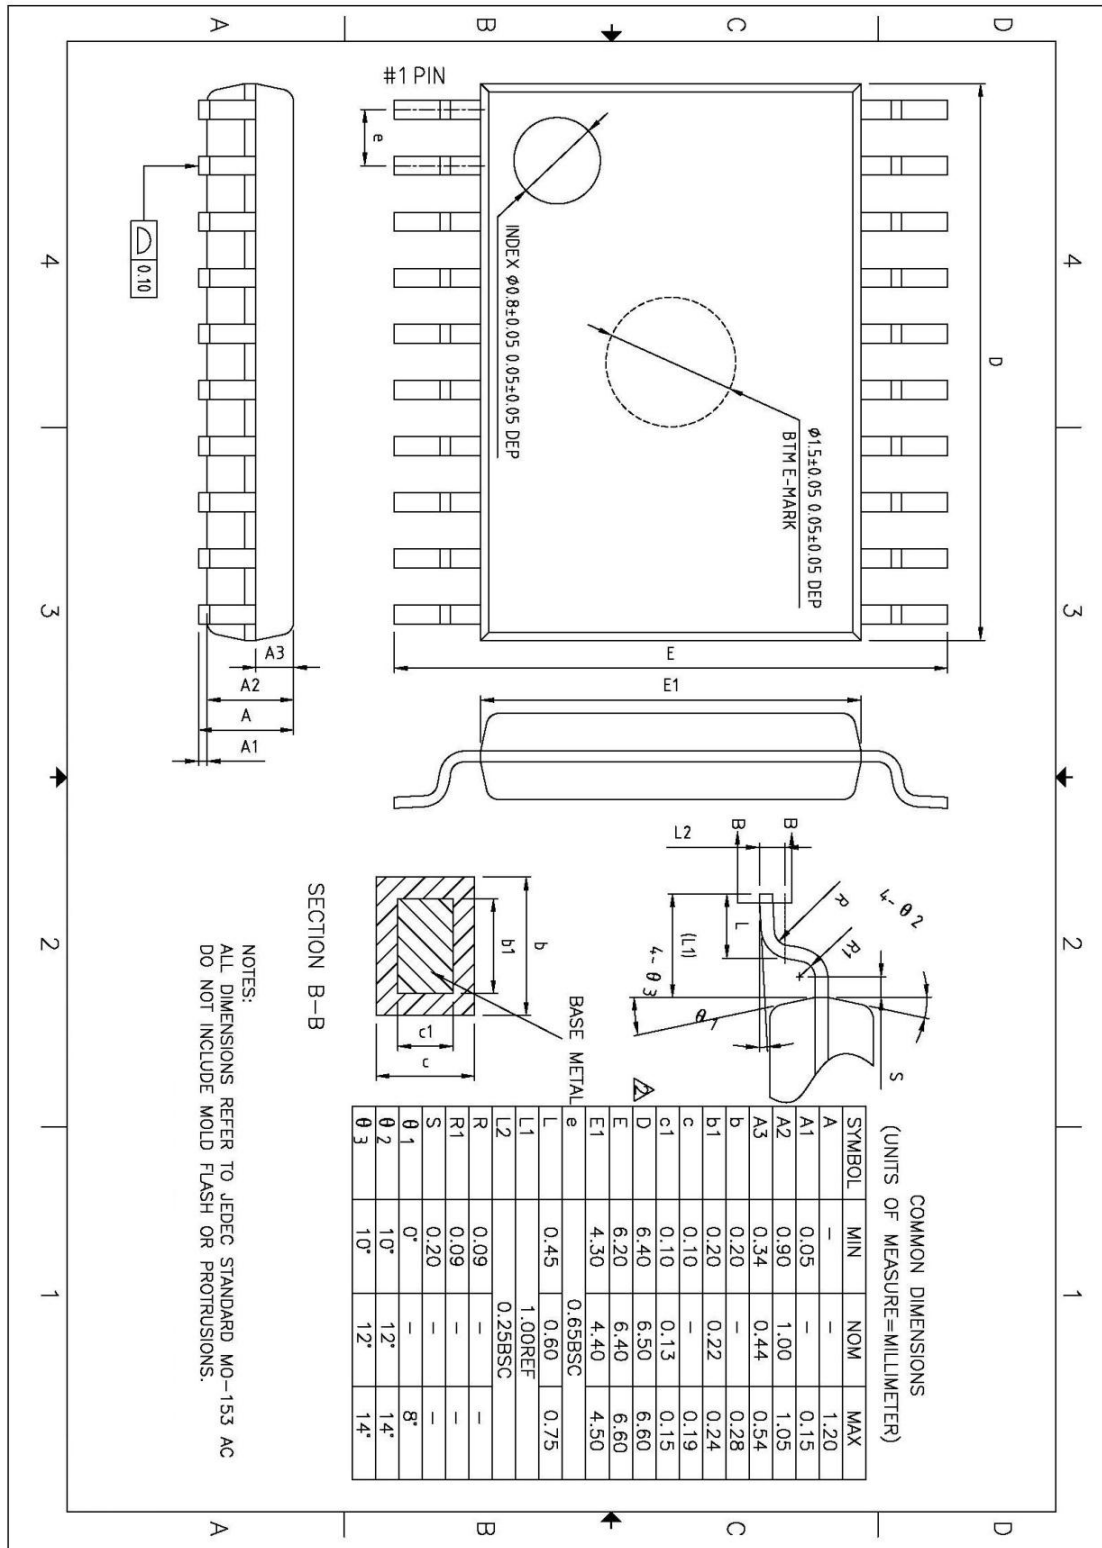


Figure 4-3 20 pin TSSOP package



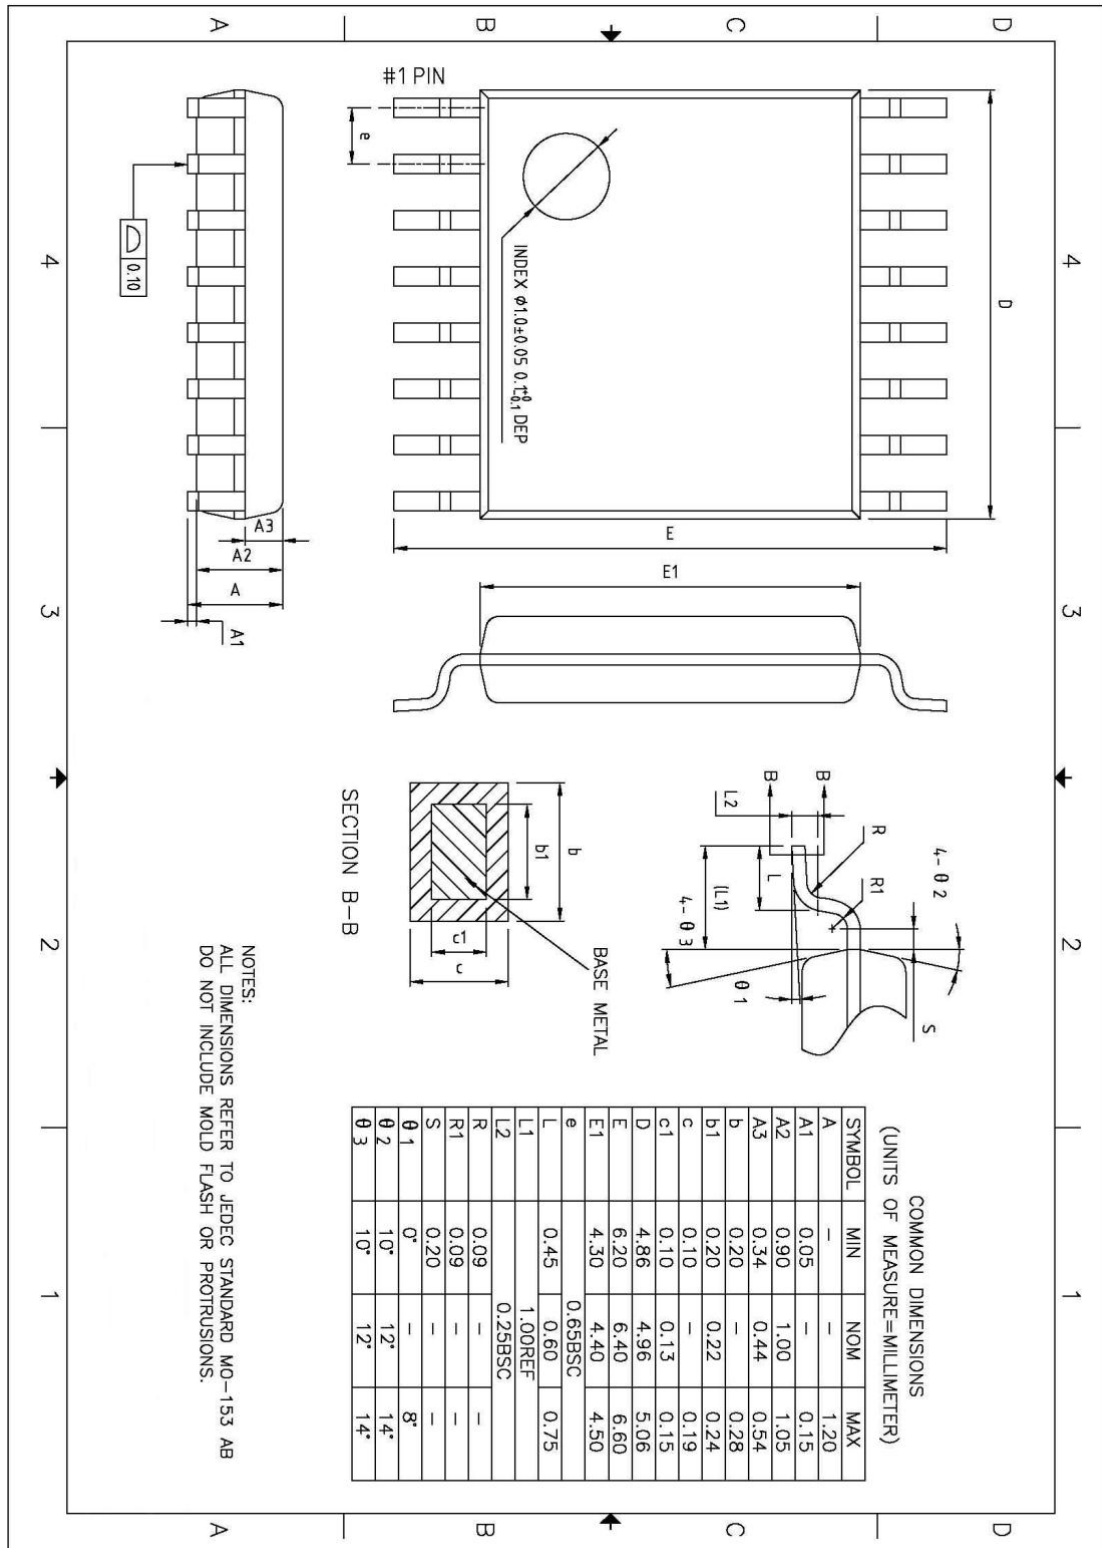


Figure 4-5 16 pin TSSOP package

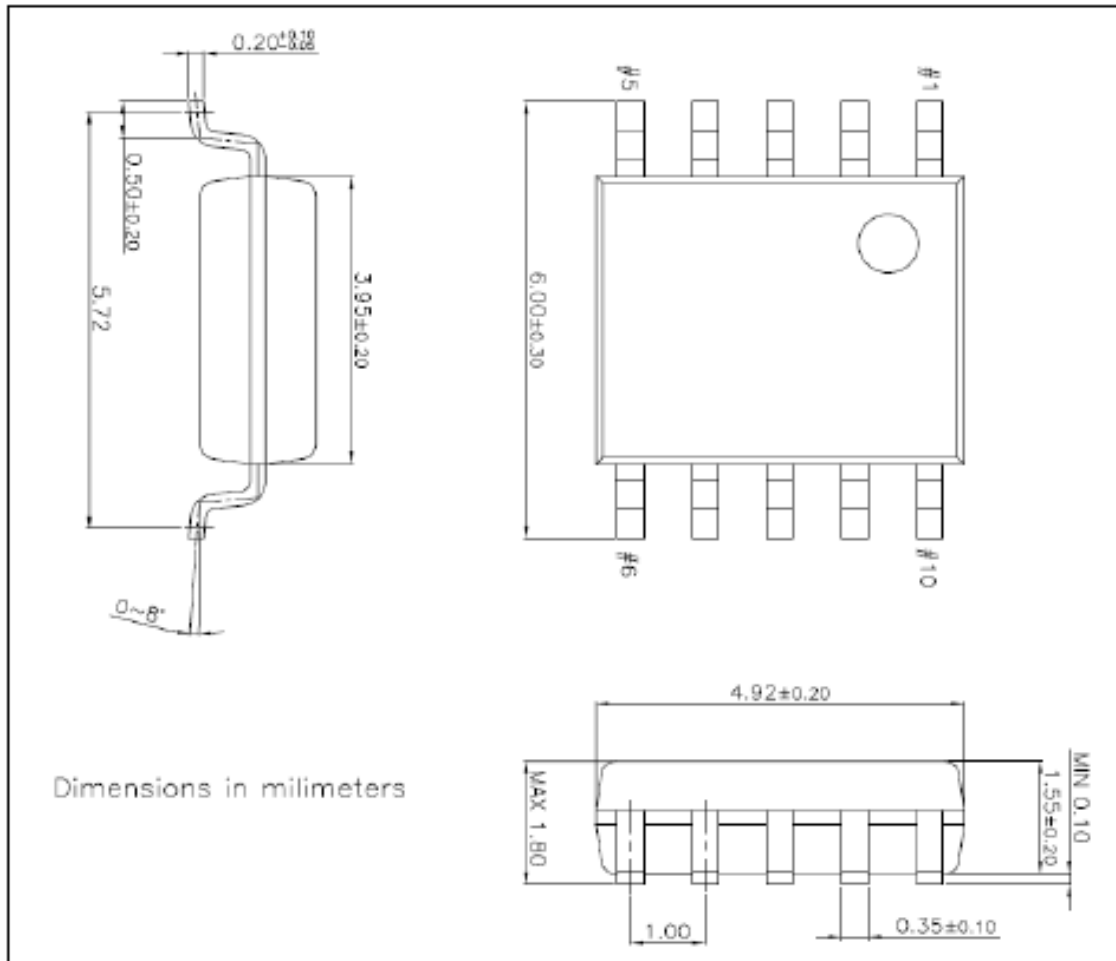


Figure 4-6 10 pin SSOP package

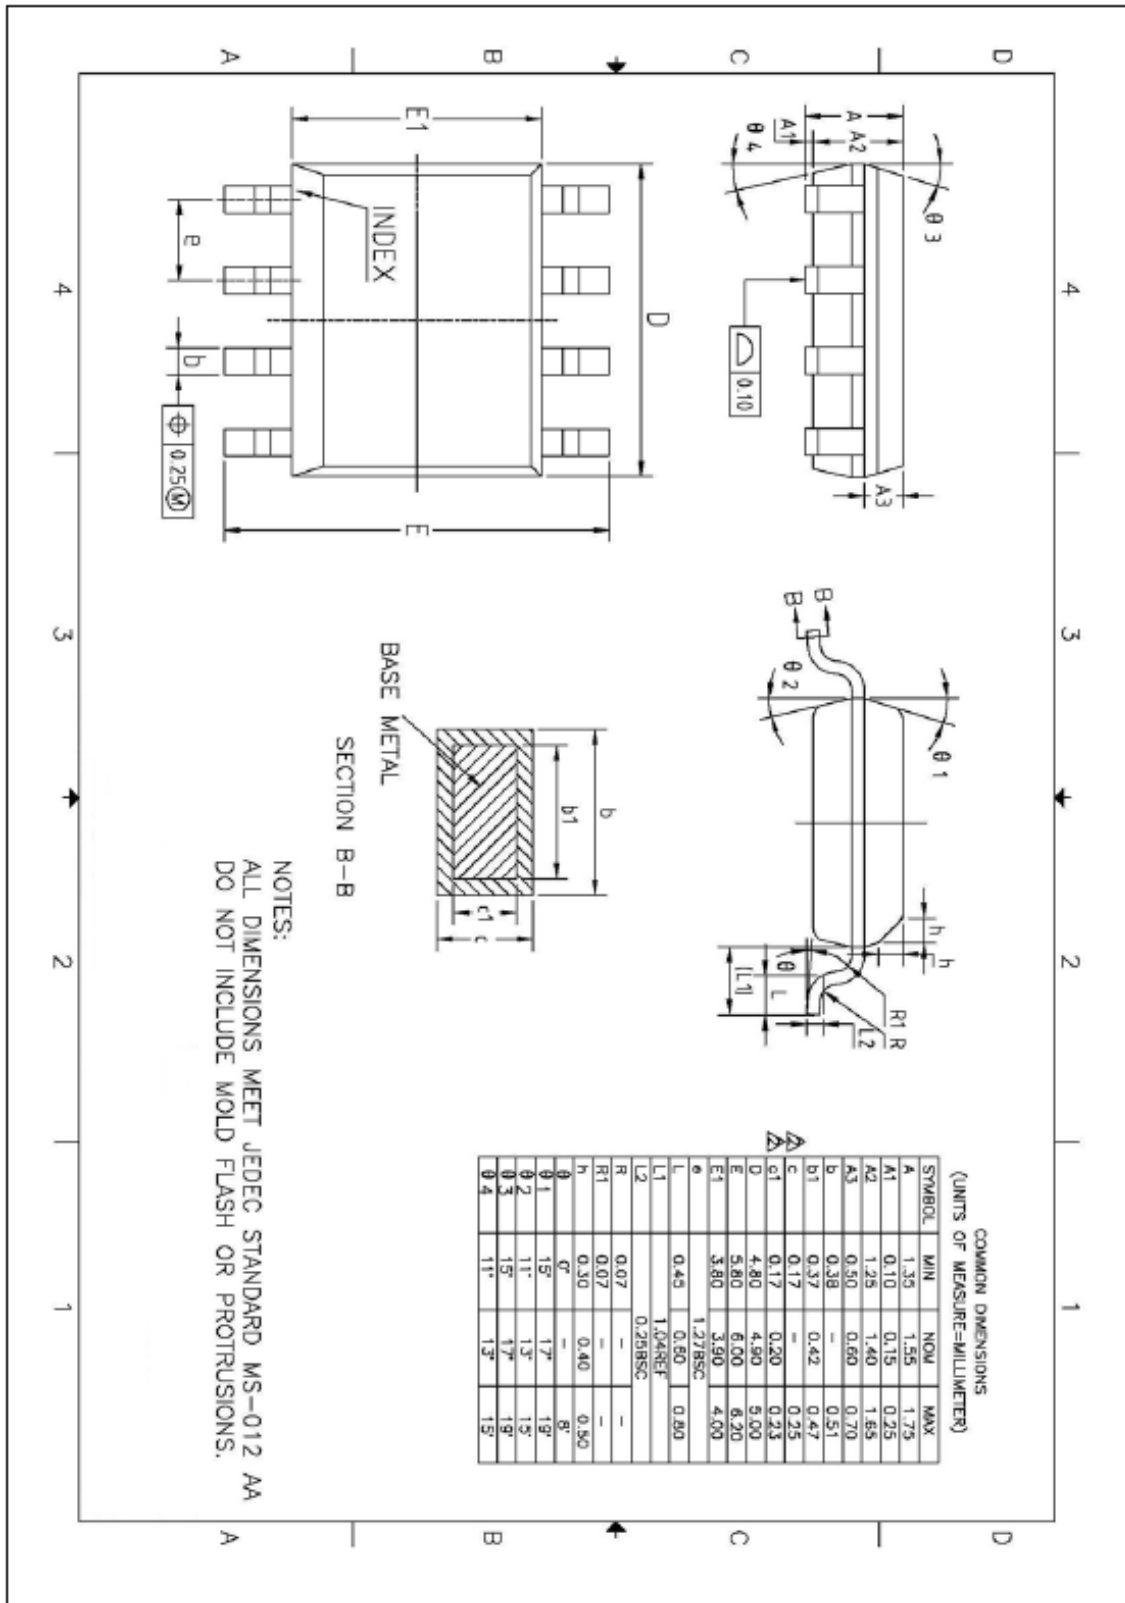


Figure 4-7 8 pin SOP package

## 5. Pin Description

Table 5-1 Normal Pin description

PIN Name	I/O	Function	@RESET	Shared with
P00	I/O	Port P0 8-Bit I/O Port Can be set in input or output mode in 1-bit units Internal pull-up register can be used via software when this port is used as input port Open Drain enable register can be used via software when this port is used as output port (P02 OpenDrain output only)	Input	AIN0 / EC0 / SO / (DSDA)
P01				AIN1 / SCK / (DSCL)
P02				INT0 / SI / RESETB / (Vpp)
P03				AIN2 / SS
P04				AIN3
P05				AIN4 / PWM2
P06				AIN5
P07				AIN6
P10	I/O	Port P1 8-Bit I/O Port Can be set in input or output mode in 1-bit units Internal pull-up register can be used via software when this port is used as input port Open Drain enable register can be used via software when this port is used as output port	Input	AIN7
P11				-
P12				-
P13				AIN8 / Averf / INT1 / EC1
P14				AIN9 / (DSCL1)
P15				AIN10 / PWM0
P16				AIN11 / PWM1
P17				AIN12 / (DSDA1)
P20	I/O	Port P2 2bit I/O Port Can be set in input or output mode in 1-bit units Internal pull-up register can be used via software when this port is used as input port Open Drain enable register can be used via software when this port is used as output port	Input	AIN13
P21				AIN14
				-
				-
				-



## 6. Port Structures

### 6.1 General Purpose I/O Port

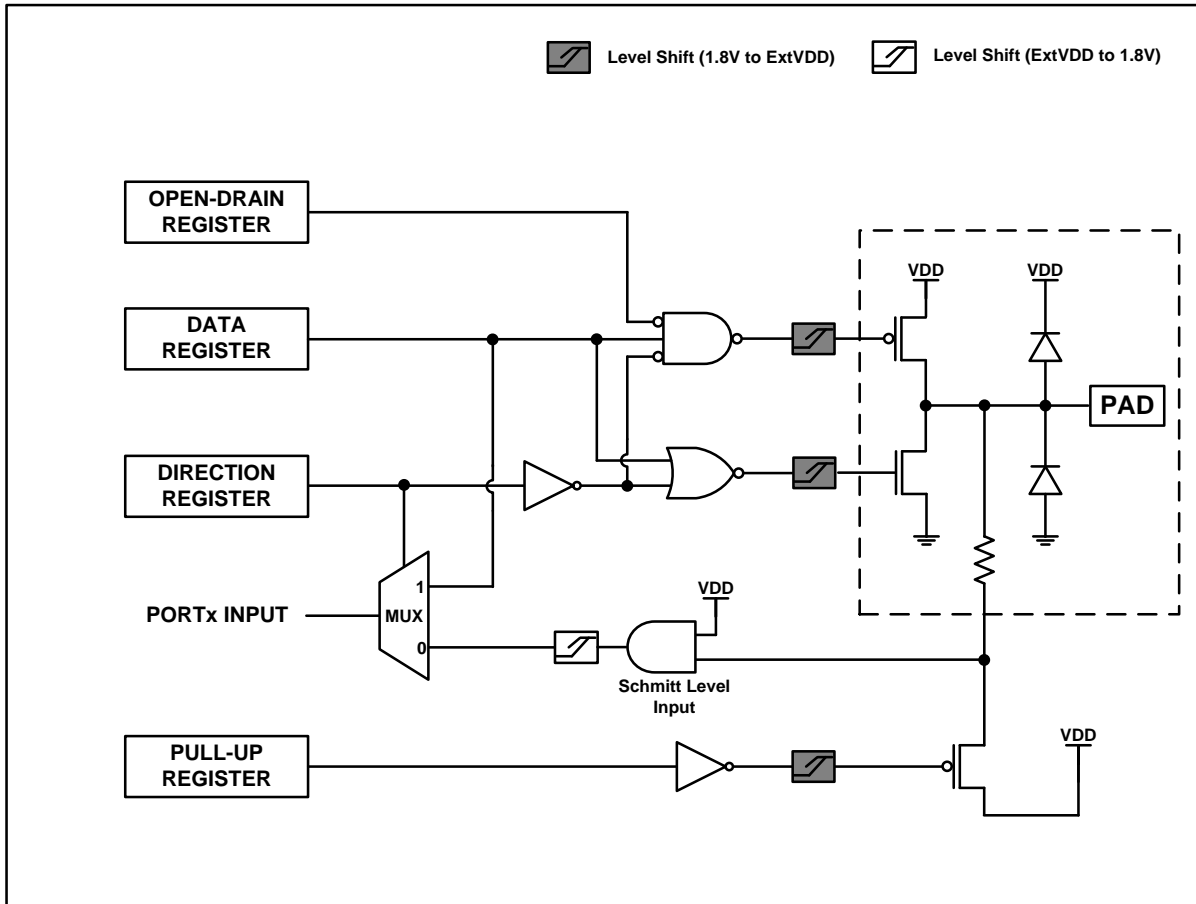


Figure 6-1 General Purpose I/O Port

### 6.2 Second Function I/O Port

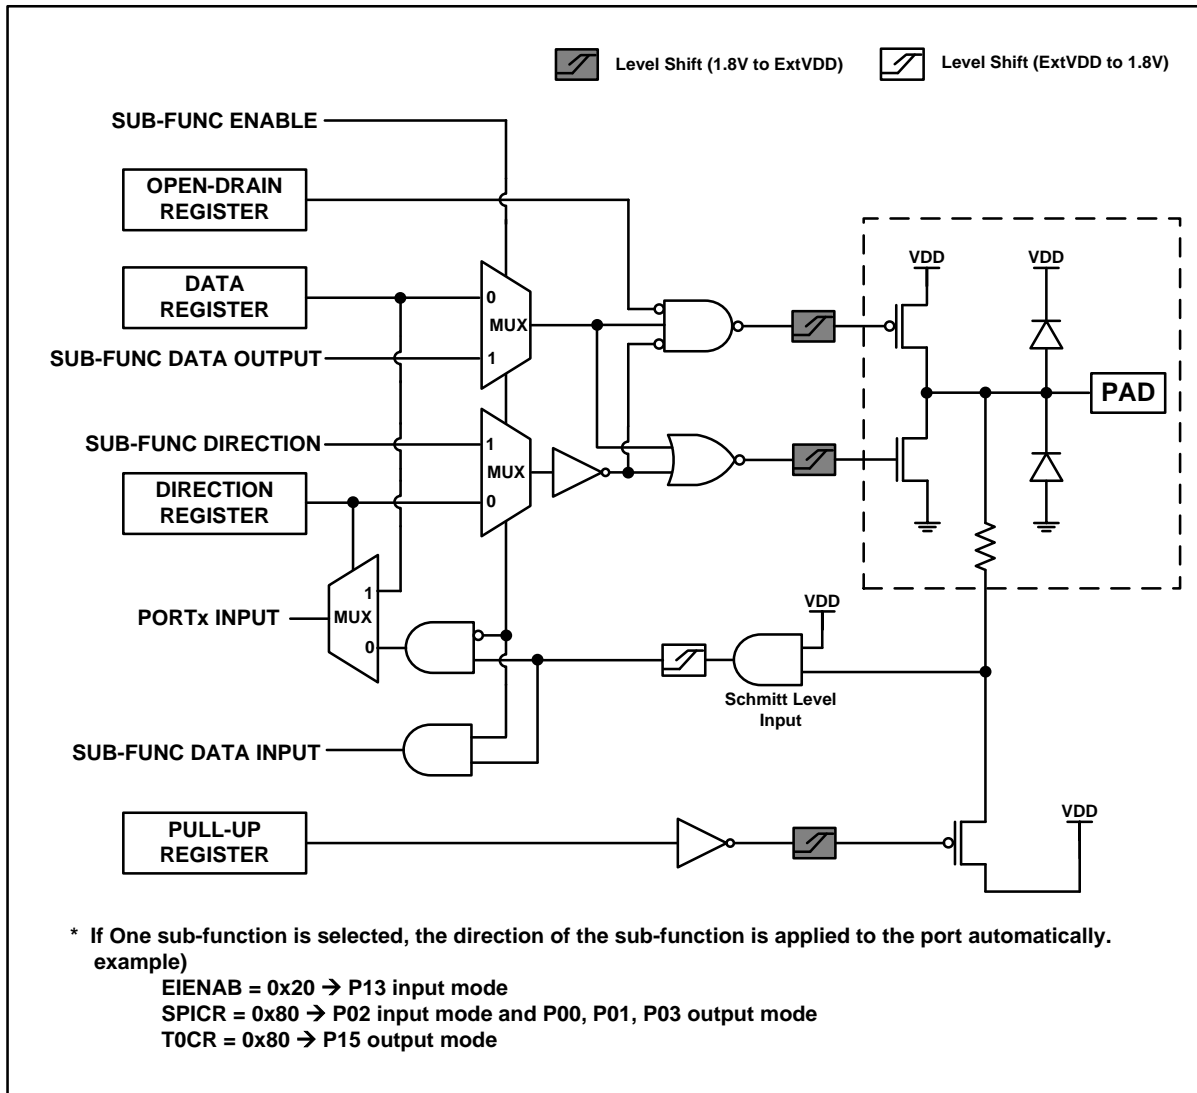


Figure 6-2 Second Function I/O Port

### 6.3 Analog Input I/O Port

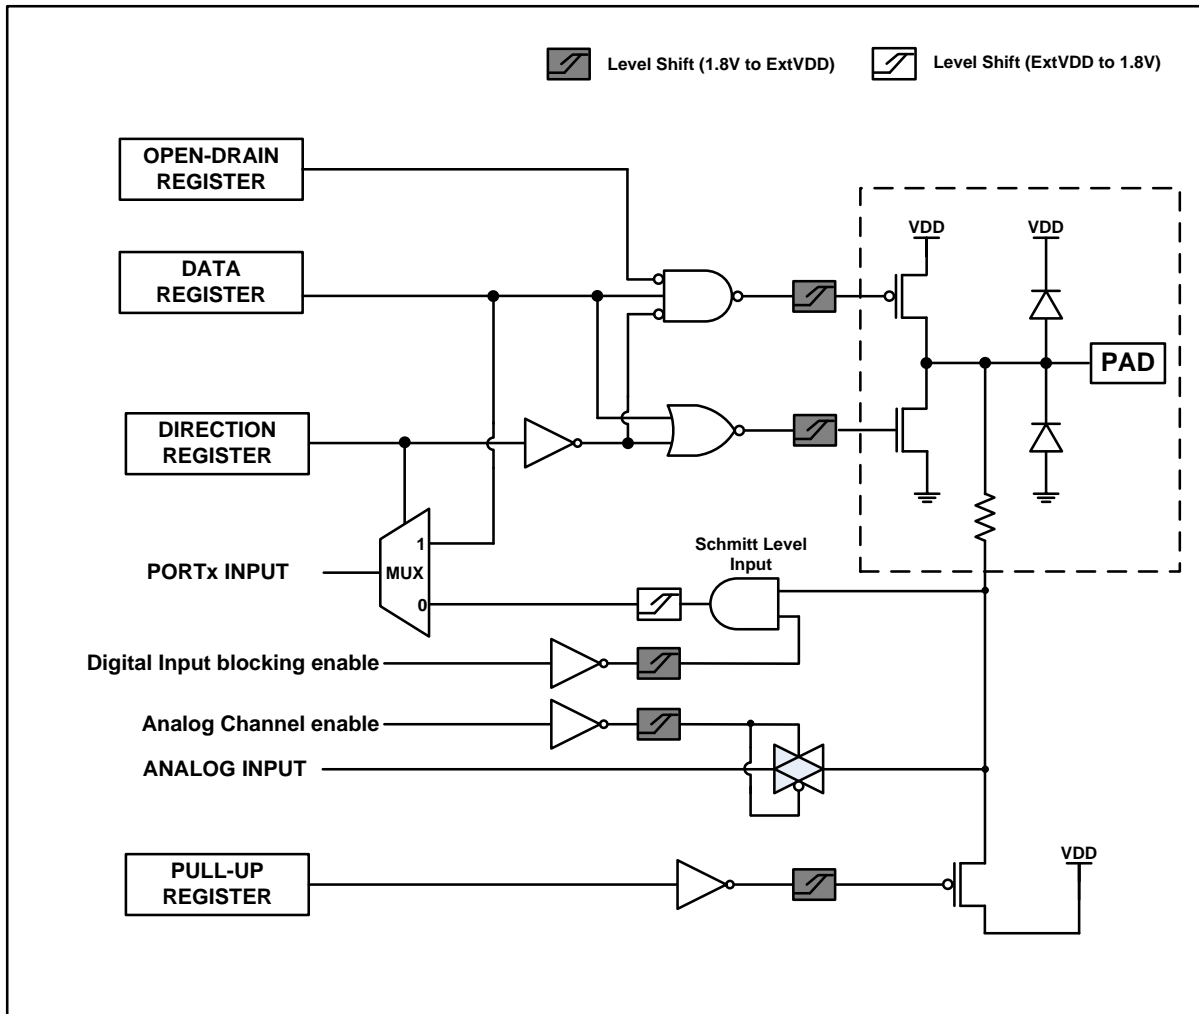


Figure 6-3 Analog Input I/O Port

### 6.4 Reset I/O Port

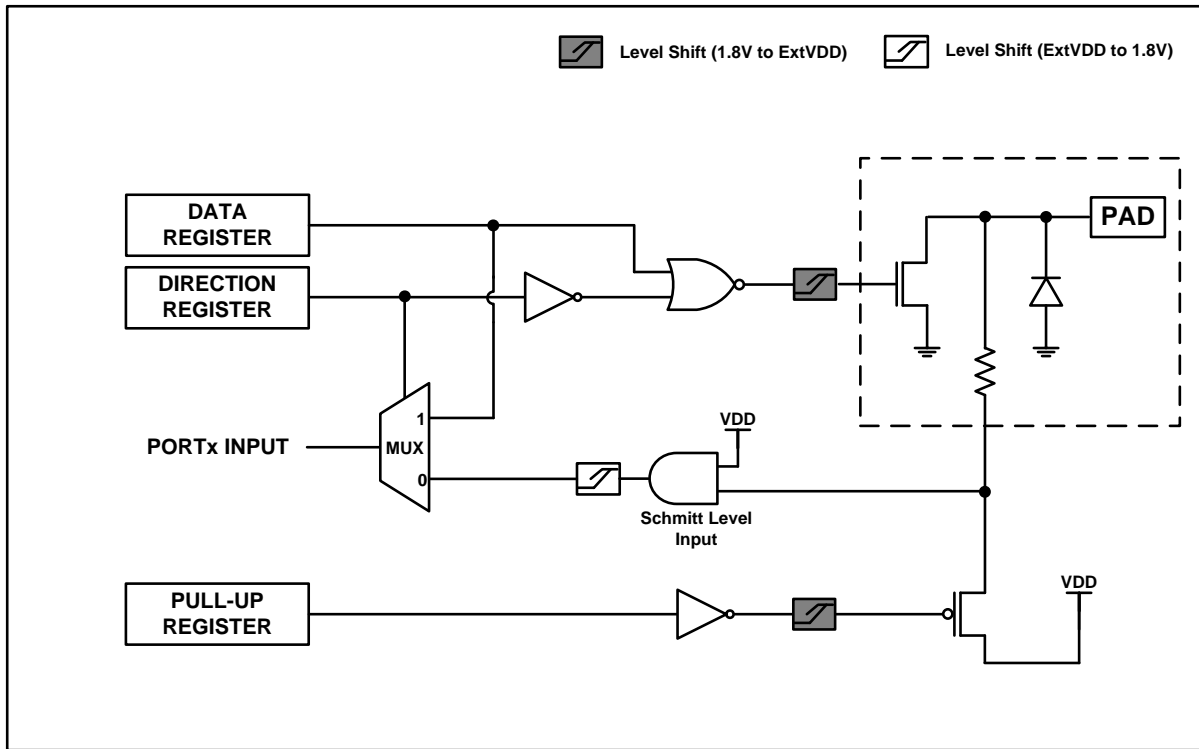


Figure 6-4 Reset I/O Port

## 7. Electrical Characteristics

### 7.1 Absolute Maximum Ratings

Table 7-1 Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply Voltage	VDD	-0.3~+6.5	V
	VSS	-0.3~+0.3	V
Normal Voltage Pin	VI	-0.3~VDD+0.3	V
	VO	-0.3~VDD+0.3	V
	IOH	10	mA
	$\Sigma$ IOH	80	mA
	IOL	20	mA
	$\Sigma$ IOL	160	mA
	Total Power Dissipation	PT	600
Storage Temperature	TSTG	-45~+125	°C

Note) Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### 7.2 Recommended Operating Conditions

Table 7-2 Recommended Operation Conditions

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Supply Voltage	VDD	$F_{IRC}=0.4\sim 16\text{MHz}$	2.2	-	5.5	V
Operating Temperature	TOPR	-	-40	-	85	°C
Operating Frequency	FOPR	Internal RC-OSC	15.68	16	16.32	MHz
		Internal WDT-OSC	32	64	96	kHz

### 7.3 A/D CONVERTER CHARACTERISTICS

( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{DD} = 2.7 - 5.5\text{V}$ ,  $V_{SS} = 0\text{V}$ )

Parameter	Symbol	Conditions	Min	Typ	Max	Units	
Resolution	–	–	–	12	–	bit	
Integral Linear Error	INL	AVREF=2.7V – 5.5V, fx=8MHz	–	–	±4	LSB	
Differential Linearity Error	DLE		–	–	±1		
Zero Offset Error	ZOE		-3	–	+7		
Full Scale Error	FSE		–	–	±3		
Conversion Time	tCON	12bit resolution, fx=8MHz	20	–	–	us	
Analog Input Voltage	VAN	–	VSS	–	AVREF	V	
Analog Reference Voltage	AVREF	–	1.8	–	VDD		
VDD18	–	–	–	1.8	–	V	
A/DC Input Leakage Current	IAN	-	–	–	2	uA	
ADC Current	IADC	Enable	VDD=5.12V	–	1	2	mA
		Disable		–	–	0.1	uA

- Notes:
1. Zero offset error is the difference between 000000000000 and the converted output for zero input voltage (VSS);
  2. Full scale error is the difference between 111111111111 and the converted output for full-scale input voltage (VDD).
  3. ADC zero offset value(-3LSB ~ 7 LSB) is addressed at 0x4007 of option memory.

### 7.4 Voltage Dropout Converter Characteristics

Table 7-3 Voltage Dropout Converter Characteristics

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Operating Voltage		-	2.2	-	5.5	V
Operating Temperature		-	-40	-	+85	°C
Regulation Voltage		-	1.62	1.8	1.98	V
Current Drivability		RUN/IDLE	-	20	-	mA
		STOP1	-	0.5	-	uA
		STOP2	-	0.5	-	uA
Operating Current	IDD1	RUN/IDLE	-	-	15	mA
	TRAN	STOP to RUN	-	-	200	us

Note) -STOP1: WDTRC running- STOP2: WDTRC disable

### 7.5 Power-On Reset Characteristics

Table 7-4 Power-On Reset Characteristics

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Operating Voltage		-	VSS	-	5.5	V
Operating Temperature		-	-40	-	+85	°C
RESET Release Level		-	1.2	1.4	1.6	V
Operating Current	IDD	-	-	0.1	-	uA

## 7.6 Brown Out Detector Characteristics

**Table 7-5 Brown Out Detector Characteristics**

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Operating Voltage		-	VSS	-	5.5	V
Operating Temperature		-	-40	-	+85	°C
Detection Level	4.0	-	3.8	4.0	4.2	V
	3.5	-	3.3	3.5	3.7	V
	3.0	-	2.8	3.0	3.2	V
	2.5	-	2.3	2.5	2.7	V
	2.3		2.1	2.3	2.5	V
	2.1		1.9	2.1	2.3	V
Hysteresis		-	-	50	-	mV
Operating Current	IDD	-	-	-	50	uA

## 7.7 Internal RC Oscillator Characteristics

**Table 7-6 Internal RC Oscillator Characteristics**

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Operating Voltage		-	2.2	-	5.5	V
Operating Temperature		-	-40	-	+85	°C
Frequency		25°C	15.84	16	16.16	MHz
		-10°C~+50°C	15.68	16	16.32	MHz
		-40°C~+85°C	15.52	16	16.48	MHz
Stabilization Time		-	-	1	-	ms
Operating Current	IDD	-	-	400	-	uA

## 7.8 Internal WDT Oscillator Characteristics

**Table 7-7 Ring-Oscillator Characteristics**

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Operating Voltage		-	2.2	-	5.5	V
Operating Temperature		-	-40	-	+85	°C
Frequency		-	32	64	96	kHz
Stabilization Time		-	-	1	-	ms
Operating Current	IDD	-	-	5	-	uA

## 7.9 DC Characteristics

**Table 7-8 DC Characteristics**

(VDD =2.2~5.5V, VSS =0V, f<sub>IRC</sub>=8.0MHz, TA=-40~+85°C)

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Input Low Voltage	VIL	P0, P1, P2	0	-	0.2VDD	V
Input High Voltage	VIH	P0, P1, P2	0.8VDD	-	VDD	V
Output Low Voltage	VOL	ALL I/O (IOL=40mA)	-	-	1	V
Output High Voltage	VOH	ALL I/O (IOH=-20mA)	VDD-1	-	-	V
Input High Leakage Current	IIH	ALL PAD	-1	-	1	uA
Input Low Leakage Current	IIL	ALL PAD	-1	-	1	uA
Pull-Up Resister	RPU	ALL PAD	25	50	75	kΩ
Power Supply Current	IDD	Run Mode, f <sub>XIN</sub> =8MHz @5V	-	3	5	mA
	IIDLE	Idle Mode, f <sub>XIN</sub> =8MHz @5V	-	2	5	mA
	ISTOP1	STOP1 Mode, WDTRC Enable @5V	-	10	-	uA
	ISTOP2	STOP2 Mode, WDTRC Disable @5V	-	5	-	uA

Note) STOP1: WDT only running, STOP2: All function disable.



### 7.10 AC Characteristics

Table 7-9 AC Characteristics

(VDD=5.0V±10%, VSS=0V, TA=-40~+85°C)

Parameter	Symbol	PIN	MIN	TYP	MAX	Unit
Operating Frequency	fMCP	-	0.25	-	16	MHz
System Clock Cycle Time	tSYS	-	4000	-	62.5	ns
Oscillation Stabilization Time (8MHz)	tMST1	-	-	-	1	ms
External Clock "H" or "L" Pulse Width	tCPW	-	-	-	tSYS/2	ns
External Clock Transition Time	tRCP,tFCP	-	-	-	10	ns
External Interrupt Input Width	tIW	INT0~INTx	2	-	-	tSYS
External Interrupt Transition Time	tFI,tRI	INT0~INTx			1	us
nRESET Input Pulse "L" Width	tRST	nRESET	8	-	-	tSYS
External Counter Input "H" or "L" Pulse Width	tECW	EC0~ECx	2	-	-	tSYS
Event Counter Transition Time	tREC,tFEC	EC0~ECx	-	-	20	ns

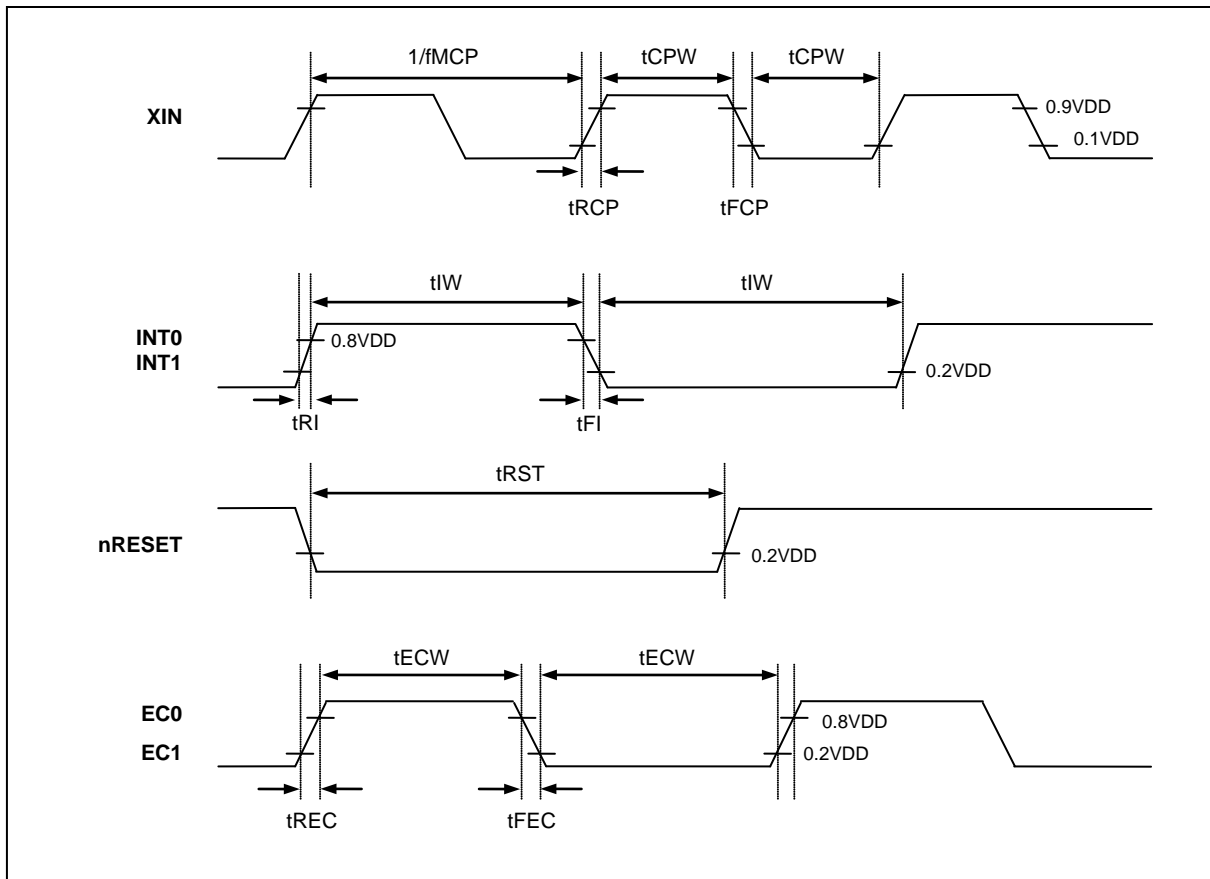


Figure 7-1 AC Timing

### 7.11 SPI Characteristics

Table 7-10 SPI Characteristics

(VDD=5.0V±10%, VSS=0V, TA=-40~+85°C)

Parameter	Symbol	PIN	MIN	TYP	MAX	Unit
Output Clock Pulse Period	tSCK	SCK	-	SPI clock mode	-	ns
Input Clock Pulse Period	tSCK	SCK	2• tSYS	-	-	ns
Input Clock "H" or "L" Pulse Width	tSCKL, tSCKH	SCK		50% duty	-	ns
Input Clock Pulse Transition Time	tFSCK, tRSCK	SCK	-	-	30	ns
Output Clock "H" or "L" Pulse Width	tSCKL, tSCKH	SCK	tSYS-30	-	-	ns
Output Clock Pulse Transition Time	tFSCK, tRSCK	SCK	-	-	30	ns
First Output Clock Delays Time	tFOD	OUTPUT				
Output Clock Delay Time	tDS	OUTPUT	-	-	100	ns
Input Pulse Transition Time	tFSIN, tRSIN	INPUT	-	-	30	ns
Input Setup Time	tDIS	INPUT	100	-	-	ns
Input Hold Time	tDIH	INPUT	tSYS+70	-	-	ns

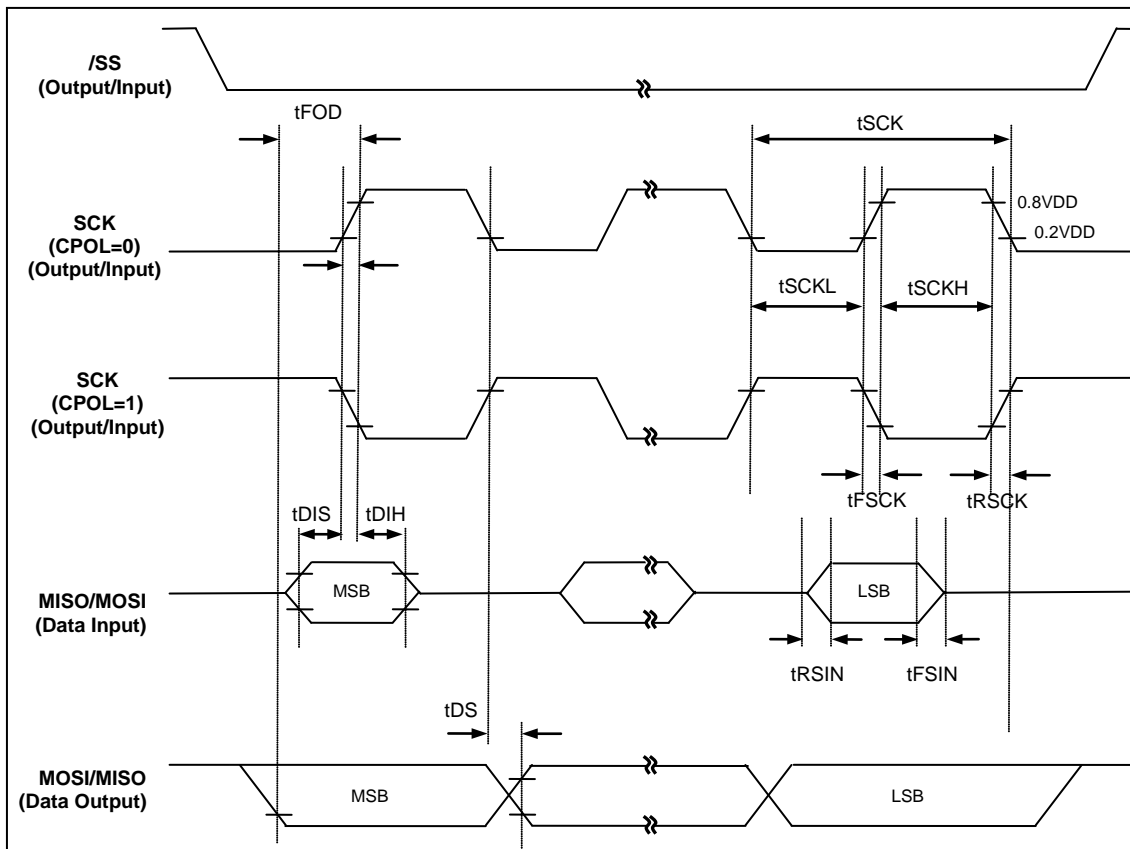


Figure 7-2 SPI Timing

## 7.12 Typical Characteristics

These graphs and tables provided in this section are for design guidance only and are not tested or guaranteed. In some graphs or tables the data presented are outside specified operating range (e.g. outside specified VDD range). This is for information only and devices are guaranteed to operate properly only within the specified range.

The data presented in this section is a statistical summary of data collected on units from different lots over a period of time. "Typical" represents the mean of the distribution while "max" or "min" represents (mean +  $3\sigma$ ) and (mean -  $3\sigma$ ) respectively where  $\sigma$  is standard deviation.

## 8. Memory

The MC97F1204S addresses two separate address memory stores: Program memory and Data memory. The logical separation of Program and Data memory allows Data memory to be accessed by 8-bit addresses, which can be more quickly stored and manipulated by 8-bit CPU.


Program memory can only be read, not written to providing up to 4Kbytes of Program memory on-chip. Data memory can be read and written to up to 256bytes internal memory (IRAM) including the stack area.

### 8.1 Program Memory

A 16-bit program counter is capable of addressing up to 64Kbytes for one bank of memory space, but this device has 4Kbytes program memory space.

Figure 8-1 shows a map of program memory. After reset, the CPU begins execution from location 0000H. Each interrupt is assigned a fixed location in program memory. The interrupt causes the CPU to jump to that location, where it commences execution of the service routine.

External interrupt 0, for example, is assigned to location 0003H. If external interrupt 0 is going to be used, its service routine must begin at location 0003H. If the interrupt is not going to be used, its service location is available as general purpose program memory. If an interrupt service routine is short enough (as is often the case in control applications), it can reside entirely within that 8 byte interval. Longer service routines can use a jump instruction to skip over subsequent interrupt locations, if other interrupts are in use.

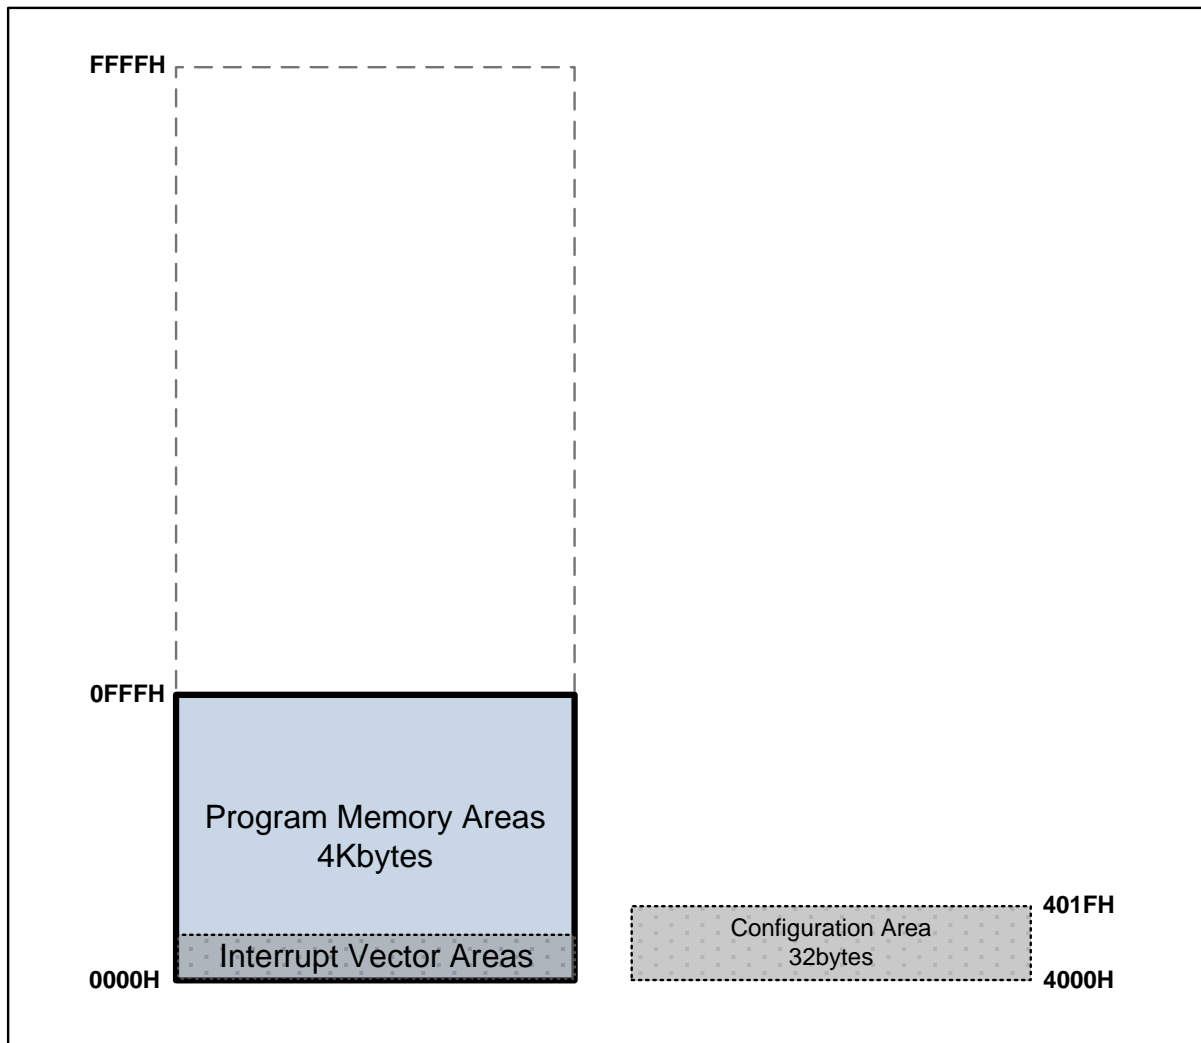

**Figure 8-1 Program Memory**

- User Function Mode: 4KbytesProgram Memory Area included Interrupt Vector Region
- Non-volatile and reprogramming memory: FLASH memory based on EEPROM cell

## 8.2 Data Memory

Figure 8-2 shows the external and internal Data memory space available.

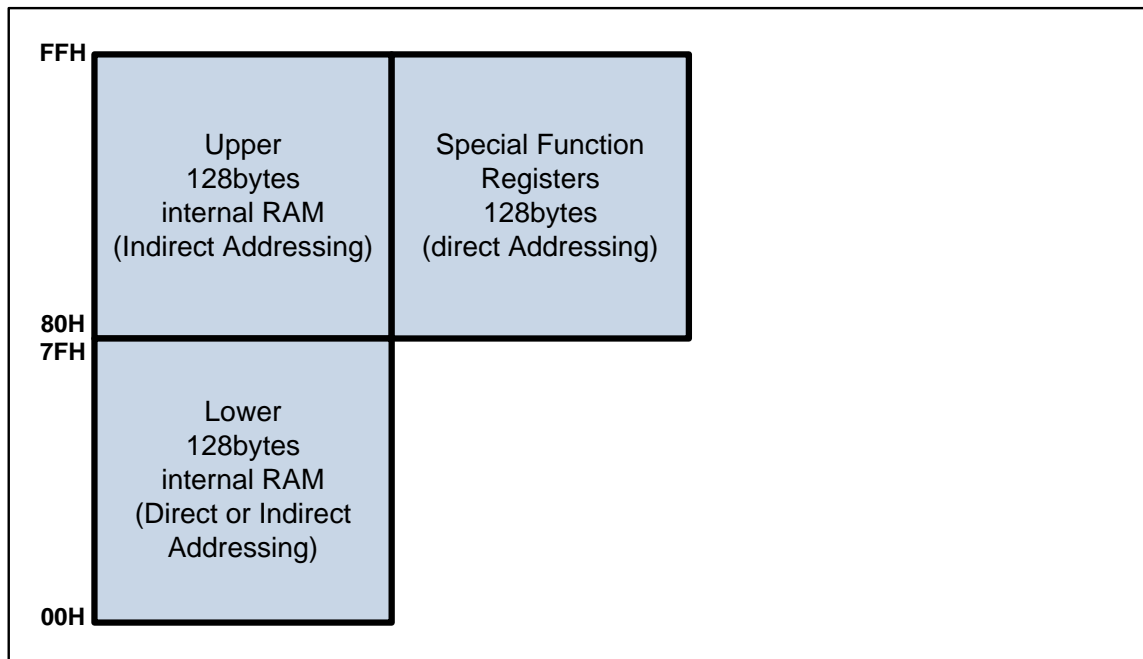


Figure 8-2 Data Memory map

The internal memory space is divided into three blocks, which are generally referred to as the lower 128, upper 128, and SFR space.

Internal Data memory addresses are always one byte wide, which implies an address space of only 256bytes. However, the addressing modes for internal RAM can in fact accommodate 384bytes, using a simple trick. Direct addresses higher than 7FH access one memory space and indirect addresses higher than 7FH access a different memory space. Thus Figure 8-2 shows the upper 128 and SFR space occupying the same block of addresses, 80H through FFH, although they are physically separate entities.

The lower 128bytes of RAM are present in all 8051 devices as mapped in Figure 8-3. The lowest 32 bytes are grouped into 4 banks of 8 registers. Program instructions call out these registers as R0 through R7. Two bits in the Program Status Word select which register bank is in use. This allows more efficient use of code space, since register instructions are shorter than instructions that use direct addressing.

The next 16bytes above the register banks form a block are bit-addressable memory space. The 8051 instruction set includes a wide selection of single-bit instructions, and the 128bits in this area can be directly addressed by these instructions. The bit addresses in this area are 00H through 7FH.

All of the bytes in the lower 128 can be accessed by either direct or indirect addressing. These spaces are used for user RAM and stack pointer. The upper 128bytes RAM can only be accessed by indirect addressing.

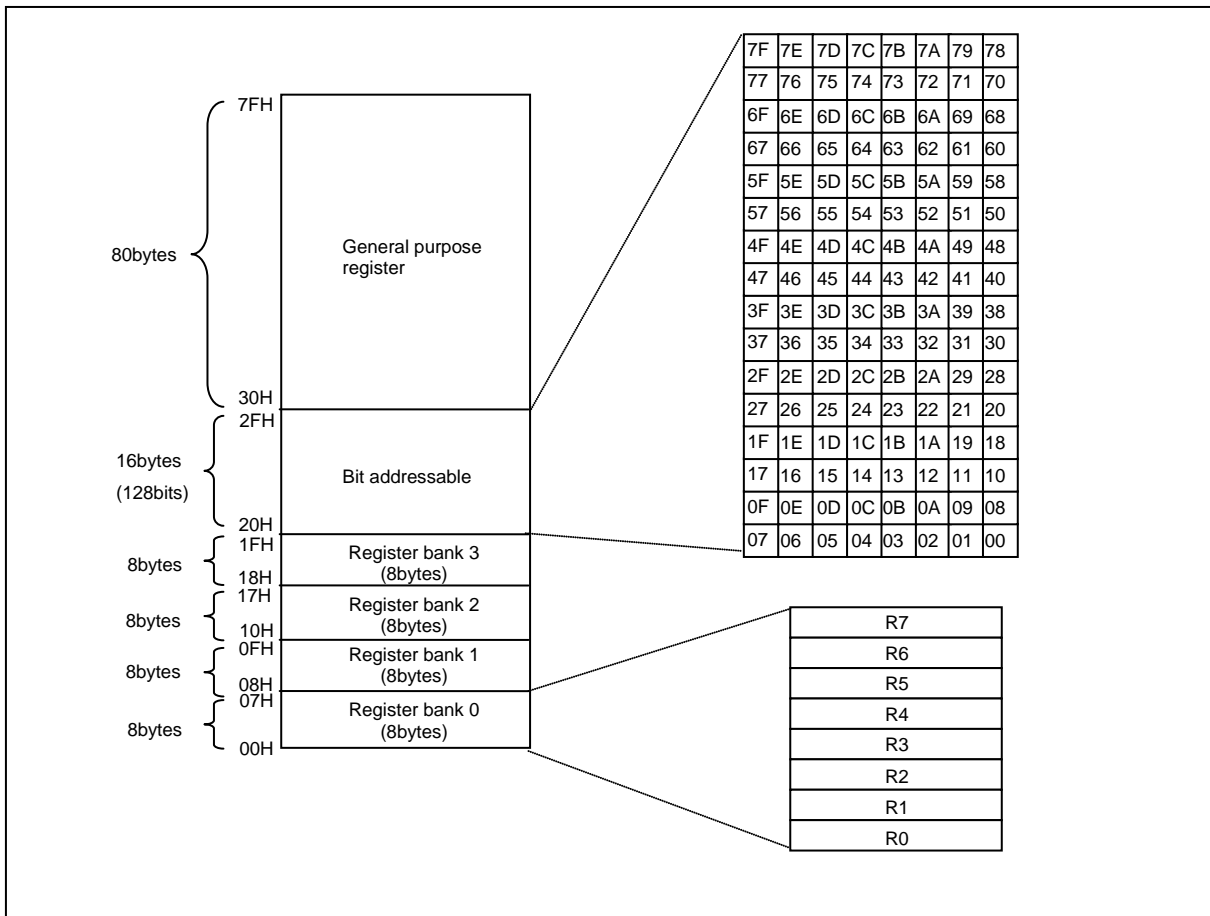


Figure 8-3 Low 128bytes RAM

## 8.3 SFR Map

### 8.3.1 SFR Map Summary


Table 8-1 SFR Map Summary

	0H/8H	1H/9H	2H/AH	3H/BH	4H/CH	5H/DH	6H/EH	7H/FH
<b>F8H</b>	-	-	-	-	-	-	-	-
<b>F0H</b>	B	-	-	-	-	-	-	-
<b>E8H</b>	-	-	-	-	-	-	-	-
<b>E0H</b>	ACC	P2PU	P0DB	P1DB	P2DB	-	-	-
<b>D8H</b>	-	P1PU	PSR0	-	PSR2	PSR3	-	-
<b>D0H</b>	PSW	P0PU	SPICR	SPIDR	SPISR	TMISR	-	-
<b>C8H</b>	-	-	-	-	-	-	-	-
<b>C0H</b>	-	P2OD	T2CR	T2CR1	PWM2DRL CDR2L / T2L	PWM2DRH CDR2H / T2H	PWM2PRL T2DRL	PWM2PRH T2DRH
<b>B8H</b>	-	P1OD	T1CR	T1CR1	PWM1DRL CDR1L / T1L	PWM1DRH CDR1H / T1H	PWM1PRL T1DRL	PWM1PRH T1DRH
<b>B0H</b>	-	P0OD	T0CR	T0CR1	PWM0DRL CDR0L / T0L	PWM0DRH CDR0H / T0H	PWM0PRL T0DRL	PWM0PRH T0DRH
<b>A8H</b>	IE	IE1	IE2	-	-	-	-	-
<b>A0H</b>	-	-	EO	EIENAB	EIFLAG	EIEDGE	EIPOLA	EIBOTH
<b>98H</b>	P3	P2IO	IP1	IP1H	IP2	IP2H	-	PCI
<b>90H</b>	P2	P1IO	IP	IPH	-	ADCM	ADCM1 /ADCRL	ADCRH
<b>88H</b>	P1	P0IO	SCCR	BCCR	BITR	WDTMR	WDTR /WDTCR	BODR
<b>80H</b>	P0	SP	DPL	DPH	DPL1	DPH1	RSFR	PCON




### 8.3.2 Compiler Compatible SFR


#### ACC (Accumulator) : E0H

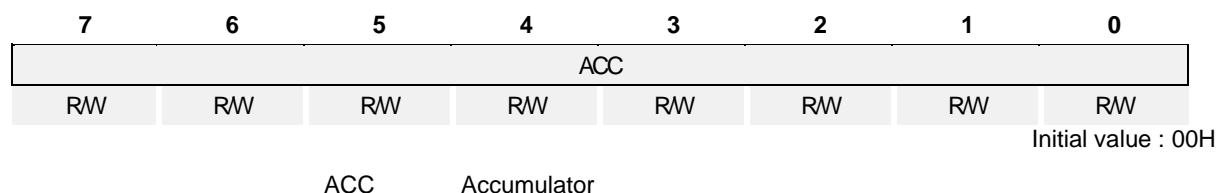


#### B (B Register) : F0H

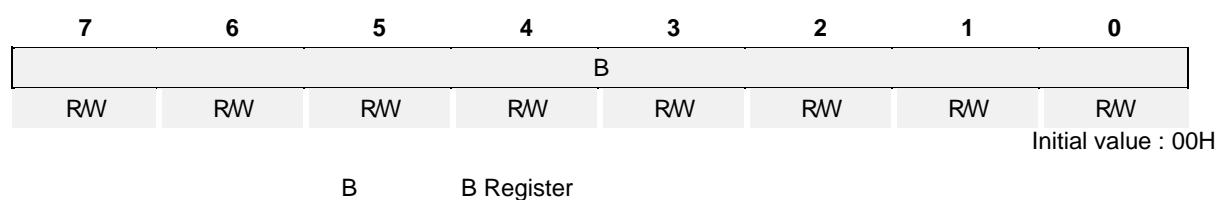


#### SP (Stack Pointer) : 81H

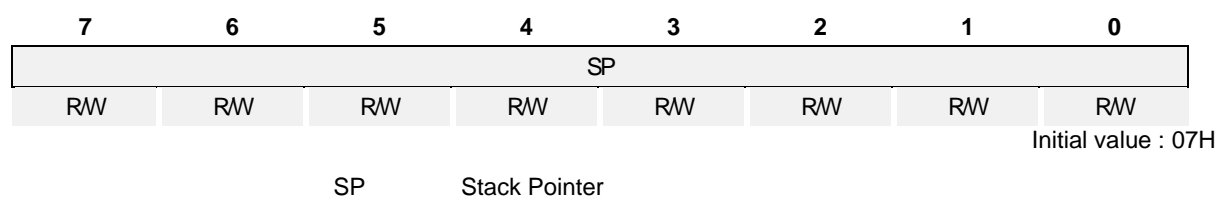

#### DPL (Data Pointer Low Byte) : 82H

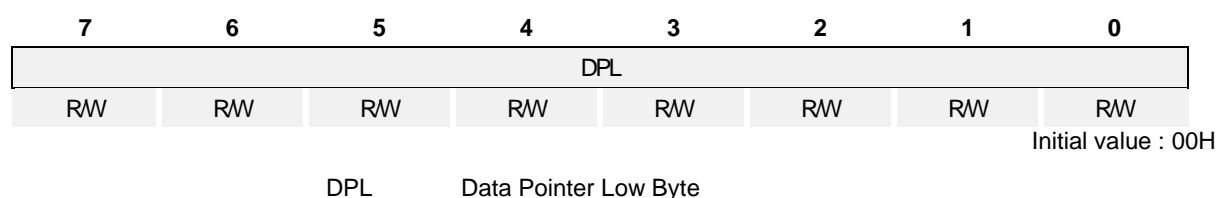

#### DPH (Data Pointer High Byte) : 83H

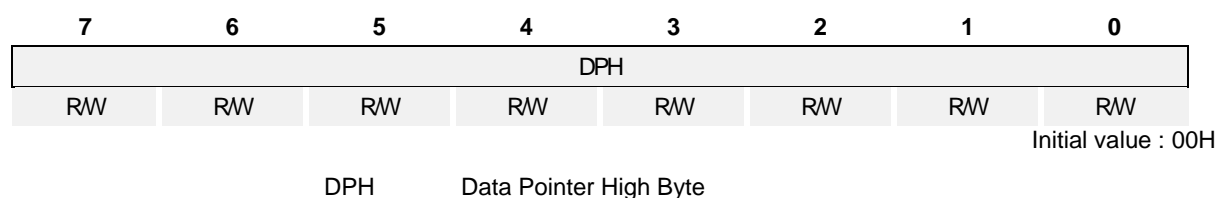

**DPL1 (Data Pointer 1 Low Byte) : 84H**

7	6	5	4	3	2	1	0
DPL1							
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

DPL1      Data Pointer1 Low Byte

**DPH1 (Data Pointer 1 High Byte) : 85H**

7	6	5	4	3	2	1	0
DPH1							
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

DPH1      Data Pointer1 High Byte

**PSW (Program Status Word) : D0H**

7	6	5	4	3	2	1	0
CY	AC	F0	RS1	RS0	OV	F1	P
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

CY	Carry Flag
AC	Auxiliary Carry Flag
F0	General Purpose User-Definable Flag
RS1	Register Bank Select bit 1
RS0	Register Bank Select bit 0
OV	Overflow Flag
F1	User-Definable Flag
P	Parity Flag. Set/cleared by hardware each instruction cycle to indicate an odd/even number of '1' bits in the accumulator

**EO (Extended Operation Register) : A2H**

7	6	5	4	3	2	1	0
-	-	-	TRAP_EN	-	-	-	DPSEL0
R	R	R	RW	R	R	R	RW

Initial value : 00H

TRAP_EN	Select the instruction
0	Select MOVC @(DPTR++), A
1	Select Software TRAP instruction
DPSEL	Select Banked Data Point Register
0	DPTR = {DPH, DPL}
1	DPTR1 = {DPH1, DPL1}

## 9. I/O Ports

### 9.1 I/O Ports

The MC97F1204S has 18 I/O ports (P0 ~ P2). Each port can be easily configured by software as I/O pin, internal pull up and open drain pin to meet various system configurations and design requirements.

**Table 9-1 Register Map**

Name	Address	Dir	Default	Description
P0	80H	R/W	00H	P0 Data Register
P0IO	89H	R/W	00H	P0 Direction Register
P0PU	D1H	R/W	00H	P0 Pull-up Resistor Selection Register
P0OD	B1H	R/W	04H	P0 Open-drain Selection Register
P0DB	E2H	R/W	00H	P0 Debounce Enable Register
P1	88H	R/W	00H	P1 Data Register
P1IO	91H	R/W	00H	P1 Direction Register
P1PU	D9H	R/W	00H	P1 Pull-up Resistor Selection Register
P1OD	B9H	R/W	00H	P1 Open-drain Selection Register
P1DB	E3H	R/W	00H	P1 Debounce Enable Register
P2	90H	R/W	00H	P2 Data Register
P2IO	99H	R/W	00H	P2 Direction Register
P2PU	E1H	R/W	00H	P2 Pull-up Resistor Selection Register
P2OD	C1H	R/W	00H	P2 Open-drain Selection Register
P2DB	E4H	R/W	00H	P2 Debounce Enable Register
PSR0	DAH	R/W	00H	Port Debounce selection register
PSR2	DCH	R/W	00H	Digital input port selection register
PSR3	DDH	R/W	00H	Digital input port selection register

#### 9.1.1 Data Register (Px)

Data Register is a bidirectional I/O port. If ports are configured as output ports, data can be written to the corresponding bit of the Px. If ports are configured as input ports, the data can be read from the corresponding bit of the Port Px.

#### 9.1.2 Direction Register (PxIO)

Each I/O pin can independently used as an input or an output through the PxIO register. Bits cleared in this read/write register will select the corresponding pin in Px to become an input, setting a bit sets the pin to output. All bits are cleared by a system reset.

### 9.1.3 Pull-up Resistor Selection Register (PxPU)

The on-chip pull-up resistor can be connected to them in 1-bit units with a pull-up resistor selection register (PxPU). The pull-up register selection controls the pull-up resistor enable/disable of each port. When the corresponding bit is 1, the pull-up resistor of the pin is enabled. When 0, the pull-up resistor is disabled. All bits are cleared by a system reset.

### 9.1.4 Open-drain Selection Register (PxOD)

The open-drain selection register controls the open-drain enable/disable of each port. Ports become push-pull by a system reset. You should connect an internal resistor or an external resistor in open-drain output mode.

### 9.1.5 De-bounce Enable Register (PxDB)

P0 ~ P3 support de-bounce function. De-bounce time of each port has 1/2/4/8us

### 9.1.6 Port Selection Register (PSR0, PSR2, PSR3)

PSR0 :Port debounce selection register can select one of four debounce length of all port.

PSR2, PSR3 : Digital Input port selection register can select use of port's Digital input or not.

## 9.2 PORT P0

### P0 (P0 Data Register) : 80H

7	6	5	4	3	2	1	0
P07	P06	P05	P04	P03	P02	P01	P00
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

P0[7:0] I/O Data

### P0IO (P0 Direction Register) 89H

7	6	5	4	3	2	1	0
P07IO	P06IO	P05IO	P04IO	P03IO	P02IO	P01IO	P00IO
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

P0IO[7:0] P0 data I/O direction.

0 Input

1 Output

**P0PU(P0 Pull-up Resistor Selection Register) :D1H**

7	6	5	4	3	2	1	0
P07PU	P06PU	P05PU	P04PU	P03PU	P02PU	P01PU	P00PU
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

P0PU[7:0] Configure pull-up resistor of P0 port  
 0 Disable  
 1 Enable

**P0OD (P0 Open-drain Selection Register) :B1H**

7	6	5	4	3	2	1	0
P07OD	P06OD	P05OD	P04OD	P03OD	1	P01OD	P00OD
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 04H

P0OD[7:0] Configure open-drain of P0 port  
 0 Disable  
 1 Enable

**P0DB(P0Debounce Enable Register) :E2H**

7	6	5	4	3	2	1	0
P07DB	P06DB	P05DB	P04DB	P03DB	P02DB	P01DB	P00DB
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

P0DB[7:0] Configure debounce of P0 port  
 0 Disable  
 1 Enable

**9.3 PORT P1**
**P1 (P1 Data Register) : 88H**

7	6	5	4	3	2	1	0
P17	P16	P15	P14	P13	P12	P11	P10
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

P1[7:0] I/O Data

**P1IO (P1 Direction Register) 91H**

7	6	5	4	3	2	1	0
P17IO	P16IO	P15IO	P14IO	P13IO	P12IO	P11IO	P10IO
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

P1IO[7:0] P1 data I/O direction.  
 0 Input  
 1 Output

**P1PU(P1 Pull-up Resistor Selection Register) :D9H**

7	6	5	4	3	2	1	0
P17PU	P16PU	P15PU	P14PU	P13PU	P12PU	P11PU	P10PU
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

P1PU[7:0] Configure pull-up resistor of P1 port  
 0 Disable  
 1 Enable

**P1OD (P1 Open-drain Selection Register) :B9H**

7	6	5	4	3	2	1	0
P17OD	P16OD	P15OD	P14OD	P13OD	P12OD	P11OD	P10OD
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

P1OD[7:0] Configure open-drain of P1 port  
 0 Disable  
 1 Enable

**P1DB(P1Debounce Enable Register) :E3H**

7	6	5	4	3	2	1	0
P17DB	P16DB	P15DB	P14DB	P13DB	P12DB	P11DB	P10DB
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

P1DB[7:0] Configure debounce of P1 port  
 0 Disable  
 1 Enable

## 9.4 PORT P2

### P2 (P2 Data Register) :90H

7	6	5	4	3	2	1	0
-	-	-	-	-	-	P21	P20
-	-	-	-	-	-	RW	RW

Initial value :0H

P2[1:0] I/O Data

### P2IO (P2 Direction Register) : 99H

7	6	5	4	3	2	1	0
-	-	-	-	-	-	P21IO	P20IO
-	-	-	-	-	-	RW	RW

Initial value :0H

P2IO[1:0] P2 data I/O direction.  
 0 Input  
 1 Output

### P2PU(P2 Pull-up Resistor Selection Register) :E1H

7	6	5	4	3	2	1	0
-	-	-	-	-	-	P21PU	P20PU
-	-	-	-	-	-	RW	RW

Initial value :0H

P2PU[1:0] Configure pull-up resistor of P2 port  
 0 Disable  
 1 Enable

### P2OD (P2 Open-drain Selection Register) :C1H

7	6	5	4	3	2	1	0
-	-	-	-	-	-	P21OD	P20OD
-	-	-	-	-	-	RW	RW

Initial value :0H

P2OD[1:0] Configure open-drain of P2 port  
 0 Disable  
 1 Enable

**P2DB (P2Debounce Enable Register) :E4H**

7	6	5	4	3	2	1	0
-	-	-	-	-	-	P21DB	P20DB
-	-	-	-	-	-	RW	RW

Initial value :0H

P2DB[1:0]    Configure debounce of P2 port  
 0    Disable  
 1    Enable

**9.5 PORT SELECT REGISTER PSR0, 2, 3****PSR0 (Port Debounce selection register) :DAH**

7	6	5	4	3	2	1	0
-	-	-	-	PSR03	PSR02	PSR01	PSR00
-	-	-	-	R/W	R/W	R/W	R/W

Initial value :0H

PSR0[3:2]    External Reset Debounce selection register  
 0    0    8us  
 0    1    16us  
 1    0    32us  
 1    1    64us

PSR0[1:0]    Port Debounce selection register  
 0    0    1us  
 0    1    2us  
 1    0    4us  
 1    1    8us



**PSR2 (Digital input port selection register) :DCH**

7	6	5	4	3	2	1	0
PSR27	PSR26	PSR25	PSR24	PSR23	PSR22	PSR21	PSR20
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

It is recommended to set this register when using port as Analog input such as ADC input.

PSR20	P00 Digital Input selection register
0	P00 digital input(default)
1	AIN0 input
PSR21	P01 Digital Input selection register
0	P01 digital input(default)
1	AIN1 input
PSR22	P03 Digital Input selection register
0	P03 digital input(default)
1	AIN2 input
PSR23	P04 Digital Input selection register
0	P04 digital input(default)
1	AIN3 input
PSR24	P05 Digital Input selection register
0	P05 digital input(default)
1	AIN4 input
PSR25	P06 Digital Input selection register
0	P06 digital input(default)
1	AIN5 input
PSR26	P07 Digital Input selection register
0	P07 digital input(default)
1	AIN6 input
PSR27	P10 Digital Input selection register
0	P10 digital input (default)
1	AIN7 input

**PSR3 (Digital input port selection register) :DDH**

7	6	5	4	3	2	1	0
-	PSR36	PSR35	PSR34	PSR33	PSR32	PSR31	PSR30
-	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

It is recommended to set this register when using port as Analog input such as ADC input.

PSR30	P13 Digital Input selection register
0	P13 digital input(default)
1	AIN8 input
PSR31	P14 Digital Input selection register
0	P14 digital input(default)
1	AIN9 input
PSR32	P15 Digital Input selection register
0	P15 digital input(default)
1	AIN10 input
PSR33	P16 Digital Input selection register
0	P16 digital input(default)
1	AIN11 input
PSR34	P17 Digital Input selection register
0	P17 digital input(default)
1	AIN12 input
PSR35	P20 Digital Input selection register
0	P20 digital input(default)
1	AIN13 input
PSR36	P21 Digital Input selection register
0	P21 digital input(default)
1	AIN14 input

## 10. Interrupt Controller

### 10.1 Overview

The MC97F1204S supports up to 12 interrupt sources. The interrupts have separate enable register bits associated with them, allowing software control. They can also have four levels of priority assigned to them. The interrupt controller has following features:

- receive the request from 11 interrupt source
- 4 priority levels
- Multi Interrupt possibility
- If the requests of different priority are received simultaneously, the request of higher priority is serviced first and then lower priority is serviced.
- Each interrupt source can be controlled by EA bit and each IEx bit
- Interrupt latency: 5-8 machine cycles in single interrupt system

The maskable interrupts are enabled through three pair of interrupt enable registers (IE, IE1, IE2). Bits of IE, IE1, IE2 register each individually enable/disable a particular interrupt source. Overall control is provided by EA (bit 7 of IE). When EA is set to '0', all interrupts are disabled; when EA is set to '1', interrupts are individually enabled or disabled through the other bits of the interrupt enable registers. The MC97F1204S supports a 4-level priority scheme. Each maskable interrupt is individually assigned to one of four priority levels by writing to IPx or IPHx.

Figure 10-1 shows the Interrupt Priority Level. Priority can be set by writing to two bits of IPx and IPxH register. Each bit of IPx, IPxH corresponds to each interrupt decides one of 4 priority levels of each interrupt. High level interrupt priority always has higher priority than low level interrupt. And Lower number interrupt has higher priority than higher number interrupt in the same level.

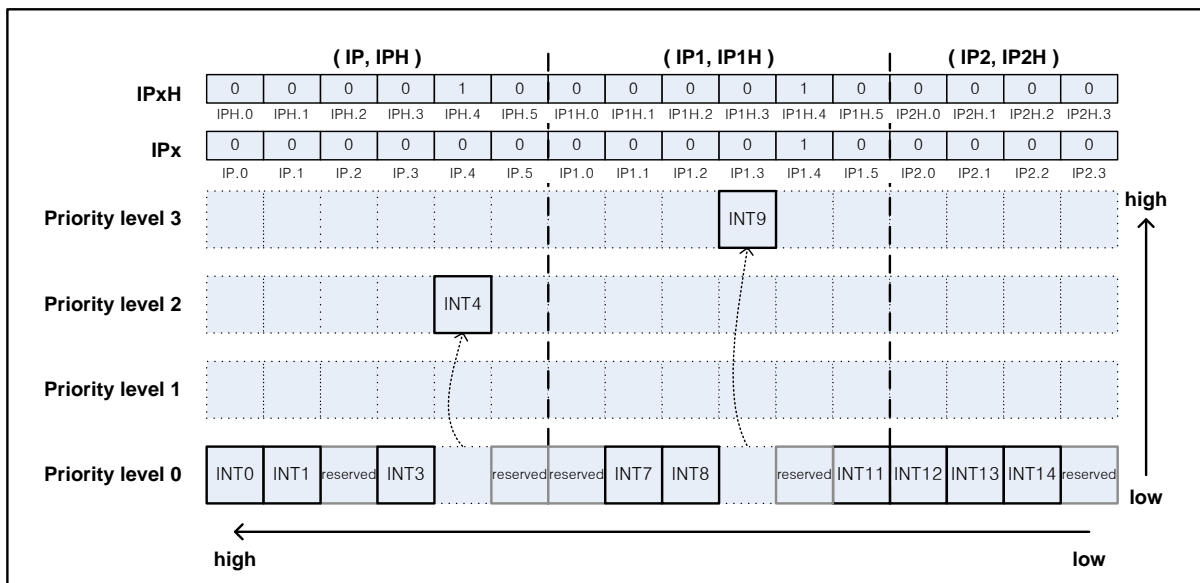


Figure 10-1 Interrupt Priority Level

## 10.2 External Interrupt

The external interrupt on INT0, INT1 pins receive various interrupt request depending on the edge selection register EIEDGE (External Interrupt Edge register) and EIPOLA (External Interrupt Polarity register) as shown in Figure 10-2. Also each external interrupt source has control setting bits. The EIFLAG (External interrupt flag register) register provides the status of external interrupts.

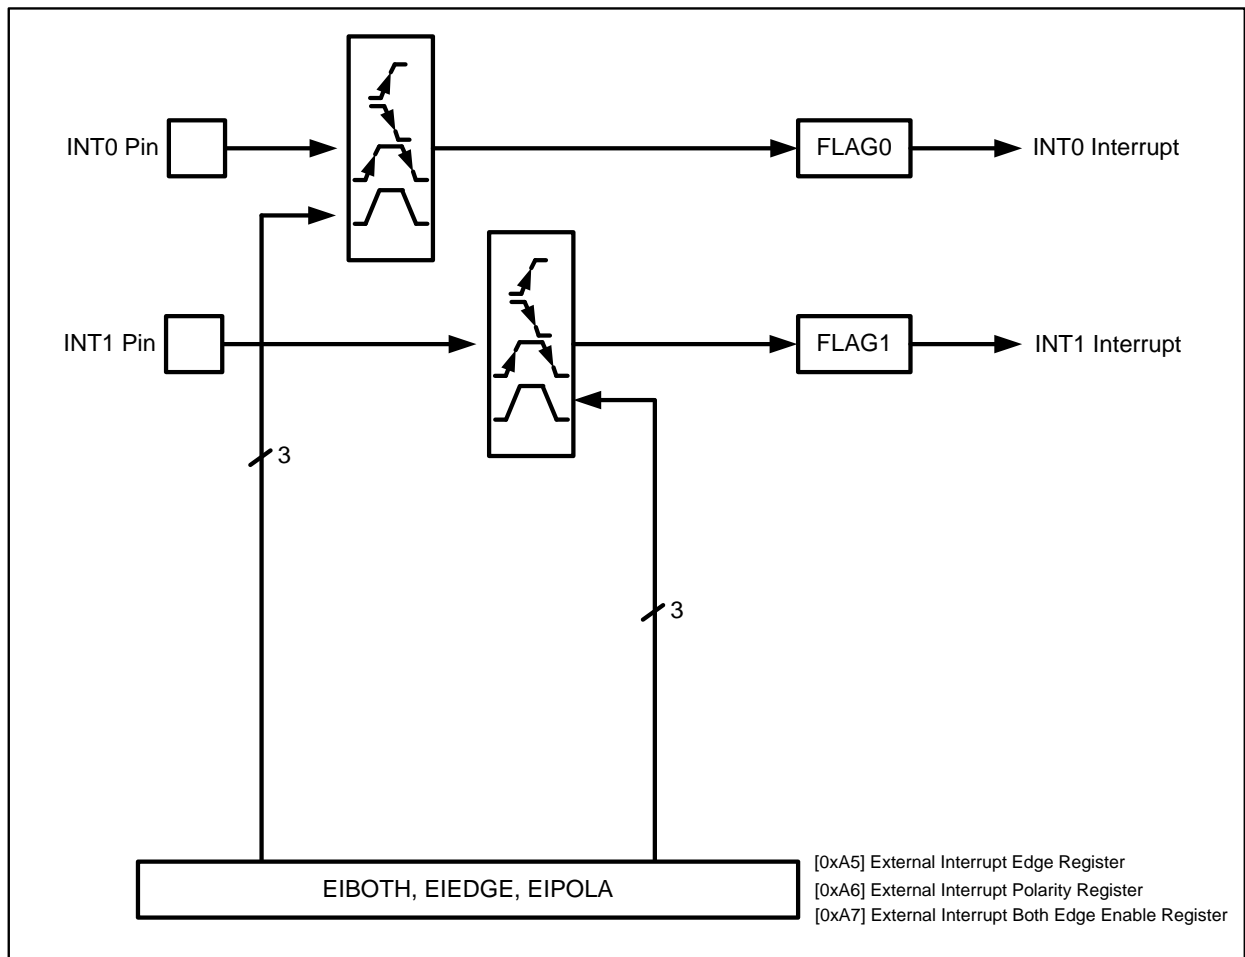


Figure 10-2 External Interrupt Description

10.3 Block Diagram

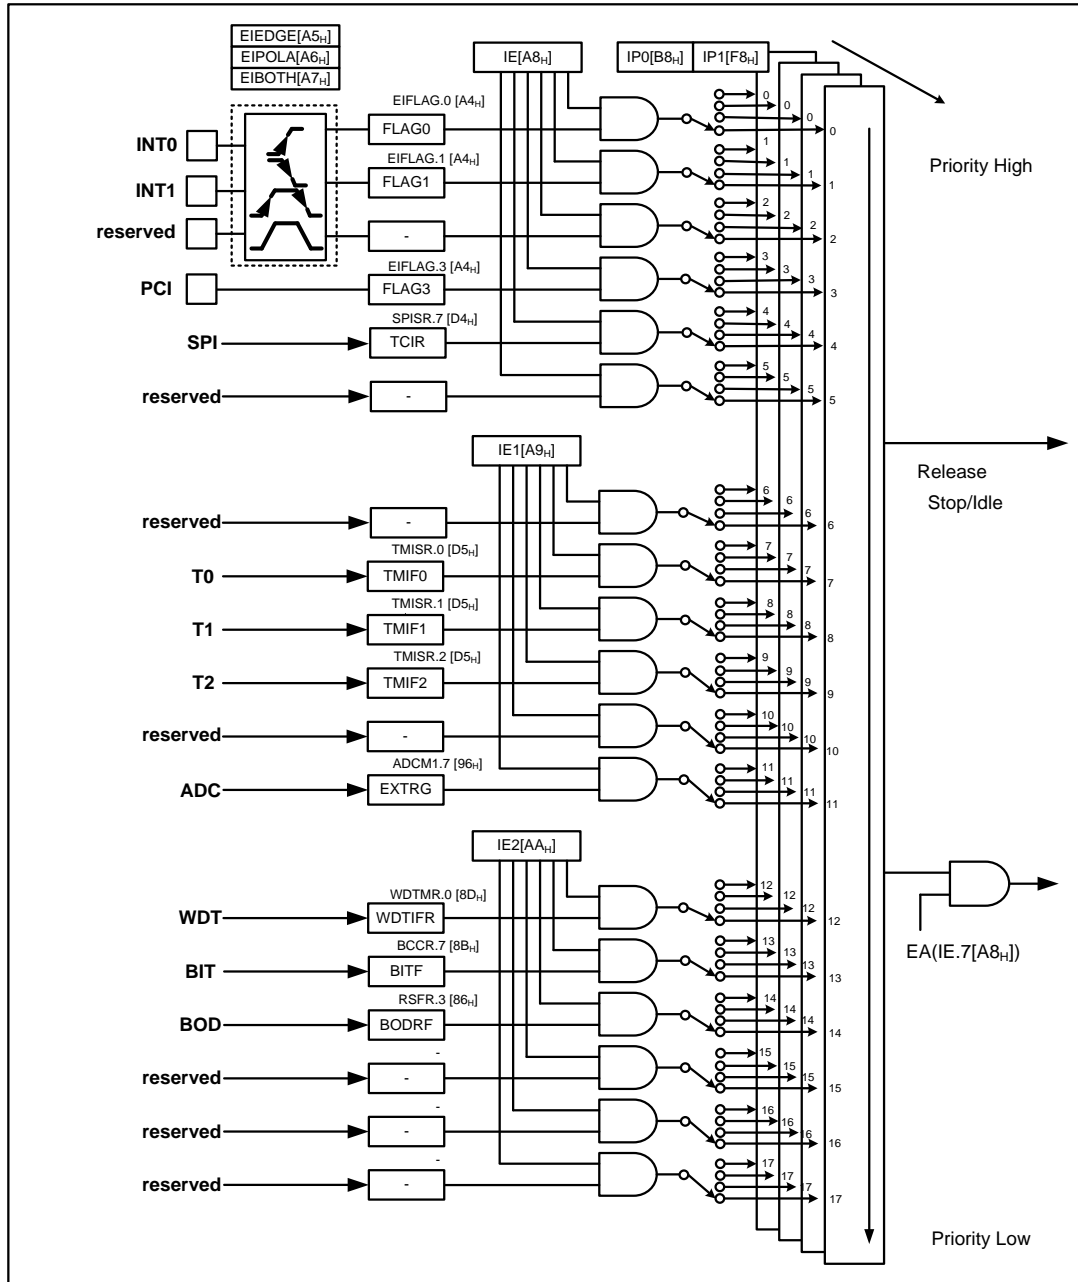


Figure 10-3 Block Diagram of Interrupt

## 10.4 Interrupt Vector Table

The interrupt controller supports 12 interrupt sources as shown in the Table 10-1 below. When interrupt becomes service, long call instruction (LCALL) is executed in the vector address. Interrupt request 12 has a decided priority order.

**Table 10-1 Interrupt Vector Address Table**

Interrupt Source	Symbol	Interrupt Enable Bit	Priority	Mask	Vector Address
Hardware Reset	RESETB	0	0	Non-Maskable	0000H
External Interrupt 0	INT0	IE.0	1	Maskable	0003H
External Interrupt 1	INT1	IE.1	2	Maskable	000BH
Reserved	INT2	IE.2	3	Maskable	0013H
PCI	INT3	IE.3	4	Maskable	001BH
SPI	INT4	IE.4	5	Maskable	0023H
Reserved	INT5	IE.5	6	Maskable	002BH
Reserved	INT6	IE1.0	7	Maskable	0033H
T0	INT7	IE1.1	8	Maskable	003BH
T1	INT8	IE1.2	9	Maskable	0043H
T2	INT9	IE1.3	10	Maskable	004BH
Reserved	INT10	IE1.4	11	Maskable	0053H
ADC	INT11	IE1.5	12	Maskable	005BH
WDT	INT12	IE2.0	13	Maskable	0063H
BIT	INT13	IE2.1	14	Maskable	006BH
BOD	INT14	IE2.2	15	Maskable	0073H
Reserved	INT15	IE2.3	16	Maskable	007BH
Reserved	INT16	IE2.4	17	Maskable	0083H
Reserved	INT17	IE2.5	18	Maskable	008BH

For mask-able interrupt execution, first EA bit must set '1' and specific interrupt source must set '1' by writing a '1' to associated bit in the IEx. If interrupt request is received, specific interrupt request flag set '1'. And it remains '1' until CPU accepts interrupt. After that, interrupt request flag will be cleared automatically.

### 10.5 Interrupt Sequence

An interrupt request is held until the interrupt is accepted or the interrupt latch is cleared to '0' by a reset or an instruction. Interrupt acceptance always generates at last cycle of the instruction. So instead of fetching the current instruction, CPU executes internally LCALL instruction and saves the PC stack. For the interrupt service routine, the interrupt controller gives the address of LJMP instruction to CPU. After finishing the current instruction, at the next instruction to go interrupt service routine needs 5~8 machine cycle and the interrupt service task is terminated upon execution of an interrupt return instruction [RETI]. After generating interrupt, to go to interrupt service routine, the following process is progressed


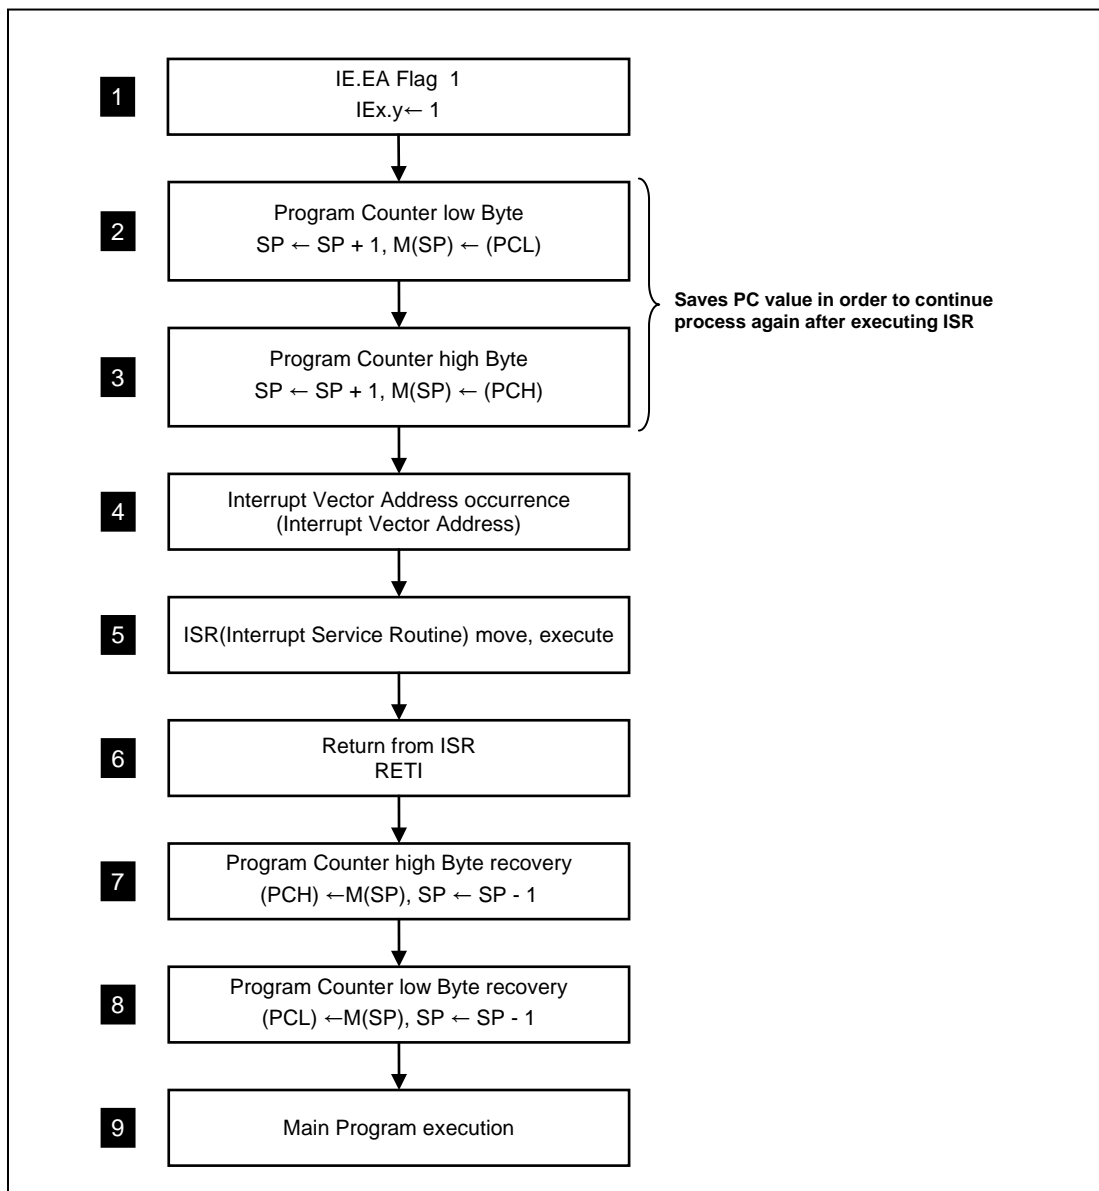


Figure 10-4 Interrupt Execution Sequence

## 10.6 Effective Timing after Controlling Interrupt bit



**Figure 10-5 Interrupt Enable Register effective Timing**

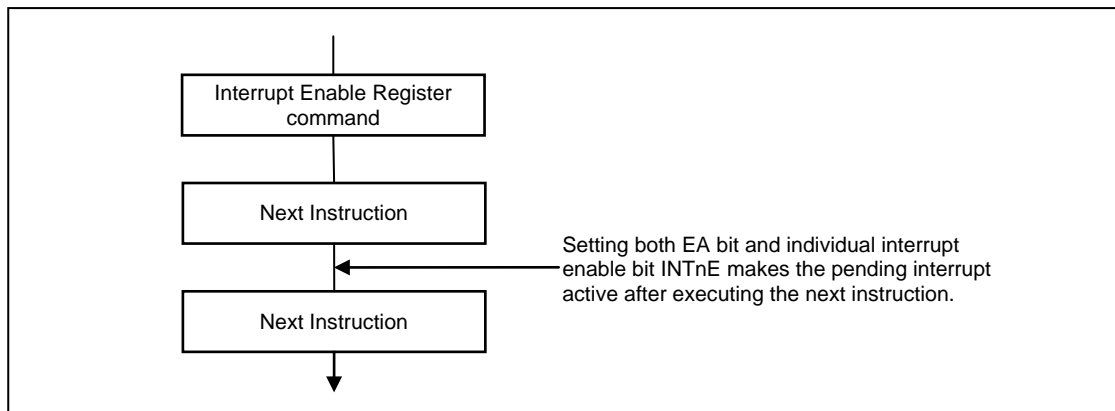

### 10.7 Multi Interrupt

If two requests of different priority are received simultaneously, the request of higher priority is serviced first and then lower priority is serviced. If requests of the interrupt are received at the same time simultaneously, an interrupt polling sequence determines by hardware which request is serviced.

However, multiple processing through software for special features is possible.

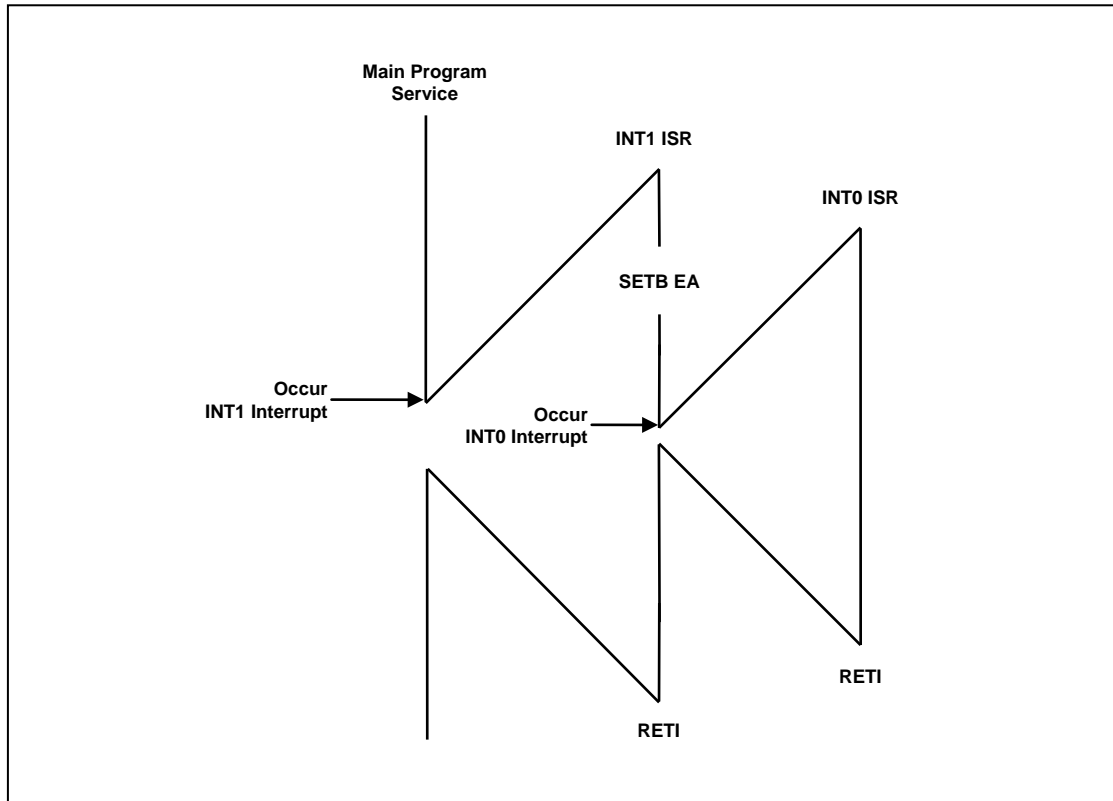


Figure 10-6 Execution of Multi Interrupt

Following example is shown to service INT0 routine during INT1 routine in Figure 10-6. In this example, INT0 interrupt level is higher than INT1 interrupt level. If some interrupt level is not higher than INT1 level, it can't service its interrupt service routine while INT1 ISR is serviced. INT0 ISR is serviced after INT1 ISR is finished.

Example) Software Multi Interrupt:

```

INT1:  MOV    IE, #03H    ; Enable INT0, INT1
        MOV    IP, #01H
        MOV    IPH, #00H ; interrupt level of INT0 is 1 (INT1 is in level 0)
        SETB   EA        ; Enable global interrupt (necessary for multi interrupt)
        :
```

### 10.8 Interrupt Enable Accept Timing

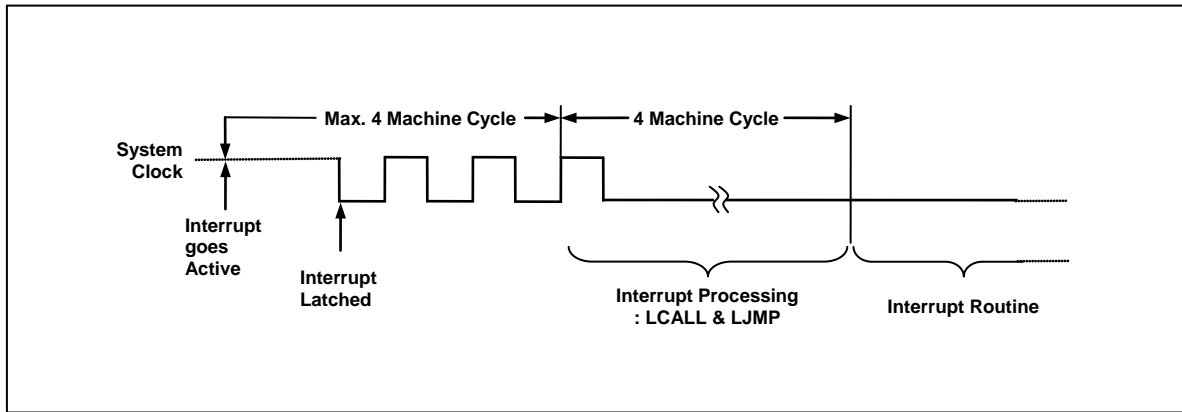


Figure 10-7 Interrupt Response Timing Diagram

### 10.9 Interrupt Service Routine Address

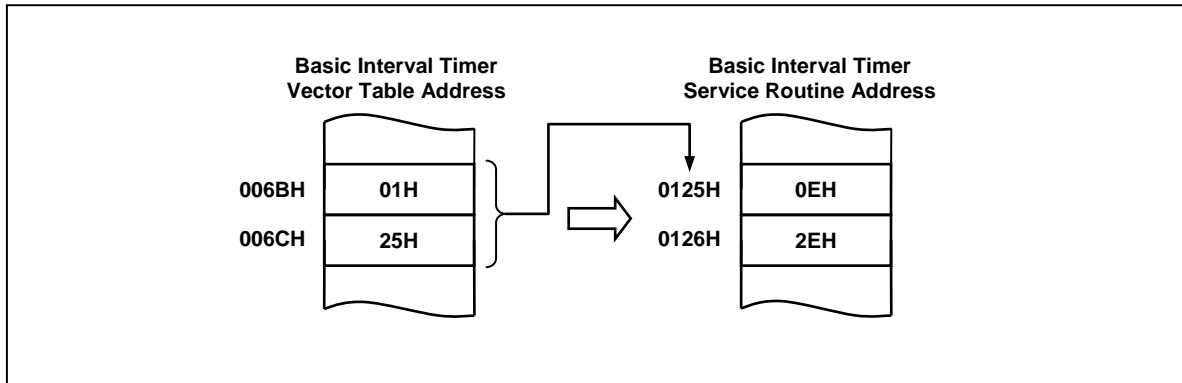


Figure 10-8 Correspondence between vector table address and the entry address of ISR

### 10.10 Saving/Restore General-Purpose Registers

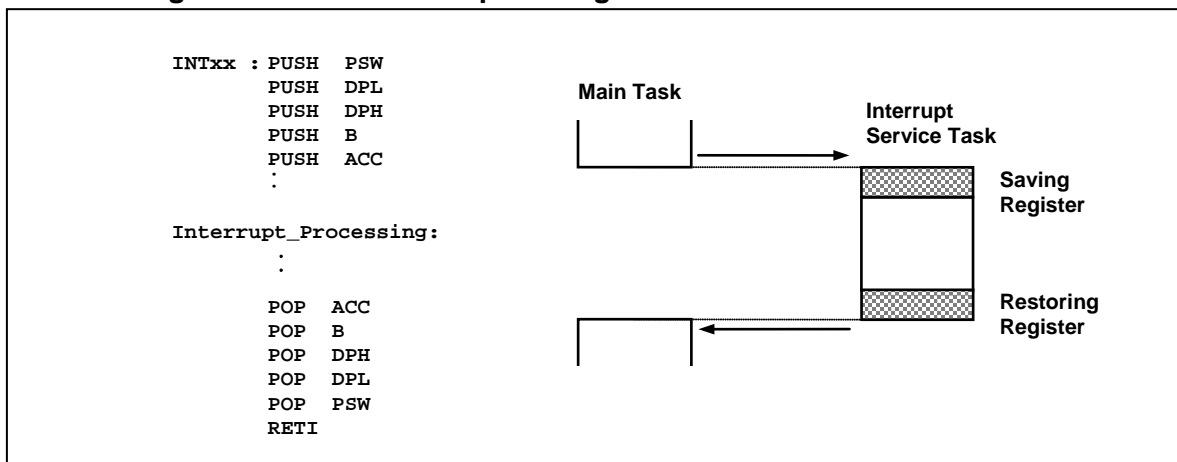


Figure 10-9 Saving/Restore Process Diagram & Sample Source

### 10.11 Interrupt Timing

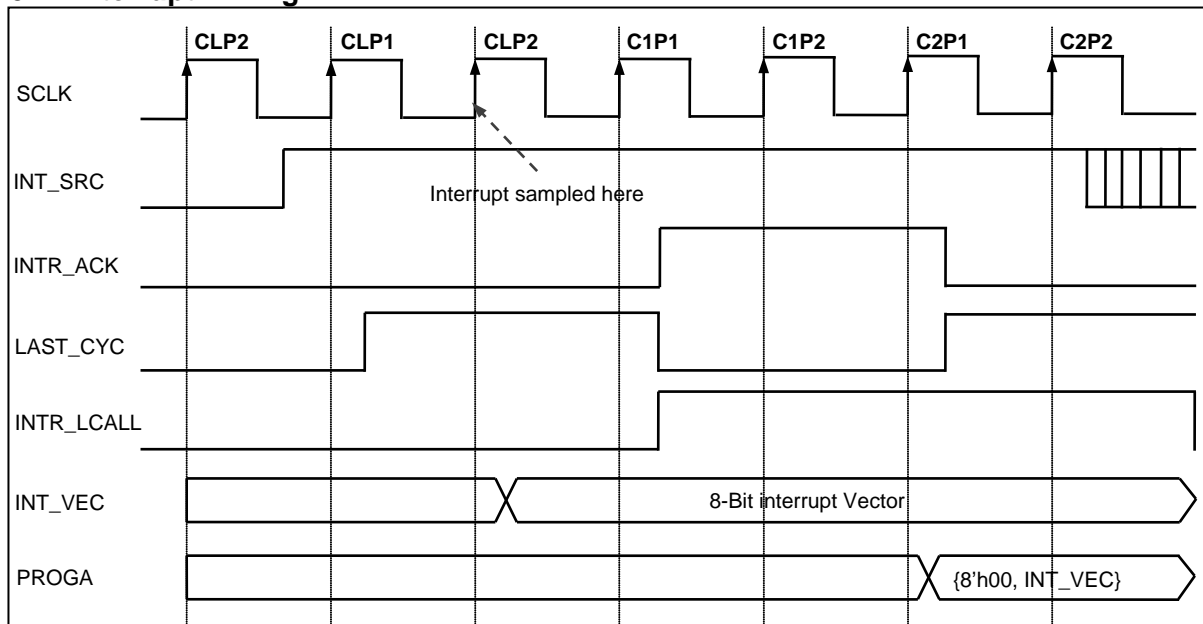


Figure 10-10 Timing chart of Interrupt Acceptance and Interrupt Return Instruction

Interrupt source sampled at last cycle of the command. When sampling interrupt source, it is decided to low 8-bit of interrupt vector. M8051W core makes interrupt acknowledge at first cycle of command, executes long call to jump interrupt routine as INT\_VEC.

Note) command cycle C?P?: L=Last cycle, 1=1<sup>st</sup> cycle or 1<sup>st</sup> phase, 2=2<sup>nd</sup> cycle or 2<sup>nd</sup> phase

### 10.12 Interrupt Register Description

Table 10-2 Register Map

Name	Address	Dir	Default	Description
IE	A8H	R/W	00H	Interrupt Enable Register
IE1	A9H	R/W	00H	Interrupt Enable Register 1
IE2	AAH	R/W	00H	Interrupt Enable Register 2
IP	92H	R/W	00H	Interrupt Priority Register
IPH	93H	R/W	00H	Interrupt Priority Register High
IP1	9AH	R/W	00H	Interrupt Priority Register 1
IP1H	9BH	R/W	00H	Interrupt Priority Register 1 High
IP2	9CH	R/W	00H	Interrupt Priority Register 2
IP2H	9DH	R/W	00H	Interrupt Priority Register 2 High
EIENAB	A3H	R/W	00H	External Interrupt Enable Register
EIFLAG	A4H	R/W	00H	External Interrupt Flag Register
EIEDGE	A5H	R/W	00H	External Interrupt Edge Register
EIPOLA	A6H	R/W	00H	External Interrupt Priority Register
EIBOTH	A7H	R/W	00H	External Interrupt Both Edge Enable Register
PCI	9FH	R/W	00H	Pin Change Interrupt Enable Register

### 10.12.1 Register description for Interrupt

#### IE (Interrupt Enable Register) : A8H

7	6	5	4	3	2	1	0
EA	-	-	INT4E	INT3E	-	INT1E	INT0E
RW	-	-	RW	RW	-	RW	RW

Initial value : 00H

EA	Enable or disable all interrupt bits
0	All Interrupt disable
1	All Interrupt enable
INT4E	Enable or disable SPI Interrupt
0	SPI interrupt Disable
1	SPI interrupt Enable
INT3E	Enable or disable Pin Change Interrupt
0	Pin Change Interrupt Disable
1	Pin Change Interrupt Enable
INT1E	Enable or disable External Interrupt 1
0	External interrupt 1 Disable
1	External interrupt 1 Enable
INT0E	Enable or disable External Interrupt 0
0	External interrupt 0 Disable
1	External interrupt 0 Enable

#### IE1 (Interrupt Enable Register 1) : A9H

7	6	5	4	3	2	1	0
-	-	INT11E	-	INT9E	INT8E	INT7E	-
-	-	RW	-	RW	RW	RW	-

Initial value : 00H

INT11E	Enable or disable ADC Interrupt
0	ADC interrupt Disable
1	ADC interrupt Enable
INT9E	Enable or disable Timer 2 Interrupt
0	Timer2 interrupt Disable
1	Timer2 interrupt Enable
INT8E	Enable or disable Timer 1 Interrupt
0	Timer1 interrupt Disable
1	Timer1 interrupt Enable
INT7E	Enable or disable Timer 0 Interrupt
0	Timer0 interrupt Disable
1	Timer0 interrupt Enable

**IE2 (Interrupt Enable Register 2) : AAH**

7	6	5	4	3	2	1	0
-	-	-	-	-	INT14E	INT13E	INT12E
-	-	-	-	-	RW	RW	RW

Initial value : 00H

INT14E    Enable or disable BOD Interrupt  
           0    BOD interrupt Disable  
           1    BOD interrupt Enable

INT13E    Enable or disable BIT Interrupt  
           0    BIT interrupt Disable  
           1    BIT interrupt Enable

INT12E    Enable or disable WDT Interrupt  
           0    WDT interrupt Disable  
           1    WDT interrupt Enable

**IP (Interrupt Priority Register) :92H**

7	6	5	4	3	2	1	0
-	-	IP5	IP4	IP3	IP2	IP1	IP0
-	-	RW	RW	RW	RW	RW	RW

Initial value : 00H

**IPH (Interrupt Priority Register High) :93H**

7	6	5	4	3	2	1	0
-	-	IPH5	IPH4	IPH3	IPH2	IPH1	IPH0
-	-	RW	RW	RW	RW	RW	RW

Initial value : 00H

IP[5:0],  
IPH[5:0]    Select Interrupt Priority.  
               Each IPH and IP corresponds to INT5~INT0.

IPH	IP	Description
0	0	level 0 (lowest)
0	1	level 1
1	0	level 2
1	1	level 3 (highest)

**IP1 (Interrupt Priority Register 1) :9AH**

7	6	5	4	3	2	1	0
-	-	IP15	IP14	IP13	IP12	IP11	IP10
-	-	RW	RW	RW	RW	RW	RW

Initial value : 00H

**IP1H (Interrupt Priority Register 1 High) :9BH**

7	6	5	4	3	2	1	0
-	-	IP1H5	IP1H4	IP1H3	IP1H2	IP1H1	IP1H0
-	-	RW	RW	RW	RW	RW	RW

Initial value : 00H

IP1[5:0],  
IP1H[5:0]      Select Interrupt Priority.  
Each IP1H and IP1 corresponds to INT11~INT6.

IP1H	IP1	Description
0	0	level 0 (lowest)
0	1	level 1
1	0	level 2
1	1	level 3 (highest)

**IP2 (Interrupt Priority Register 2) :9CH**

7	6	5	4	3	2	1	0
-	-	-	-	IP23	IP22	IP21	IP20
-	-	-	-	RW	RW	RW	RW

Initial value : 0H

**IP2H (Interrupt Priority Register 2 High) :9DH**

7	6	5	4	3	2	1	0
-	-	-	-	IP2H3	IP2H2	IP2H1	IP2H0
-	-	-	-	RW	RW	RW	RW

Initial value : 0H

IP2[3:0],  
IP2H[3:0]      Select Interrupt Priority.  
Each IP2H and IP2 corresponds to INT15~INT12.

IP2H	IP2	Description
0	0	level 0 (lowest)
0	1	level 1
1	0	level 2
1	1	level 3 (highest)

**EIFLAG (External Interrupt Flag Register) : A4H**

7	6	5	4	3	2	1	0
-	-	-	-	FLAG3	-	FLAG1	FLAG0
-	-	-	-	RW	-	RW	RW

Initial value :0H

If External Interrupt is occurred, the flag becomes '1'. The flag can be cleared by writing a '0' to bit. It is also cleared automatically after interrupt service routine is served.

FLAG[0]	When External Interrupt 0 is occurred this bit is set. 0 External Interrupt 0 is not occurred 1 External Interrupt 0 is occurred
FLAG[1]	When External Interrupt 1 is occurred this bit is set. 0 External Interrupt 1 is not occurred 1 External Interrupt 1 is occurred
FLAG[3]	When Pin Change Interrupt is occurred this bit is set. 0 Pin Change Interrupt is not occurred 1 Pin Change Interrupt is occurred

**EIEDGE (External Interrupt Edge Register) : A5H**

7	6	5	4	3	2	1	0
-	-	-	-	-	-	EDGE1	EDGE0
-	-	-	-	-	-	RW	RW

Initial value : 0H

EDGE[0]	Determines the type of External interrupt 0, edge or level sensitive. 0 Level (default) 1 Edge
EDGE[1]	Determines the type of External interrupt 1, edge or level sensitive. 0 Level (default) 1 Edge

**EIPOLA (External Interrupt Polarity Register) : A6H**

7	6	5	4	3	2	1	0
-	-	-	-	-	-	POLA1	POLA0
-	-	-	-	-	-	RW	RW

Initial value :0H

According to EIEDGE, this register acts differently. If EIEDGE is level type, external interrupt polarity have level value. If EIEDGE is edge type, external interrupt polarity have edge value.

POLA[0]	Determine the polarity of External Interrupt 0 0 When High level or rising edge, Interrupt occur(default) 1 When Low level or falling edge, Interrupt occur
POLA[1]	Determine the polarity of External Interrupt 1 0 When High level or rising edge, Interrupt occur(default) 1 When Low level or falling edge, Interrupt occur

**EIENAB (External Interrupt Enable Register) : A3H**

7	6	5	4	3	2	1	0
-	-	-	-	-	-	ENAB1	ENAB0
-	-	-	-	-	-	RW	RW

Initial value :0H

- ENAB[0]    Enable or Disable External Interrupt 0  
           0    Disable External Interrupt 0(default)  
           1    Enable External Interrupt 0
- ENAB[1]    Enable or Disable External Interrupt 1  
           0    Disable External Interrupt 1(default)  
           1    Enable External Interrupt 1

**EIBOTH (External Interrupt Both Edge Enable Register) : A7H**

7	6	5	4	3	2	1	0
-	-	-	-	-	-	BOTH1	BOTH0
-	-	-	-	-	-	RW	RW

Initial value :0H

- If BOTHx is written to '1', the corresponding external pin interrupt is enabled by both edges(no level).  
 And EIEDGE and EIPOLA register value are ignored.
- BOTH0    Determine the type of External Interrupt 0  
           0    Both edge detection Disable (default)  
           1    Both edge detection Enable
- BOTH1    Determine the type of External Interrupt 1  
           0    Both edge detection Disable (default)  
           1    Both edge detection Enable



**PCI (Pin Change Interrupt Enable Register) :9FH**

7	6	5	4	3	2	1	0
PCI7	PCI6	PCI5	PCI4	PCI3	PCI2	PCI1	PCI0
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

- PCI0      Select PCI interrupt enable or disable of P10  
 0      Disable (default)  
 1      Enable
- PCI1      Select PCI interrupt enable or disable of P11  
 0      Disable (default)  
 1      Enable
- PCI2      Select PCI interrupt enable or disable of P12  
 0      Disable (default)  
 1      Enable
- PCI3      Select PCI interrupt enable or disable of P13  
 0      Disable (default)  
 1      Enable
- PCI4      Select PCI interrupt enable or disable of P14  
 0      Disable (default)  
 1      Enable
- PCI5      Select PCI interrupt enable or disable of P15  
 0      Disable (default)  
 1      Enable
- PCI6      Select PCI interrupt enable or disable of P16  
 0      Disable (default)  
 1      Enable
- PCI7      Select PCI interrupt enable or disable of P17  
 0      Disable (default)  
 1      Enable

## 11. Peripheral Hardware

### 11.1 Clock Generator

#### 11.1.1 Overview

As shown in Figure 11-1, the clock generator produces the basic clock pulses which provide the system clock to CPU and peripheral hardware.

The system clock is INT-OSC Oscillator(8MHz) and the default division rate is one.

In order to stabilize system internally, use 64kHz WDT-oscillator for BIT, WDT and ports de-bounce.

- Calibrated Internal RC Oscillator (16MHz)
  - . INT-RC OSC/1 (16MHz)
  - . INT-RC OSC/2 (8MHz , Default system clock)
  - . INT-RC OSC/4 (4MHz)
  - . INT-RC OSC/8 (2MHz)

#### 11.1.2 Block Diagram

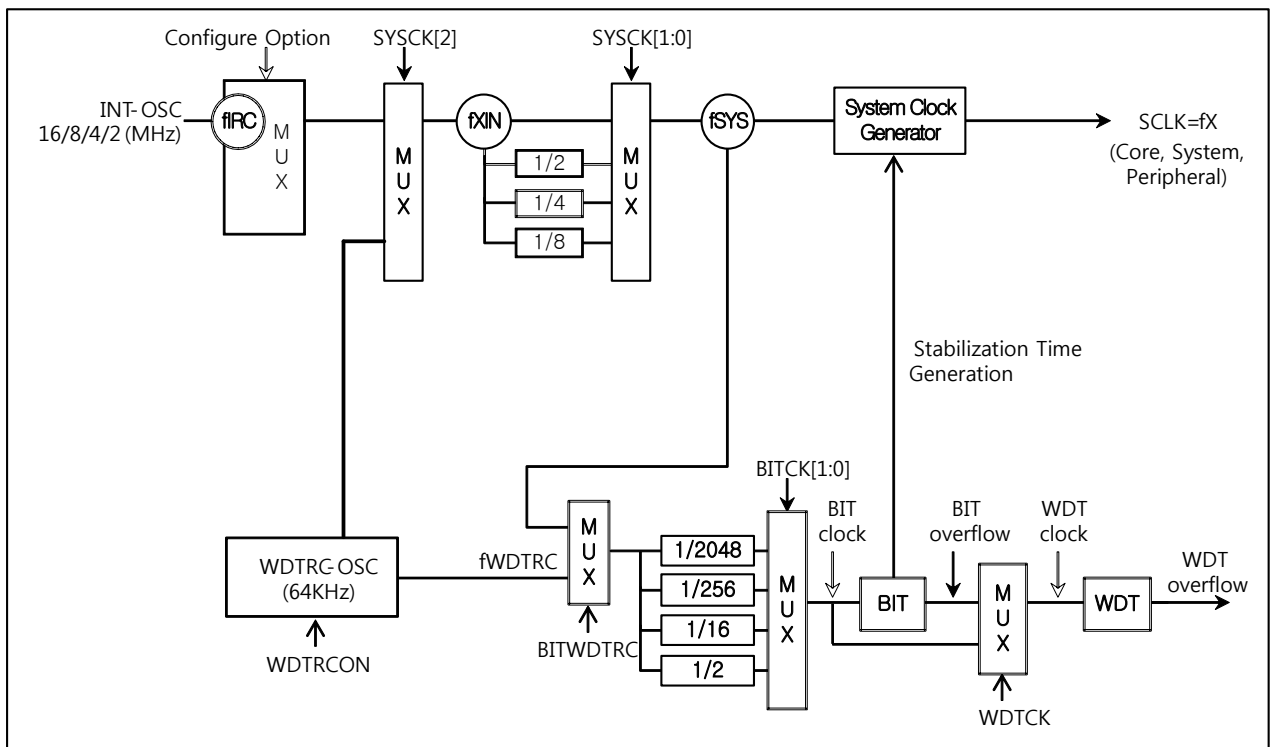


Figure 11-1 Clock Generator Block Diagram

**11.1.3 Register Map**

**Table 11-1 Register Map**

Name	Address	Dir	Default	Description
SCCR	8AH	R/W	00H	System and Clock Control Register

**11.1.4 Register description for Clock Generator**

**SCCR (System and Clock Control Register) : 8AH**

7	6	5	4	3	2	1	0
WDTRCON	-	-	OSCNF1	OSCNF0	SYSC2	SYSC1	SYSC0
0	-	-	0	0	0	0	0
R/W	-	-	R/W	R/W	R/W	R/W	R/W

Initial value :00H

WDTRCON	Select WDTRC enable or disable.			
0	WDTRC disable			
1	WDTRC enable			
OSCNF[1:0]	OSC Noise Filter Enable			
OSCNF1	OSCNF0	Description		
0	0	x1		
0	1	x2		
1	0	x3		
1	1	x4		
SYSC[2:0]	Determine System Clock			
SYSC2	SYSC1	SYSC0	Description	
0	0	0	fXIN(default)	
0	0	1	fXIN/2	
0	1	0	fXIN/4	
0	1	1	fXIN/8	
1	0	0	Do not use	
1	0	1	fWDTRC/2	
1	1	0	fWDTRC/4	
1	1	1	fWDTRC/8	

\* bit 5 and bit 6 of SCCR register must be kept '0'

### 11.1.5 System clock selection Configure option

Oscillator Type Selection (Configure Option)		
XTS[2:0]	Internal RC 8MHz	000
	Internal RC 4MHz	001
	Internal RC 2MHz	010
	-	011
	-	100
	-	101
	-	110
	Internal RC 16MHz	111

## 11.2 BIT

### 11.2.1 Overview

The MC97F1204S has one 8-bit Basic Interval Timer that is free-run and can't stop. Block diagram is shown in Figure 11-2. In addition, the Basic Interval Timer generates the time base for watchdog timer counting. It also provides a Basic interval timer interrupt (BITF).

The MC97F1204S has these Basic Interval Timer (BIT) features:

- During Power On, BIT gives a stable clock generation time
- On exiting Stop mode, BIT gives a stable clock generation time
- As clock function, time interrupt occurrence

### 11.2.2 Block Diagram

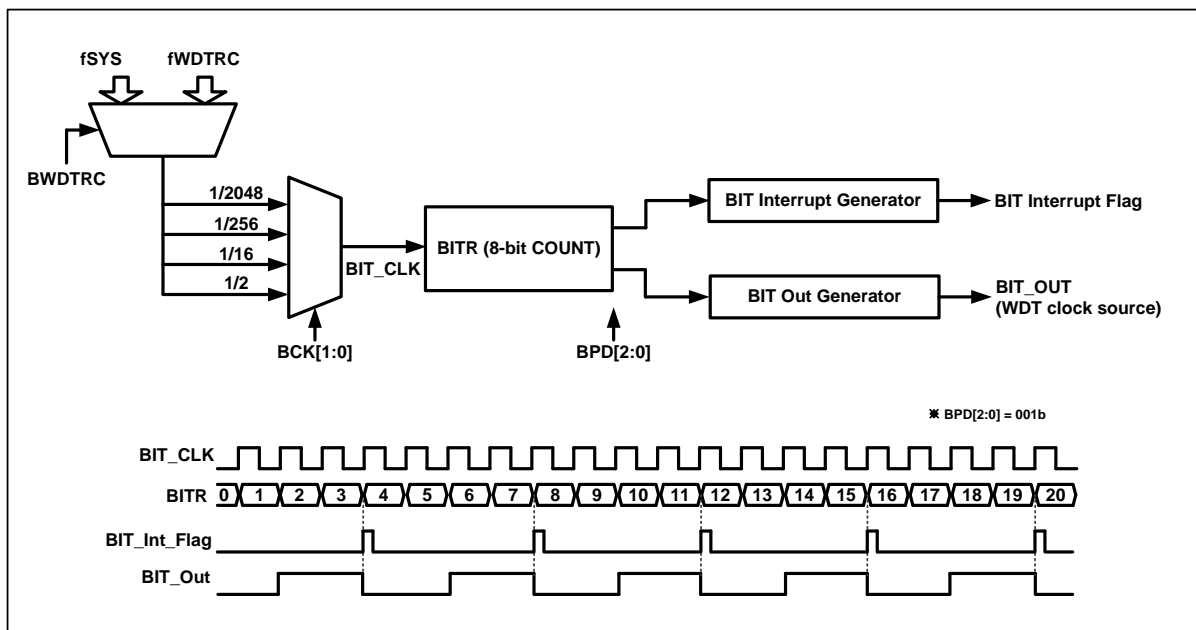


Figure 11-2 BIT Block Diagram

### 11.2.3 Register Map

Table 11-2 Register Map

Name	Address	Dir	Default	Description
BCCR	8BH	R/W	05H	BIT Clock Control Register
BITR	8CH	R	00H	Basic Interval Timer Register

### 11.2.4 Register description for Bit Interval Timer

#### BCCR (BIT Clock Control Register) : 8BH

7	6	5	4	3	2	1	0
BITF	BCK1	BCK0	BWDTRC	BCLR	BPD2	BPD1	BPD0
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 05H

BITF	When BIT Interrupt occurs, this bit becomes '1'. This bit is cleared automatically if BIT and global interrupt enable bit is set. For clearing bit, write '0' to this bit.						
	0 no generation						
	1 generation						
BCK[1:0]	Select BIT Clock Source						
	BCK1	BCK0					
	0	0	fBIT/2048(default)				
	0	1	fBIT/256				
	1	0	fBIT/16				
	1	1	fBIT/2				
BWDTRC	Select BIT Clock Source to WDTRC						
	0 fSYS						
	1 fWDTRC						
BCLR	If BCLR Bit is written to '1', BIT Counter is cleared as '0', After one machine cycle BCLR is cleared automatically.						
	0 Free Running						
	1 Clear Counter						
BPD[2:0]	Select BIT overflow period (BIT Clock ≈3.9kHz, default)						
	BPD2	BPD1	BPD0				
	0	0	0	0.512ms (BIT Clock * 2)			
	0	0	1	1.024ms			
	0	1	0	2.048ms			
	0	1	1	4.096ms			
	1	0	0	8.192ms			
	1	0	1	16.384ms (default)			
	1	1	0	32.768ms			
	1	1	1	65.536ms			

#### BITR (Basic Interval Timer Register) : 8CH

7	6	5	4	3	2	1	0
BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
R	R	R	R	R	R	R	R

Initial value : 00H

BIT[7:0] BIT Counter

### 11.3 WDT

#### 11.3.1 Overview

The watchdog timer rapidly detects the CPU malfunction such as endless looping caused by noise or the like, and resumes the CPU to the normal state. The watchdog timer signal for detecting malfunction can be selected either a reset CPU or an interrupt request. When the watchdog timer is not being used for malfunction detection, it can be used as a timer to generate an interrupt at fixed intervals. It is possible to use free running 8-bit timer mode (WDTRSON='0') or watch dog timer mode (WDTRSON='1') as setting WDTMR[6] bit. If writing WDTMR[5] to '1', WDT counter value is cleared and counts up. After 1 machine cycle, this bit has '0' automatically. The watchdog timer consists of 8-bit binary counter and the watchdog timer data register. When the value of 8-bit binary counter is equal to the 8 bits of WDTR, the interrupt request flag is generated. This can be used as Watchdog timer interrupt or reset the CPU in accordance with the bit WDTRSON.

WDT has BIT overflow output as default clock source. And by selecting WDTCK bit in WDTMR register, BIT clock source is selected as WDT clock source. The interval of watchdog timer interrupt is decided by BIT overflow period and WDTR set value. The equation is as below

$$\text{WDT Interrupt Interval} = (\text{BIT Interrupt Interval}) \times (\text{WDTR Value} + 1)$$

#### 11.3.2 Block Diagram

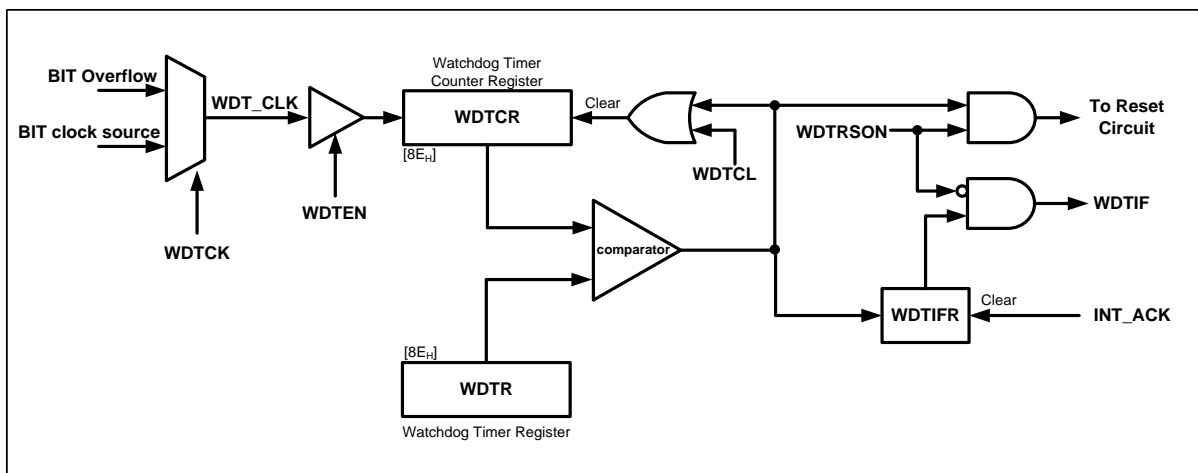


Figure 11-3 WDT Block Diagram

### 11.3.3 Register Map

Table 11-3 Register Map

Name	Address	Dir	Default	Description
WDTR	8EH	W	FFH	Watch Dog Timer Register
WDTCR	8EH	R	00H	Watch Dog Timer Counter Register
WDTMR	8DH	R/W	00H	Watch Dog Timer Mode Register

### 11.3.4 Register description for Watch Dog Timer

#### WDTR (Watch Dog Timer Register: Write Case) : 8EH

7	6	5	4	3	2	1	0
WDTR7	WDTR6	WDTR5	WDTR4	WDTR3	WDTR2	WDTR1	WDTR0
W	W	W	W	W	W	W	W

Initial value : FFH

WDTR[7:0] Set a period  
 $WDT\ Interrupt\ Interval = (BIT\ Interrupt\ Interval) \times (WDTR\ Value + 1)$

Note) To guarantee proper operation, the data should be greater than 01H.

#### WDTCR (Watch Dog Timer Counter Register: Read Case) : 8EH

7	6	5	4	3	2	1	0
WDTCR7	WDTCR6	WDTCR5	WDTCR4	WDTCR3	WDTCR2	WDTCR1	WDTCR0
R	R	R	R	R	R	R	R

Initial value : 00H

WDTCR[7:0] WDT Counter




**WDTMR (Watch Dog Timer Mode Register) : 8DH**

7	6	5	4	3	2	1	0
WDTEN	WDTRSON	WDTCL	WDTCK	-	-	-	WDTIFR
RW	RW	RW	RW	-	-	-	RW

Initial value : 00H

- WDTEN      Control WDT operation  
0      disable  
1      enable
- WDTRSON    Control WDT Reset operation  
0      Free Running 8-bit timer  
1      Watch Dog Timer Reset ON
- WDTCL      Clear WDT Counter.  
This bit is cleared automatically after 1 machine cycle  
0      Free Run  
1      Clear WDT Counter
- WDTCK      WDT Clock Source  
0      BIT Overflow  
1      BIT Clock Source
- WDTIFR     When WDT Interrupt occurs, this bit becomes '1'. For clearing bit, write '0' to this bit or auto clear by INT\_ACK signal.  
0      WDT Interrupt no generation  
1      WDT Interrupt generation

**11.3.5 WDT Interrupt Timing Waveform**

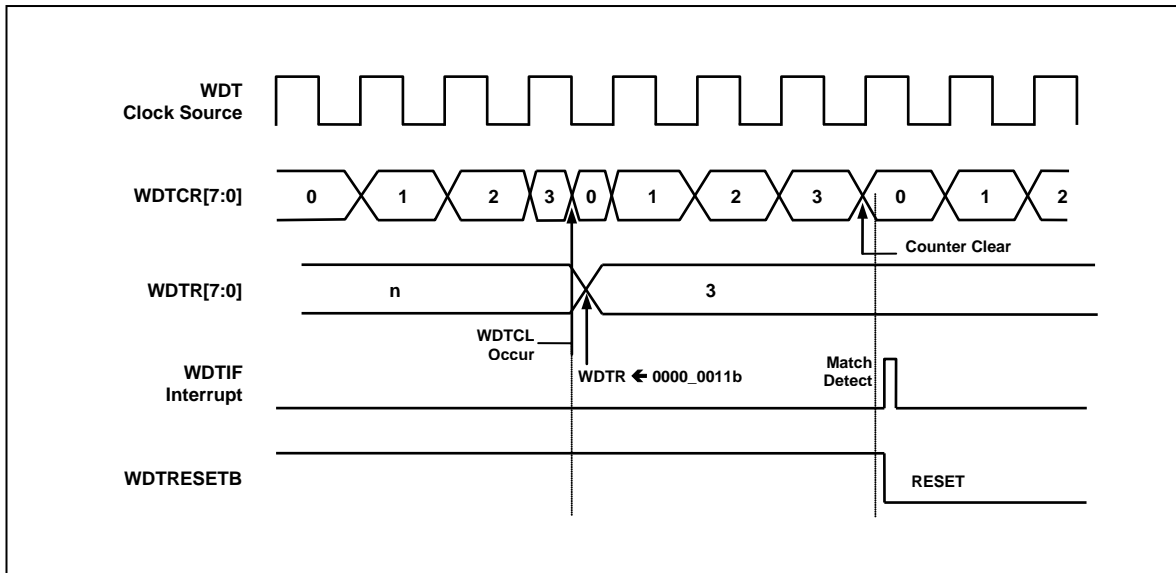

**Figure 11-4 WDT Interrupt Timing Waveform**

## 11.4 Timer/PWM

### 11.4.1.1 Overview

The 16-bit timer x(0~2) consists of Multiplexer, Timer Data Register High/Low, Timer Register High/Low, Timer Mode Control Register, PWM Duty High/Low, PWM Period High/Low Register. It is able to use internal 16-bit timer/ counter without a port output function.

The 16-bit timer x can be clocked by internal or external clock source (EC0, EC1). The divided clock of the main clock selected from prescaler output.

### 11.4.1.2 16-Bit Timer/Counter Mode

In the 16-bit Timer/Counter Mode, if the TxH + TxL value and the TxDRH + TxDRL value are matched, Tx/PWMx port outputs. The output is square wave (50% duty), the frequency is following

$$f_{COMP} = \frac{\text{Timer Clock Frequency}}{2 \times \text{Prescaler Value} \times (\text{TxDR} + 1)}$$

$f_{COMP}$  is timer output frequency and TxDR is the 16 bits value of TxDRH and TxDRL.

To export the compare output as Tx/PWMx, the Tx\_PE bit in the TxCR1 register must set to '1'.

The 16-bit Timer/Counter Mode is selected by control registers as shown in Figure 11-5.

When TxH, TxL are read, TxL should be read first. Because when TxL is read TxH is captured to buffer, and when TxH is read captured value of TxH is read.

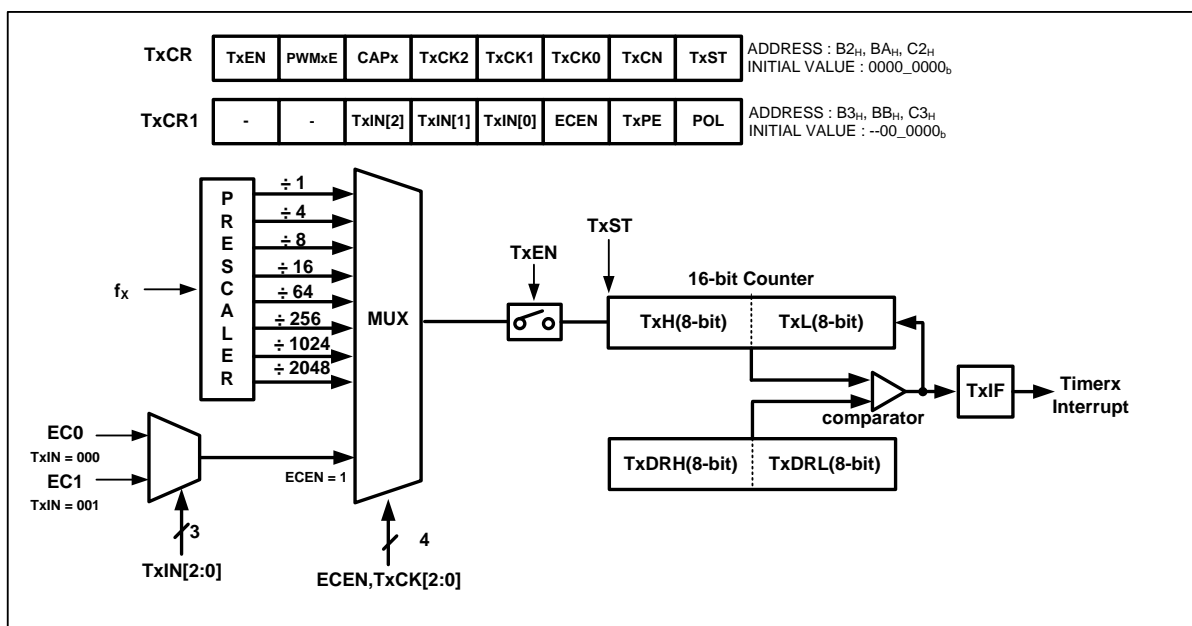


Figure 11-5 Timer x 16-bit Mode Block Diagram

### 11.4.1.3 16-Bit Capture Mode

The timer x(0~2) capture mode is set by CAPx as '1' in TxCR register. The clock is same source as Output Compare mode. The interrupt occurs at TxH, TxL and TxDRH, TxDRL matching time. The capture result is loaded into CDRxH, CDRxL. The TxH, TxL value is automatically cleared(0000<sub>H</sub>) by hardware and restarts counter.

This timer interrupt in capture mode is very useful when the pulse width of captured signal is wider than the maximum period of timer. As the EIEDGE and EIPOLA and EIBOTH register setting, the external interrupt INTx function is chosen.

The CDRxH, PWMxDRH and TxH are in same address. In the capture mode, reading operation is read the CDRxH, not TxH because path is opened to the CDRxH. PWMxDRH will be changed in writing operation. The PWMxDRL, TxL, CDRxL has the same function.

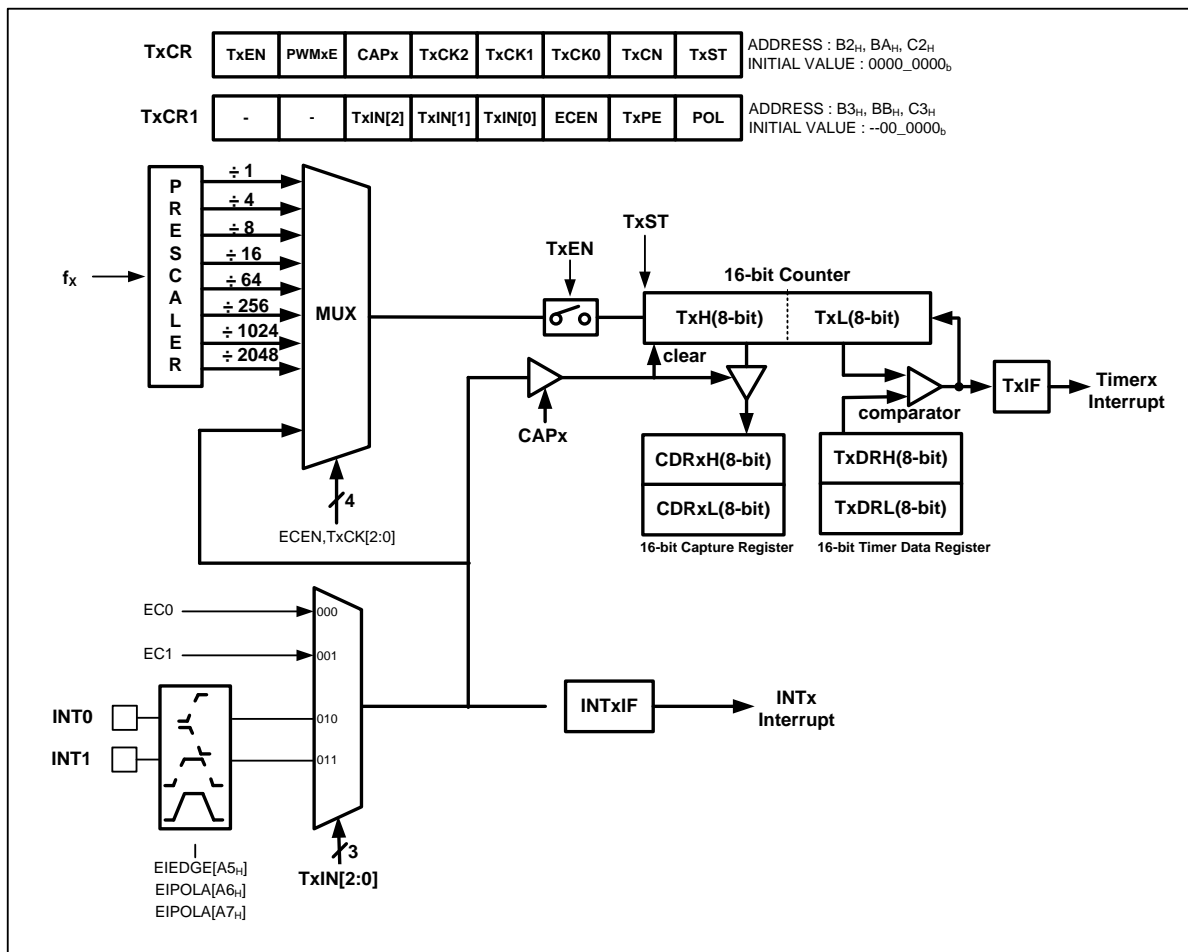


Figure 11-6 Timer x 16bit Capture Mode

### 11.4.1.4 PWM Mode

The timer x(0~2) has a PWM (pulse Width Modulation) function. In PWM mode, the Tx/PWMx output pin outputs up to 16-bit resolution PWM output. This pin should be configured as a PWM output by set TX\_PE to '1'. The PWM output mode is determined by the PWMxPRH, PWMxPRL, PWMxDRH and PWMxDRL. And you should configure PWMxE bit to "1" in TxCR register before write to PWM registers.


$$\text{PWM Period} = ( \{ \text{PWMxPRH}, \text{PWMxPRL} \} + 1 ) \times \text{Timerx Clock Period}$$

$$\text{PWM Duty} = ( \{ \text{PWMxDRH}, \text{PWMxDRL} \} + 1 ) \times \text{Timerx Clock Period}$$

**Table 11-4 PWM Frequency vs. Resolution at 8MHz**

Resolution	Frequency		
	TxCk[2:0]=000 (125ns)	TxCk[2:0]=001(500ns)	TxCk[2:0]=010(1us)
16-bit	122.070Hz	30.469Hz	15.259Hz
15-bit	244.141Hz	60.938Hz	30.518Hz
10-bit	7.8125kHz	1.95kHz	976.563Hz
9-bit	15.625kHz	3.9kHz	1.953kHz
8-bit	31.25kHz	7.8kHz	3.906kHz

In PWM mode, the duty value and counter matching enables the period value and counter comparison. After counter and the period value matching, counter restarts. If the duty value is set same to the period value, counter doesn't restart after the duty value and counter matching. It is highly recommended that the duty value is not set same to the period value. PWM Period and Duty same output shown in Figure 11-9 Example of PWM at 8MHz (Period = Duty). The POL bit of TxCR register decides the polarity of duty cycle.

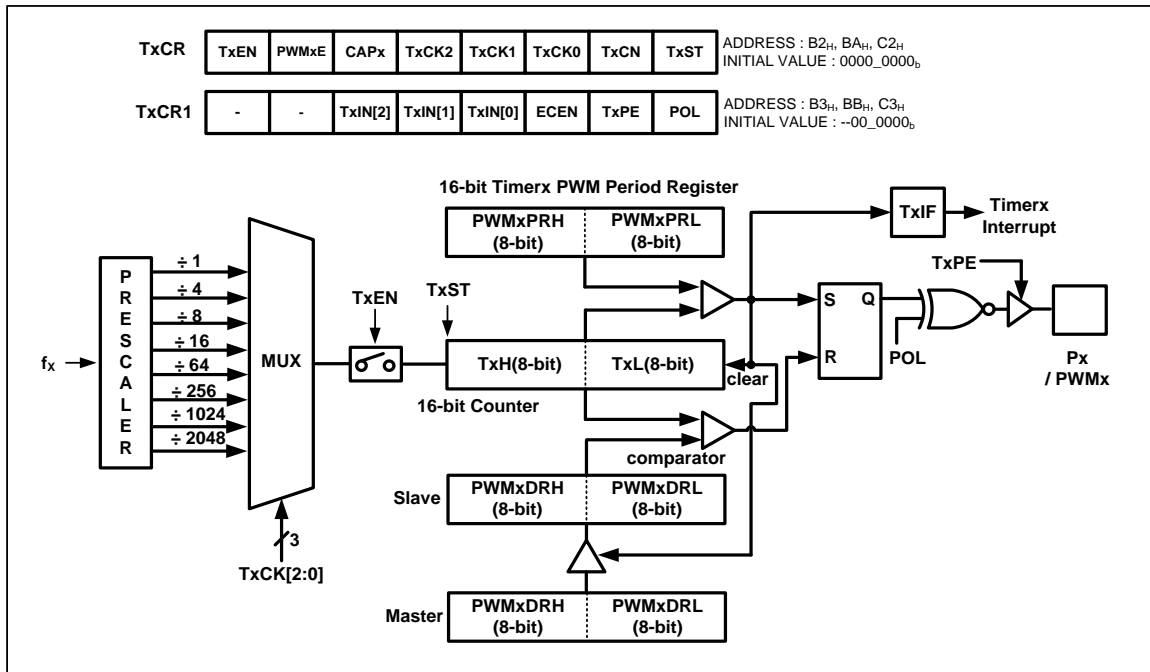

**Figure 11-7 PWM Mode**

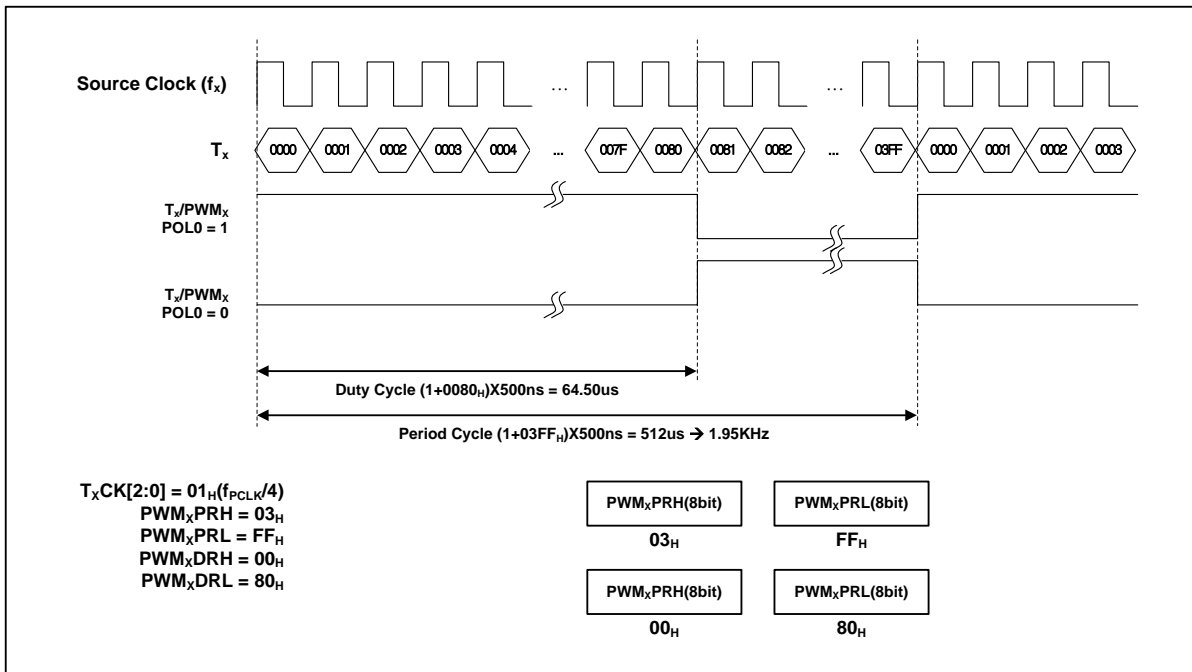


Figure 11-8 Example of PWM at 8MHz

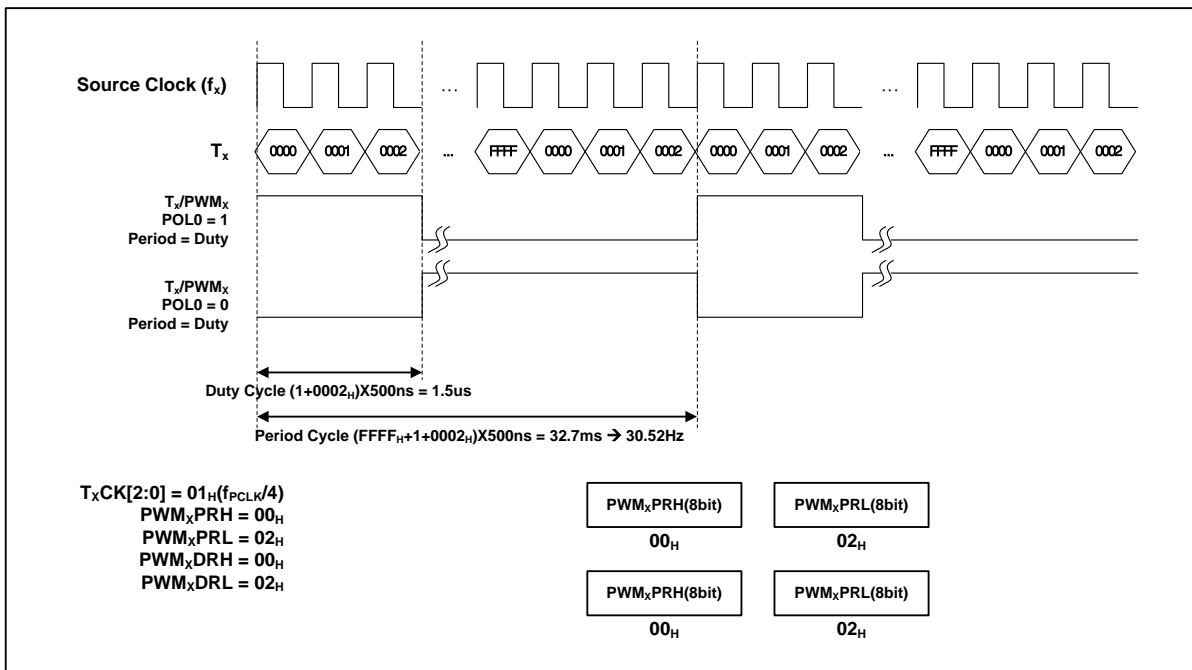


Figure 11-9 Example of PWM at 8MHz (Period = Duty)

### 11.4.1.5 Register Map

Table 11-5 Register Map

Name	Address	Dir	Default	Description
T0CR	B2 <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 0 Mode Control Register
T0CR1	B3 <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 0 Mode Control Register 1
T0L	B4 <sub>H</sub>	R	00 <sub>H</sub>	Timer 0 Low Register
PWM0DRL	B4 <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 0 Duty Register Low
CDR0L	B4 <sub>H</sub>	R	00 <sub>H</sub>	Timer 0 Capture Data Register Low
T0H	B5 <sub>H</sub>	R	00 <sub>H</sub>	Timer 0 Register High
PWM0DRH	B5 <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 0 Duty Register High
CDR0H	B5 <sub>H</sub>	R	00 <sub>H</sub>	Timer 0 Capture Data Register High
T0DRL	B6 <sub>H</sub>	W	FF <sub>H</sub>	Timer 0 Data Register Low
PWM0PRL	B6 <sub>H</sub>	W	FF <sub>H</sub>	PWM 0 Period Register Low
T0DRH	B7 <sub>H</sub>	W	FF <sub>H</sub>	Timer 0 Data Register High
PWM0PRH	B7 <sub>H</sub>	W	FF <sub>H</sub>	PWM 0 Period Register High
T1CR	BA <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 1 Mode Control Register
T1CR1	BB <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 1 Mode Control Register 1
T1L	BC <sub>H</sub>	R	00 <sub>H</sub>	Timer 1 Register Low
PWM1DRL	BC <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 1 Duty Register Low
CDR1L	BC <sub>H</sub>	R	00 <sub>H</sub>	Timer 1 Capture Data Register Low
T1H	BD <sub>H</sub>	R	00 <sub>H</sub>	Timer 1 Register High
PWM1DRH	BD <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 1 Duty Register High
CDR1H	BD <sub>H</sub>	R	00 <sub>H</sub>	Timer 1 Capture Data Register High
T1DRL	BE <sub>H</sub>	W	FF <sub>H</sub>	Timer 1 Data Register Low
PWM1PRL	BE <sub>H</sub>	W	FF <sub>H</sub>	PWM 1 Period Register Low
T1DRH	BF <sub>H</sub>	W	FF <sub>H</sub>	Timer 1 Data Register High
PWM1PRH	BF <sub>H</sub>	W	FF <sub>H</sub>	PWM 1 Period Register High
T2CR	C2 <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 2 Mode Control Register
T2CR1	C3 <sub>H</sub>	R/W	00 <sub>H</sub>	Timer 2 Mode Control Register 1
T2L	C4 <sub>H</sub>	R	00 <sub>H</sub>	Timer 2 Register Low
PWM2DRL	C4 <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 2 Duty Register Low
CDR2L	C4 <sub>H</sub>	R	00 <sub>H</sub>	Timer 2 Capture Data Register Low
T2H	C5 <sub>H</sub>	R	00 <sub>H</sub>	Timer 2 Register High
PWM2DRH	C5 <sub>H</sub>	R/W	00 <sub>H</sub>	PWM 2 Duty Register High
CDR2H	C5 <sub>H</sub>	R	00 <sub>H</sub>	Timer 2 Capture Data Register High
T2DRL	C6 <sub>H</sub>	W	FF <sub>H</sub>	Timer 2 Data Register Low
PWM2PRL	C6 <sub>H</sub>	W	FF <sub>H</sub>	PWM 2 Period Register Low
T2DRH	C7 <sub>H</sub>	W	FF <sub>H</sub>	Timer 2 Data Register High
PWM2PRH	C7 <sub>H</sub>	W	FF <sub>H</sub>	PWM 2 Period Register High

### 11.4.1.6 Register description for Timer/Counter x

#### TxCR (Timer 0~2Mode Control Register): B2H, BAH, C2H

7	6	5	4	3	2	1	0
TxEN	PWMxE	CAPx	TxCK2	TxCK1	TxCK0	TxCN	TxST
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00<sub>H</sub>

TxEN	Control Timer x		
0	Timer x disable		
1	Timer x enable		
PWMxE	Control PWM enable		
0	PWM disable		
1	PWM enable		
CAPx	Control Timer x capture mode.		
0	Timer/Counter mode		
1	Capture mode		
TxCK[2:0]	Select clock source of Timer x. F <sub>x</sub> is the frequency of main system		
	TxCK2	TxCK1	TxCK0 description
	0	0	0 f <sub>x</sub>
	0	0	1 f <sub>x</sub> /4
	0	1	0 f <sub>x</sub> /8
	0	1	1 f <sub>x</sub> /16
	1	0	0 f <sub>x</sub> /64
	1	0	1 f <sub>x</sub> /256
	1	1	0 f <sub>x</sub> /1024
	1	1	1 f <sub>x</sub> /2048
TxCN	Control Timer x Count pause/continue.		
0	Temporary count stop		
1	Continue count		
TxST	Control Timer x start/stop		
0	Counter stop		
1	Clear counter and start		

Note) set TxST bit after write to Tx, PWM, CDRx registers.

**TxCR1 (Timer 0~2 Mode Control Register 1) : B3H, BBH, C3H**

7	6	5	4	3	2	1	0
-	-	TxIN[2]	TxIN[1]	TxIN[0]	ECEN	Tx_PE	POL
-	-	-	-	-	RW	RW	RW

Initial value : 00<sub>H</sub>

TxIN[2:0] Select Event Counter and External Interrupt for Capture mode

TxIN2	TxIN1	TxIN0	description
0	0	0	EC0
0	0	1	EC1
0	1	0	XINT0
0	1	1	XINT1
1	0	0	-
1	0	1	-
1	1	0	-
1	1	1	-

ECEN Control Event Counter

0	Event Counter disable
1	Event Counter enable

Tx\_PE Control Timer x Output port

0	Timer x Output disable
1	Timer x Output enable

POL Configure PWM polarity

0	Negative (Duty Match: Clear)
1	Positive (Duty Match: Set)

**TxL (Timer 0~2 Register Low, Read Case) : B4H, BCH, C4H**

7	6	5	4	3	2	1	0
TxL7	TxL6	TxL5	TxL4	TxL3	TxL2	TxL1	TxL0
R	R	R	R	R	R	R	R

Initial value : 00<sub>H</sub>

TxL[7:0] TxL Counter Period Low data.

**CDRxL (Capture 0~2 Data Register Low, Read Case) : B4H, BCH, C4H**

7	6	5	4	3	2	1	0
CDRxL07	CDRxL06	CDRxL05	CDRxL04	CDRxL03	CDRxL02	CDRxL01	CDRxL00
R	R	R	R	R	R	R	R

Initial value : 00<sub>H</sub>

CDRxL[7:0] Tx Capture Low data.



**PWMxDRL (PWM 0~2 Duty Register Low, Write Case) : B4H, BCH, C4H**

7	6	5	4	3	2	1	0
PWMxDRL7	PWMxDRL6	PWMxDRL5	PWMxDRL4	PWMxDRL3	PWMxDRL2	PWMxDRL1	PWMxDRL0
W	W	W	W	W	W	W	W

 Initial value : 00<sub>H</sub>

PWMxDRL[7:0] Tx PWM Duty Low data

Note) Writing is effective only when PWMxE = 1 and TxST = 0

**TxH (Timer 0~2 Register High, Read Case) : B5H, BDH, C5H**

7	6	5	4	3	2	1	0
TxH7	TxH6	TxH5	TxH4	TxH3	TxH2	TxH1	TxH0
R	R	R	R	R	R	R	R

 Initial value : 00<sub>H</sub>

TxH[7:0] TxH Counter Period High data.

**CDRxH (Capture 0~2 Data High Register, Read Case) : B5H, BDH, C5H**

7	6	5	4	3	2	1	0
CDRxH07	CDRxH06	CDRxH05	CDRxH04	CDRxH03	CDRxH02	CDRxH01	CDRxH00
R	R	R	R	R	R	R	R

 Initial value : 00<sub>H</sub>

CDRxH[7:0] Tx Capture High data

**PWMxDRH (PWM0~2 Duty Register High, Write Case) : B5H, BDH, C5H**

7	6	5	4	3	2	1	0
PWMxDRH7	PWMxDRH6	PWMxDRH5	PWMxDRH4	PWMxDRH3	PWMxDRH2	PWMxDRH1	PWMxDRH0
W	W	W	W	W	W	W	W

 Initial value : 00<sub>H</sub>

PWMxDRH[7:0] Tx PWM Duty High data

Note) Writing is effective only when PWMxE = 1 and TxST = 0

**TxDRL (Timer 0~2 Data Register Low, Write Case) : B6H, BEH, C6H**

7	6	5	4	3	2	1	0
TxDRL7	TxDRL6	TxDRL5	TxDRL4	TxDRL3	TxDRL2	TxDRL1	TxDRL0
W	W	W	W	W	W	W	W

 Initial value : FF<sub>H</sub>

TxDRL[7:0] TxL Compare Low data

Note) Be sure to clear PWMxE before loading this register.

**PWMxPRL (PWM 0~2 Period Register Low, Write Case) : B6H, BEH, C6H**

7	6	5	4	3	2	1	0
PWMxPRL7	PWMxPRL6	PWMxPRL5	PWMxPRL4	PWMxPRL3	PWMxPRL2	PWMxPRL1	PWMxPRL0
W	W	W	W	W	W	W	W

Initial value : FF<sub>H</sub>

PWMxPRL[7:0] TxPWM Period Low data

Note) Writing is effective only when PWMxE = 1 and TxST = 0

**TxDRH (Timer 0~2 Data Register High, Write Case) : B7H, BFH, C7H**

7	6	5	4	3	2	1	0
TxDRH7	TxDRH6	TxDRH5	TxDRH4	TxDRH3	TxDRH2	TxDRH1	TxDRH0
W	W	W	W	W	W	W	W

Initial value : FF<sub>H</sub>

TxDRH[7:0] TxH Compare High data

Note) Be sure to clear PWMxE before loading this register.

**PWMxPRH (PWM 0~2 Period Register High, Write Case) : B7H, BFH, C7H**

7	6	5	4	3	2	1	0
PWMxPRH7	PWMxPRH6	PWMxPRH5	PWMxPRH4	PWMxPRH3	PWMxPRH2	PWMxPRH1	PWMxPRH0
R/W	W	W	W	W	W	W	W

Initial value : FF<sub>H</sub>

PWMxPRH[7:0] TxPWM Period High data

Note) Writing is effective only when PWMxE = 1 and TxST = 0

**11.4.2 Timer Interrupt Status Register (TMISR)****11.4.2.1 Register description for TMISR****TMISR (Timer Interrupt Status Register) : D5H**

7	6	5	4	3	2	1	0
-	-	-	-	-	TMIF2	TMIF1	TMIF0
-	-	-	-	-	R	R	R

Initial value :0H

TMIFx Timer x Interrupt Flag

0 No Timer x interrupt

1 Timer x interrupt occurred, write "1" to clear interrupt flag

Note) The Timer Interrupt Status Register contains interrupt information of each timers. Even if user disabled timer interrupt at IE2, user could check timer interrupt condition from this register.

## 11.5 SPI

### 11.5.1 Overview

There is Serial Peripheral Interface (SPI) one channel in MC97F1204S. The SPI allows synchronous serial data transfer between the external serial devices. It can do Full-duplex communication by 4-wire (MOSI, MISO, SCK, SS), support Master/Slave mode, can select serial clock (SCK) polarity, phase and whether LSB first data transfer or MSB first data transfer.

### 11.5.2 Block Diagram

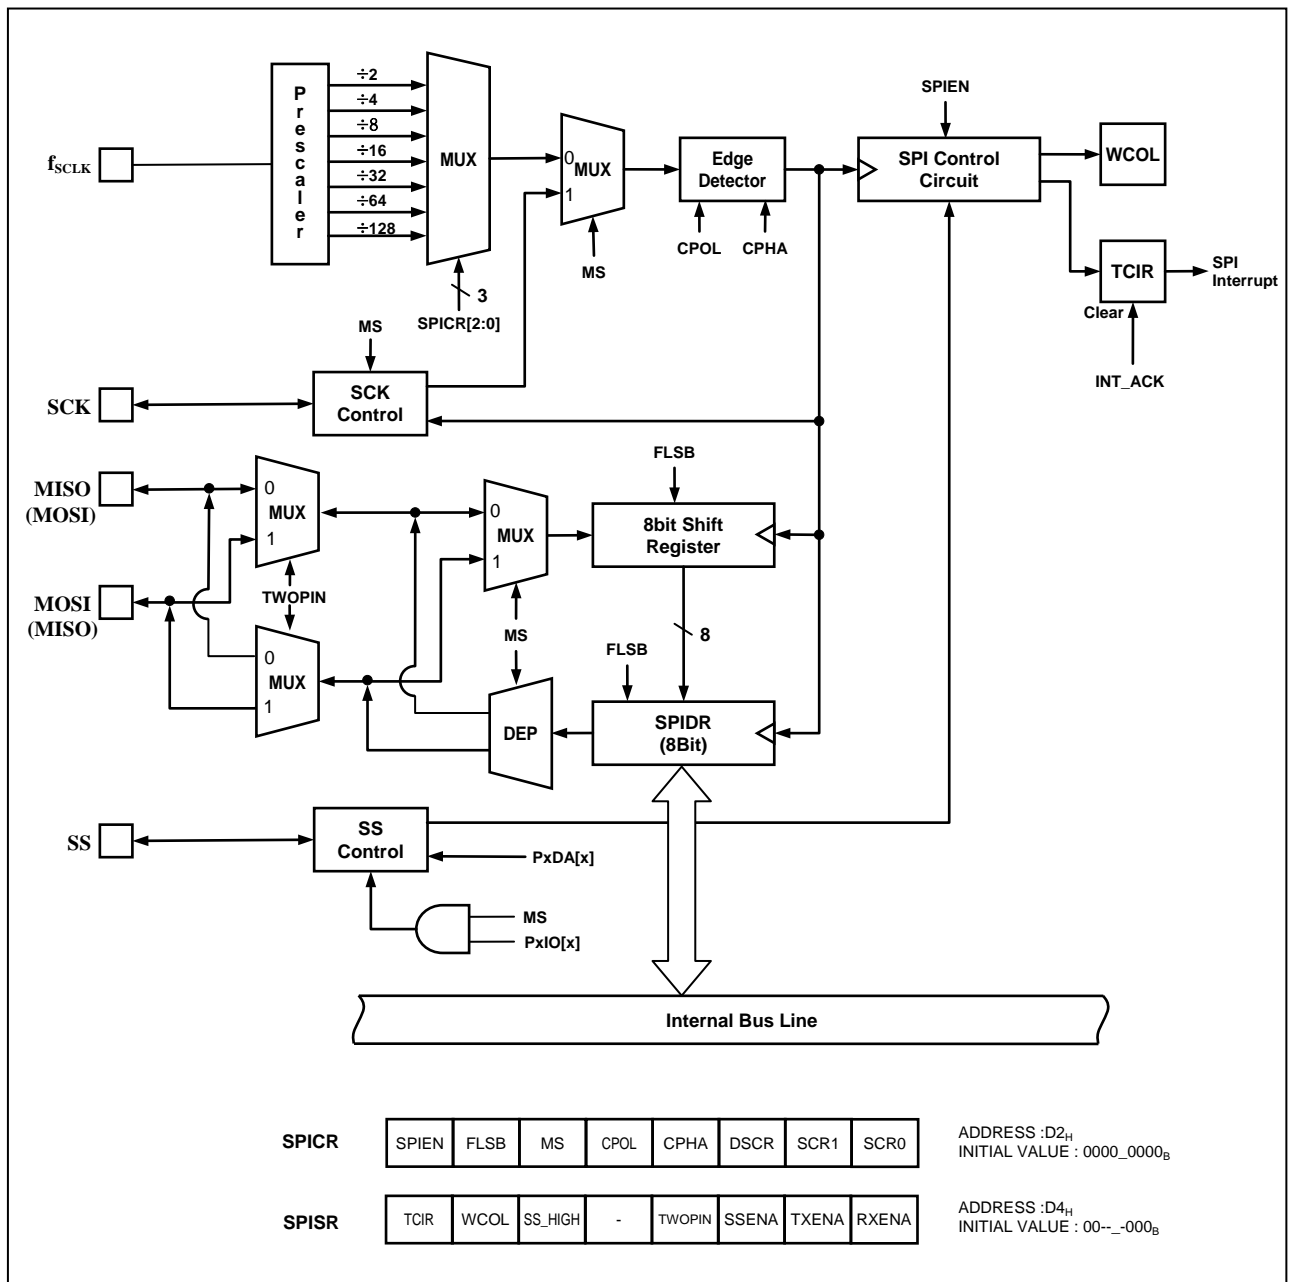


Figure 11-10 SPI Block Diagram

### 11.5.3 Data Transmit / Receive Operation

User can use SPI for serial data communication by following step

1. Select SPI operation mode(master/slave, polarity, phase) by control register SPICR.
2. When the SPI is configured as a Master, it selects a Slave by SS signal (active low).  
When the SPI is configured as a Slave, it is selected by SS signal incoming from Master
3. When the user writes a byte to the data register SPIDR, SPI will start an operation.
4. In this time, if the SPI is configured as a Master, serial clock will come out of SCK pin. And Master shifts the eight bits into the Slave (transmit), Slave shifts the eight bits into the Master at the same time (receive). If the SPI is configured as a Slave, serial clock will come into SCK pin. And Slave shifts the eight bits into the Master (transmit), Master shifts the eight bits into the Slave at the same time (receive).
5. When transmit/receive is done, TCIR (Transmit Complete or Interrupt Request) bit will be set. If the SPI interrupt is enabled, an interrupt is requested. And TCIR bit is cleared by hardware when executing the corresponding interrupt. If SPI interrupt is disable, TCIR bit is cleared when user read the status register SPISR, and then access (read/write) the data register SPIDR.

Note) If you want to use both transmit and receive, set the TXENA, RXENA bit of SPISR, and if user want to use only either transmit or receive, clear the TXENA or RXENA. In this case, user can use disabled pin by GPIO freely.

### 11.5.4 SS pin function

1. When the SPI is configured as a Slave, the SS pin is always input. If LOW signal come into SS pin, the SPI logic is active. And if HIGH signal come into SS pin, the SPI logic is stop. In this time, SPI logic will be reset, and invalidate any transmitted or received data.
2. When the SPI is configured as a Master, the user can select the direction of the SS pin by port direction register (PxIO[x]). If the SS pin is configured as an output, user can use general GPIO output mode. If the SS pin is configured as an input, 'HIGH' signal must come into SS pin to guarantee Master operation. If 'LOW' signal come into SS pin, the SPI logic interprets this as another master selecting the SPI as a slave and starting to send data to it. To avoid bus contention, MS bit of SPICR will be cleared and the SPI becomes a Slave and then, TCIR bit of SPISR will be set, and if the SPI interrupt is enabled, an interrupt is requested.

Note)

- When the SS pin is configured as an output at Master mode, SS pin's output value is defined by user's software (PxDA[x]). Before SPICR setting, the direction of SS pin must be defined
- If you don't need to use SS pin, clear the SENA bit of SPISR. So, you can use disabled pin by GPIO freely. In this case, SS signal is driven by 'HIGH' or 'LOW' internally. (master is 'HIGH', slave is 'LOW')
- When SS pin is configured as input(master or slave), if 'HIGH' signal come into SS pin, this flag bit(SS\_HIGH) will be set at the SS rising time. And you can clear it by writing '0'.

### 11.5.5 Timing Waveform

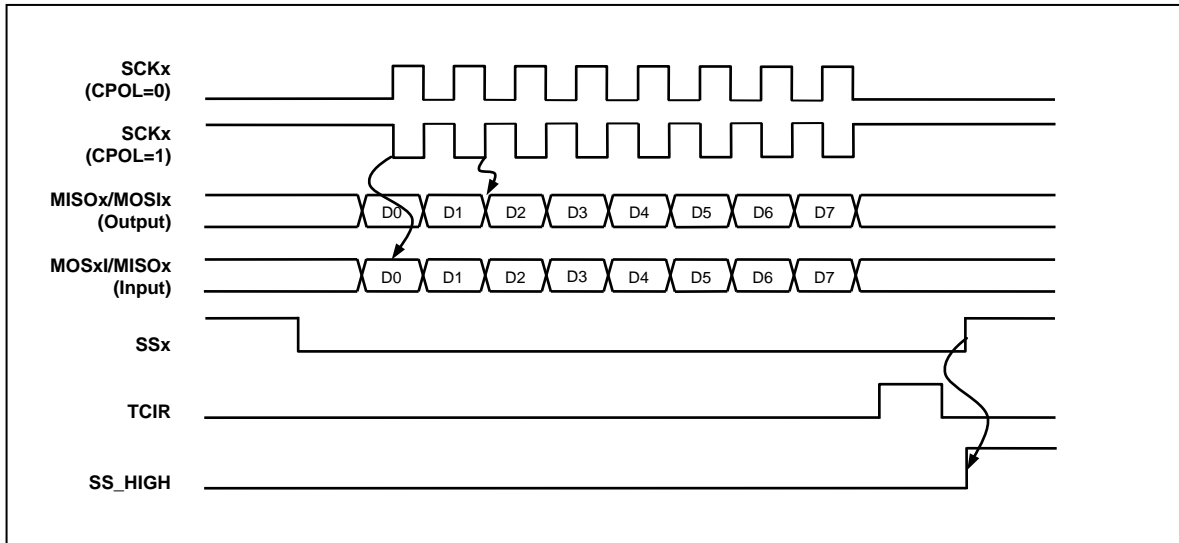


Figure 11-11 SPI Transmit/Receive Timing Diagram at CPHA = 0

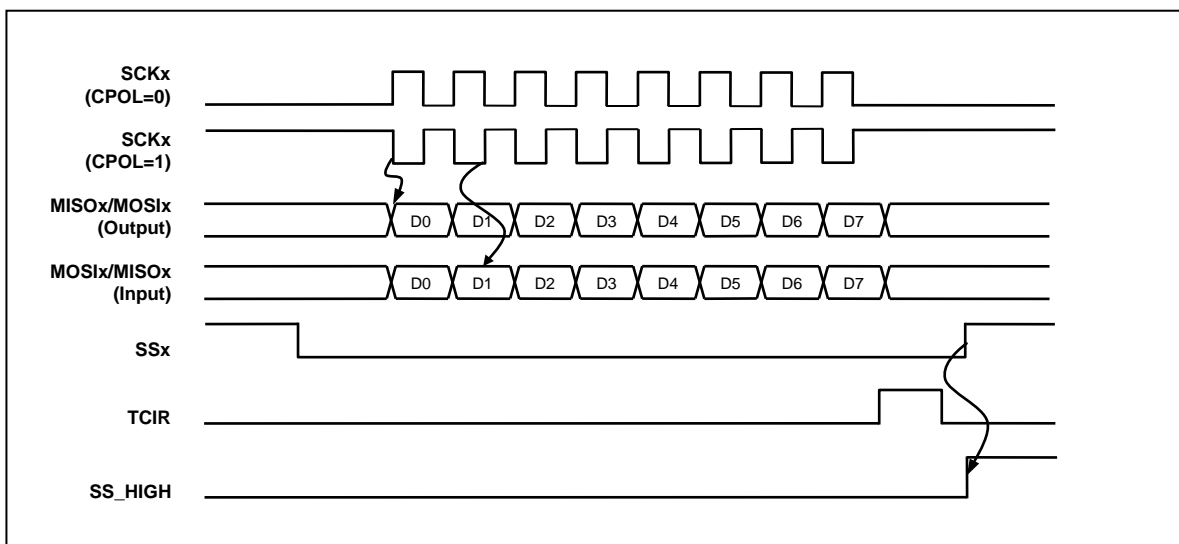


Figure 11-12 SPI Transmit/Receive Timing Diagram at CPHA = 1

### 11.5.6 Register Map

Table 11-6 Register Map

Name	Address	Dir	Default	Description
SPICR	D2H	R/W	0H	SPI Control Register
SPIDR	D3H	R/W	0H	SPI Data Register
SPISR	D4H	-	0H	SPI Status Register

### 11.5.7 Register description for SPI

#### SPICR(SPI Control Register) : D2H

7	6	5	4	3	2	1	0
SPIEN	FLSB	MS	CPOL	CPHA	DSCR	SCR1	SCR0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

SPIEN	This bit controls the SPI operation		
0	SPI Disable		
1	SPI Enable		
FLSB	This bit selects the data transmission sequence		
0	MSB First		
1	LSB First		
MS	This bit selects whether Master or Slave mode		
0	Slave mode		
1	Master mode		
CPOL	These two bits control the serial clock (SCK) mode		
CPHA	Clock Polarity (CPOL) bit determine SCK's value at idle mode		
	Clock Phase (CPHA) bit determine if data is sampled on the leading or trailing edge of SCK.		
	Refer to Figure 11-11, Figure 11-12		
CPOL	CPHA	Leading Edge	Trailing Edge
0	0	Sample (Rising)	Setup (Falling)
0	1	Setup (Rising)	Sample (Falling)
1	0	Sample (Falling)	Setup (Rising)
1	1	Setup (Falling)	Sample (Rising)
DSCR	These three bits select the SCK rate of the device configured as a Master. When DSCR bit is written one, SCK will be doubled in Master mode.		
SCR[2:0]	fx– Main system clock oscillation frequency.		
DSCR	SCR1	SCR0	SCK frequency
0	0	0	fx/4
0	0	1	fx/16
0	1	0	fx/64
0	1	1	fx/128
1	0	0	fx/2
1	0	1	fx/8
1	1	0	fx/32
1	1	1	fx/64

**SPIDR(SPI Data Register) : D3H**

7	6	5	4	3	2	1	0
SPIDR7	SPIDR6	SPIDR5	SPIDR4	SPIDR3	SPIDR2	SPIDR1	SPIDR0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Initial value : 00H

SPIDR [7:0] SPI data register.  
 Although you only use reception, user must write any data in here to start the SPI operation.

**SPISR (SPI Status Register) : D4H**

7	6	5	4	3	2	1	0
TCIR	WCOL	SS_HIGH	-	TWOPIN	SSENA	TXENA	RXENA
R	R	R/W	-	R/W	R/W	R/W	R/W

Initial value : 00H

TCIR	When a serial data transmission is complete, the TCIR bit is set. If the SPI interrupt is enabled, an interrupt is requested. And TCIR bit is cleared by hardware when executing the corresponding interrupt. If SPI interrupt is disable, TCIR bit is cleared when user read the status register SPISR, and then access (read/write) the data register SPIDR.
0	Interrupt cleared
1	Transmission Complete and Interrupt Requested
WCOL	This bit is set if the data register SPIDR is written during a data transfer. This bit is cleared when user read the status register SPISR, and then access (read/write) the data register SPIDR.
0	No collision
1	Write Collision
SS_HIGH	When SS pin is configured as input(master or slave), if 'HIGH' signal come into SS pin, this flag bit will be set at the SS rising time. And you can clear it by writing '0'. You can write only zero.
0	Flag is cleared
1	Flag is set
TWOPIN	This bit controls the 2 pin operation. In master mode,
0	Disable
1	Enable
SSENA	This bit controls the SS pin operation
0	Disable
1	Enable
TXENA	This bit controls a data transfer operation
0	Disable
1	Enable
RXENA	This bit controls a data reception operation
0	Disable
1	Enable

Note that if TWOPIN is set to '1', MOSI and MISO pins are changed.

## 11.6 12-Bit A/D Converter

### 11.6.1 Overview

The analog-to-digital converter (A/D) allows conversion of an analog input signal to a corresponding 12-bit digital value. The A/D module has fifteenth analog inputs. The output of the multiplex is the input into the converter, which generates the result via successive approximation. The A/D module has four registers which are the control register ADCM (A/D Converter Mode Register), ADCM1 (A/D Converter Mode Register 1) and A/D result register ADCHR (A/D Converter Result High Register) and ADCLR (A/D Converter Result Low Register). It is selected for the corresponding channel to be converted by setting ADSEL[3:0]. To executing A/D conversion, ADST bit sets to '1'. The register ADCHR and ADCLR contains the results of the A/D conversion. When the conversion is completed, the result is loaded into the ADCHR and ADCLR, the A/D conversion status bit AFLAG is set to '1', and the A/D interrupt is set. While processing A/D conversion, AFLAG bit is read as '0'. If using STBY (power down) bit, the ADC is disabled. Also interrupt of internal timer, external event can start ADC regardless of interrupt occurrence.

ADC Conversion Time = ADCLK \* 60 cycles

After STBY bit is reset (ADC power enable) and it is restarted, during some cycle, ADC conversion value may have an inaccurate value.

When using ports as ADC input port, it is recommended to set corresponding PSR2, PSR3 register to prevent current leakage or unexpected function, because analog value enters to digital circuit.

ADC zero offset value is written to 4007h of option memory.

To read the zero offset value, refer to the assembly code below.

(Example)

```
char Zero_offset;           // signed value
#pragma ASM
    mov  A, #0              ;
    mov  DPTR, #4007h      ; ADC Zero offset value is addressed at 0x4007
    mov  A, @A+DPTR        ; A = ADC zero offset value
#pragma ENDASM
Zero_offset = ACC;         //
```



11.6.2 Block Diagram

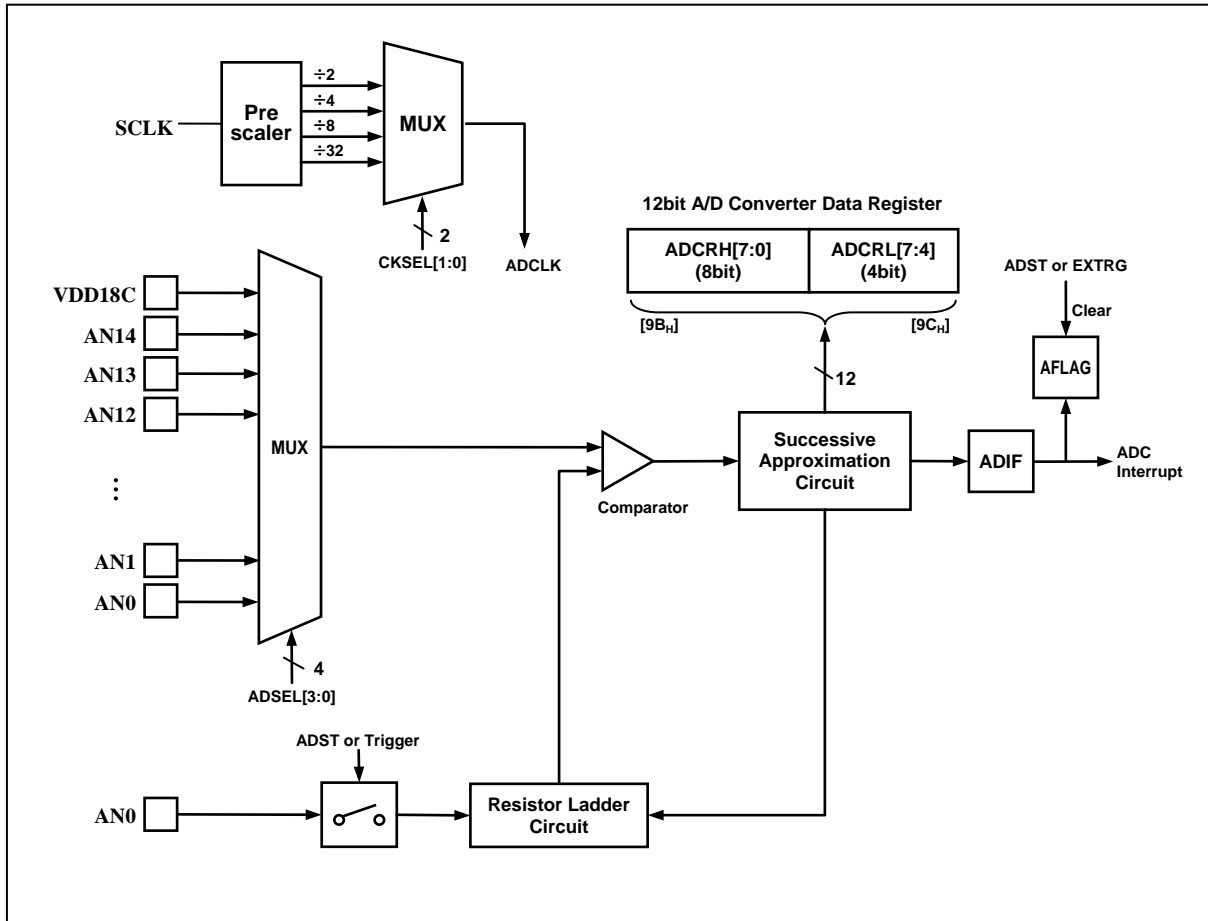


Figure 11-13 ADC Block Diagram

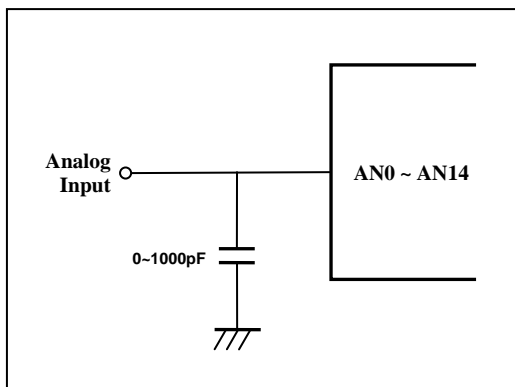


Figure 11-14 A/D Analog Input Pin Connecting Capacitor

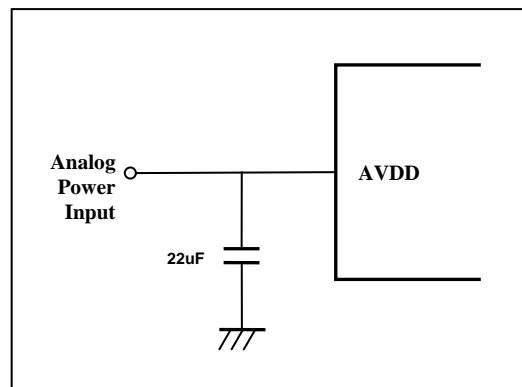


Figure 11-15 A/D Power (AVDD) Pin Connecting Capacitor

### 11.6.3 ADC Operation

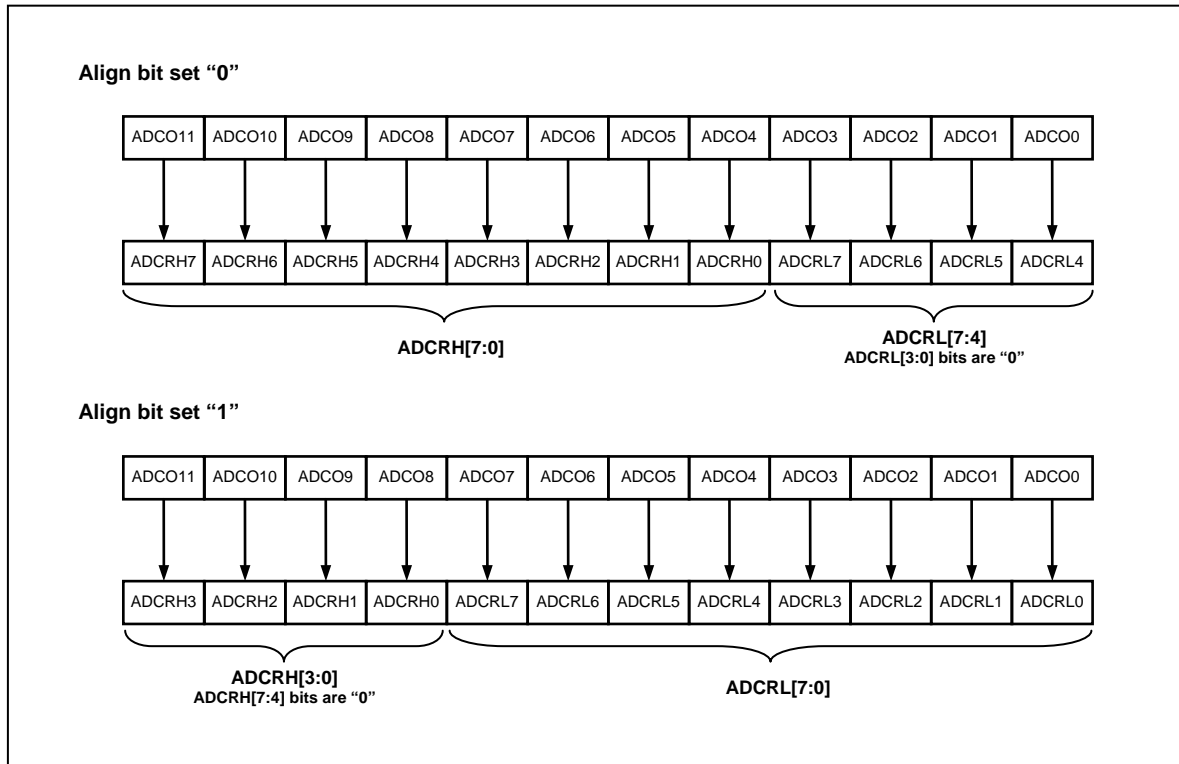


Figure 11-16 ADC Operation for Align bit

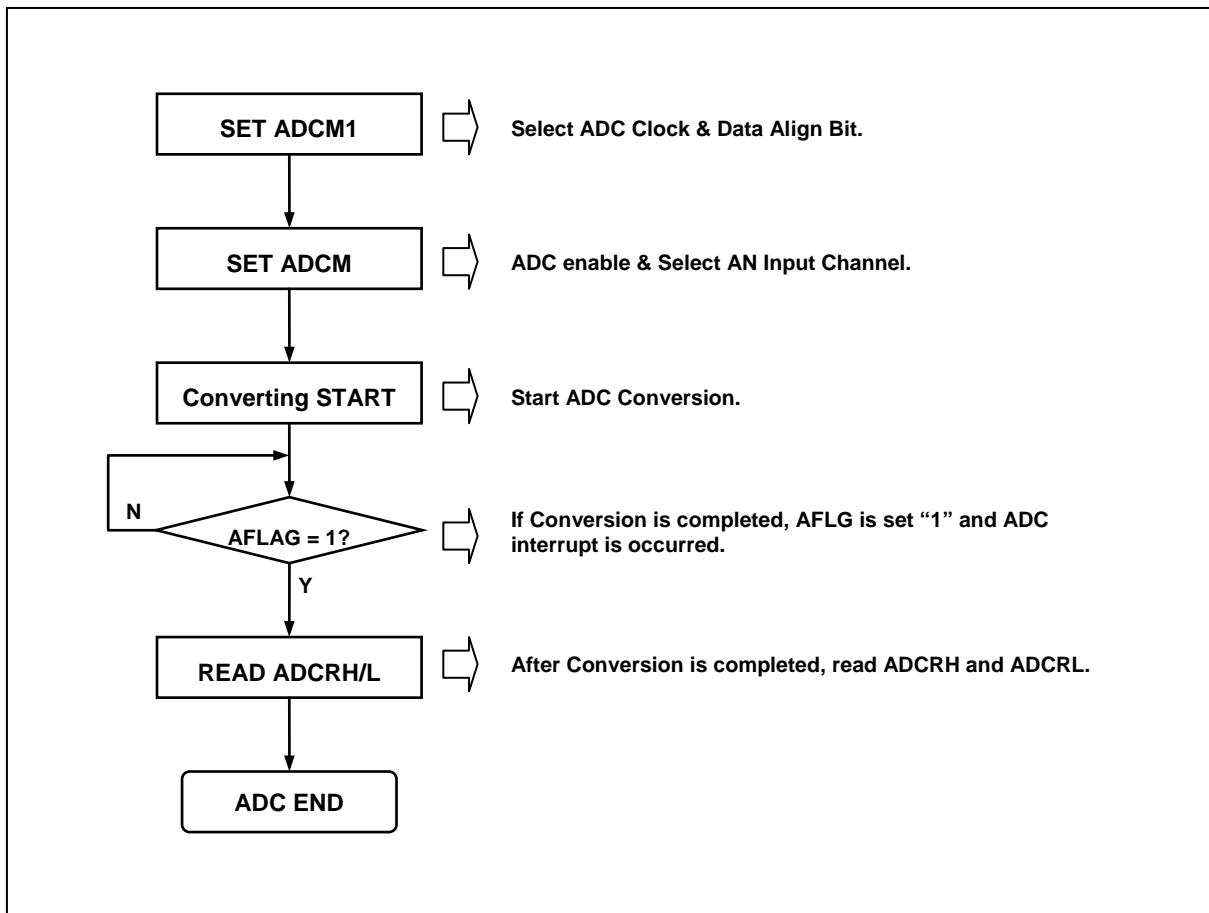


Figure 11-17 Converter Operation Flow

#### 11.6.4 Register Map

Name	Address	Dir	Default	Description
ADCM	95H	R/W	8FH	A/D Converter Mode Register
ADCRH	97H	R	xxH	A/D Converter Result High Register
ADCRL	96H	R	xxH	A/D Converter Result Low Register
ADCM1	96H	R/W (STBY=1)	01H	A/D Converter Mode 1 Register
ADCM1	96H	W (STBY=0)	01H	A/D Converter Mode 1 Register

#### 11.6.5 Register description for ADC

Note) when STBY bit is set to '1', ADCM1 can be read. If ADC enables, it is possible only to write ADCM1. When reading, ADCRH is read.

**ADCM (A/D Converter Mode Register) : 95H**

7	6	5	4	3	2	1	0
STBY	ADST	REFSEL	AFLAG	ADSEL3	ADSEL2	ADSEL1	ADSEL0
RW	RW	RW	R	RW	RW	RW	RW

Initial value : 8FH

STBY	Control operation of A/D standby (power down)				
0	ADC module enable				
1	ADC module disable (power down)				
ADST	Control A/D Conversion stop/start.				
0	ADC Conversion Stop				
1	ADC Conversion Start				
REFSEL	A/D Converter reference selection				
0	Internal Reference (VDD)				
1	External Reference(AVREF)				
AFLAG	A/D Converter operation state				
0	During A/D Conversion				
1	A/D Conversion finished				
ADSEL[3:0]	A/D Converter input selection				
	ADSEL3	ADSEL2	ADSEL1	ADSEL0	Description
	0	0	0	0	Channel0(AN0)
	0	0	0	1	Channel1(AN1)
	0	0	1	0	Channel2(AN2)
	0	0	1	1	Channel3(AN3)
	0	1	0	0	Channel4(AN4)
	0	1	0	1	Channel5(AN5)
	0	1	1	0	Channel6(AN6)
	0	1	1	1	Channel7(AN7)
	1	0	0	0	Channel8(AN8)
	1	0	0	1	Channel9(AN9)
	1	0	1	0	Channel10(AN10)
	1	0	1	1	Channel11(AN11)
	1	1	0	0	Channel12(AN12)
	1	1	0	1	Channel13(AN13)
	1	1	1	0	Channel14(AN14)
	1	1	1	1	Channel15(VDD18), default

**ADCRH (A/D Converter Result High Register) : 97H**

7	6	5	4	3	2	1	0
ADDM11	ADDM10	ADDM9	ADDM8	ADDM7 ADDL11	ADDM6 ADDL10	ADDM5 ADDL9	ADDM4 ADDL8
R	R	R	R	R	R	R	R

Initial value :xxH

ADDM[11:4] MSB align, A/D Converter High result (8-bit), default

ADDL[11:8] LSB align, A/D Converter High result (4-bit)

**ADCRL (A/D Converter Result Low Register) : 96H**

7	6	5	4	3	2	1	0
ADDM3 ADDL7	ADDM2 ADDL6	ADDM1 ADDL5	ADDM0 ADDL4	ADDL3	ADDL2	ADDL1	ADDL0
R	R	R	R	R	R	R	R

Initial value :xxH

ADDM[3:0] MSB align, A/D Converter Low result (4-bit), default

ADDL[7:0] LSB align, A/D Converter Low result (8-bit)

**ADCM1 (A/D Converter Mode Register) : 96H**

	7	6	5	4	3	2	1	0
	EXTRG	TSEL2	TSEL1	TSEL0	-	ALIGN	CKSEL1	CKSEL0
STBY=1	RW(	RW	RW	RW	-	RW	RW	RW
STBY=0	W	W	W	W	-	W	W	W

Initial value : 01H

EXTRG A/D external Trigger  
 A/D conversion Start by external Trigger, and Stop by clearing this bit  
 0 A/D conversion Stop and External Trigger disable  
 1 External Trigger enable

TSEL[2:0] A/D Trigger Source selection

TSEL2	TSEL1	TSEL0	Description
0	0	0	External Interrupt 0
0	0	1	External Interrupt 1
0	1	0	-
0	1	1	-
1	0	0	Timer0 interrupt
1	0	1	Timer1 interrupt
1	1	0	Timer2 interrupt
1	1	1	-

ALIGN A/D Converter data align selection.  
 0 MSB align (ADCRH[7:0], ADCRL[7:4]), default  
 1 LSB align (ADCRH[3:0], ADCRL[7:0])

CKSEL[1:0] A/D Converter Clock selection

CKSEL1	CKSEL0	ADC Clock	ADC VDD
0	0	fx/2	Test Only
0	1	fx/4, default	3V~5V
1	0	fx/8	2.7V~3V
1	1	fx/32	2.4V~2.7V

Note) 1.fx : system clock

2. ADC clock have to be used 3MHz under

## 12. Power Down Operation

### 12.1 Overview

The MC97F1204S has three power-down modes to minimize the power consumption of the device. In power down mode, power consumption is reduced considerably. The device provides three kinds of power saving functions, IDLE, STOP1 and STOP2 mode. In three modes, program is stopped.

To go to STOP1 mode, WDTRC should be set by writing '1' to WDTRCON bit in SCCR register.

### 12.2 Peripheral Operation in IDLE/STOP Mode

Table 12-1 Peripheral Operation during Power Down Mode.

Peripheral	IDLE Mode	STOP1 Mode	STOP2 Mode
CPU	ALL CPU Operation are Disable	ALL CPU Operation are Disable	ALL CPU Operation are Disable
RAM	Retain	Retain	Retain
Basic Interval Timer	Operates Continuously	Operates Continuously	Stop
Watch Dog Timer	Operates Continuously	Operates Continuously	Stop
Timer	Operates Continuously	Halted (Only when the Event Counter Mode is Enable, Timer operates Normally)	Halted (Only when the Event Counter Mode is Enable, Timer operates Normally)
SPI	Operates Continuously	Only operate with external clock	Only operate with external clock
Internal OSC (8MHz)	Oscillation	Stop	Stop
Internal RCOSC (64kHz)	Oscillation	Oscillation	Stop
I/O Port	Retain	Retain	Retain
Control Register	Retain	Retain	Retain
Address Data Bus	Retain	Retain	Retain
Release Method	By RESET, all Interrupts	By RESET, SPI (External clock), External Interrupt (with PCI), WDT, BIT, BOD, TIMER(EC)	By RESET, SPI (External clock), External Interrupt (with PCI), BODTIMER(EC)

### 12.3 IDLE mode

The power control register is set to '01h' to enter the IDLE Mode. In this mode, the internal oscillation circuits remain active. Oscillation continues and peripherals are operated normally but CPU stops. It is released by reset or interrupt. To be released by interrupt, interrupt should be enabled before IDLE mode. If using reset, because the device becomes initialized state, the registers have reset value.

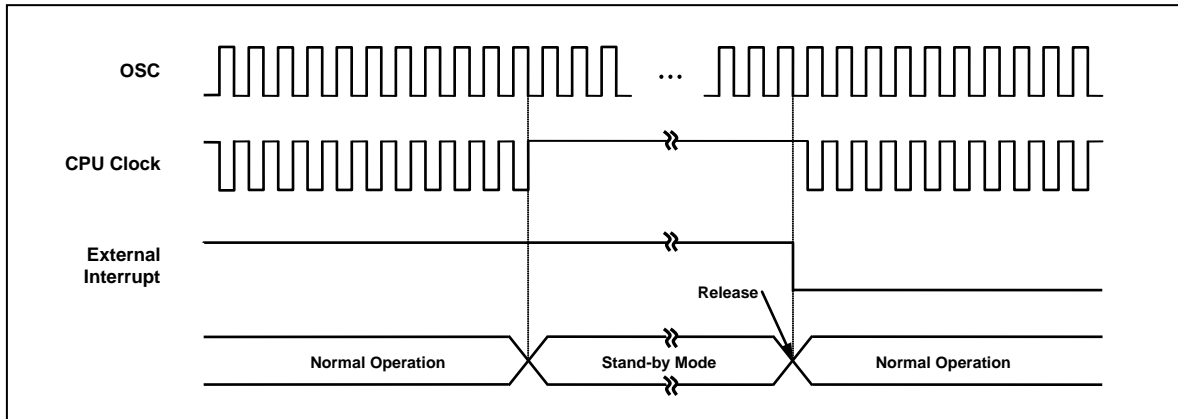


Figure 12-1 IDLE Mode Release Timing by External Interrupt

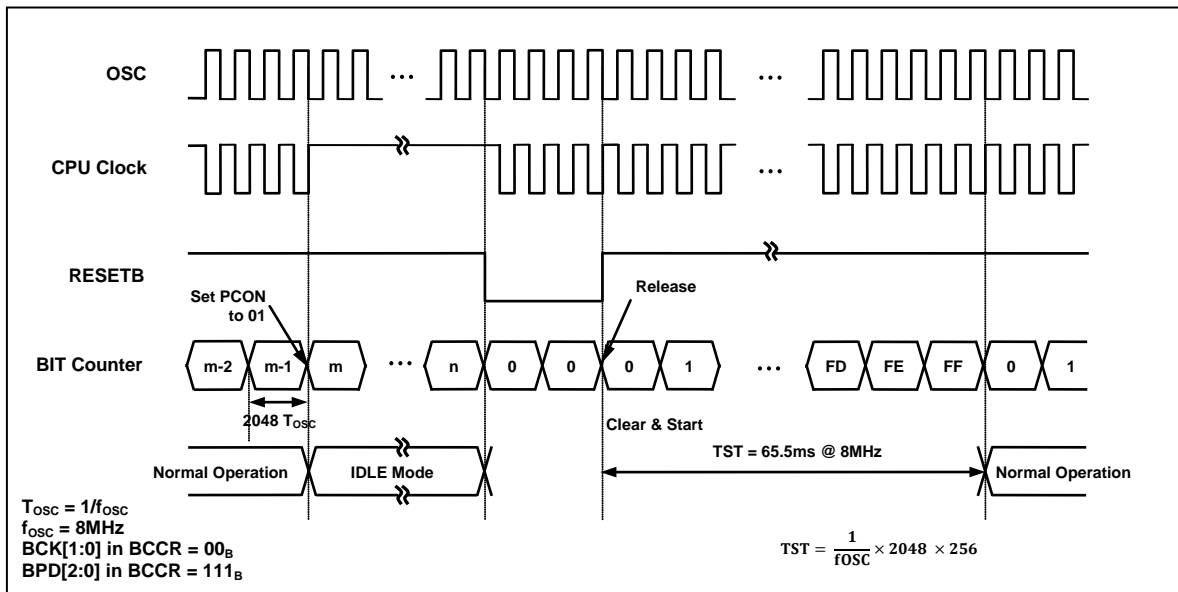


Figure 12-2 IDLE Mode Release Timing by /RESET

(Ex) `MOV PCON, #00000001b` ; setting of IDLE mode : set the bit of STOP and IDLE Control register (PCON)

### 12.4 STOP mode

The power control register is set to '03h' to enter the STOP Mode. In the stop mode, the main oscillator, system clock and peripheral clock is stopped, but watch timer continue to operate if WDTRCON bit in SCCR register is written to '1'. With the clock frozen, all functions are stopped, but the on-chip RAM and control registers are held.

The source for exit from STOP mode is hardware reset and interrupts. The reset re-defines all the control registers.

When exit from STOP mode, enough oscillation stabilization time is required to normal operation. Figure 12-3 shows the timing diagram. When released from STOP mode, the Basic interval timer is activated on wake-up. Therefore, before STOP instruction, user must be set its relevant prescaler divide ratio to have long enough time (more than 20msec). this guarantees that oscillator has started and stabilized.

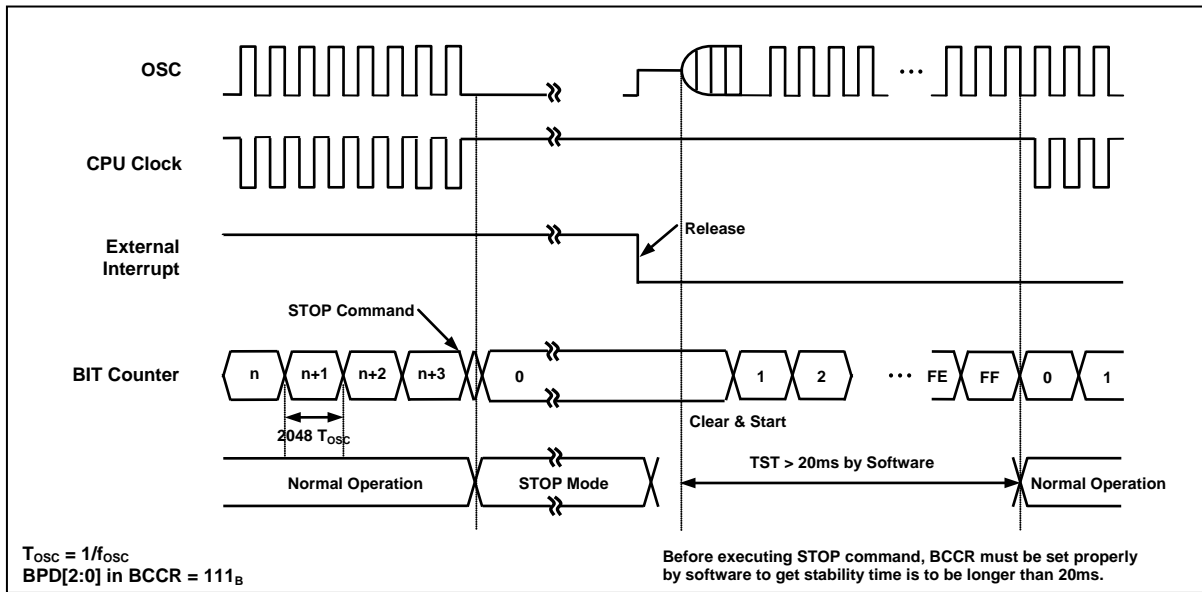


Figure 12-3 STOP Mode Release Timing by External Interrupt

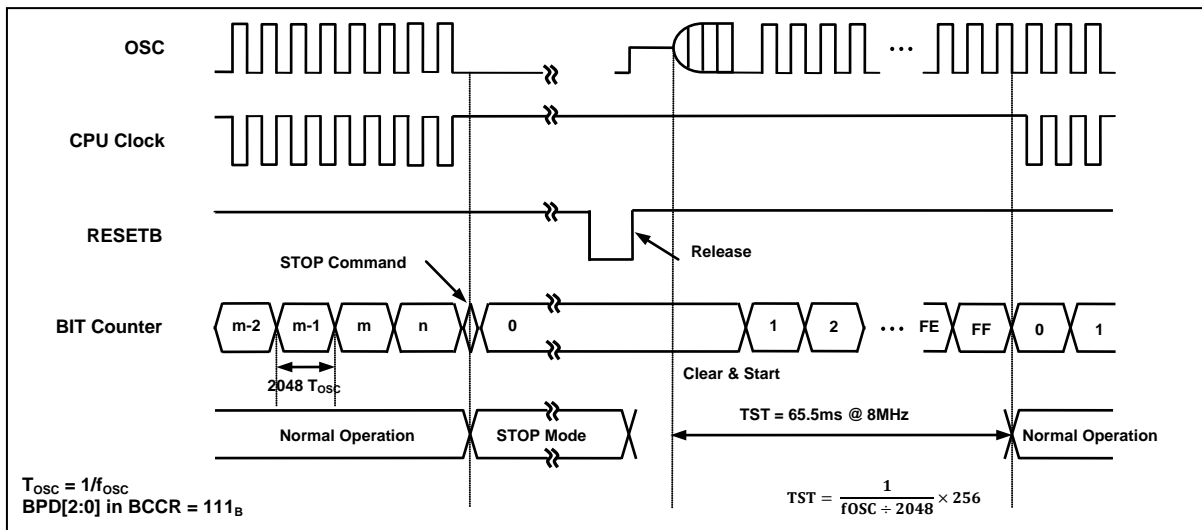


Figure 12-4 STOP Mode Release Timing by /RESET



### 12.5 Release Operation of STOP1, 2 Mode

After STOP1, 2 mode is released, the operation begins according to content of related interrupt register just before STOP1, 2 mode start (Figure 12-5). Interrupt Enable Flag of All (EA) of IE should be set to `1`. Released by only interrupt which each interrupt enable flag = `1`, and jump to the relevant interrupt service routine.

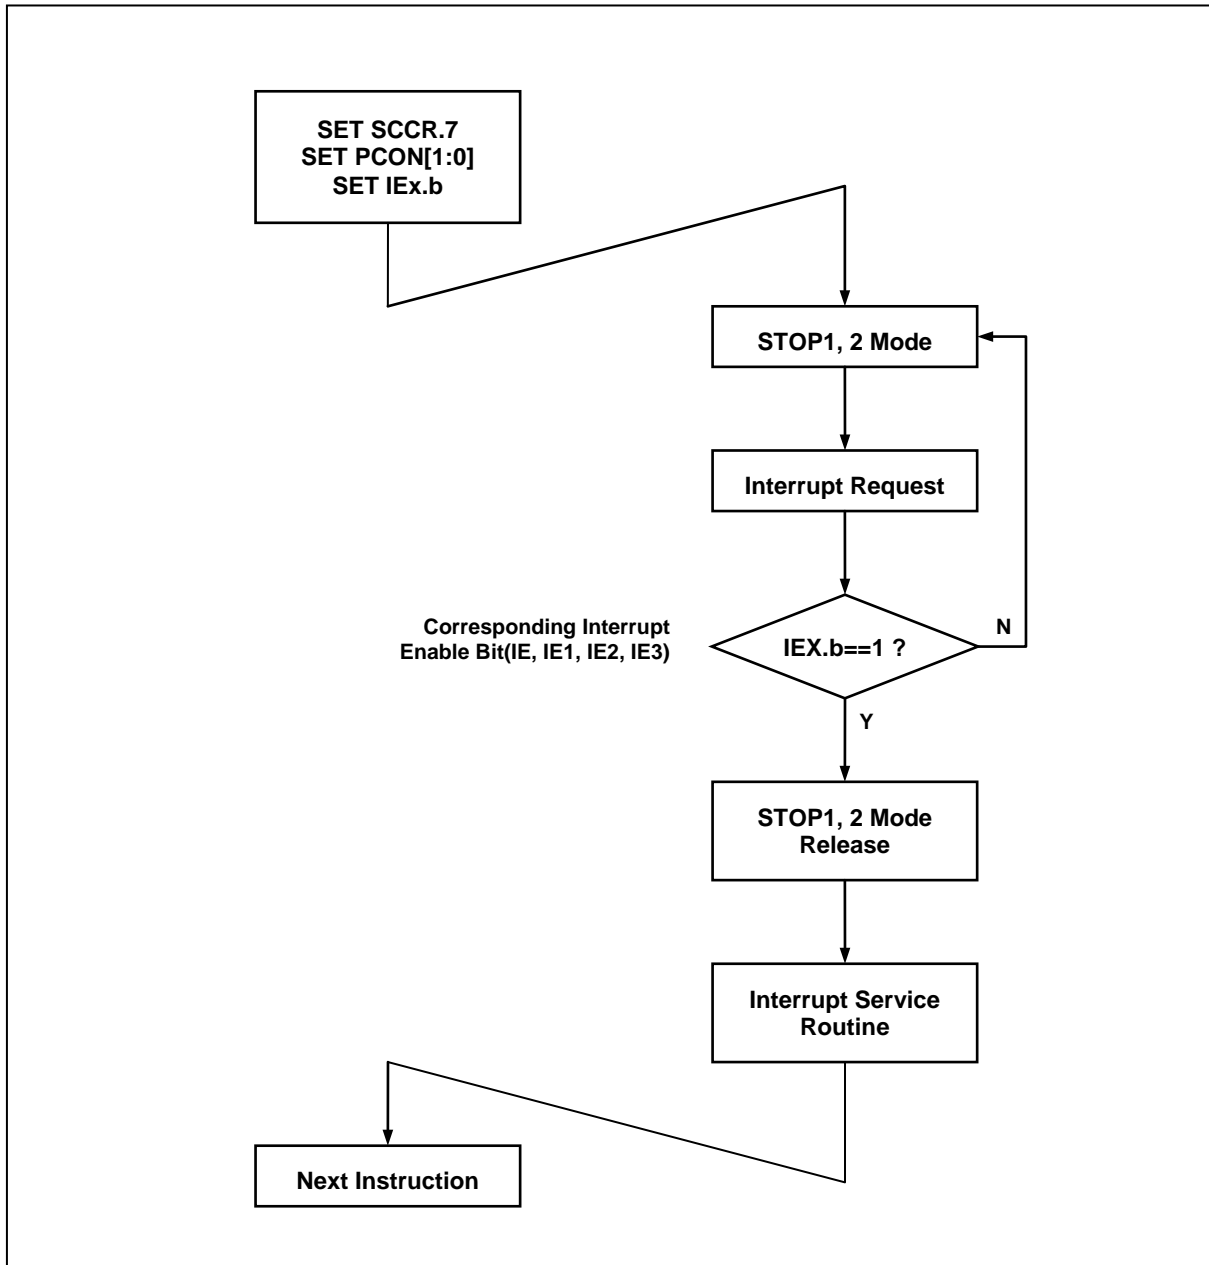


Figure 12-5 STOP1, 2 Mode Release Flow

## 12.5.1 Register Map

Table 12-2 Register Map

Name	Address	Dir	Default	Description
PCON	87H	R/W	00H	Power Control Register

## 12.5.2 Register description for Power Down Operation

### PCON (Power Control Register) : 87H

7	6	5	4	3	2	1	0
bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
RW	RW	RW	RW	RW	RW	RW	RW

Initial value : 00H

01H IDLE mode enable

03H STOP1, 2 mode enable

Note)

- To enter IDLE mode, PCON must be set to '01H'.
- To STOP1,2 mode, PCON must be set to '03H'.  
(In STOP1,2 mode, PCON register is cleared automatically by interrupt or reset)
- When PCON is set to '03H', if SCCR[7] is set to '1', it enters the STOP1 mode. If SCCR[7] is cleared to '0', it enters the STOP2 mode
- The different thing in STOP 1,2 is only clock operation of internal 64kHz-OSC during STOP mode operating.

## 13. RESET

### 13.1 Overview

The MC97F1204S has reset by external RESETB pin. The following is the hardware setting value.

**Table 13-1 Reset state**


On Chip Hardware	Initial Value
Program Counter (PC)	0000h
Accumulator	00h
Stack Pointer (SP)	07h
Peripheral Clock	On
Control Register	Peripheral Registers refer
Brown-Out Detector	Enable

### 13.2 Reset source

The MC97F1204S has seven types of reset generation procedures. The following is the reset sources.

- External RESETB (In the case of RSTDIS = '0')
- Power ON RESET (POR)
- WDT Overflow Reset (In the case of WDTEN = '1')
- BOD Reset (In the case of BODLS ≠ '000')
- LVD Reset (In the case of LVROFF = '0')
- OCD2 Reset

### 13.3 Block Diagram

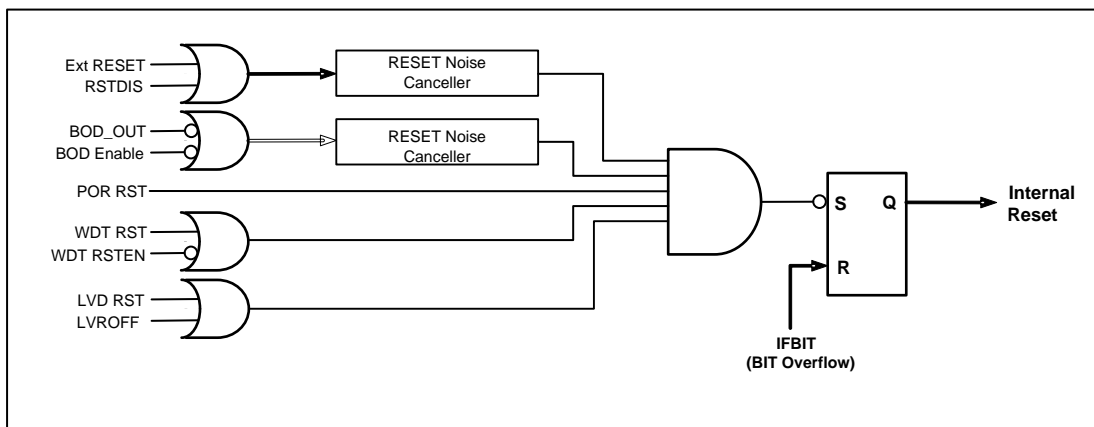

**Figure 13-1 RESET Block Diagram**

### 13.4 RESET Noise Canceller

The Figure 13-2 is the Noise canceller diagram for Noise cancel of RESET. It has the Noise cancel value of about 7us (@V<sub>DD</sub>=5V) to the low input of System Reset.

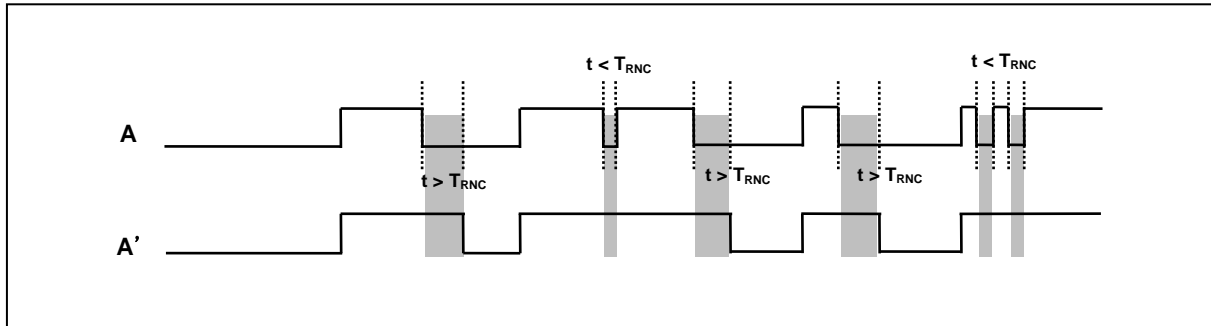


Figure 13-2 Reset noise canceller time diagram

### 13.5 Power ON RESET

When rising device power, the POR (Power ON Reset) have a function to reset the device. If using POR, it executes the device RESET function instead of the RESET IC or the RESET circuits. And External RESET PIN is able to use as Normal input pin.

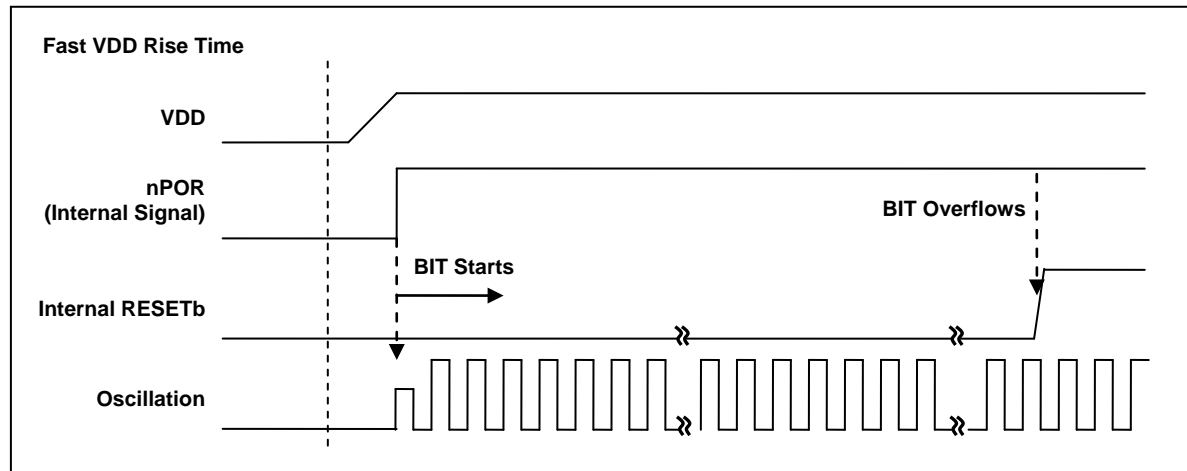


Figure 13-3 Fast VDD rising time

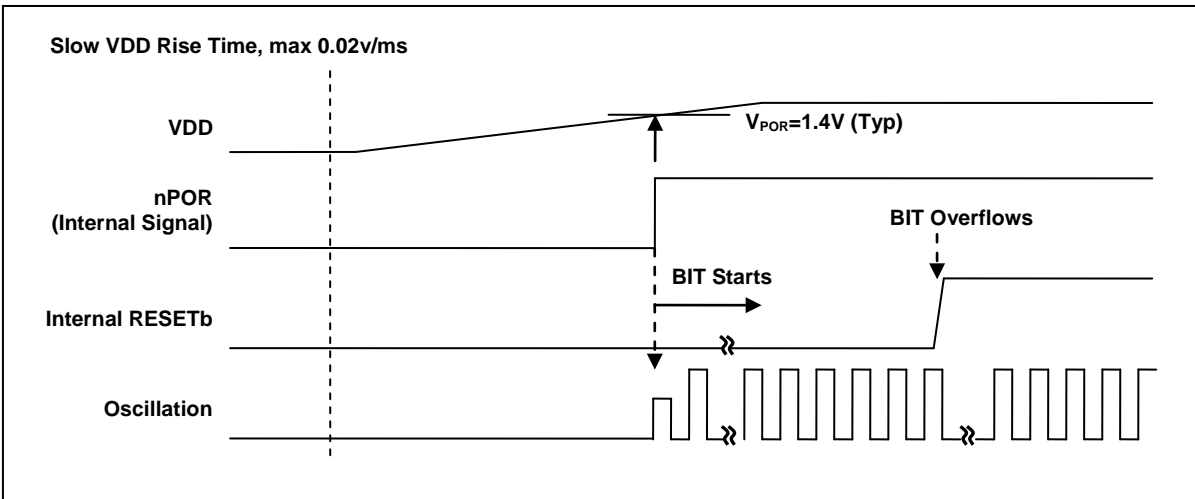


Figure 13-4 Internal RESET Release Timing On Power-Up

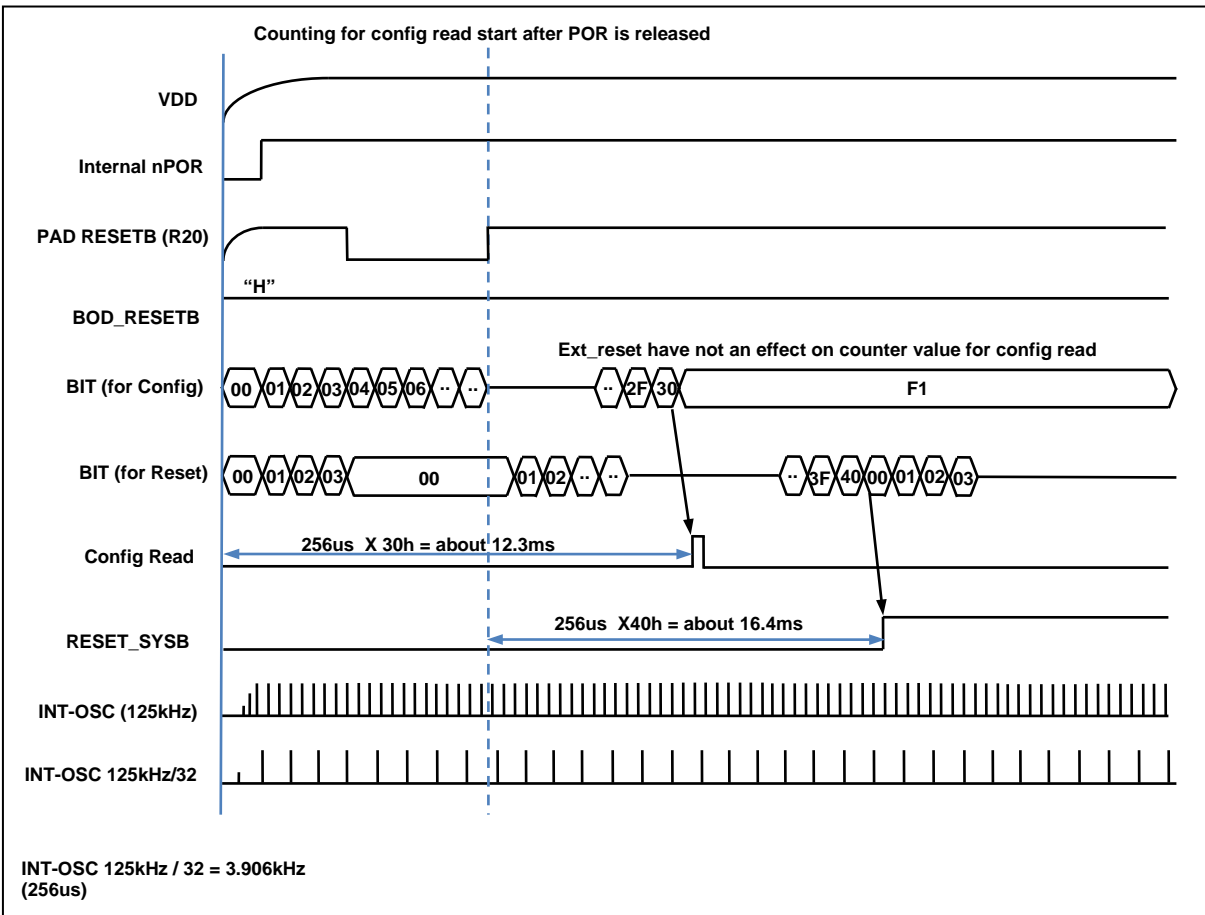


Figure 13-5 Configuration timing when Power-on (at 8Mhz)

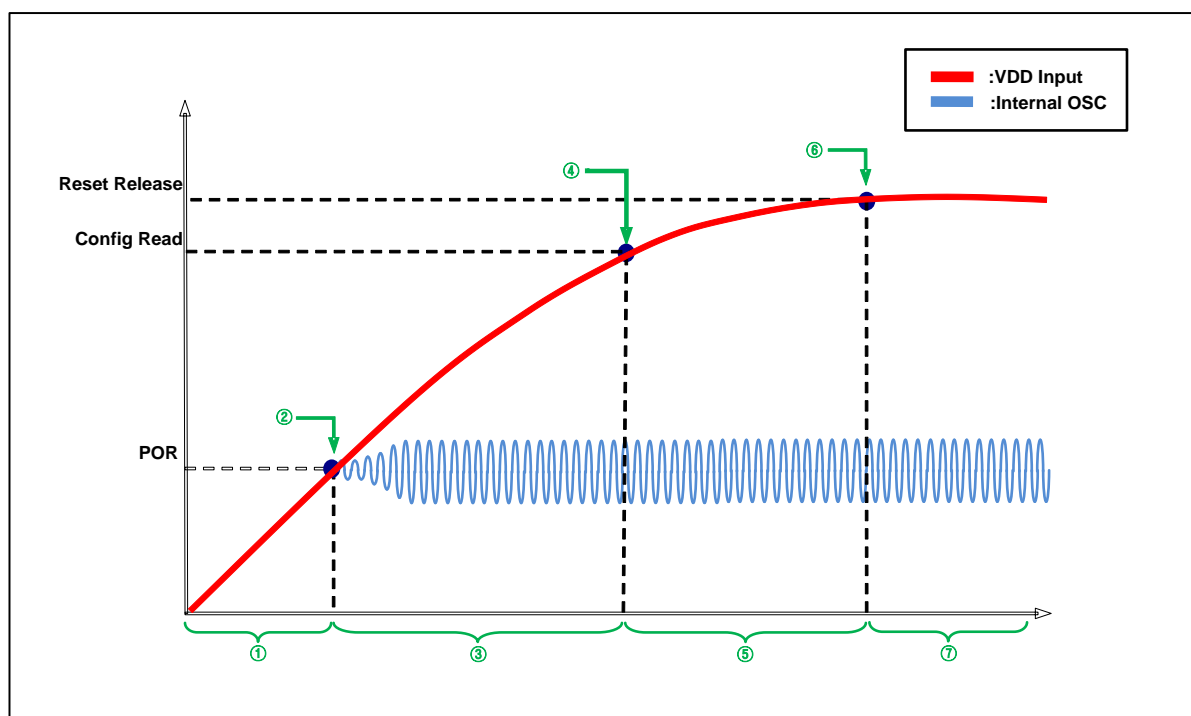


Figure 13-6 Boot Process Wave Form

Table 13-2 Boot Process Description

Process	Description	Remarks
①	-No operation	
②	-1st POR level detection -Internal OSC (125kHz) ON	-about 1.2V ~ 1.6V
③	- (INT-OSC125kHz/32)×30h Delay section (=12ms) -VDD input voltage must rise over than flash operating voltage for configure option read	-Slew Rate $\geq$ 0.025V/ms
④	- Configure option read point	-about 1.5V ~ 1.6V -Config. value is determined by writing option
⑤	- Rising section to Reset Release Level	-16ms point after POR or Ext_reset release
⑥	- Reset Release section (BIT overflow) i) after16ms, after External Reset Release (External reset) ii) 16ms point after POR (POR only)	- BIT is used for peripheral stability
⑦	-Normal operation	

### 13.6 External RESETB Input

The External RESETB is the input to a Schmitt trigger. A reset is accomplished by holding the reset pin low for at least 8µs over, within the operating voltage range and oscillation stable, it is applied, and the internal state is initialized. After reset state becomes '1', it needs the stabilization time with 16ms and after the stable state, the internal RESET becomes '1'. The Reset process step needs 5 oscillator clocks. And the program execution starts at the vector address stored at address 0000H.

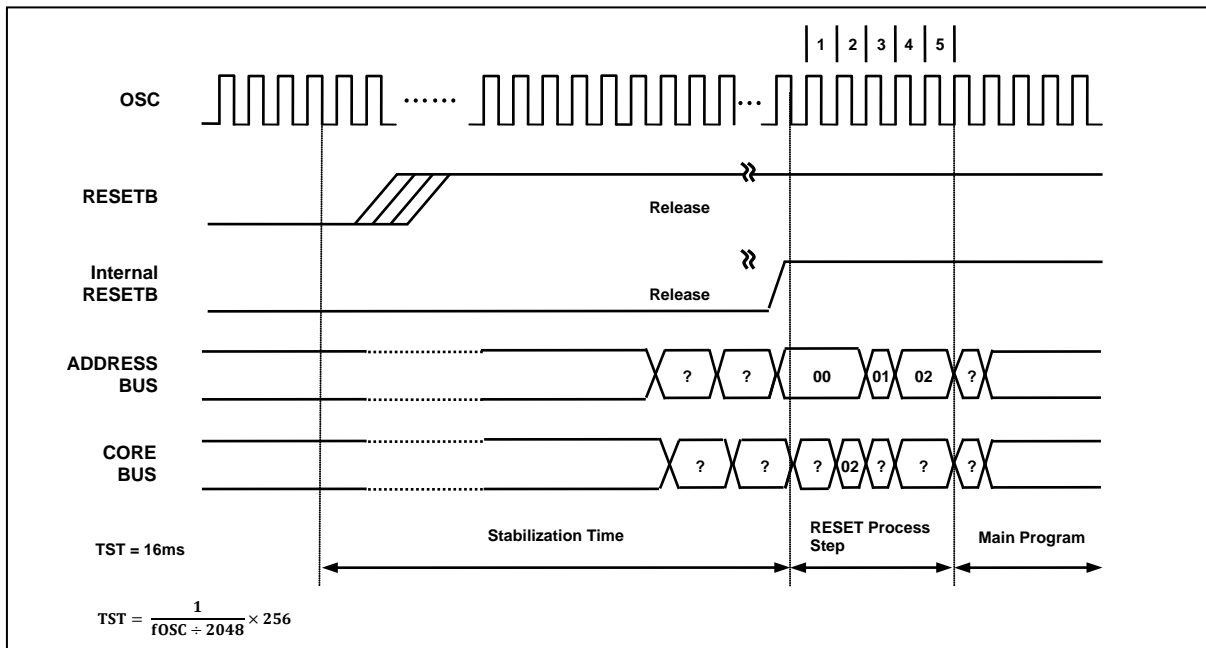


Figure 13-7 Timing Diagram after RESET

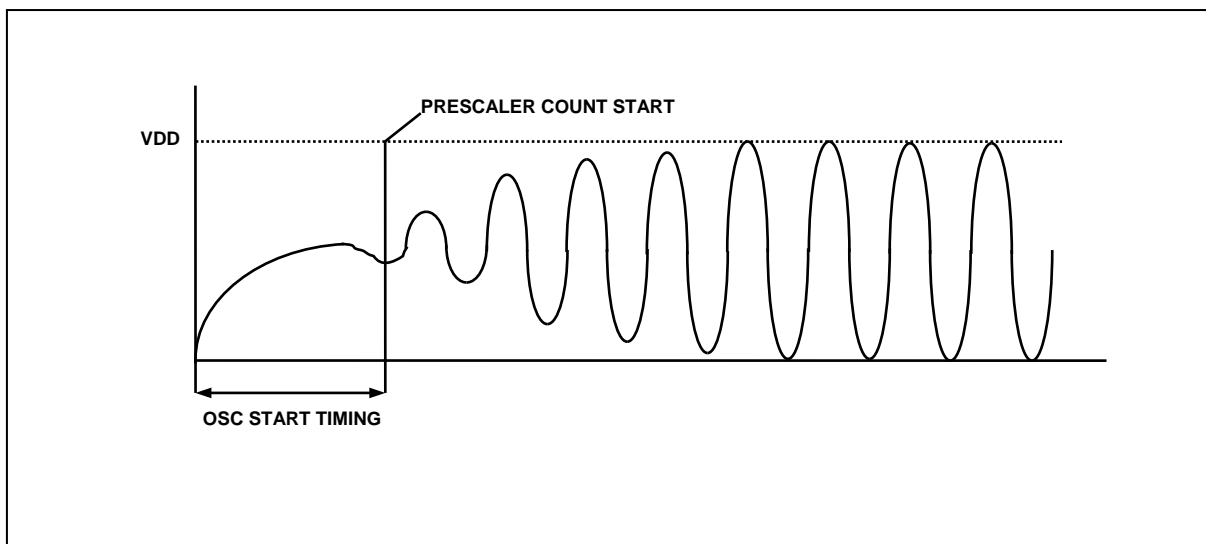


Figure 13-8 Oscillator generating waveform example

Note) as shown Figure 13-8, the stable generating time is not included in the start-up time.

### 13.7 Brown Out Detector Processor

The MC97F1204S has an On-chip Brown-out detection circuit for monitoring the VDD level during operation by comparing it to a fixed trigger level. The trigger level for the BOD can be selected by BODLS[2:0] bit to be 2.1V, 2.3V, 2.5V, 3.0V, 3.5V or 4.0V. In the STOP mode, this will contribute significantly to the total current consumption. So to minimize the current consumption, it is necessary to enable BOD by select BODLS the BODEN bit is set to off by software.

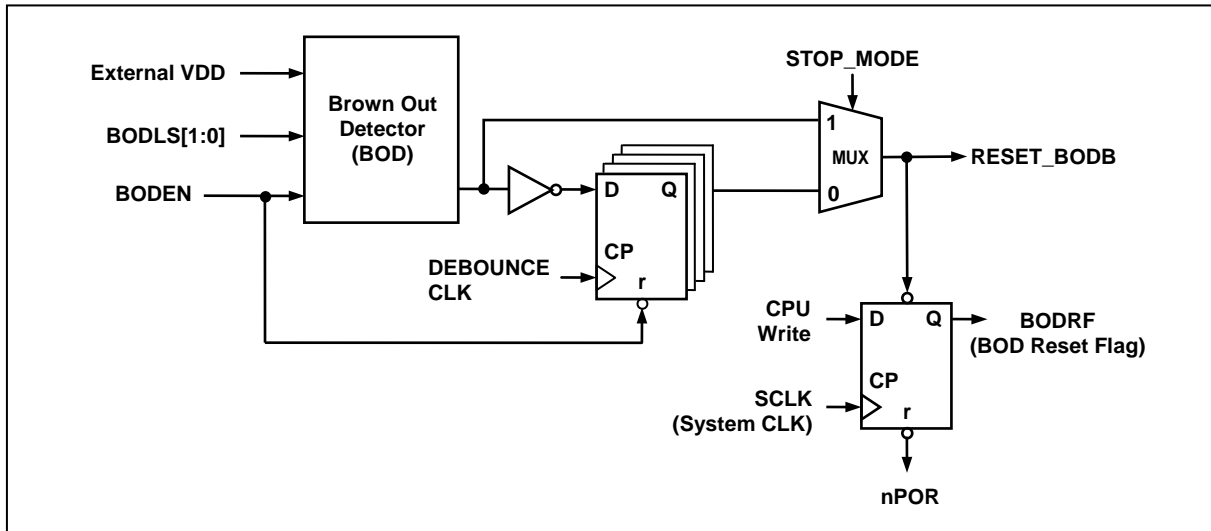


Figure 13-9 Block Diagram of BOD

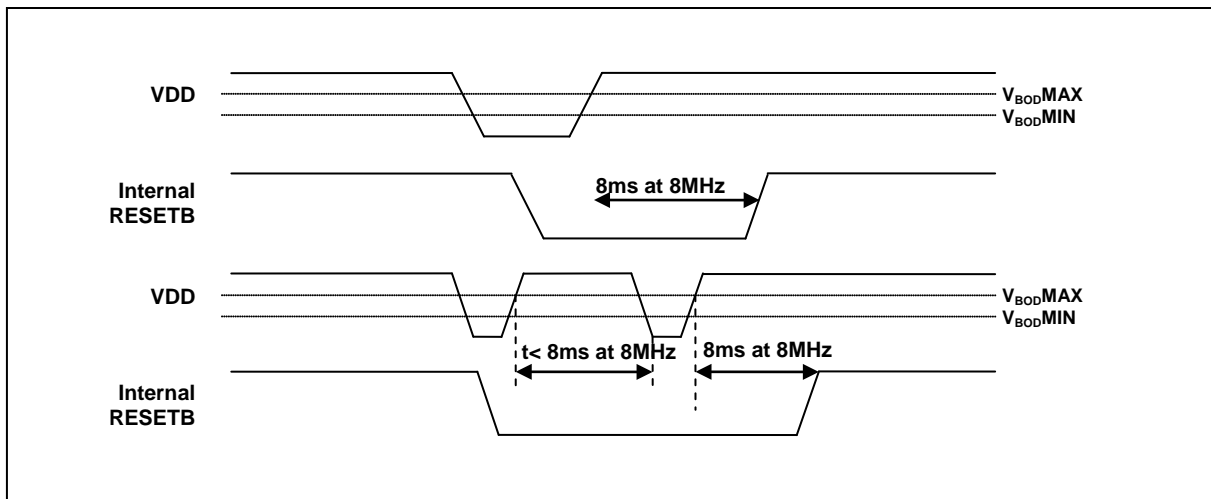


Figure 13-10 Internal Reset at the power fail situation



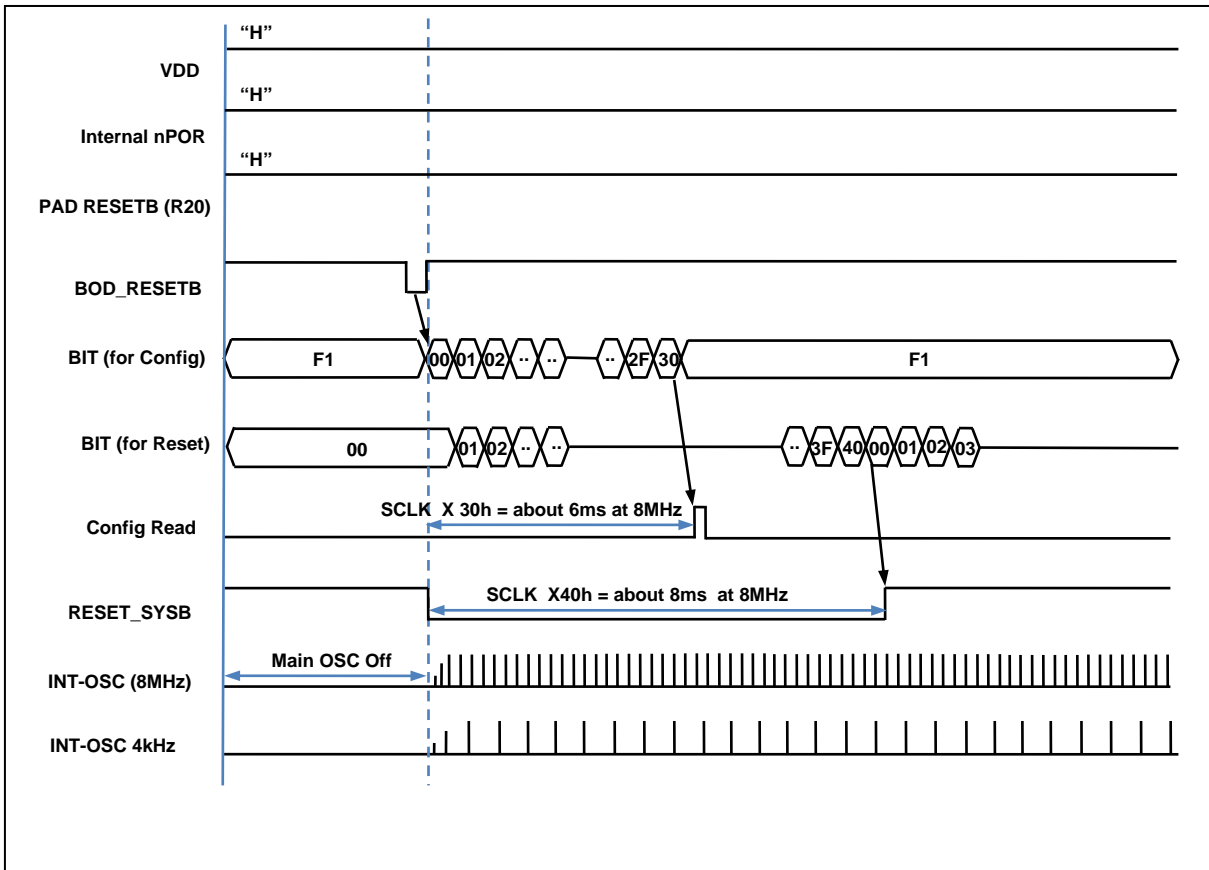


Figure 13-11 Configuration timing when BOD RESET

### 13.7.1 Register Map

Table 13-3 Register Map

Name	Address	Dir	Default	Description
RSFR	86H	R/W	84H	Reset Source Flag register
BODR	8FH	R/W	00H	BOD Control register

### 13.7.2 Register description for Reset Operation

#### RSFR (Reset Source Flag register) : 86H

7	6	5	4	3	2	1	0
PORF	EXTRF	WDTRF	OCDRF	BODRF	LVDRF	-	-
RW	RW	RW	RW	RW	RW	-	-

Initial value : 84H

PORF	Power-On Reset flag bit. The bit is reset by writing '0' to this bit.
0	No detection
1	Detection
EXTRF	External Reset flag bit. The bit is reset by writing '0' to this bit or by Power ON reset.
0	No detection
1	Detection
WDTRF	Watch Dog Reset flag bit. The bit is reset by writing '0' to this bit or by Power ON reset.
0	No detection
1	Detection
OCDRF	On-Chip Debug2 Reset flag bit. The bit is reset by writing '0' to this bit or by Power ON reset.
0	No detection
1	Detection
BODRF	Brown-Out Reset& Interrupt flag bit. The bit is reset by writing '0' to this bit or by Power ON reset or by BOD ack signal
0	No detection
1	Detection
LVDRF	Low Voltage Detect flag bit. The bit is reset by writing '0' to this bit or by Power ON reset.
0	No detection
1	Detection

**BODR (BOD Control Register) : 8FH**

7	6	5	4	3	2	1	0
LVROFF	BODINTON	-	-	ENBODST	BODLS2	BODLS1	BODLS0
R/W	R/W	-	-	R/W	R/W	R/W	R/W

Initial value : 00H

- LVROFF      Select LVR ON or OFF
  - 0      LVR ON
  - 1      LVR OFF
- BODINTON    Select BOD reset or Interrupt
  - 0      Reset
  - 1      Interrupt
- ENBODST     Select STOP mode BOD enable or disable
  - 0      disable
  - 1      enable
- BODLS[2:0]   BOD level Voltage
 

BODLS2	BODLS1	BODLS0	Description
0	0	0	BOD disable (default)
0	0	1	2.1V
0	1	0	2.3V
0	1	1	2.5V
1	0	0	3.0V
1	0	1	3.5V
1	1	0	4.0V
1	1	1	reserved

## 14. On-chip Debug System

### 14.1 Overview

#### 14.1.1 Description

On-chip debug System (OCD2) of MC97F1204OCD can be used for programming the non-volatile memories and on-chip debugging. Detailed descriptions for programming via the OCD2 interface can be found in the following chapter.

Figure 14-1 shows a block diagram of the OCD2 interface and the On-chip Debug system.

#### 14.1.2 Feature

- Two-wire external interface: 1-wire serial clock input, 1-wire bi-directional serial data bus
- Debugger Access to:
  - All Internal Peripheral Units
  - Internal data RAM
  - Program Counter
  - Flash Memory
- Extensive On-chip Debug Support for Break Conditions, Including
  - Break Instruction
  - Single Step Break
  - Program Memory Break Points on Single Address
  - Programming of Flash, Fuses, and Lock Bits through the two-wire Interface
  - On-chip Debugging Supported by OCD2 Dongle
- Operating frequency
  - Supports the maximum frequency of the target MCU

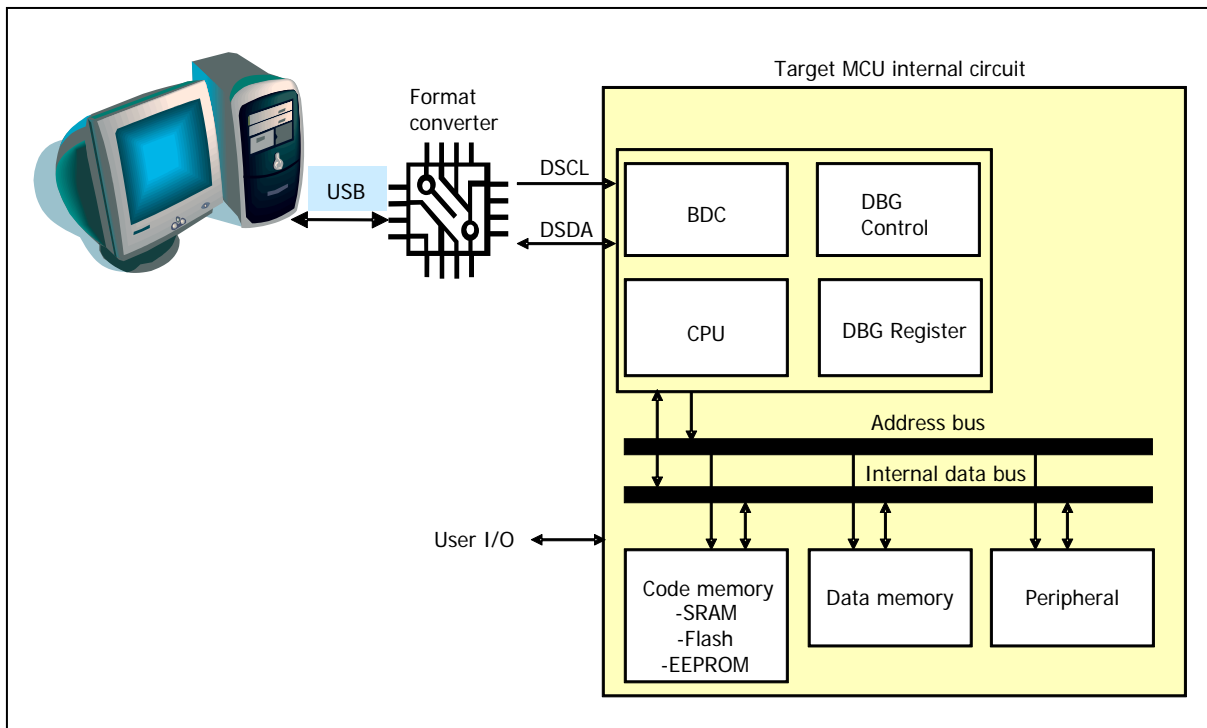


Figure 14-1 Block Diagram of On-chip Debug System

## 14.2 Two-pin external interface

### 14.2.1 Basic transmission packet

- 10-bit packet transmission using two-pin interface.
- 1-packet consists of 8-bit data, 1-bit parity and 1-bit acknowledge.
- Parity is even of '1' for 8-bit data in transmitter.
- Receiver generates acknowledge bit as '0' when transmission for 8-bit data and its parity has no error.
- When transmitter has no acknowledge (Acknowledge bit is '1' at tenth clock), error process is executed in transmitter.
- When acknowledge error is generated, host PC makes stop condition and transmits command which has error again.
- Background debugger command is composed of a bundle of packet.
- Start condition and stop condition notify the start and the stop of background debugger command respectively.

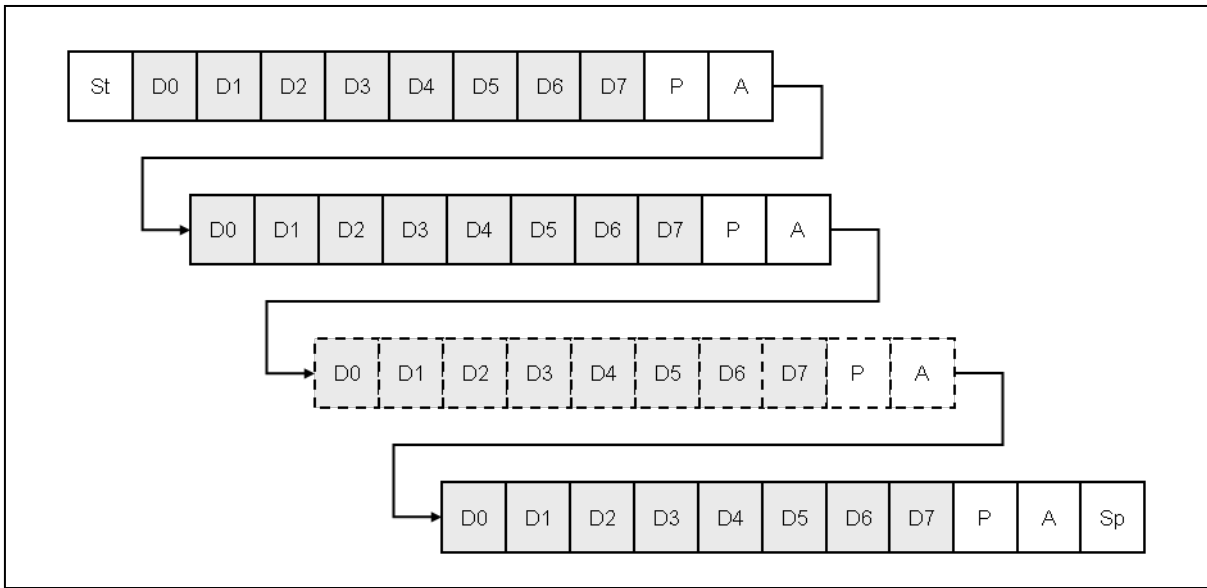


Figure 14-2 10-bit transmission packet

14.2.2 Packet transmission timing

14.2.2.1 Data transfer

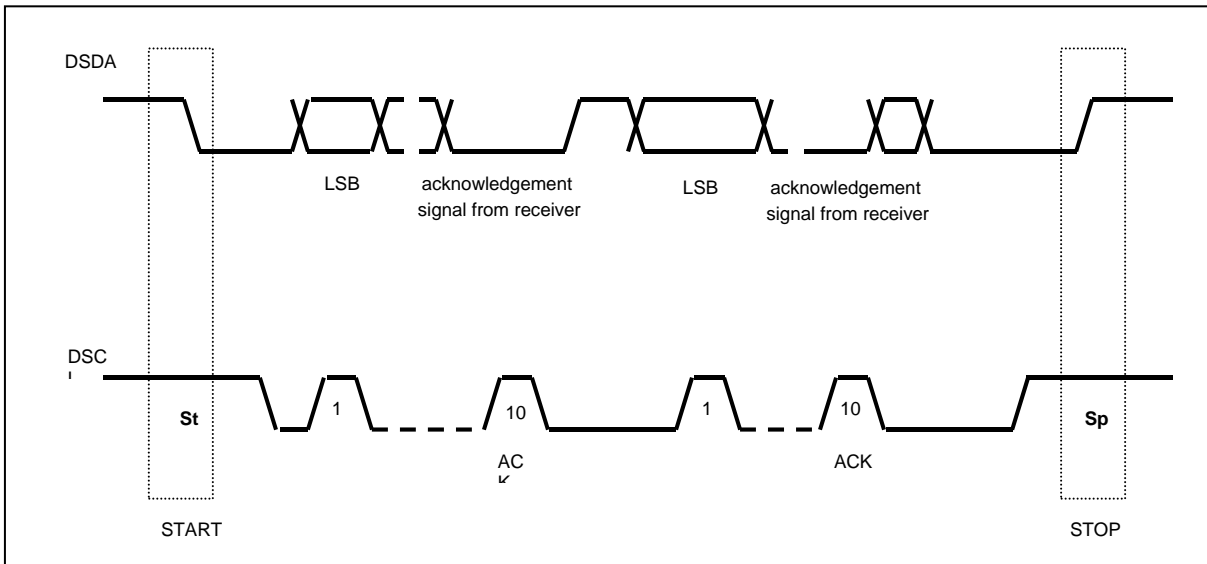


Figure 14-3 Data transfer on the twin bus

14.2.2.2 Bit transfer

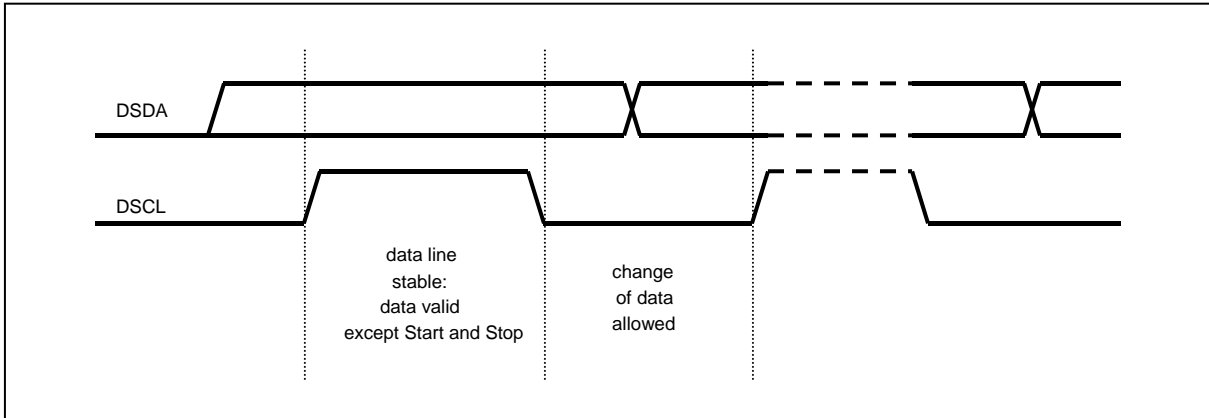


Figure 14-4 Bit transfer on the serial bus

14.2.2.3 Start and stop condition

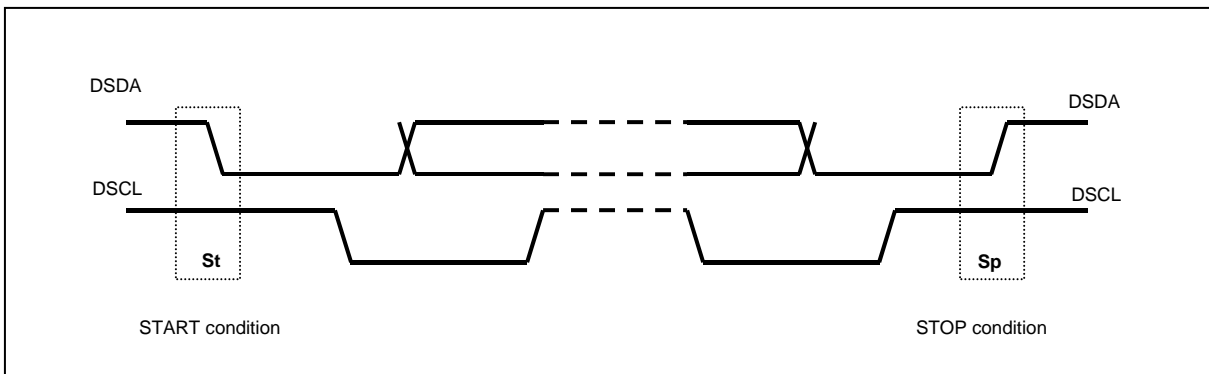


Figure 14-5 Start and stop condition

14.2.2.4 Acknowledge bit

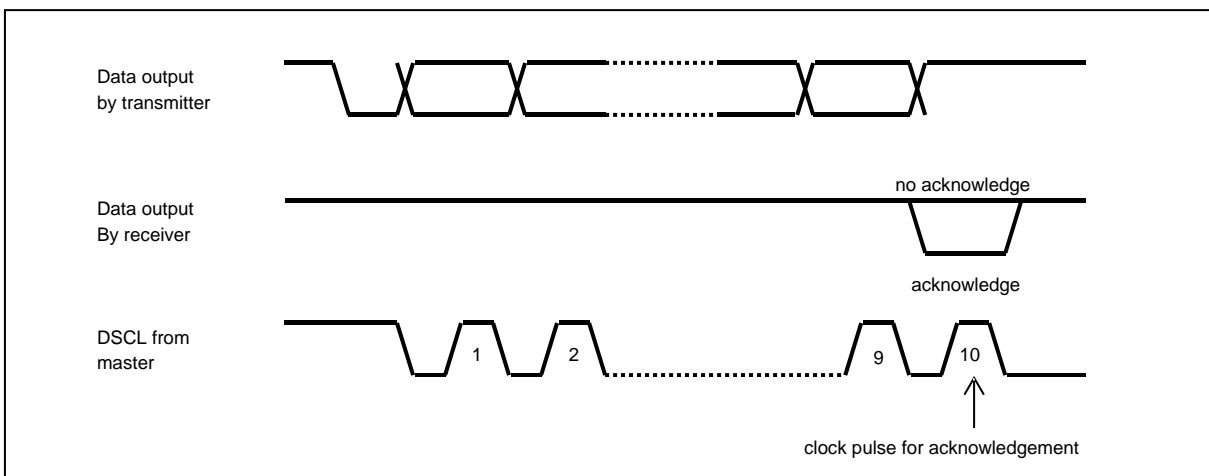


Figure 14-6 Acknowledge on the serial bus

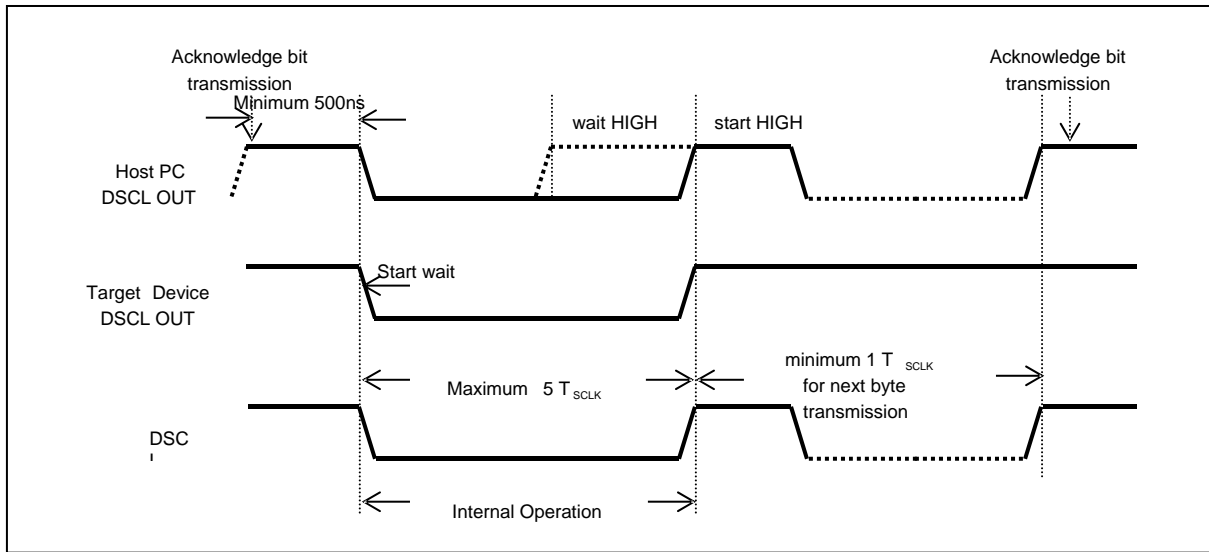


Figure 14-7 Clock synchronization during wait procedure

### 14.2.3 Connection of transmission

Two-pin interface connection uses open-drain (wire-AND bidirectional I/O).

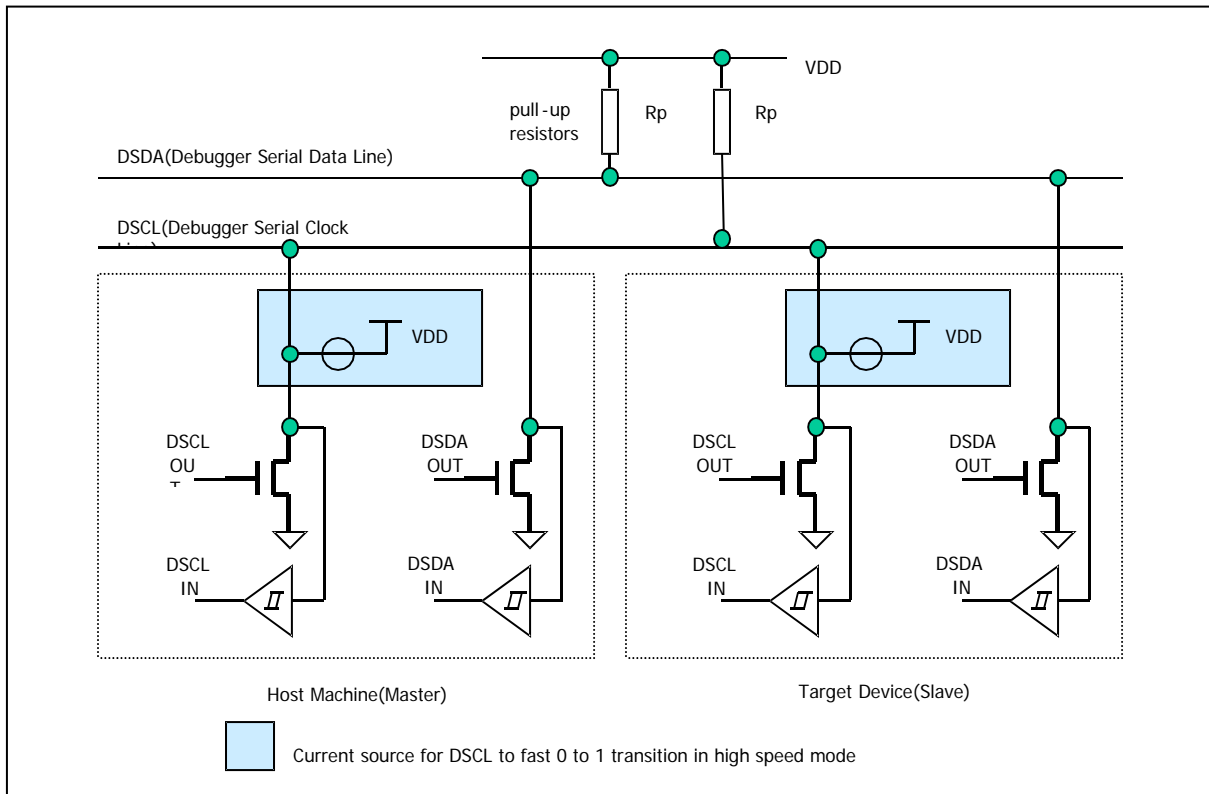


Figure 14-8 Connection of transmission



## 15. Configure option

### 15.1 Configure option Control Register

#### FUSE\_CFG0 (Pseudo-Configure Data)

7	6	5	4	3	2	1	0
		RSTDIS	XTS[2]	XTS[1]	XTS[0]		
		R	R	R	R		

Initial value :20H

RSTDIS	External RESETB disable Bit
0	External RESETB enable
1	External RESETB disable (default)
XTS[2:0]	Oscillator Type Selection
000	Internal RC 8MHz
001	Internal RC 4MHz
010	Internal RC 2MHz
011	-
100	-
101	-
110	-
111	Internal RC 16MHz

## 16. APPENDIX

### A. Instruction Table

Instructions are either 1, 2 or 3 bytes long as listed in the 'Bytes' column below.

Each instruction takes either 1, 2 or 4 machine cycles to execute as listed in the following table.

1 machine cycle comprises 2 system clock cycles.

ARITHMETIC					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
ADD A,Rn	Add register to A	$A=A+Rn$	1	1	28-2F
ADD A,direct	Add direct byte to A	$A=A+direct$	2	1	25
ADD A,@Ri	Add indirect memory to A	$A=A+@Ri$	1	1	26-27
ADD A,#data	Add immediate to A	$A=A+data$	2	1	24
ADDC A,Rn	Add register to A with carry	$A=A+Rn+C$	1	1	38-3F
ADDC A,direct	Add direct byte to A with carry	$A=A+direct+C$	2	1	35
ADDC A,@Ri	Add indirect memory to A with carry	$A=A+@Ri+C$	1	1	36-37
ADDC A,#data	Add immediate to A with carry	$A=A+data+C$	2	1	34
SUBB A,Rn	Subtract register from A with borrow	$A=A-Rn-C$	1	1	98-9F
SUBB A,direct	Subtract direct byte from A with borrow	$A=A-direct-C$	2	1	95
SUBB A,@Ri	Subtract indirect memory from A with borrow	$A=A-@Ri-C$	1	1	96-97
SUBB A,#data	Subtract immediate from A with borrow	$A=A-data-C$	2	1	94
INC A	Increment A	$A=A+1$	1	1	04
INC Rn	Increment register	$Rn=Rn+1$	1	1	08-0F
INC direct	Increment direct byte	$direct=direct+1$	2	1	05
INC @Ri	Increment indirect memory	$@Ri=@Ri+1$	1	1	06-07
DEC A	Decrement A	$A=A-1$	1	1	14
DEC Rn	Decrement register	$Rn=Rn-1$	1	1	18-1F
DEC direct	Decrement direct byte	$Direct=direct-1$	2	1	15
DEC @Ri	Decrement indirect memory	$@Ri=@Ri-1$	1	1	16-17
INC DPTR	Increment data pointer	$DPTR=DPTR+1$	1	2	A3
MUL AB	Multiply A by B (the high byte remains in the B register)	$\{B,A\}=A*B$	1	4	A4
DIV AB	Divide A by B (A=quotient, B=remainder)	$\{A,B\}=A/B$	1	4	84
DA A	Decimal Adjust A	$A=\{AH+6,AL+6\}$	1	1	D4

LOGICAL					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
ANL A,Rn	AND register to A	$A=A\&Rn$	1	1	58-5F
ANL A,direct	AND direct byte to A	$A=A\&direct$	2	1	55
ANL A,@Ri	AND indirect memory to A	$A=A\&@Ri$	1	1	56-57
ANL A,#data	AND immediate to A	$A=A\&data$	2	1	54
ANL direct,A	AND A to direct byte	$direct=direct\&A$	2	1	52
ANL direct,#data	AND immediate to direct byte	$direct=direct\&data$	3	2	53
ORL A,Rn	OR register to A	$A=A Rn$	1	1	48-4F
ORL A,direct	OR direct byte to A	$A=A direct$	2	1	45
ORL A,@Ri	OR indirect memory to A	$A=A @Ri$	1	1	46-47
ORL A,#data	OR immediate to A	$A=A data$	2	1	44
ORL direct,A	OR A to direct byte	$direct=direct A$	2	1	42
ORL direct,#data	OR immediate to direct byte	$direct=direct data$	3	2	43
XRL A,Rn	Exclusive-OR register to A	$A=A\^Rn$	1	1	68-6F
XRL A,direct	Exclusive-OR direct byte to A	$A=A\^direct$	2	1	65
XRL A,@Ri	Exclusive-OR indirect memory to A	$A=A\^@Ri$	1	1	66-67
XRL A,#data	Exclusive-OR immediate to A	$A=A\^data$	2	1	64
XRL direct,A	Exclusive-OR A to direct byte	$direct=direct\^A$	2	1	62
XRL direct,#data	Exclusive-OR immediate to direct byte	$direct=direct\^data$	3	2	63

CLR A	Clear A	A=#00H	1	1	E4
CPL A	Complement A	A=~A	1	1	F4
SWAP A	Swap Nibbles of A	A={AL,AH}	1	1	C4
RL A	Rotate A left(bit7→bit0)	A=A<<1	1	1	23
RLC A	Rotate A left through carry(bit7→C, C→bit0)	A=C,A<<	1	1	33
RR A	Rotate A right(bit0→bit7)	A=A>>1	1	1	03
RRC A	Rotate A right through carry(C→bit7, bit0→C)	A=C,A>>1	1	1	13

DATA TRANSFER					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
MOV A,Rn	Move register to A	A=Rn	1	1	E8-EF
MOV A,direct	Move direct byte to A	A=direct	2	1	E5
MOV A,@Ri	Move indirect memory to A	A=@Ri	1	1	E6-E7
MOV A,#data	Move immediate to A	A=data	2	1	74
MOV Rn,A	Move A to register	Rn=A	1	1	F8-FF
MOV Rn,direct	Move direct byte to register	Rn=direct	2	2	A8-AF
MOV Rn,#data	Move immediate to register	Rn=data	2	1	78-7F
MOV direct,A	Move A to direct byte	direct=A	2	1	F5
MOV direct,Rn	Move register to direct byte	direct=Rn	2	2	88-8F
MOV direct1,direct2	Move direct byte to direct byte	direct1=direct2	3	2	85
MOV direct,@Ri	Move indirect memory to direct byte	direct=@Ri	2	2	86-87
MOV direct,#data	Move immediate to direct byte	direct=data	3	2	75
MOV @Ri,A	Move A to indirect memory	@Ri=A	1	1	F6-F7
MOV @Ri,direct	Move direct byte to indirect memory	@Ri=direct	2	2	A6-A7
MOV @Ri,#data	Move immediate to indirect memory	@Ri=data	2	1	76-77
MOV DPTR,#data	Move immediate to data pointer	DPTR=data16	3	3	90
MOVC A,@A+DPTR	Move code byte relative DPTR to A	A=@A+DPTR	1	2	93
MOVC A,@A+PC	Move code byte relative PC to A	A=@A+PC	1	2	83
MOVX A,@Ri	Move external data(A8) to A	A=@Ri	1	2	E2-E3
MOVX A,@DPTR	Move external data(A16) to A	A=@DPTR	1	2	E0
MOVX @Ri,A	Move A to external data(A8)	@Ri=A	1	2	F2-F3
MOVX @DPTR,A	Move A to external data(A16)	@DPTR=A	1	2	F0
PUSH direct	Push direct byte onto stack	SP=SP+1,SP=direct	2	2	C0
POP direct	Pop direct byte from stack	Direct=SP,SP=SP-1	2	2	D0
XCH A,Rn	Exchange A and register	A<->Rn	1	1	C8-CF
XCH A,direct	Exchange A and direct byte	A<->direct	2	1	C5
XCH A,@Ri	Exchange A and indirect memory	A<->@Ri	1	1	C6-C7
XCHD A,@Ri	Exchange A and indirect memory nibble	{AH,@RiL}<->{@RiH,AL}	1	1	D6-D7

BOOLEAN					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
CLR C	Clear carry	C=0	1	1	C3
CLR bit	Clear direct bit	bit=0	2	1	C2
SETB C	Set carry	C=1	1	1	D3
SETB bit	Set direct bit	bit=1	2	1	D2
CPL C	Complement carry	C=/C	1	1	B3
CPL bit	Complement direct bit	bit=/bit	2	1	B2
ANL C,bit	AND direct bit to carry	C=C&bit	2	2	82
ANL C,/bit	AND direct bit inverse to carry	C=C&/bit	2	2	B0
ORL C,bit	OR direct bit to carry	C=C bit	2	2	72
ORL C,/bit	OR direct bit inverse to carry	C=C /bit	2	2	A0
MOV C,bit	Move direct bit to carry	C=bit	2	1	A2
MOV bit,C	Move carry to direct bit	bit=C	2	2	92

BRANCHING					
Mnemonic	Description		Bytes	Cycles	Opcode
ACALL addr 11	Absolute jump to subroutine	SP=SP+1,SP=PCL SP=SP+1,SP=PCH PC=addr11	2	2	11→F1
LCALL addr 16	Long jump to subroutine	SP=SP+1,SP=PCL SP=SP+1,SP=PCH PC=addr16	3	2	12
RET	Return from subroutine	PCH=SP,SP=SP-1 PCL=SP,SP=SP-1 PC={PCH, PCL}	1	2	22
RETI	Return from interrupt	PCH=SP,SP=SP-1 PCL=SP,SP=SP-1 PC={PCH, PCL}	1	2	32
AJMP addr 11	Absolute jump unconditional	PC=addr11	2	2	01→E1
LJMP addr 16	Long jump unconditional	PC=addr16	3	2	02
SJMP rel	Short jump (relative address)	PC=PC+rel	2	2	80
JC rel	Jump on carry = 1	if(C=1),PC=PC+rel	2	2	40
JNC rel	Jump on carry = 0	if(C≠1),PC=PC+rel	2	2	50
JB bit,rel	Jump on direct bit = 1	if(bit=1),PC=PC+rel	3	2	20
JNB bit,rel	Jump on direct bit = 0	if(bit≠1),PC=PC+rel	3	2	30
JBC bit,rel	Jump on direct bit = 1 and clear	if(bit=1),PC=PC+rel bit=0	3	2	10
JMP @A+DPTR	Jump indirect relative DPTR	PC=@A+DPTR	1	2	73
JZ rel	Jump on accumulator = 0	if(A=00h),PC=PC+rel	2	2	60
JNZ rel	Jump on accumulator ≠ 0	if(A≠00h),PC=PC+rel	2	2	70
CJNE A,direct,rel	Compare A,direct jne relative	if(A≠direct),PC=PC+rel 	3	2	B5
CJNE A,#data,rel	Compare A,immediate jne relative	if(A≠data),PC=PC+rel	3	2	B4
CJNE Rn,#data,rel	Compare register, immediate jne relative	if(Rn≠data),PC=PC+rel 	3	2	B8-BF
CJNE @Ri,#data,rel	Compare indirect, immediate jne relative	if(@Ri≠data),PC=PC+rel rel	3	2	B6-B7
DJNZ Rn,rel	Decrement register, jnz relative	Rn=Rn-1 if(Rn≠00h),PC=PC+rel	2	2	D8-DF
DJNZ direct,rel	Decrement direct byte, jnz relative	direct=direct-1 if(direct≠00h),PC=PC+rel	3	2	D5

MISCELLANEOUS					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
NOP	No operation	-	1	1	00

ADDITIONAL INSTRUCTIONS (selected through EO[7:4])					
Mnemonic	Description	Operation	Bytes	Cycles	Opcode
MOVC @(DPTR++),A	M8051W/M8051EW-specific instruction supporting software download into program memory		1	2	A5
TRAP	Software break command		1	1	A5

In the above table, an entry such as E8-EF indicates a continuous block of hex op-codes used for 8 different registers, the register numbers of which are defined by the lowest three bits of the corresponding code. Non-continuous blocks of codes, shown as 11→F1 (for example), are used for absolute jumps and calls, with the top 3 bits of the code being used to store the top three bits of the destination address.

**B. Package relation**

	<b>97F1204S DBN</b>	<b>97F1204S RBN</b>	<b>97F1204S B</b>	<b>97F1204S MBN</b>	<b>97F1204S HBN</b>	<b>97F1104S SBN</b>	<b>97F1104S MBN</b>
Pin count	20	20	20	16	16	10	8
Max I/O	18	18	18	14	14	8	6
Difference (removed functions on standard MC97F1204S)	-			-		-	
	-			-		-	
	-			-		-	
	-			-		-	