




The RF MOSFET Line
RF Power Field Effect Transistors
N-Channel Enhancement-Mode Lateral MOSFETs**MRF373R1**
MRF373SR1

Designed for broadband commercial and industrial applications with frequencies from 470 – 860 MHz. The high gain and broadband performance of these devices make them ideal for large-signal, common source amplifier applications in 28 volt transmitter equipment.

- Guaranteed CW Performance at 860 MHz, 28 Volts, Narrowband Fixture
 - Output Power – 60 Watts
 - Power Gain – 13 dB
 - Efficiency – 50%
- Typical Performance at 860 MHz, 28 Volts, Broadband Push-Pull Fixture
 - Output Power – 100 Watts (PEP)
 - Power Gain – 11.2 dB
 - Efficiency – 40%
 - IMD – –30 dBc
- Excellent Thermal Stability
- 100% Tested for Load Mismatch Stress at All Phase Angles with 5:1 VSWR @ 28 Vdc, 860 MHz, 60 Watts CW
- In Tape and Reel. R1 = 500 units per 32 mm, 13 inch Reel.


470 – 860 MHz, 60 W, 28 V
LATERAL N-CHANNEL
BROADBAND
RF POWER MOSFETS

CASE 360B-05, STYLE 1
NI-360
MRF373R1

CASE 360C-05, STYLE 1
NI-360S
MRF373SR1
MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	Vdc
Gate-Source Voltage	V_{GS}	± 20	Vdc
Drain Current – Continuous	I_D	7	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	173 1.33	W W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	– 65 to +150	$^\circ\text{C}$
Operating Junction Temperature	T_J	200	$^\circ\text{C}$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.75	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	$^\circ\text{C}/\text{W}$

NOTE – CAUTION – MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Drain–Source Breakdown Voltage (V _{GS} = 0 Vdc, I _D =1 μA)	V _{(BR)DSS}	65	–	–	Vdc
Zero Gate Voltage Drain Current (V _{DS} = 28 Vdc, V _{GS} = 0 Vdc)	I _{DSS}	–	–	1	μAdc
Gate–Source Leakage Current (V _{GS} = 20 Vdc, V _{DS} = 0 Vdc)	I _{GSS}	–	–	1	μAdc
ON CHARACTERISTICS					
Gate Threshold Voltage (V _{DS} = 10 V, I _D = 200 μA)	V _{GS(th)}	2	3	4	Vdc
Gate Quiescent Voltage (V _{DS} = 28 V, I _D = 100 mA)	V _{GS(Q)}	3	4	5	Vdc
Drain–Source On–Voltage (V _{GS} = 10 V, I _D = 3 A)	V _{DS(on)}	–	0.6	0.8	Vdc
Forward Transconductance (V _{DS} = 10 V, I _D = 3 A)	g _{fs}	2.2	2.9	–	S
DYNAMIC CHARACTERISTICS					
Input Capacitance (V _{DS} = 28 V, V _{GS} = 0, f = 1 MHz)	C _{iss}	–	79	–	pF
Output Capacitance (V _{DS} = 28 V, V _{GS} = 0, f = 1 MHz)	C _{oss}	–	46	–	pF
Reverse Transfer Capacitance (V _{DS} = 28 V, V _{GS} = 0, f = 1 MHz)	C _{rss}	–	4	–	pF
FUNCTIONAL CHARACTERISTICS, CW Operation					
Common Source Power Gain (V _{DD} = 28 V, P _{out} = 60 W, I _{DQ} = 200 mA, f = 860 MHz)	G _{ps}	13	14.7	–	dB
Drain Efficiency (V _{DD} = 28 V, P _{out} = 60 W, I _{DQ} = 200 mA, f = 860 MHz)	η	50	54	–	%
Load Mismatch (V _{DD} = 28 V, P _{out} = 60 W, I _{DQ} = 200 mA, f = 860 MHz, Load VSWR at 5:1 at All Phase Angles)	ψ	No Degradation in Output Power			
TYPICAL CHARACTERISTICS, 2 Tone Operation, Push Pull Configuration (MRF373SR1), Broadband Fixture					
Common Source Power Gain (V _{DD} = 28 Vdc, P _{out} = 100 W PEP, I _{DQ} = 400 mA, f1 = 860.0 MHz, f2 = 866 MHz)	G _{ps}	–	11.2	–	dB
Drain Efficiency (V _{DD} = 28 Vdc, P _{out} = 100 W PEP, I _{DQ} = 400 mA, f1 = 860.0 MHz, f2 = 866 MHz)	η	–	40	–	%
Third Order Intermodulation Distortion (V _{DD} = 28 Vdc, P _{out} = 100 W PEP, I _{DQ} = 400 mA, f1 = 860.0 MHz, f2 = 866 MHz)	IMD	–	–30	–	dBc

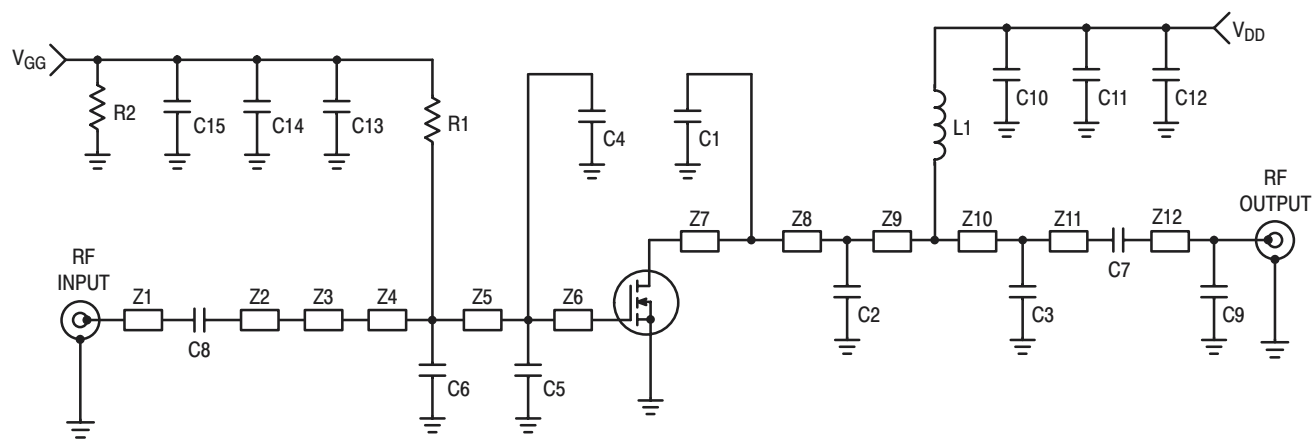

C1	4.7 pF, B Case Chip Capacitor, ATC
C2	15 pF, B Case Chip Capacitor, ATC
C3	6.8 pF, B Case Chip Capacitor, ATC
C4, C5, C6	10 pF, B Case Chip Capacitor, ATC
C7, C8	47 pF, B Case Chip Capacitor, ATC
C9	0.2 pF, B Case Chip Capacitor, ATC
C10, C13	300 pF, B Case Chip Capacitor, ATC, Side Mounted
C11	2) 2.2 μ F, 50 V, Kemet P/N C1825C225
C12	22 μ F, 50 V, Kemet P/N T491D226K50AS
C14	2) 1.0 μ F, 50 V, Kemet P/N C1825C105
C15	10 μ F, 35 V, Kemet P/N T491D106K35AS
L1	22 nH, Coilcraft P/N B07T
R1	1.2 k Ω , Vishay Dale Chip Resistor (1206)
R2	12 k Ω , Vishay Dale Chip Resistor (1206)

Connectors	N-Type (female), M/A Com P/N 3052-1648-10
PCB	MRF373 Printed Circuit Board Rev 01, CuClad 250 (GX-0300-55), height 30 mils, $\epsilon_r = 2.55$
Heatsink	Motorola P/N 95-11LDMOSKPS-1
Insert	LDMOS μ 250 3" x 5" Bedstead Motorola P/N 95-11LDMOSKPS-2 Insert for LDMOS μ 250 3" x 5" Bedstead
End Plates	2) Motorola P/N 93-3MB-9, End Plate for Type-N Connector
Banana Jack and Nut	2) Johnson P/N 108-0904-001
Brass Banana Jack	2) H.H. Smith P/N SM-101

Figure 1. Single-Ended Narrowband Test Circuit Schematic (MRF373R1)

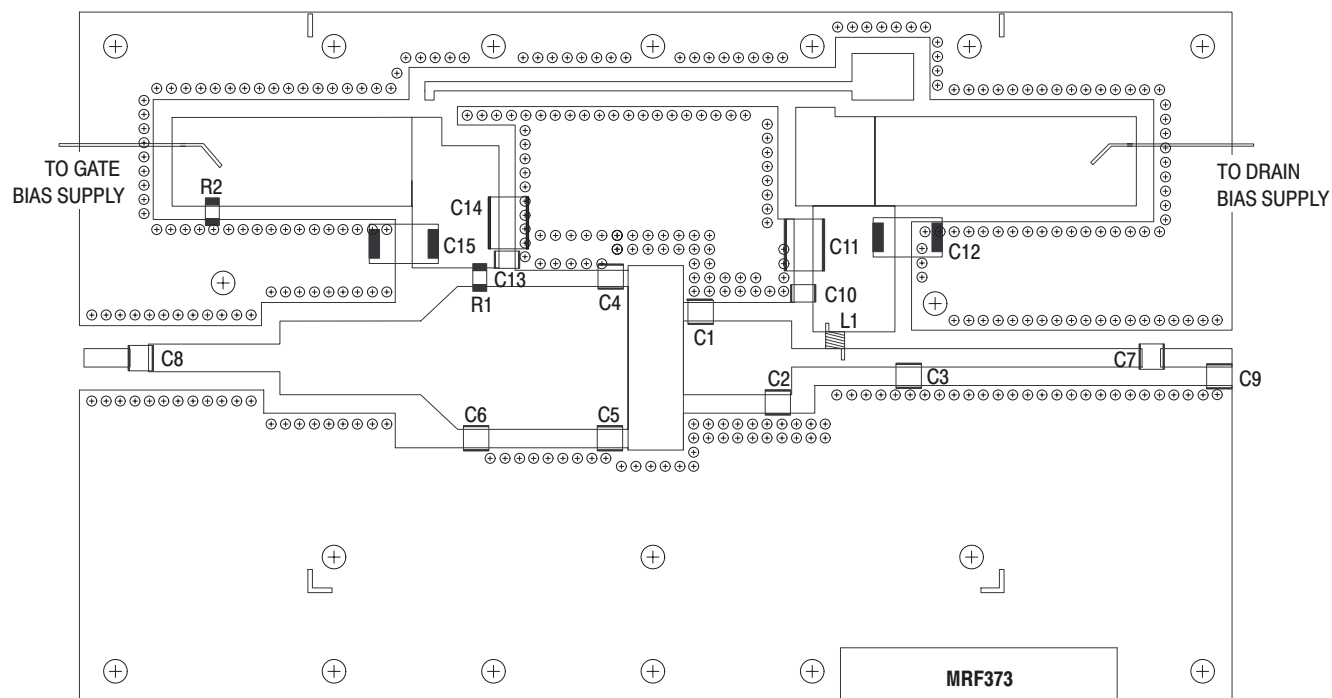


Figure 2. Single-Ended Narrowband Test Circuit Layout
(Suitable for Use with MRF373R1)


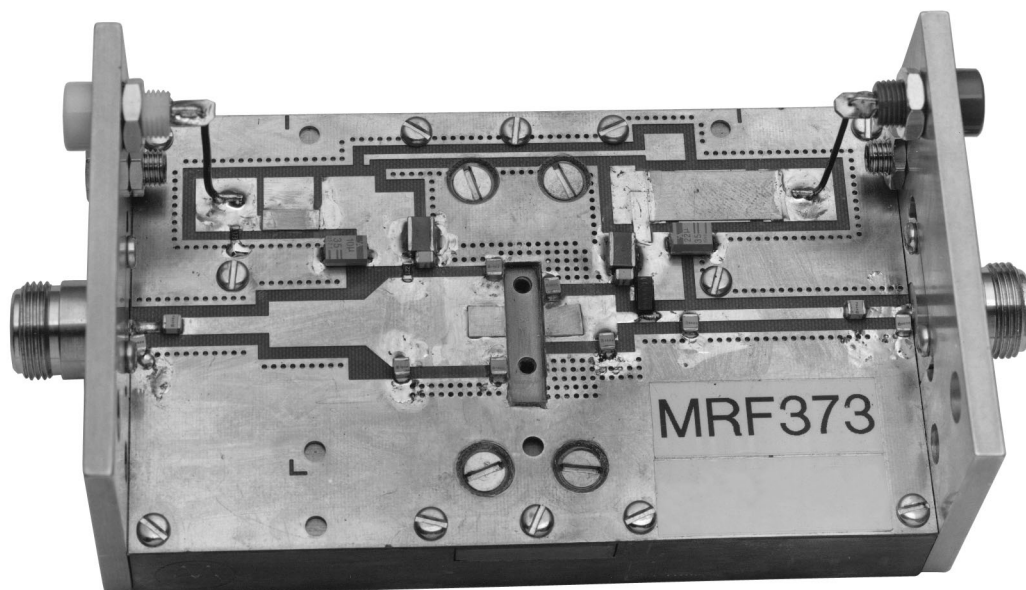


Figure 3. MRF373R1 Narrowband Test Fixture Photo

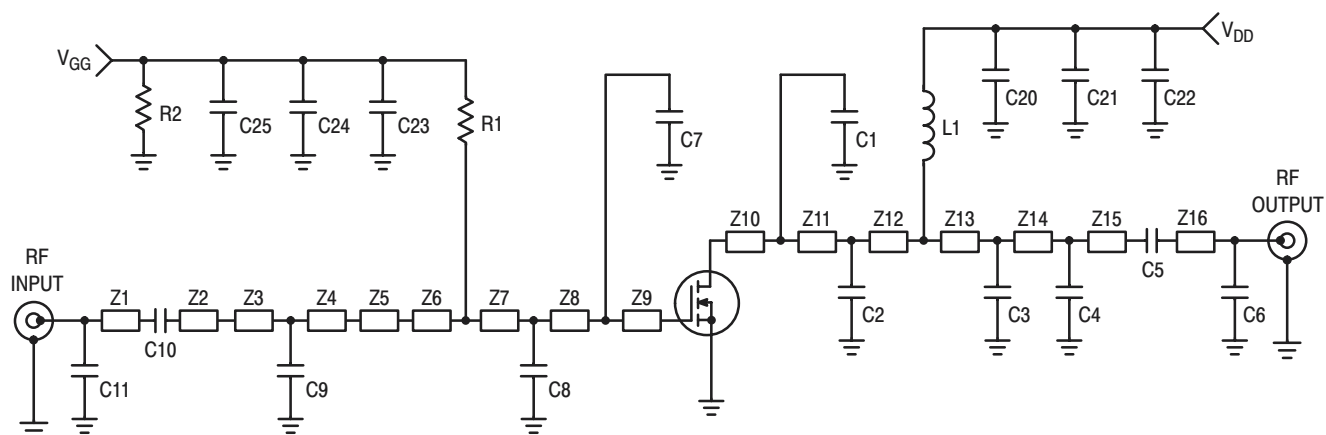

C1, C2	18 pF, B Case Chip Capacitor, ATC
C3	12 pF, B Case Chip Capacitor, ATC
C4, C11	0.8 pF, B Case Chip Capacitor, ATC
C5, C10	68 pF, B Case Chip Capacitor, ATC
C6	0.3 pF, B Case Chip Capacitor, ATC
C7	15 pF, B Case Chip Capacitor, ATC
C8	10 pF, B Case Chip Capacitor, ATC
C9	1.8 pF, B Case Chip Capacitor, ATC
C20, C23	300 pF, B Case Chip Capacitor, ATC, Side Mounted
C21	2) 2.2 μ F, 100 V, Vishay P/N VJ3640Y225KXBAT
C24	2) 1.0 μ F, 50 V, Kemet P/N C1825C105
C22	22 μ F, 35 V, Kemet P/N T491D226K35AS
C25	10 μ F, 35 V, Kemet P/N T491D106K35AS
L1	22 nH, Coilcraft P/N B07T
R1	1.2 k Ω , Vishay Dale Chip Resistor (1206)
R2	12 k Ω , Vishay Dale Chip Resistor (1206)

Connectors	N-Type (female), M/A Com P/N 3052-1648-10
PCB	MRF373 Printed Circuit Board Rev 01, CuClad 250 (GX-0300-55), height 30 mils, $\epsilon_r = 2.55$ (new PCB's available from CMR)
Heatsink	Motorola P/N 95-11LDMOSKPS-1 LDMOS μ 250 3" x 5" Bedstead
Insert	Motorola P/N 95-11LDMOSKPS-2S Insert for LDMOS μ 250S 3" x 5" Bedstead
End Plates	2) Motorola P/N 93-3MB-9, End Plate for Type-N Connector
Banana Jack and Nut	2) Johnson P/N 108-0904-001
Brass Banana Jack	2) H.H. Smith P/N SM-101

Figure 4. Single-Ended Narrowband Test Circuit Schematic (MRF373SR1)

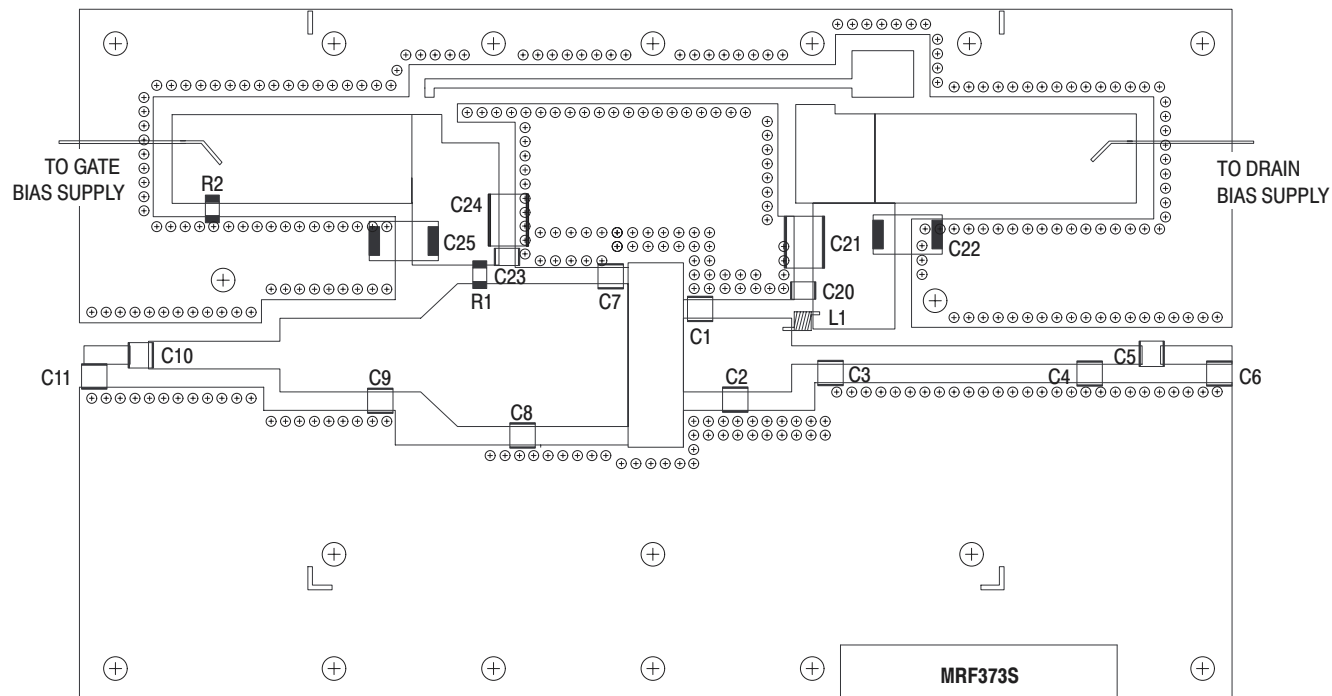


Figure 5. Single-Ended Narrowband Test Circuit Layout
(Suitable for Use with MRF373SR1)

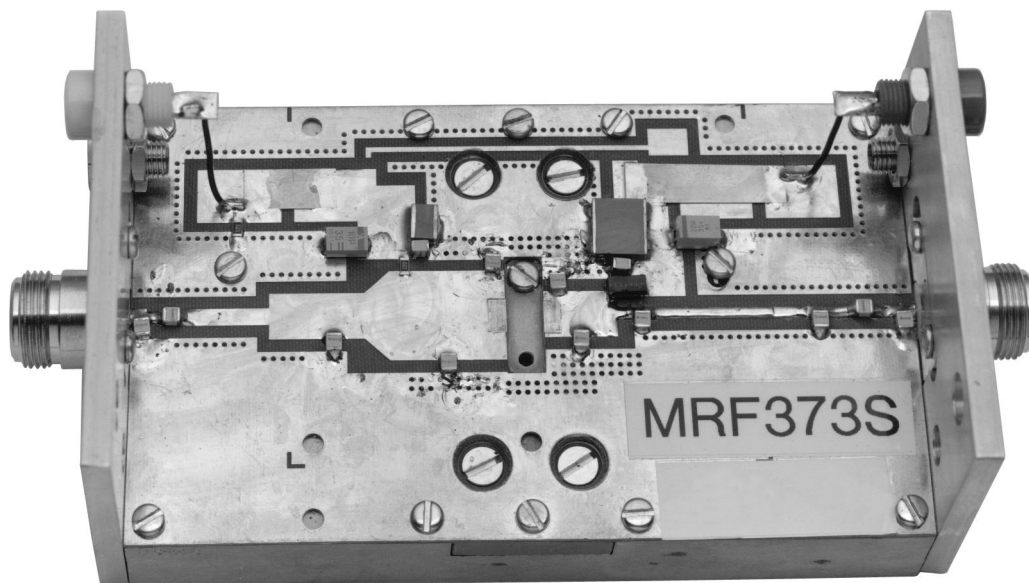


Figure 6. MRF373SR1 Narrowband Test Circuit Photo

TYPICAL CHARACTERISTICS FOR MRF373R1 IN SINGLE-ENDED FIXTURE

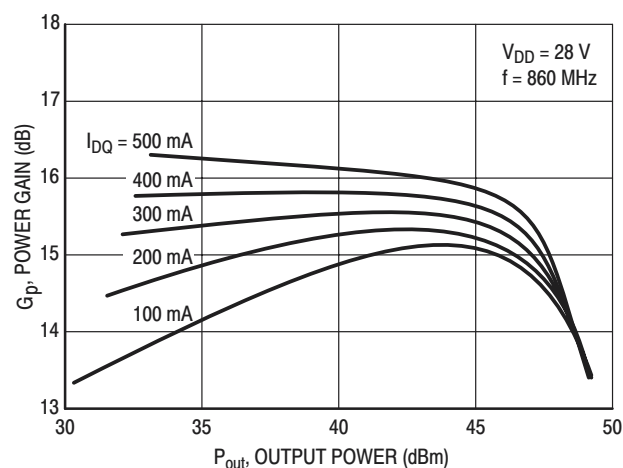


Figure 7. Power Gain versus Output Power

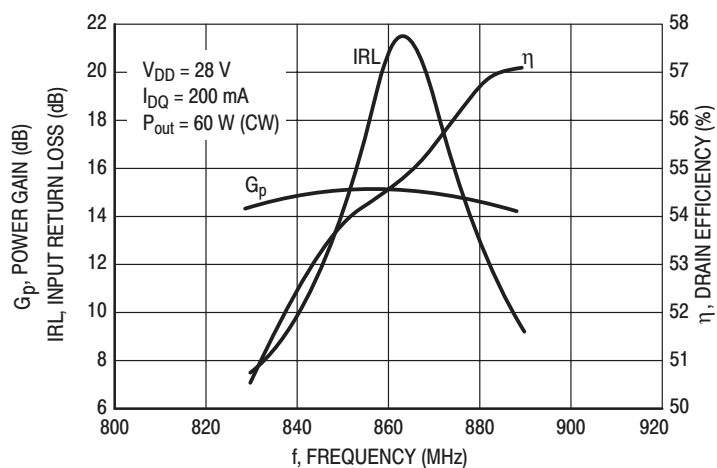


Figure 8. Performance in Narrowband Circuit


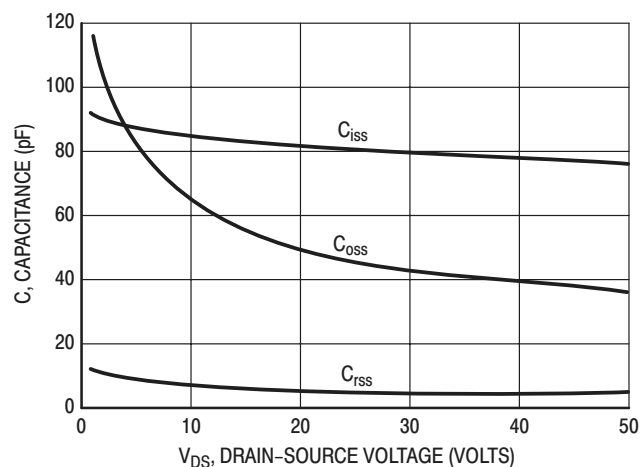


Figure 9. Capacitance versus Voltage

Table 1. Common Source S-Parameters ($V_{DS} = 28\text{ V}$, $I_D = 2.0\text{ A}$)

f MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	S ₁₁	∠ φ	S ₂₁	∠ φ	S ₁₂	∠ φ	S ₂₂	∠ φ
400	0.921	182	2.23	52	0.009	39	0.824	184
450	0.922	181	1.95	49	0.009	53	0.832	184
500	0.924	180	1.70	46	0.010	64	0.841	184
550	0.926	179	1.49	42	0.011	72	0.851	183
600	0.929	178	1.31	38	0.013	78	0.860	183
650	0.932	177	1.16	35	0.015	81	0.870	182
700	0.936	176	1.03	31	0.017	82	0.881	182
750	0.940	176	0.93	28	0.019	82	0.892	181
800	0.945	175	0.84	26	0.021	82	0.904	180
850	0.951	174	0.78	24	0.023	80	0.917	180
900	0.957	173	0.72	24	0.025	78	0.929	179

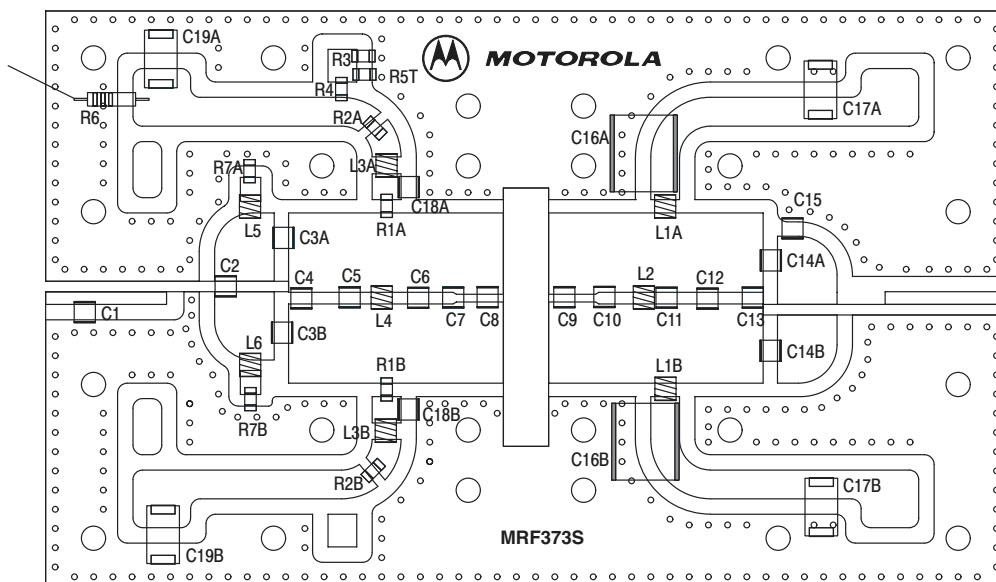

Vertical Balun Mounting Detail

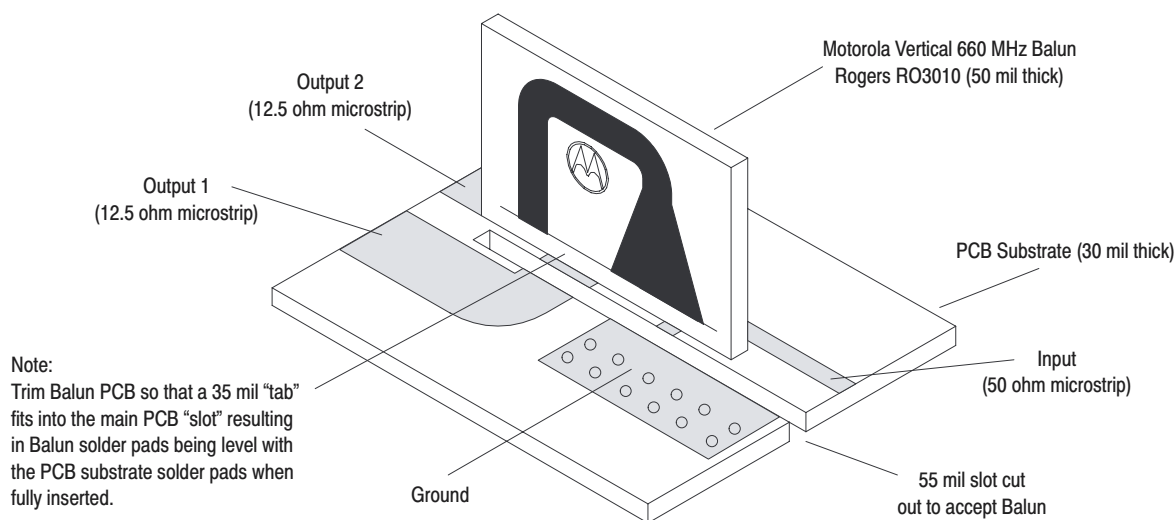


Figure 10. MRF373SR1 Broadband Push-Pull Component Layout

Table 2. MRF373SR1 Broadband Push–Pull Application Parts List

Designation	Description
C1	1.0 pF, AVX, P12101J1R0BBT
C2, C4, C10	10 pF, AVX, P12101J100GBT
C3A, B	120 pF, 300 V, AVX, AQ149M121JAJBE
C5, C6, C9	12 pF, AVX, P12101J120GBT
C7, C8	18 pF, AVX, P12101J180GBT
C11	6.8 pF, AVX, P12101J6R8BBT
C12	4.7 pF, AVX, P12101J4R7BBT
C13, C18A, B	3.3 pF, AVX, P12101J3R3BBT
C14A, B	100 pF, 500 V, AVX, AQ147M101JAJBE
C15	2.7 pF, AVX, P12101J2R7BBT
C16A, B	3.3 μ F, 100 V, Vitramon P/N VJ3640Y335KXBAT
C17A, B, C19A, B	22 μ F, 35 V, Kemet P/N T491D226K35AS
L1A, B, L3A, B, L4, L5	8.0 nH, Coilcraft P/N A03T
L2, L6	12.5 nH, Coilcraft P/N A04T
R1A, B	22 Ω , Vishay Dale Chip Resistor, 1/4 W (1206)
R2A, B	10 Ω , Vishay Dale Chip Resistor, 1/4 W (1206)
R3	390 Ω , Vishay Dale Chip Resistor (1206)
R4	2.4 k Ω , Vishay Dale Chip Resistor (1206)
R5T	470 Ω Thermistor, KOA SPEER MOT P/N 0680149M01
PCB	MRF373 PP Printed Circuit Board Rev 2C, Rogers RO4350, Height 30 mils, $\epsilon_r = 3.48$
Balun A, B	Vertical 660 MHz Broadband Balun, Printed Circuit Board Rev 01, Rogers RO3010, Height 50 mils, $\epsilon_r = 10.2$

TYPICAL TWO-TONE BROADBAND CHARACTERISTICS

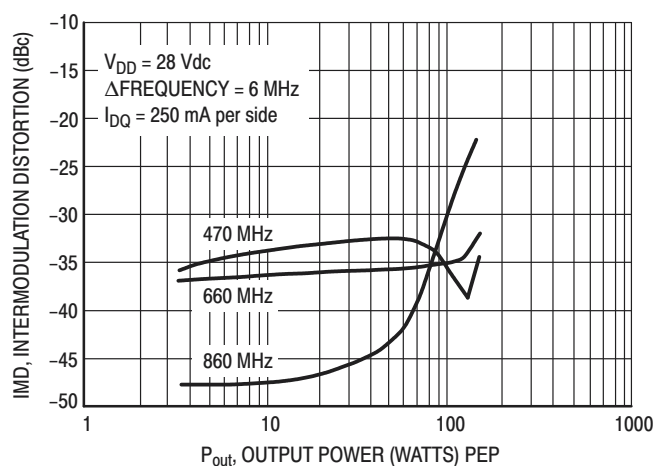


Figure 11. Intermodulation Distortion versus Output Power (MRF373S Broadband Push-Pull Fixture)

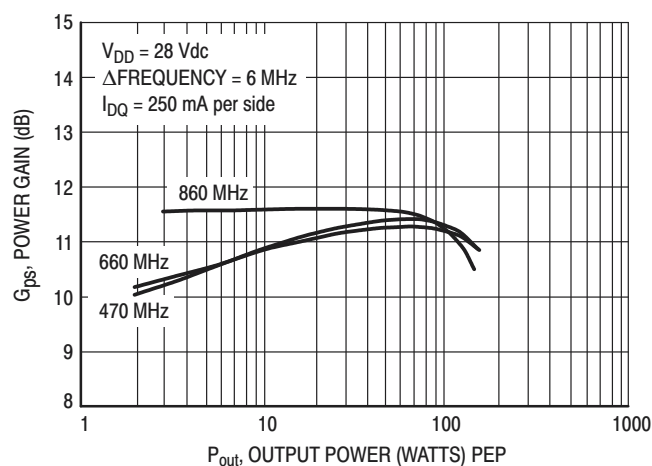


Figure 12. Broadband Power Gain versus Output Power (MRF373S Broadband Push-Pull Fixture)



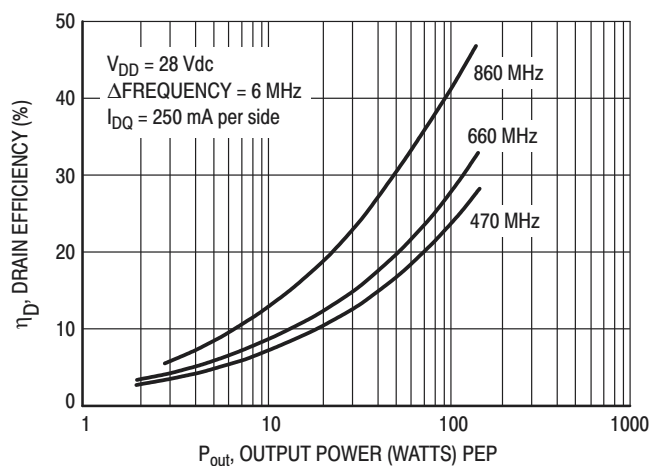


Figure 13. Efficiency versus Output Power (MRF373S Broadband Push-Pull Fixture)

NOTES

ARCHIVED 2005

PACKAGE DIMENSIONS

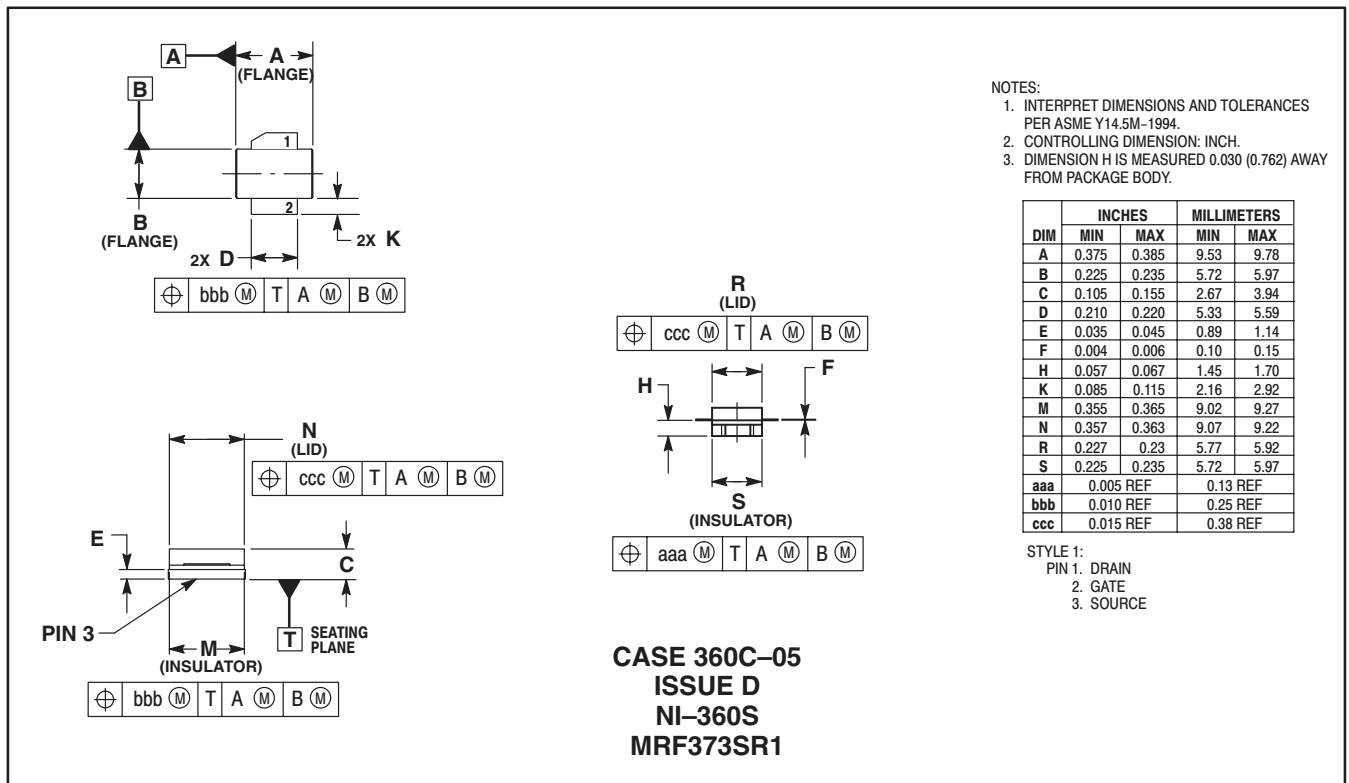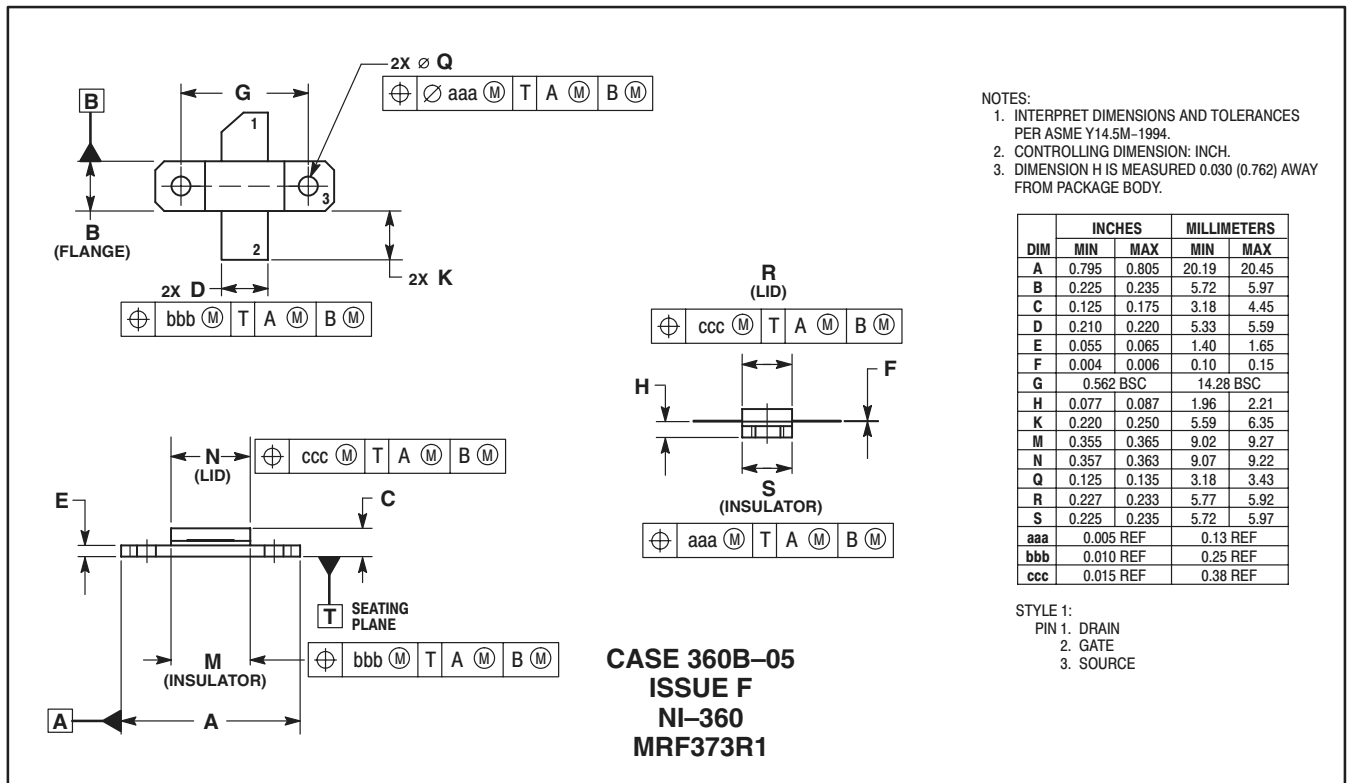

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and the Stylized M Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola, Inc. 2002.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1, Minami-Azabu. Minato-ku, Tokyo 106-8573 Japan. 81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre, 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T. Hong Kong. 852-26668334

Technical Information Center: 1-800-521-6274

HOME PAGE: <http://www.motorola.com/semiconductors/>



MOTOROLA



MRF373/D

Archived 2005