

# 1N482B-1N486B

## LOW LEAKAGE RECTIFIERS

### FEATURES:

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number
- Available Non-RoHS (standard) or RoHS compliant (add PBF suffix)

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Average Forward Rectified Current @ $T_A = 75^\circ\text{C}$	$I_{AV}$	200	mA
Average Forward Rectified Current @ $T_A = 150^\circ\text{C}$	$I_{AV}$	50	mA
Maximum Non-Repetitive Surge (8.3ms ½ sine)	$I_{FSM}$	2.0	A
Junction Temperature Range	$T_J$	-65 to 175	$^\circ\text{C}$
Storage Temperature range	$T_{stg}$	-65 to 175	$^\circ\text{C}$
Thermal Resistance @ $L = 3/8''$	$R_{\theta JL}$	250	$^\circ\text{C}/\text{mW}$

### ELECTRICAL CHARACTERISTICS

Part number	Reverse Voltage	Working Peak Reverse Voltage	Maximum Forward Voltage Drop	Maximum Leakage Current	
	$V_{RM}$	$V_{RWM}$	$V_F @ 0.1A$	$I_R @ V_{RWM}$	
	Volts	Volts	Volts	25 $^\circ\text{C}$	150 $^\circ\text{C}$
				nA	$\mu\text{A}$
1N482B	40	30	1.0	25	5
1N483B	80	70	1.0	25	5
1N484B	110	100	1.0	25	5
1N485B	200	180	1.0	25	5
1N486B	250	225	1.0	25	5




High-reliability discrete products  
and engineering services since 1977

# 1N482B-1N486B

## LOW LEAKAGE RECTIFIERS

### MECHANICAL CHARACTERISTICS

<b>Case</b>	DO-35 Hermetic Glass Case
<b>Marking</b>	Alpha-numeric
<b>Polarity</b>	Cathode band

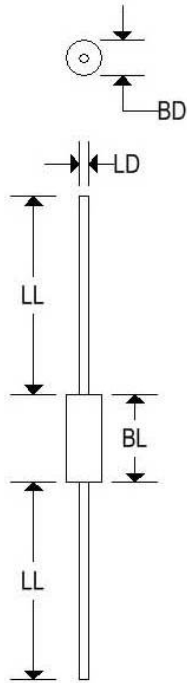

	DO-35			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.055	0.090	1.400	2.290
BL	0.120	0.200	3.050	5.080
LD	0.018	0.022	0.460	0.560
LL	1.000	1.500	25.400	38.100