



# Agilent MSA-9970 Cascadable Silicon Bipolar MMIC Amplifier

## Data Sheet

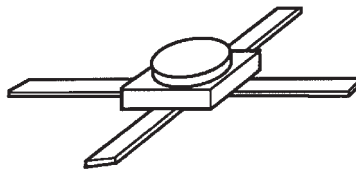
### Description

The MSA-9970 is a high performance silicon bipolar Monolithic Microwave Integrated Circuit (MMIC) housed in a hermetic high reliability package. This MMIC is designed with high open loop gain and is intended to be used with external resistive and reactive feedback elements to create a variety of special purpose gain blocks.

Applications include very broadband, minimum ripple amplifiers with extended low frequency performance possible through the use of a high valued external feedback blocking capacitor; extremely well matched ( $-20$  dB return loss) amplifiers; and negative gain slope amplifiers for flattening MMIC cascades.

The MSA-series is fabricated using Agilent's 10 GHz  $f_T$ , 25 GHz  $f_{MAX}$ , silicon bipolar MMIC process which uses nitride self-alignment, ion implantation, and gold metallization to achieve excellent performance, uniformity and reliability. The use of an external bias resistor for temperature and current stability also allows bias flexibility.


### 70 mil Package



### Features

- **Open Loop Feedback Amplifier**
- **Performance Flexibility with User Selected External Feedback for:**
  - Broadband Minimum Ripple Amplifiers
  - Low Return Loss Amplifiers
  - Negative Gain Slope Amplifiers
- **Usable Gain to 6.0 GHz**
- **16.0 dB Typical Open Loop Gain at 1.0 GHz**
- **14.5 dBm Typical  $P_{1dB}$  at 1.0 GHz**
- **Hermetic Gold-ceramic Microstrip Package**
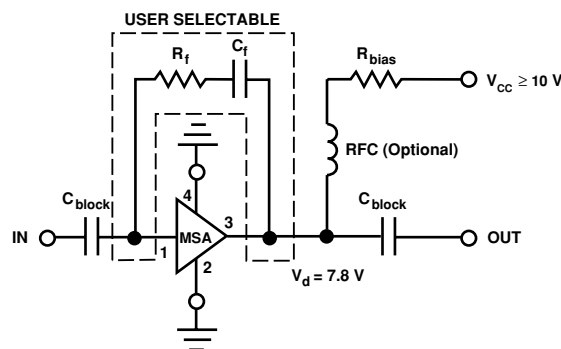
### Typical Biasing Configuration



### MSA-9970 Absolute Maximum Ratings

| Parameter                          | Absolute Maximum <sup>[1]</sup> |
|------------------------------------|---------------------------------|
| Device Current                     | 80 mA                           |
| Power Dissipation <sup>[2,3]</sup> | 750 mW                          |
| RF Input Power                     | +13 dBm                         |
| Junction Temperature               | 200°C                           |
| Storage Temperature                | -65°C to 200°C                  |

#### Thermal Resistance<sup>[2,4]</sup>:

$$\theta_{jc} = 150^{\circ}\text{C/W}$$

#### Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2.  $T_{\text{CASE}} = 25^{\circ}\text{C}$ .
3. Derate at 6.7 mW/°C for  $T_{\text{C}} > 88^{\circ}\text{C}$ .
4. The small spot size of this technique results in a higher, though more accurate determination of  $\theta_{jc}$  than do alternate methods.

### Electrical Specifications<sup>[1]</sup>, $T_{\text{A}} = 25^{\circ}\text{C}$

| Symbol             | Parameters and Test Conditions: $I_{\text{d}} = 35 \text{ mA}$ , $Z_{\text{o}} = 50 \Omega$ | Units | Min.        | Typ.                | Max.         |
|--------------------|---|-------|-------------|---------------------|--------------|
| $G_{\text{P}}$     | Power Gain <sup>[2]</sup> ( $ S_{21} ^2$ )<br>f = 0.1 GHz<br>f = 1.0 GHz<br>f = 4.0 GHz     | dB    | 14.5<br>8.0 | 17.5<br>16.0<br>9.0 | 17.5<br>10.0 |
| $P_{1 \text{ dB}}$ | Output Power at 1 dB Gain Compression <sup>[2]</sup><br>f = 1.0 GHz                         | dBm   |             | 14.5                |              |
| $IP_3$             | Third Order Intercept Point <sup>[2]</sup><br>f = 1.0 GHz                                   | dBm   |             | 25.0                |              |
| $V_{\text{d}}$     | Device Voltage  | V     | 7.0         | 7.8                 | 8.6          |
| dV/dT              | Device Voltage Temperature Coefficient  | mV/°C |             | -16.0               |              |

#### Notes:

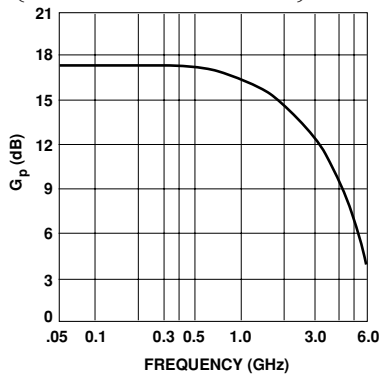
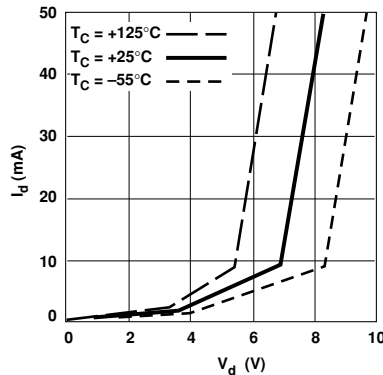
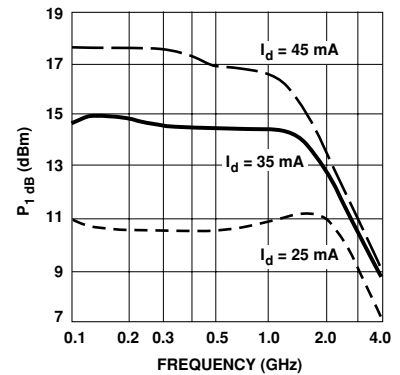
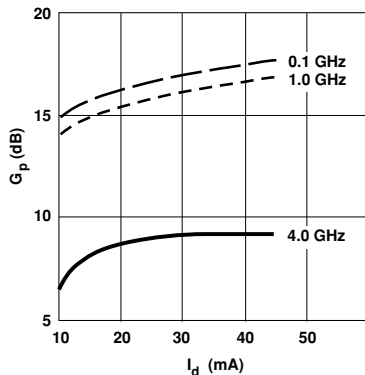
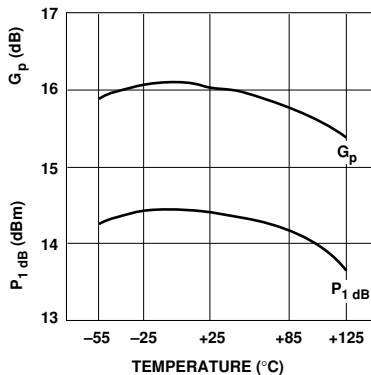
1. The recommended operating current range for this device is 25 to 45 mA. Typical performance as a function of current is on the following page.
2. Open loop value. Adding external feedback will alter device performance.

**MSA-9970 Typical Scattering Parameters ( $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $I_d = 35 \text{ mA}$ )**

| Freq.<br>GHz | S <sub>11</sub> |      | S <sub>21</sub> |      |     | S <sub>12</sub> |      |     | S <sub>22</sub> |      | k    |
|--------------|-----------------|------|-----------------|------|-----|-----------------|------|-----|-----------------|------|------|
|              | Mag             | Ang  | dB              | Mag  | Ang | dB              | Mag  | Ang | Mag             | Ang  |      |
| 0.02         | .89             | -1   | 17.5            | 7.51 | 179 | -37.2           | .014 | 4   | .93             | -1   | 1.01 |
| 0.05         | .90             | -3   | 17.5            | 7.47 | 177 | -35.6           | .017 | 34  | .92             | -3   | .83  |
| 0.1          | .90             | -6   | 17.4            | 7.45 | 174 | -33.2           | .022 | 43  | .93             | -6   | .70  |
| 0.2          | .89             | -12  | 17.4            | 7.43 | 168 | -29.6           | .033 | 61  | .93             | -13  | .39  |
| 0.4          | .87             | -24  | 17.2            | 7.27 | 156 | -24.4           | .061 | 63  | .91             | -27  | .24  |
| 0.6          | .85             | -36  | 17.0            | 7.06 | 145 | -20.8           | .091 | 58  | .90             | -40  | .21  |
| 0.8          | .82             | -47  | 16.6            | 6.78 | 134 | -18.8           | .115 | 52  | .87             | -53  | .21  |
| 1.0          | .79             | -59  | 16.2            | 6.49 | 124 | -17.0           | .141 | 44  | .84             | -66  | .24  |
| 1.5          | .72             | -86  | 15.3            | 5.79 | 100 | -14.6           | .186 | 29  | .74             | -96  | .28  |
| 2.0          | .65             | -113 | 14.2            | 5.10 | 77  | -13.4           | .215 | 16  | .64             | -123 | .34  |
| 2.5          | .59             | -133 | 13.0            | 4.45 | 61  | -12.9           | .227 | 7   | .57             | -143 | .39  |
| 3.0          | .54             | -155 | 11.6            | 3.79 | 42  | -12.5           | .236 | -3  | .51             | -163 | .46  |
| 3.5          | .53             | -174 | 10.3            | 3.28 | 26  | -12.4           | .239 | -14 | .45             | 178  | .53  |
| 4.0          | .52             | 168  | 9.2             | 2.87 | 10  | -12.5           | .238 | -22 | .39             | 164  | .59  |
| 4.5          | .53             | 152  | 8.0             | 2.51 | -4  | -12.6           | .234 | -30 | .34             | 155  | .66  |
| 5.0          | .55             | 140  | 6.9             | 2.21 | -17 | -12.8           | .228 | -37 | .31             | 153  | .72  |
| 5.5          | .55             | 130  | 5.8             | 1.94 | -31 | -13.2           | .220 | -44 | .30             | 154  | .80  |
| 6.0          | .55             | 121  | 4.6             | 1.70 | -43 | -13.6           | .209 | -48 | .32             | 157  | .88  |
| 6.5          | .56             | 114  | 3.5             | 1.50 | -53 | -13.8           | .203 | -54 | .37             | 158  | .94  |
| 7.0          | .56             | 107  | 2.6             | 1.34 | -63 | -14.0           | .201 | -59 | .42             | 157  | .97  |

**Typical Performance,  $T_A = 25^\circ\text{C}$** 

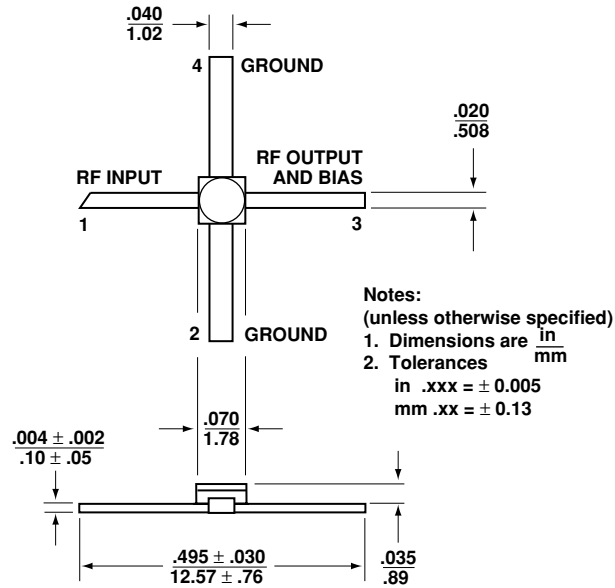
(unless otherwise noted)


**Figure 1. Open Loop Power Gain vs. Frequency,  $I_d = 35 \text{ mA}$ .**

**Figure 2. Device Current vs. Voltage.**

**Figure 3. Open Loop Output Power at 1 dB Gain Compression vs. Frequency.**

**Figure 4. Open Loop Power Gain vs. Current.**

**Figure 5. Open Loop Output Power at 1 dB Gain Compression and Open Loop Power Gain vs. Case Temperature,  $f = 1.0 \text{ GHz}$ ,  $I_d = 35 \text{ mA}$ .**

## Ordering Information

| Part Numbers | No. of Devices | Comments |
|--------------|----------------|----------|
| MSA-9970     | 10             | Bulk     |

## 70 mil Package Dimensions



## [www.agilent.com/semiconductors](http://www.agilent.com/semiconductors)

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or  
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (65) 6756 2394

India, Australia, New Zealand: (65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or  
0120-61-1280(Domestic Only)

Korea: (65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines,  
Indonesia: (65) 6755 2044

Taiwan: (65) 6755 1843

Data subject to change.

Copyright © 2005 Agilent Technologies, Inc.

Obsoletes 5966-4948E

April 5, 2005

5989-2762EN



**Agilent Technologies**