



MT7202

1.5A LED driver with internal switch

DESCRIPTION

The MT7202 is a continuous mode inductive step-down converter, designed for driving single or multiple series connected LEDs efficiently from a voltage source higher than the LED voltage. The device operates from an input supply between 6V~50V and provides an externally adjustable output current of up to 1.5A.

The MT7202 includes the output switch and a high-side output current sensing circuit, which uses an external resistor to set the nominal average output current.

Output current can be adjusted below the set value, by applying an external control signal to the 'ADJ' pin.

The ADJ pin will accept either a DC voltage or a PWM waveform. Depending upon the control frequency, this will provide either a continuous or a gated output current. The PWM filter components are contained within the chip.

The PWM filter provides a soft-start feature by controlling the rise of input/output current. The soft-start time can be increased using an external capacitor from the ADJ pin to ground. Applying a voltage of 0.2V or lower to the ADJ pin turns the output off and switches the device into a low current standby state.


FEATURES

- Simple low parts count
- 1.5A output current
- Single pin on/off and brightness control using DC voltage or PWM
- Internal PWM filter
- Unique frequency Jitter technique to reduce EMI
- High efficiency (up to 97%)
- Wide input voltage range: 6V to 50V
- Output shutdown
- Up to 1MHz switching frequency
- Inherent open-circuit LED protection
- High accuracy output current $\pm 3\%$
- Available in SOT89-5 packages

APPLICATION

- Low voltage halogen replacement LEDs
- Automotive lighting
- Low voltage industrial lighting
- LED back-up lighting
- Illuminated signs
- Stage lights

APPLICATION CIRCUIT

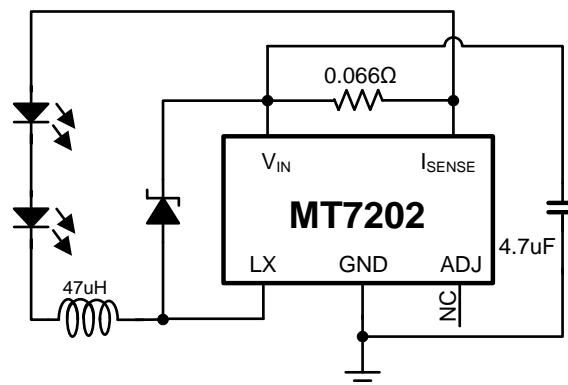

**MT7202****1.5A LED driver with internal switch****ABSOLUTE MAXIMUM RATINGS**

(Voltages to GND unless otherwise stated)

Input voltage (V_{IN})	-0.3V to +60V
I_{SENSE} voltage (V_{SENSE})	+0.3V to -5V (measured with respect to V_{IN})
LX output voltage (V_{LX})	-0.3V to +60V
Adjust pin input voltage (V_{ADJ})	-0.3V to +6V
Switch output current (I_{LX})	1.25A
Power dissipation (P_{tot})	1W
Operating temperature (T_{OP})	-40 to 105°C
Storage temperature (T_{ST})	-55 to 150°C
Max. Junction temperature (T_{JMAX})	150°C
ESD(HBM)	4KV

THERMAL RESISTANCE


Junction to ambient ($R_{\theta JA}$)	78°C/W
Junction to case ($R_{\theta JC}$)	45°C/W



MT7202

1.5A LED driver with internal switch

PIN CONFIGURATIONS



Chip Mark

MT7202

X YY WW XX

└─ Manufacturing code
 └─ Week code
 └─ Year code
 └─ Manufacturing code

PIN DESCRIPTION

Name	Pin No.	Description
LX	1	Drain of internal switch
GND	2	Ground
ADJ	3	Multi-function On/Off and brightness control pin: <ul style="list-style-type: none"> • Leave floating for normal operation. ($V_{ADJ}=2.38V$). The nominal average output current setting as $I_{OUTnom}=0.1/R_S$ • Drive to voltage below 0.235V to turn off output current • Drive with DC voltage ($0.235V < V_{ADJ} < 1.6V$) to adjust output current from 20% to 100% of I_{OUTnom}. Drive with DC voltage larger than 1.6V will clamp the output current as 100% I_{OUTnom} • Drive with PWM signal adjust output current. • Connect a capacitor from this pin to ground to increase soft-start time.
ISENSE	4	Connect resistor R_S from this pin to V_{IN} to define nominal average output current $I_{OUTnom}=0.1/R_S$ (Note: $R_{SMIN}=0.066\Omega$ with ADJ pin open-circuit)
VIN	5	Input voltage (6V to 50V). Decouple to ground with 4.7 μ F or higher X7R ceramic capacitor close to device

**MT7202****1.5A LED driver with internal switch****ELECTRICAL CHARACTERISTICS**(Test Conditions: $V_{IN}=12V$, $T_{amb}=25^{\circ}C$ unless otherwise stated)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage		6		50	V
V_{SU}	Internal regulator start-up threshold	V_{IN} rising		5.8		V
I_{INQoff}	Quiescent supply current with output off	ADJ pin grounded		120		μA
I_{INQon}	Quiescent supply current with output on	ADJ pin floating $f=250kHz$		600		μA
V_{SENSE}	Mean current sense threshold voltage(defines LED current setting accuracy)	Measured on I_{SENSE} pin with respect to V_{IN}	95	100	105	mV
$V_{SENSEHYS}$	Sense threshold hysteresis			± 15		%
I_{SENSE}	I_{SENSE} pin input current	$V_{SENSE}=V_{IN}-0.1$		1.25	10	μA
V_{REF}	Internal reference voltage			1.20		V
$\Delta V_{REF}/\Delta T$	Temperature coefficient of V_{REF}				50	ppm/ $^{\circ}C$
V_{ADJ}	External control voltage range on ADJ pin for dc brightness control		0.235		1.6	V
V_{ADJoff}	DC voltage on ADJ pin to switch device from on state to off state	V_{ADJ} falling		0.210		V
V_{ADJon}	DC voltage on ADJ pin to switch device from off state to on state	V_{ADJ} rising		0.235		V
I_{LXmean}	Continuous LX switch current				1.5	A
R_{LX}	LX switch 'On' resistance			0.4		Ω
$I_{LX(leak)}$	LX switch leakage current				1	μA
$D_{PWM(LF)}$	Duty cycle range of PWM signal applied to ADJ pin during low frequency PWM dimming mode	Frequency<500Hz Amplitude between 1.5V and 5.5V	0.01		1	
	Brightness control range				1000:1	
T_{ONmin}	Minimum 'ON' time	LX switch 'ON'	200			ns
T_{OFFmin}	Minimum 'OFF' time	LX switch 'OFF'	200			ns
f_{LXmax}	Recommended maximum operating frequency				1.1	MHz
D_{LX}	Recommended duty cycle range of output switch at f_{LXmax}		0.3		0.7	
T_{PD}	Internal comparator propagation delay			50		ns
T_{SD}	Thermal shutdown threshold			165		$^{\circ}C$
T_{SD-HYS}	Thermal shutdown hysteresis			30		$^{\circ}C$



MT7202



1.5A LED driver with internal switch

BLOCK DIAGRAM

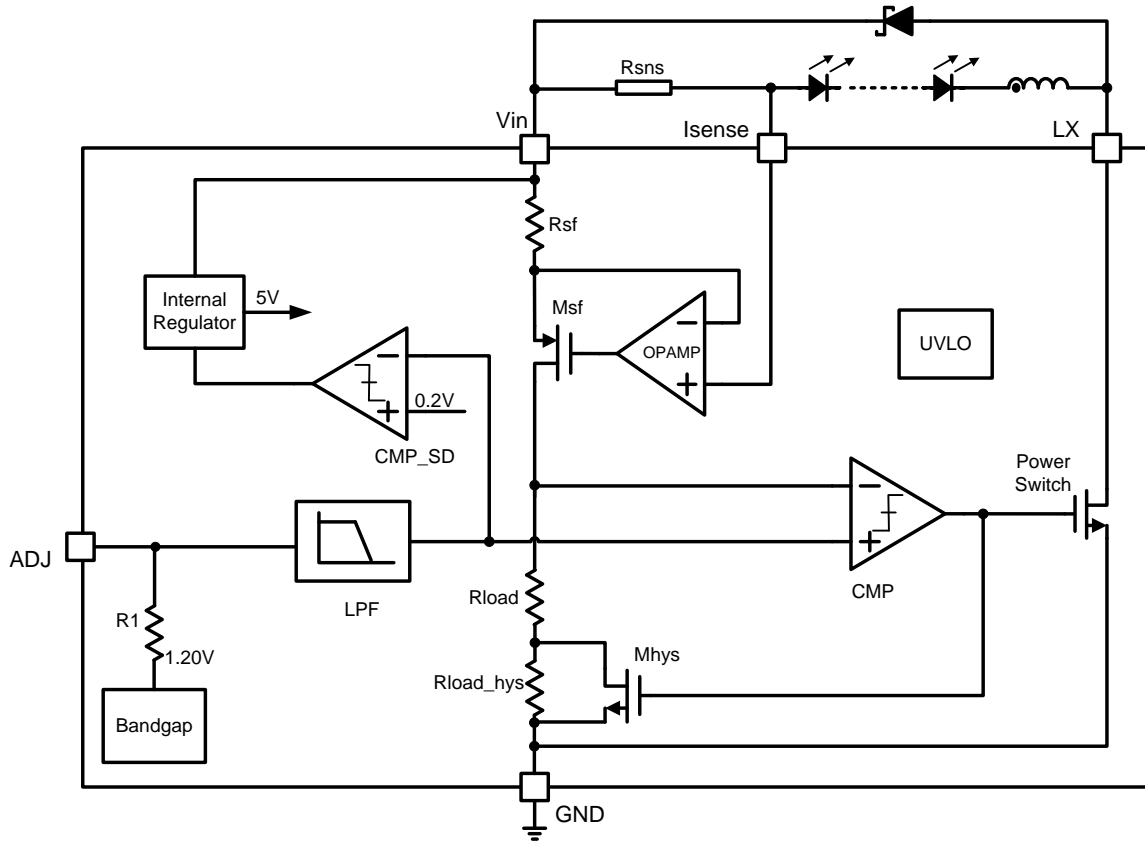

TYPICAL CHARACTERISTICS







(Inductor L=47uH, unless otherwise stated)

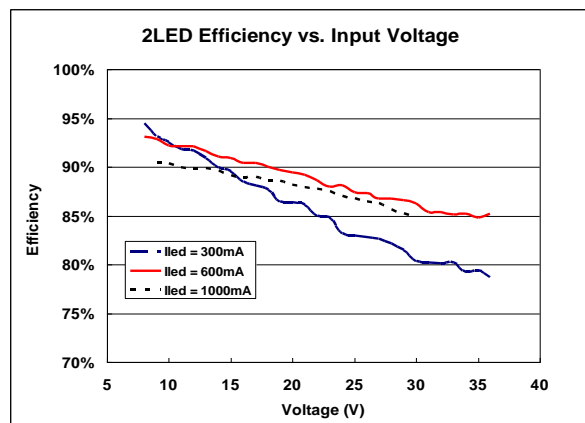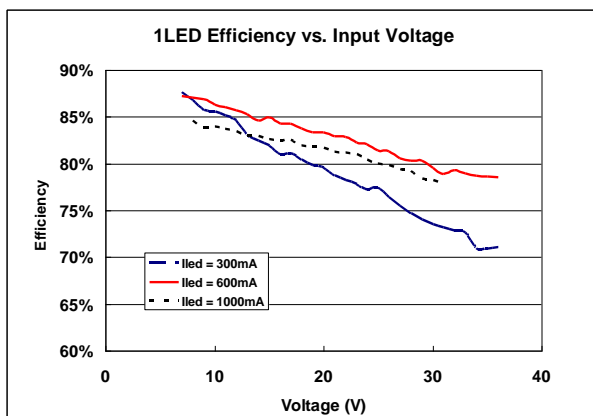



MT7202







1.5A LED driver with internal switch

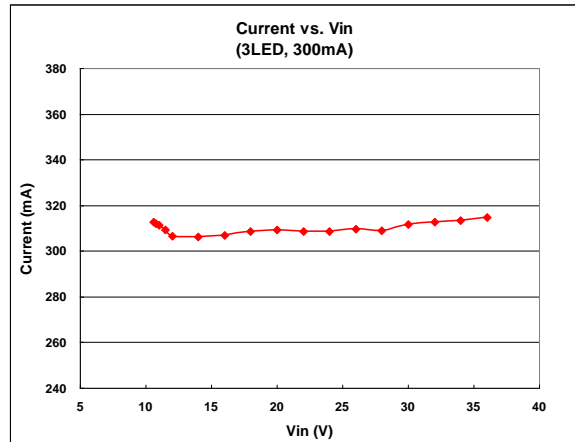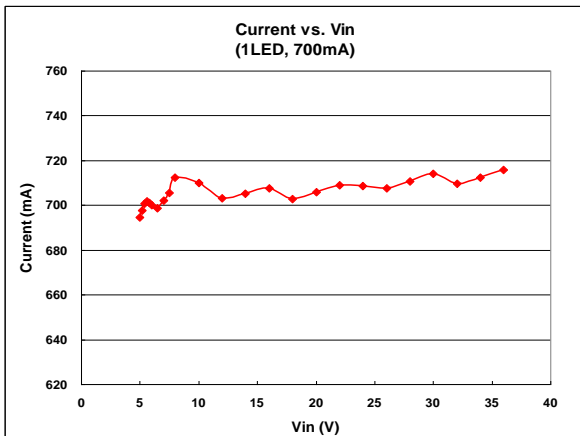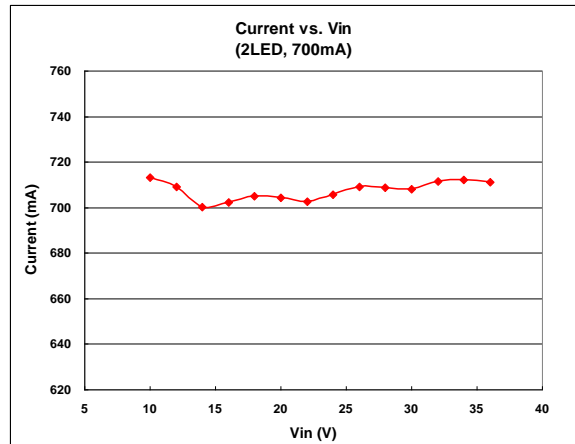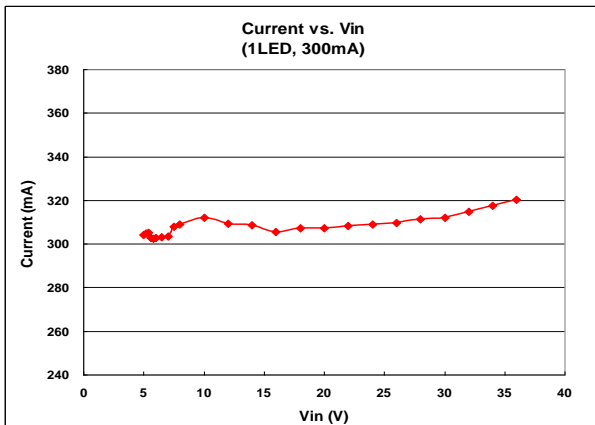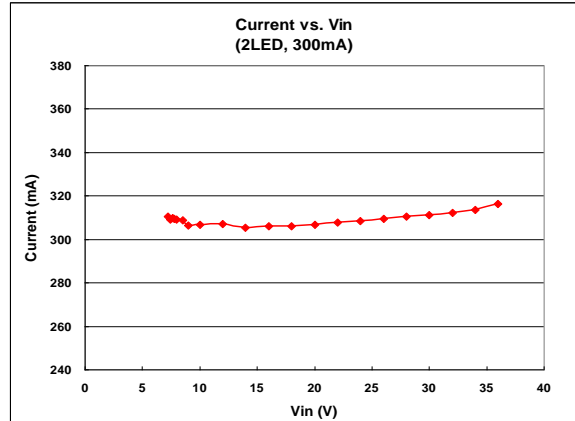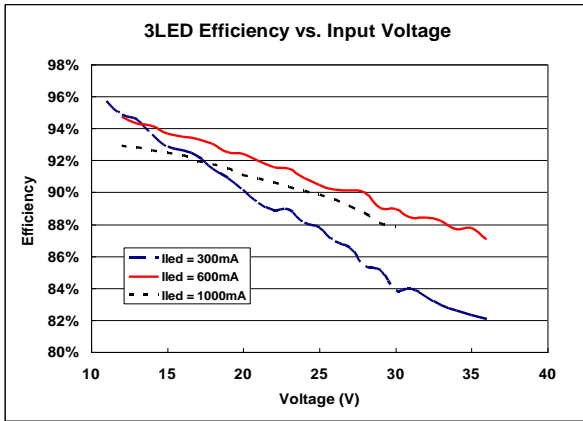



MT7202

1.5A LED driver with internal switch

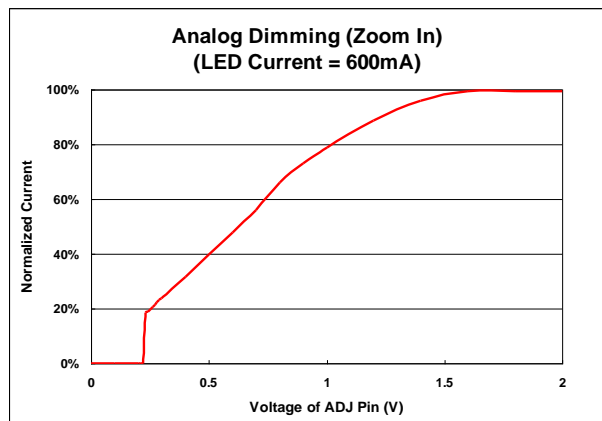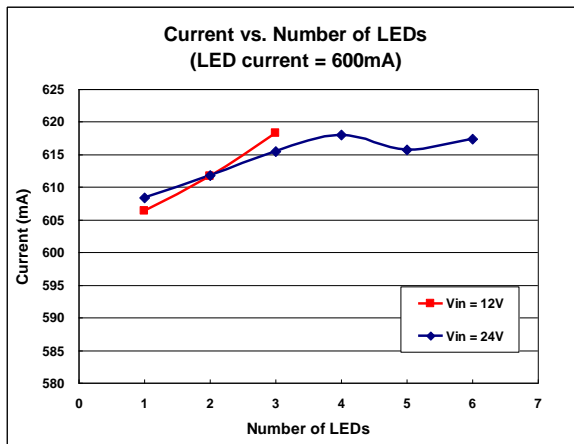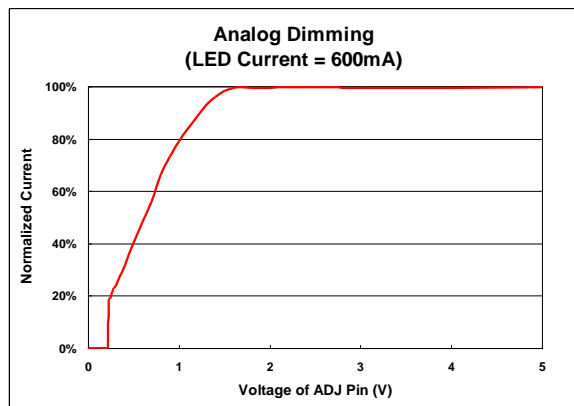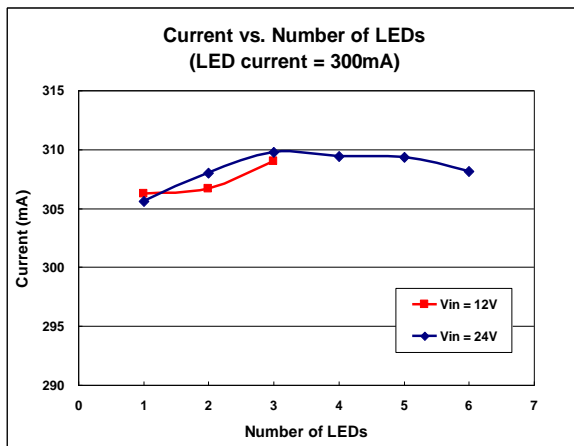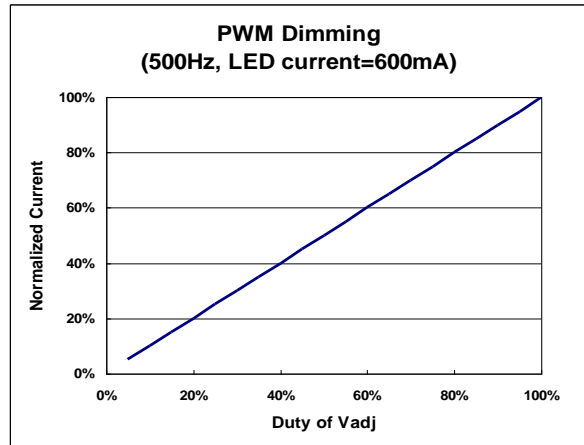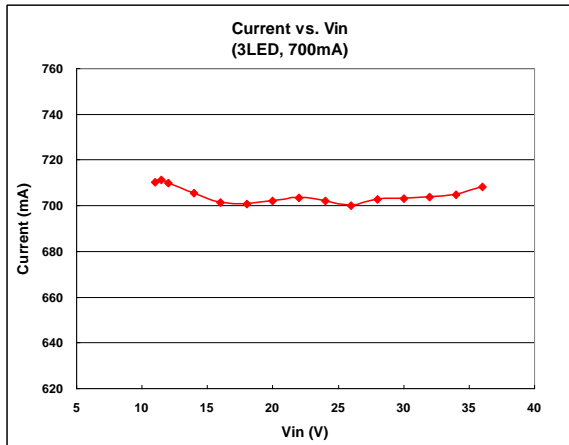



MT7202

1.5A LED driver with internal switch

Application notes

Setting nominal average output current with external resistor R_S

The nominal average output current in the LED(s) is determined by the value of the external current sense resistor (R_S) connected between V_{IN} and I_{SENSE} and is given by:

$$I_{OUTnom} = 0.1/R_S \text{ [for } R_S > 0.066]$$

The table below gives values of nominal average output current for several preferred values of current setting resistor (R_S) in the typical application circuit shown on page 1:

$R_S(\Omega)$	Nominal average output current (mA)
0.066	1500
0.1	1000
0.13	760
0.15	667


The above values assume that the ADJ pin is floating.

Note that $R_S=0.066\Omega$ is the minimum allowed value of sense resistor under these conditions to maintain switch current below the specified maximum value.

It is possible to use different values of R_S if the ADJ pin is driven from an external voltage.

Output current adjustment by external DC control voltage

The ADJ pin can be driven by an external DC voltage (V_{ADJ}), as shown, to adjust the output current to a value below the nominal average value defined by R_S .

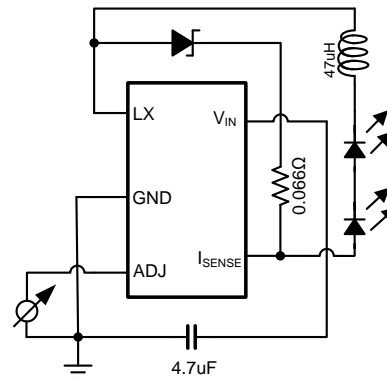


The nominal average output current in this case shown in Analog Dimming Figures above. The DC voltage dimming range is about 0.235V ~ 1.6V.

Note that 100% brightness setting corresponds to $0.1/R_S$.

When driving the ADJ pin above 1.6V, MT7202 will internally clamp the brightness to 100%.

Output current adjustment by PWM control

A Pulse Width Modulated (PWM) signal with duty cycle D_{PWM} can be applied to the ADJ pin, as shown below, to adjust the output current to a value below the nominal average value set by resistor R_S :

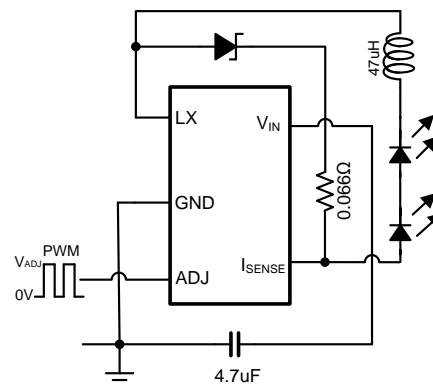

The amplitude of PWM signal need to be larger than 2.0V, normally 3.0V ~ 5.0V. The frequency of the PWM dimming signal better to be 100Hz ~ 2kHz.



MT7202

1.5A LED driver with internal switch

Shutdown mode

Taking the ADJ pin to a voltage below 0.21V for more than approximately 100μs, will turn off the output and supply current will fall to a low standby level of 120μA nominal.

Inherent open-circuit LED protection

If the connection to the LED(s) is open-circuited, the coil is isolated from the LX pin of the chip, so the device will not be damaged, unlike in many boost converters, where the back EMF may damage the internal switch by forcing the drain above its breakdown voltage.

Capacitor selection

A low ESR capacitor should be used for input decoupling, as the ESR of this capacitor appears in series with the supply source impedance and lowers overall efficiency. This capacitor has to supply the relatively high peak current to the coil and smooth the current ripple on the input supply. A minimum value of 4.7μF is acceptable if the input source is close to the device, but higher values will improve performance at lower input voltages, especially when the source impedance is high. The input capacitor should be placed as close as possible to the IC.

Inductor selection

Recommended inductor values for the MT7202 are in the range 27μH to 100μH. Higher values of inductance are recommended at higher supply voltages in order to minimize errors due to switching delays, which result in increased ripple and lower efficiency. Higher values of inductance also result in a smaller change in output current over the supply voltage range. The inductor should be mounted as close to the device as possible with low resistance connections to the LX and V_{IN} pins.

The chosen coil should have a saturation current higher than the peak output current and a

continuous current rating above the required mean output current.

The inductor value should be chosen to maintain operating duty cycle and switch 'on'/'off' times within the specified limits over the supply voltage and load current range.

The following equations can be used as a guide:

LX Switch 'On' time

$$T_{ON} = \frac{L\Delta I}{V_{IN} - V_{LED} - I_{avg}(R_S + r_L + R_{LX})}$$

Note: T_{ONmin}>200ns

LX Switch 'Off' time

$$T_{OFF} = \frac{L\Delta I}{V_D + V_{LED} + I_{avg}(R_S + r_L)}$$

Note: T_{OFFmin}>200ns

Where:

L is the coil inductance (H)

r_L is the coil resistance (Ω)

I_{avg} is the required LED current (A)

ΔI is the coil peak-peak ripple current (A)
{internally set to 0.3 x I_{avg}}

V_{IN} is the supply voltage (V)

V_{LED} is the total LED forward voltage (V)

R_{LX} is the switch resistance (Ω)

V_D is the diode forward voltage at the required load current (V)

Diode selection

It is important to select parts with a peak current rating above the peak coil current and a continuous current rating higher than the maximum output load current. It is very important to consider the reverse leakage of the diode when operating above 85°C. Excess leakage will increase the power dissipation in the device.

Reducing output ripple

Peak to peak ripple current in the LED can be reduced, if required, by shunting a capacitor C_{led} across the LED(s), A value of 1μF will reduce



MT7202

1.5A LED driver with internal switch

nominal ripple current by a factor three (approx.). Proportionally lower ripple can be achieved with higher capacitor values. Note that the capacitor will not affect operating frequency or efficiency, but it will increase start-up delay, by reducing the rate of rise of LED voltage.

Operation at low supply voltage

The internal regulator disables the drive to the switch until the supply has risen above the startup threshold (V_{SU}). Above this threshold, the device will start to operate. However, with the supply voltage below the specified minimum value, the switch duty cycle will be high and the device power dissipation will be at a maximum. Care should be taken to avoid operating the device under such conditions in the application, in order to minimize the risk of exceeding the maximum allowed die temperature.

Note that when driving loads of two or more LEDs, the forward drop will normally be sufficient to prevent the device from switching below approximately 6V. This will minimize the risk of damage to the device.

Layout considerations

LX pin

The LX pin of the device is a fast switching node, so PCB tracks should be kept as short as possible. To minimize ground 'bounce', the ground pin of the device should be soldered directly to the ground plane.

Coil and decoupling capacitors and current sense resistor

It is particularly important to mount the coil and the input decoupling capacitor as close to the


device pins as possible to minimize parasitic resistance and inductance, which will degrade efficiency. It is also important to minimize any track resistance in series with current sense resistor R_S . It's best to connect V_{IN} directly to one end of R_S and I_{SENSE} directly to the opposite end of R_S with no other currents flowing in these tracks. It is important that the cathode current of the Schottky diode does not flow in a track between R_S and V_{IN} as this may give an apparent higher measure of current than is actual because of track resistance.

ADJ pin

The ADJ pin is a high impedance input. So, when left floating, PCB tracks to this pin should be as short as possible to reduce noise pickup. A 100nF capacitor from the ADJ pin to ground will reduce frequency modulation of the output under these conditions. An additional RC low pass filter (10k Ω /100 μ F) can also be used when driving the ADJ pin from an external circuit. This LPF will provide filtering for low frequency noise and provide protection against high voltage transients.

High voltage tracks

Avoid running any high voltage tracks close to the ADJ pin, to reduce the risk of leakage due to board contamination. Any such leakage may raise the ADJ pin voltage and cause excessive output current. However, a ground ring placed around the ADJ pin is recommended to minimize changes in output current under these conditions.

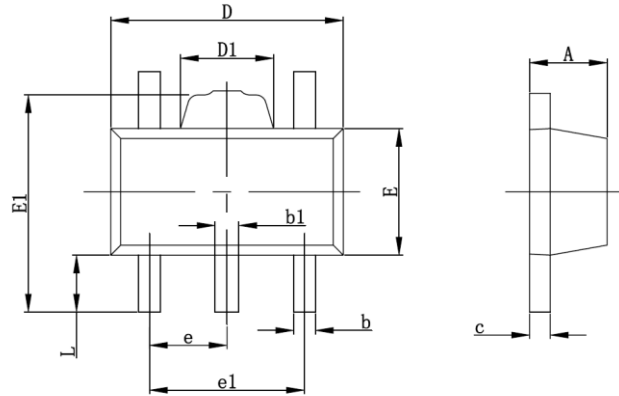**MT7202****1.5A LED driver with internal switch****PACKAGE INFORMATION**

Symbol	Dimensions in millimeters		Dimensions in inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043

Important Notice

- Maxic Technology Corporation (Maxic) reserve the right to make correction, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Maxic's terms and conditions of sale supplied at the time of order acknowledgement.
- Reproduction, copying, transferring, reprinting this paper without Maxic's written permission is prohibited.
- Maxic is not responsible or liable for customer product design by using Maxic components. To minimize the risks and associated with customer products and applications, customers should provide adequate design and operating safeguards and consult Maxic's sales department.