


# 1N5220...1N5281

## SILICON PLANAR ZENER DIODES

Standard Zener voltage tolerance is  $\pm 20\%$ .  
 Add suffix "A" for  $\pm 10\%$  Tolerance, suffix  
 "B" for  $\pm 5\%$  tolerance, suffix "C" for  $\pm 2\%$   
 tolerance, Other tolerance, non standard  
 and higher Zener voltages are upon request.

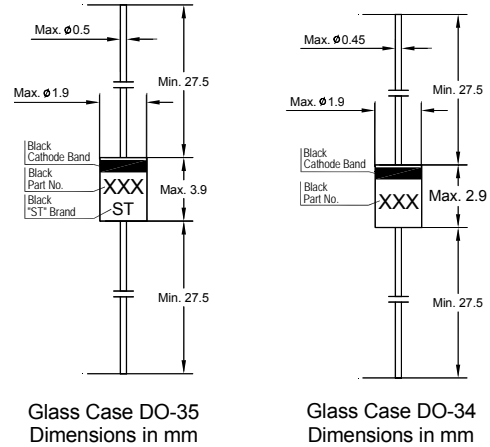

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )


| Parameter   | Symbol    | Value             | Unit             |
|---|-----------|-------------------|------------------|
| Power Dissipation at $T_{amb} = 75\text{ }^\circ\text{C}$ | $P_{tot}$ | 500 <sup>1)</sup> | mW               |
| Junction Temperature                                      | $T_j$     | 200               | $^\circ\text{C}$ |
| Storage Temperature Range                                 | $T_s$     | - 65 to + 200     | $^\circ\text{C}$ |

<sup>1)</sup> Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Parameter                                   | Symbol    | Max.              | Unit |
|---|-----------|-------------------|------|
| Thermal Resistance Junction to Ambient Air  | $R_{thA}$ | 0.3 <sup>1)</sup> | K/mW |
| Forward Voltage<br>at $I_F = 200\text{ mA}$ | $V_F$     | 1.1               | V    |

<sup>1)</sup> Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company  
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
 Certificate No. 05103



ISO 14001:2004  
 Certificate No. 71116




ISO 9001:2000  
 Certificate No. 0506098

Dated : 13/06/2007

# 1N5220...1N5281

| Type   | Zener Voltage Range                  |                       | Maximum Zener Impedance <sup>1)</sup> |                       |                          | Maximum Reverse Leakage Current    |                        | Temp. Coefficient of Zener Voltage |
|--------|--------------------------------------|-----------------------|---------------------------------------|-----------------------|--------------------------|------------------------------------|------------------------|------------------------------------|
|        | V <sub>Znom</sub> <sup>3)</sup><br>V | I <sub>ZT</sub><br>mA | r <sub>ZJT</sub><br>Ω                 | r <sub>ZJK</sub><br>Ω | at I <sub>ZK</sub><br>mA | I <sub>R</sub> <sup>2)</sup><br>μA | at V <sub>R</sub><br>V | TK <sub>VZ</sub><br>%/K            |
| 1N5220 | 2.2                                  | 20                    | 30                                    | 1150                  | 0.25                     | 100                                | 1                      | <-0.085                            |
| 1N5221 | 2.4                                  | 20                    | 30                                    | 1200                  | 0.25                     | 100                                | 1                      | <-0.085                            |
| 1N5222 | 2.5                                  | 20                    | 30                                    | 1250                  | 0.25                     | 100                                | 1                      | <-0.085                            |
| 1N5223 | 2.7                                  | 20                    | 30                                    | 1300                  | 0.25                     | 75                                 | 1                      | <-0.080                            |
| 1N5224 | 2.8                                  | 20                    | 30                                    | 1400                  | 0.25                     | 75                                 | 1                      | <-0.080                            |
| 1N5225 | 3                                    | 20                    | 29                                    | 1600                  | 0.25                     | 50                                 | 1                      | <-0.075                            |
| 1N5226 | 3.3                                  | 20                    | 28                                    | 1600                  | 0.25                     | 25                                 | 1                      | <-0.070                            |
| 1N5227 | 3.6                                  | 20                    | 24                                    | 1700                  | 0.25                     | 15                                 | 1                      | <-0.065                            |
| 1N5228 | 3.9                                  | 20                    | 23                                    | 1900                  | 0.25                     | 10                                 | 1                      | <-0.060                            |
| 1N5229 | 4.3                                  | 20                    | 22                                    | 2000                  | 0.25                     | 5                                  | 1                      | <-0.055                            |
| 1N5230 | 4.7                                  | 20                    | 19                                    | 1900                  | 0.25                     | 5                                  | 2                      | <±0.030                            |
| 1N5231 | 5.1                                  | 20                    | 17                                    | 1600                  | 0.25                     | 5                                  | 2                      | <±0.030                            |
| 1N5232 | 5.6                                  | 20                    | 11                                    | 1600                  | 0.25                     | 5                                  | 3                      | <+0.038                            |
| 1N5233 | 6                                    | 20                    | 7                                     | 1600                  | 0.25                     | 5                                  | 3.5                    | <+0.038                            |
| 1N5234 | 6.2                                  | 20                    | 7                                     | 1000                  | 0.25                     | 5                                  | 4                      | <+0.045                            |
| 1N5235 | 6.8                                  | 20                    | 5                                     | 750                   | 0.25                     | 3                                  | 5                      | <+0.050                            |
| 1N5236 | 7.5                                  | 20                    | 6                                     | 500                   | 0.25                     | 3                                  | 6                      | <+0.058                            |
| 1N5237 | 8.2                                  | 20                    | 8                                     | 500                   | 0.25                     | 3                                  | 6.5                    | <+0.062                            |
| 1N5238 | 8.7                                  | 20                    | 8                                     | 600                   | 0.25                     | 3                                  | 6.5                    | <+0.065                            |
| 1N5239 | 9.1                                  | 20                    | 10                                    | 600                   | 0.25                     | 3                                  | 7                      | <+0.068                            |
| 1N5240 | 10                                   | 20                    | 17                                    | 600                   | 0.25                     | 3                                  | 8                      | <+0.075                            |
| 1N5241 | 11                                   | 20                    | 22                                    | 600                   | 0.25                     | 2                                  | 8.4                    | <+0.076                            |
| 1N5242 | 12                                   | 20                    | 30                                    | 600                   | 0.25                     | 1                                  | 9.1                    | <+0.077                            |
| 1N5243 | 13                                   | 9.5                   | 13                                    | 600                   | 0.25                     | 0.5                                | 9.9                    | <+0.079                            |
| 1N5244 | 14                                   | 9                     | 15                                    | 600                   | 0.25                     | 0.1                                | 10                     | <+0.082                            |
| 1N5245 | 15                                   | 8.5                   | 16                                    | 600                   | 0.25                     | 0.1                                | 11                     | <+0.082                            |
| 1N5246 | 16                                   | 7.8                   | 17                                    | 600                   | 0.25                     | 0.1                                | 12                     | <+0.083                            |
| 1N5247 | 17                                   | 7.4                   | 19                                    | 600                   | 0.25                     | 0.1                                | 13                     | <+0.084                            |
| 1N5248 | 18                                   | 7                     | 21                                    | 600                   | 0.25                     | 0.1                                | 14                     | <+0.085                            |
| 1N5249 | 19                                   | 6.6                   | 23                                    | 600                   | 0.25                     | 0.1                                | 14                     | <+0.086                            |
| 1N5250 | 20                                   | 6.2                   | 25                                    | 600                   | 0.25                     | 0.1                                | 15                     | <+0.086                            |
| 1N5251 | 22                                   | 5.6                   | 29                                    | 600                   | 0.25                     | 0.1                                | 17                     | <+0.087                            |
| 1N5252 | 24                                   | 5.2                   | 33                                    | 600                   | 0.25                     | 0.1                                | 18                     | <+0.088                            |
| 1N5253 | 25                                   | 5                     | 35                                    | 600                   | 0.25                     | 0.1                                | 19                     | <+0.089                            |
| 1N5254 | 27                                   | 4.6                   | 41                                    | 600                   | 0.25                     | 0.1                                | 21                     | <+0.090                            |
| 1N5255 | 28                                   | 4.5                   | 44                                    | 600                   | 0.25                     | 0.1                                | 21                     | <+0.091                            |
| 1N5256 | 30                                   | 4.2                   | 49                                    | 600                   | 0.25                     | 0.1                                | 23                     | <+0.091                            |
| 1N5257 | 33                                   | 3.8                   | 58                                    | 700                   | 0.25                     | 0.1                                | 25                     | <+0.092                            |
| 1N5258 | 36                                   | 3.4                   | 70                                    | 700                   | 0.25                     | 0.1                                | 27                     | <+0.093                            |
| 1N5259 | 39                                   | 3.2                   | 80                                    | 800                   | 0.25                     | 0.1                                | 30                     | <+0.094                            |
| 1N5260 | 43                                   | 3                     | 93                                    | 900                   | 0.25                     | 0.1                                | 33                     | <+0.095                            |
| 1N5261 | 47                                   | 2.7                   | 105                                   | 1000                  | 0.25                     | 0.1                                | 36                     | <+0.095                            |
| 1N5262 | 51                                   | 2.5                   | 125                                   | 1100                  | 0.25                     | 0.1                                | 39                     | <+0.096                            |
| 1N5263 | 56                                   | 2.2                   | 150                                   | 1300                  | 0.25                     | 0.1                                | 43                     | <+0.096                            |
| 1N5264 | 60                                   | 2.1                   | 170                                   | 1400                  | 0.25                     | 0.1                                | 46                     | <+0.097                            |
| 1N5265 | 62                                   | 2                     | 185                                   | 1400                  | 0.25                     | 0.1                                | 47                     | <+0.097                            |
| 1N5266 | 68                                   | 1.8                   | 230                                   | 1600                  | 0.25                     | 0.1                                | 52                     | <+0.097                            |



## SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103

ISO 14001:2004  
Certificate No. 7116

ISO 9001:2000  
Certificate No. 0506098

Dated : 13/06/2007



# 1N5220...1N5281

| Type   | Zener Voltage Range           |                | Maximum Zener Impedance <sup>1)</sup> |                       |                   | Maximum Reverse Leakage Current |               | Temp. Coefficient of Zener Voltage |
|--------|-------------------------------|----------------|---------------------------------------|-----------------------|-------------------|---------------------------------|---------------|------------------------------------|
|        | $V_{Znom}$ <sup>3)</sup><br>V | $I_{ZT}$<br>mA | $r_{ZJT}$<br>$\Omega$                 | $r_{ZJK}$<br>$\Omega$ | at $I_{ZK}$<br>mA | $I_R$ <sup>2)</sup><br>$\mu A$  | at $V_R$<br>V | $TK_{VZ}$<br>%/K                   |
| 1N5267 | 75                            | 1.7            | 270                                   | 1700                  | 0.25              | 0.1                             | 56            | <+0.098                            |
| 1N5268 | 82                            | 1.5            | 330                                   | 2000                  | 0.25              | 0.1                             | 62            | <+0.098                            |
| 1N5269 | 87                            | 1.4            | 370                                   | 2200                  | 0.25              | 0.1                             | 68            | <+0.099                            |
| 1N5270 | 91                            | 1.4            | 400                                   | 2300                  | 0.25              | 0.1                             | 69            | <+0.099                            |
| 1N5271 | 100                           | 1.3            | 500                                   | --                    | --                | 0.1                             | 75            | <+0.100                            |
| 1N5272 | 110                           | 1.2            | 700                                   | --                    | --                | 0.1                             | 83            | <+0.100                            |
| 1N5273 | 120                           | 1              | 950                                   | --                    | --                | 0.1                             | 90            | <+0.100                            |
| 1N5274 | 130                           | 0.95           | 1100                                  | --                    | --                | 0.1                             | 98            | <+0.110                            |
| 1N5275 | 140                           | 0.9            | 1300                                  | --                    | --                | 0.1                             | 105           | <+0.110                            |
| 1N5276 | 150                           | 0.85           | 1500                                  | --                    | --                | 0.1                             | 113           | <+0.110                            |
| 1N5277 | 160                           | 0.8            | 1700                                  | --                    | --                | 0.1                             | 120           | <+0.115                            |
| 1N5278 | 170                           | 0.74           | 1900                                  | --                    | --                | 0.1                             | 127           | <+0.115                            |
| 1N5279 | 180                           | 0.68           | 2200                                  | --                    | --                | 0.1                             | 135           | <+0.120                            |
| 1N5280 | 190                           | 0.66           | 2400                                  | --                    | --                | 0.1                             | 142           | <+0.120                            |
| 1N5281 | 200                           | 0.65           | 2500                                  | --                    | --                | 0.1                             | 150           | <+0.120                            |

<sup>1)</sup> The Zener Impedance is derived from the 60 Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener Current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener Impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

<sup>2)</sup> Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.

<sup>3)</sup> Tested with pulses  $t_p = 20$  ms.

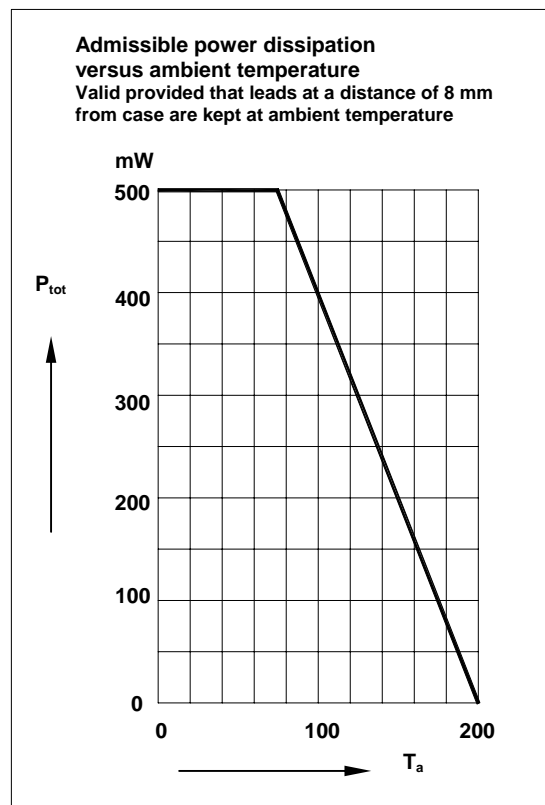

**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002  
Certificate No. 05103



ISO 14001:2004  
Certificate No. 7116



ISO 9001:2000  
Certificate No. 0506098

Dated : 13/06/2007