

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS


| Parameter | Symbol | Value |
|--------------------------------------|------------------|-------------------------------|
| Storage temperature range | T _{STG} | -65 to +200°C |
| Operating junction temperature range | T _J | -65 to +200°C |
| Maximum thermal resistance | R _{θJC} | 1.25°C/W junction to case |
| Typical thermal resistance | R _{θJC} | 1.1°C/W junction to case |
| Maximum mounting torque | | 25-30 inch pounds maximum |
| Weight | | 0.5 ounces (14 grams) typical |

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise specified)

| Parameter | Symbol | 1N | | | | | | | | Test Conditions |
|---|--------------------|-----------------------|------|------|------|------|------|------|-------|---|
| | | 3208 | 3209 | 3210 | 3211 | 3212 | 3213 | 3214 | 5332 | |
| Peak reverse voltage | V _R | 50V | 100V | 200V | 300V | 400V | 500V | 600V | 1200V | |
| Average forward current | I _{F(AV)} | 40 A | | | | | | | | T _C = 146°C, halfsine wave, R _{θJC} = 1.25°C/W |
| Maximum surge current | I _{FSM} | 800 A | | | | | | | | 8.3ms, half sine T _J = 200°C |
| Maximum I ² t for fusing | I ² t | 2600 A ² s | | | | | | | | |
| Maximum peak forward voltage | V _{FM} | 1.19 V | | | | | | | | I _{FM} = 90A; T _J = 25°C* |
| Maximum peak reverse current | I _{RM} | 10 μA | | | | | | | | V _{RRM} , T _J = 25°C |
| Maximum peak reverse current | I _{RM} | 2 mA | | | | | | | | V _{RRM} , T _J = 150°C |
| Maximum recommended operating frequency | | 10kHz | | | | | | | | |

MECHANICAL CHARACTERISTICS

| | |
|-------------------------|--------------------------------|
| Case | DO-5(R) |
| Marking | Alpha numeric |
| Normal polarity | Cathode is stud |
| Reverse polarity | Anode is stud (add "R" suffix) |

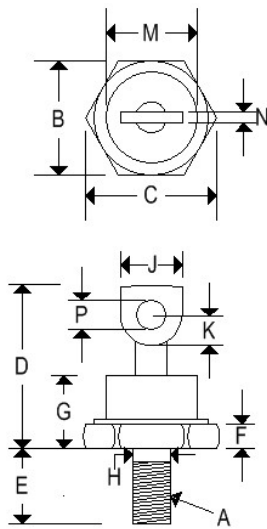

| | DO-5(R) | | | |
|----------|--------------------|-------|-------------|--------|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | ¼-28 UNF2A threads | | | |
| B | 0.669 | 0.688 | 16.990 | 17.480 |
| C | - | 0.794 | - | 20.160 |
| D | - | 1.000 | - | 25.400 |
| E | 0.422 | 0.453 | 10.720 | 11.510 |
| F | 0.115 | 0.200 | 2.920 | 5.080 |
| G | - | 0.450 | - | 11.430 |
| H | 0.220 | 0.249 | 5.580 | 6.320 |
| J | 0.250 | 0.375 | 6.350 | 9.530 |
| K | 0.156 | - | 3.960 | - |
| M | - | 0.667 | - | 16.940 |
| N | 0.030 | 0.080 | 0.760 | 2.030 |
| P | 0.140 | 0.175 | 3.560 | 4.450 |

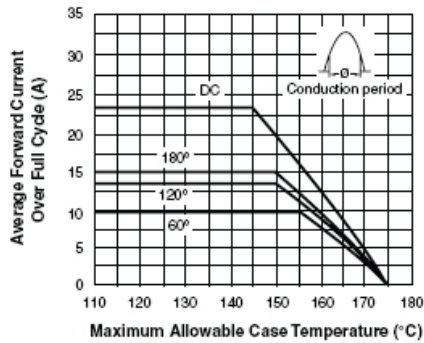


Fig. 1 - Average Forward Current vs. Maximum Allowable Case Temperature

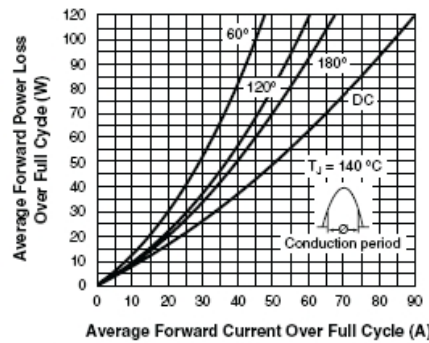


Fig. 3 - Maximum Low Level Forward Power Loss vs. Average Forward Current

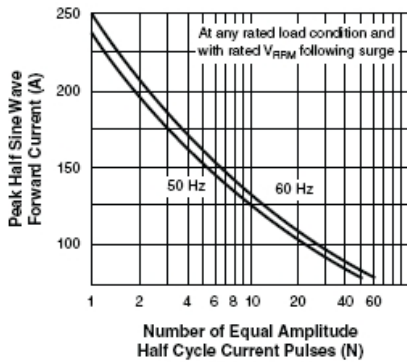


Fig. 2 - Maximum Non-Repetitive Surge Current vs. Number of Current Pulses

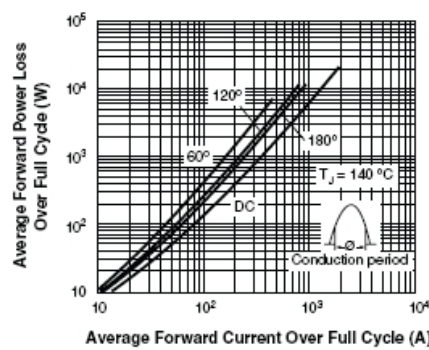


Fig. 4 - Maximum High Level Forward Power Loss vs. Average Forward Current

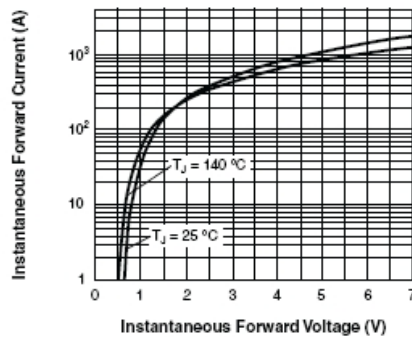


Fig. 5 - Maximum Forward Voltage vs. Forward Current