

1N5333B THRU 1N5388B

5 WATT SILICON ZENER DIODES

Suffix " B " indicates $\pm 5\%$ tolerance,
suffix " A " indicates $\pm 10\%$ tolerance.

Features


- Complete voltage range 3.3 to 200 Volts
- High peak reverse power dissipation
- High reliability
- Low leakage current

Mechanical Characteristics


- Case: D2A Molded plastic.
- Epoxy: UL94V-O rate flame retardant
- Lead: Axial lead solderable per MIL-STD-202, method 208 guaranteed.
- Polarity: Color band denotes cathode end
- Mounting position: Any

Absolute Maximum Ratings

	Symbol	Value	Unit
DC Power Dissipation @ $T_L = 75^\circ\text{C}$ Lead Length = 3/8"	P_D	5	Watts
Derate above 75°C		40	mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_j, T_s	-55 to+175	$^\circ\text{C}$

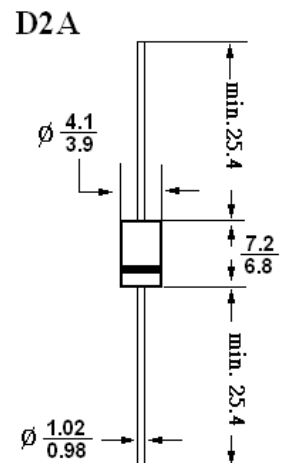

Dimensions in mm



®


РАДИОТЕХ

Тел.: (495) 795-0805
Факс: (495) 234-1603
Эл. почта: info@rct.ru
Веб: www.rct.ru

1N5333B THRU 1N5388B


Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.2\text{V Max@ } I_F = 200\text{mA}$ for all types)

JEDEC TYPE No. (Note 1)	Nominal Zener Voltage $V_Z@I_{ZT}$ Volts (Note 2)	Test Current I_{ZT} mA	Max Zener Impedance		Max Reverse Leakage Current		Max Surge Current i_r ,Amps (Note 3)	Max Voltage Regulation ΔV_Z , Volt (Note 4)	Maximum Regulator Current I_{ZM} mA (Note 5)
			$Z_{ZT}@I_{ZT}$ Ohms (Note 2)	$Z_{ZK}@I_{ZK} =$ 1mA Ohms (Note 2)	$I_R @ V_R$ μA Volts				
1N5333B	3.3	380	3	400	300	1.0	20	0.85	1440
1N5334B	3.6	350	2.5	500	150	1.0	18.7	0.8	1320
1N5335B	3.9	320	2	500	50	1.0	17.6	0.54	1220
1N5336B	4.3	290	2	500	10	1.0	16.4	0.49	1100
1N5337B	4.7	260	2	450	5.0	1.0	15.3	0.44	1010
1N5338B	5.1	240	1.5	400	1.0	1.0	14.4	0.39	930
1N5339B	5.6	220	1	400	1.0	2.0	13.4	0.25	865
1N5340B	6	200	1	300	1.0	3.0	12.7	0.19	790
1N5341B	6.2	200	1	200	1.0	4.0	12.4	0.1	765
1N5342B	6.8	175	1	200	150	4.9	11.5	0.15	700
1N5343B	7.5	175	1.5	200	150	5.4	10.7	0.15	630
1N5344B	8.2	150	1.5	200	150	5.9	10	0.2	580
1N5345B	8.7	150	2	200	150	6.3	9.5	0.2	545
1N5346B	9.1	150	2	150	150	6.6	9.2	0.22	520
1N5347B	10	125	2	125	150	7.2	8.6	0.22	475
1N5348B	11	125	2.5	125	50	8.0	8	0.25	430
1N5349B	12	100	2.5	125	2.0	8.6	7.5	0.25	395
1N5350B	13	100	2.5	100	1.0	9.4	7	0.25	365
1N5351B	14	100	2.5	75	1.0	10.1	6.7	0.25	340
1N5352B	15	75	2.5	75	1.0	10.8	6.3	0.25	315
1N5353B	16	75	2.5	75	1.0	11.5	6	0.3	295
1N5354B	17	70	2.5	75	0.5	12.2	5.8	0.35	280
1N5355B	18	65	2.5	75	0.5	13.0	5.5	0.4	264
1N5356B	19	65	3	75	0.5	13.7	5.3	0.4	250
1N5357B	20	65	3	75	0.5	14.4	5.1	0.4	237
1N5358B	22	50	3.5	75	0.5	15.8	4.7	0.45	216
1N5359B	24	50	3.5	100	0.5	17.3	4.4	0.55	198
1N5360B	25	50	4	110	0.5	18.0	4.3	0.55	190
1N5361B	27	50	5	120	0.5	19.4	4.1	0.6	176
1N5362B	28	50	6	130	0.5	20.1	3.9	0.6	170
1N5363B	30	40	8	140	0.5	21.6	3.7	0.6	158
1N5364B	33	40	10	150	0.5	23.8	3.5	0.6	144
1N5365B	36	30	11	160	0.5	25.9	3.3	0.65	132
1N5366B	39	30	14	170	0.5	28.1	3.1	0.65	122
1N5367B	43	30	20	190	0.5	31.0	2.8	0.7	110
1N5368B	47	25	25	210	0.5	33.8	2.7	0.8	100
1N5369B	51	25	27	230	0.5	36.7	2.5	0.9	93
1N5370B	56	20	35	280	0.5	40.3	2.3	1	86
1N5371B	60	20	40	350	0.5	43.0	2.2	1.2	79
1N5372B	62	20	42	400	0.5	44.6	2.1	1.35	76
1N5373B	68	20	44	500	0.5	49.0	2	1.52	70
1N5374B	75	20	45	620	0.5	54.0	1.9	1.6	63
1N5375B	82	15	65	720	0.5	59.0	1.8	1.8	58
1N5376B	87	15	75	760	0.5	63.0	1.7	2	54.5
1N5377B	91	15	75	760	0.5	65.5	1.6	2.2	52.5
1N5378B	100	12	90	800	0.5	72.0	1.5	2.5	47.5
1N5379B	110	12	125	1000	0.5	79.2	1.4	2.5	43
1N5380B	120	10	170	1150	0.5	86.4	1.3	2.5	39.5
1N5381B	130	10	190	1250	0.5	93.2	1.2	2.5	36.6
1N5382B	140	8	230	1500	0.5	101	1.2	2.5	34
1N5383B	150	8	330	1500	0.5	108	1.1	3	31.6
1N5384B	160	8	350	1650	0.5	115	1.1	3	29.4
1N5385B	170	8	380	1750	0.5	122	1	3	28
1N5386B	180	5	430	1750	0.5	130	1	4	26.4
1N5387B	190	5	450	1850	0.5	137	0.9	5	25
1N5388B	200	5	480	1850	0.5	144	0.9	5	23.6



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001
Certificate No. 7116



ISO 9001 : 2000
Certificate No. 055-199-042-04

Dated : 10/06/2005