


## 800MHz BAND FRONT-END GaAs MMIC

### ■GENERAL DESCRIPTION

NJG1711KC1 is a front-end GaAs MMIC including a LNA, a local amplifier and a mixer, designed mainly for 800MHz band cellular phone handsets.

The ultra small & ultra thin FLP10-C1 package is applied.

### ■PACKAGE OUTLINE




NJG1711KC1

### ■FEATURES

- Low Voltage Operation +2.8V typ.
- Low Current Consumption LNA 2.8mA typ.  
Mixer 6.0mA typ. (with local amplifier operation current)
- Ultra Small & Ultra Thin package FLP10-C1 (Mount Size: 2.8x3.0x0.75mm)
- LNA
  - High Small Signal Gain 18.0dB typ. @ $f_{RF}=820\text{MHz}$
  - Low Noise Figure 1.3dB typ. @ $f_{RF}=820\text{MHz}$
  - High Input IP3 -5.0dBm typ. @ $f_{RF}=820+820.1\text{MHz}$
- Mixer
  - High Conversion Gain 12.0dB typ. @ $f_{RF}=820\text{MHz}$ ,  $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$
  - Low Noise Figure 5.0dB typ. @ $f_{RF}=820\text{MHz}$ ,  $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$
  - High Input IP3 +2.0dBm typ. @ $f_{RF}=820+820.1\text{MHz}$ ,  $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$

### ■PIN CONFIGURATION

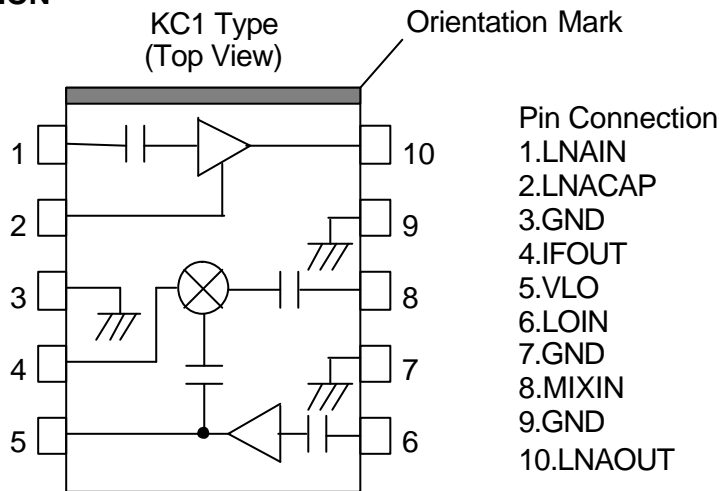

NOTE: Please note that any information on this catalog will be subject to change.

# NJG1711KC1

www.DataSheet4U.com

## ■ABSOLUTE MAXIMUM RATINGS

( $T_a=+25^{\circ}\text{C}$ ,  $Z_s=Z_i=50\Omega$ )

| PARAMETER               | SYMBOL      | CONDITIONS                           | RATINGS  | UNITS              |
|-------------------------|-------------|--------------------------------------|----------|--------------------|
| LNA Voltage             | $V_{LNA}$   |                                      | 5.0      | V                  |
| Mixer Voltage           | $V_{MIX}$   |                                      | 5.0      | V                  |
| LOCAL Amplifier Voltage | $V_{LO}$    |                                      | 5.0      | V                  |
| Input Power 1           | $P_{LNAIN}$ | $V_{LNA}=V_{MIX}=V_{LO}=2.8\text{V}$ | +15      | dBm                |
| Input Power 2           | $P_{LOIN}$  | $V_{LNA}=V_{MIX}=V_{LO}=2.8\text{V}$ | +10      | dBm                |
| Power Dissipation       | $P_D$       |                                      | 550      | mW                 |
| Operating Temperature   | $T_{opr}$   |                                      | -40~+85  | $^{\circ}\text{C}$ |
| Storage Temperature     | $T_{stg}$   |                                      | -55~+125 | $^{\circ}\text{C}$ |

## ■ELECTRICAL CHARACTERISTICS 1 (LNA)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{LNA}=2.8\text{V}$ ,  $V_{MIX}=V_{LO}=0\text{V}$ ,  $f_{RF}=820\text{MHz}$ ,  
 $P_{RF}=-35\text{dBm}$ ,  $Z_s=Z_i=50\Omega$ , with test circuit

| PARAMETER                          | SYMBOL     | CONDITIONS                     | MIN   | TYP  | MAX  | UNITS |
|------------------------------------|------------|--------------------------------|-------|------|------|-------|
| Operating Frequency                | freq       |                                | 810   | 820  | 885  | MHz   |
| LNA Voltage                        | $V_{LNA}$  |                                | 2.5   | 2.8  | 4.5  | V     |
| LNA Operating Current              | $I_{LNA}$  | $P_{RF}$ , $P_{LO}=\text{OFF}$ | -     | 2.8  | 3.3  | mA    |
| Small Signal Gain                  | Gain       |                                | 16.0  | 18.0 | 19.0 | dB    |
| Gain Flatness                      | $G_{flat}$ | $f_{RF}=810\sim 885\text{MHz}$ | -     | 0.5  | 1.0  | dB    |
| Noise Figure                       | NF         |                                | -     | 1.3  | 1.5  | dB    |
| Pout at 1dB Gain Compression point | $P_{-1dB}$ |                                | -6.0  | +1.0 | -    | dBm   |
| Input 3rd Order Intercept point    | IIP3       | $f_{RF}=820.0+820.1\text{MHz}$ | -11.0 | -5.0 | -    | dBm   |
| RF IN VSWR                         | $VSWR_i$   |                                | -     | 1.5  | 2.0  |       |
| RF OUT VSWR                        | $VSWR_o$   |                                | -     | 1.5  | 2.0  |       |

## ■ELECTRICAL CHARACTERISTICS 2 (Mixer)

GENERAL CONDITIONS:  $T_a=+25^{\circ}\text{C}$ ,  $V_{LNA}=0\text{V}$ ,  $V_{MIX}=V_{LO}=2.8\text{V}$ ,  $f_{RF}=820\text{MHz}$ ,  $f_{LO}=706.2\text{MHz}$ ,  
 $f_{IF}=113.8\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$ ,  $P_{LO}=-10\text{dBm}$ ,  $Z_s=Z_i=50\Omega$ , with test circuit

| PARAMETER                         | SYMBOL    | CONDITIONS                     | MIN  | TYP  | MAX | UNITS |
|-----------------------------------|-----------|--------------------------------|------|------|-----|-------|
| Operating Frequency               | freq      |                                | 810  | 820  | 885 | MHz   |
| Mixer Voltage                     | $V_{MIX}$ |                                | 2.5  | 2.8  | 4.5 | V     |
| Local Amplifier Voltage           | $V_{LO}$  |                                | 2.5  | 2.8  | 4.5 | V     |
| Mixer Operating Current           | $I_{MIX}$ | $P_{RF}$ , $P_{LO}=\text{OFF}$ | -    | 5.0  | 6.0 | mA    |
| Local Amplifier Operating Current | $I_{LO}$  | $P_{RF}$ , $P_{LO}=\text{OFF}$ | -    | 1.0  | 1.2 | mA    |
| Conversion Gain                   | $G_c$     |                                | 10.5 | 12.0 | -   | dB    |
| Noise Figure                      | NF        |                                | -    | 5.0  | 6.0 | dB    |
| Input 3rd Order Intercept Point   | IIP3      | $f_{RF}=820.0+820.1\text{MHz}$ | -    | +2.0 | -   | dBm   |

## ■ TERMINAL INFORMATION

| No. | SYMBOL | FUNCTION  |
|-----|--------|---|
| 1   | LNAIN  | RF input terminal of LNA. An external matching circuit is required.   |
| 2   | LNACAP | Terminal for the bypass capacitor of LNA. The bypass capacitor C1 as shown in test circuits, should be connected to this terminal as close as possible.   |
| 3   | GND    | Ground terminal (0V)  |
| 4   | IFOUT  | IF signal output terminal. The IF signal is output through external matching circuit connected to this terminal. Please connect inductances L6, L7 and power supply as shown in test circuits, since this terminal is also the terminal of mixer power supply.            |
| 5   | VLO    | Power supply terminal for local amplifier. Please place R1 and L9 as shown in test circuits at very close to this terminal.   |
| 6   | LOIN   | Local signal input terminal to local amplifier. An external matching circuit is required.   |
| 7   | GND    | Ground terminal (0V)  |
| 8   | MIXIN  | RF signal input terminal to mixer. An external matching circuit is required.  |
| 9   | GND    | Ground terminal (0V)  |
| 10  | LNAOUT | Signal output terminal of LNA. The RF signal from LNA is output through external matching circuit connected to this terminal. Please connect inductances L2, L3 and power supply as shown in test circuits, since this terminal is also the terminal of LNA power supply. |

### CAUTION


- 1) Ground terminal (No.3, 7, 9) should be connected to the ground plane as low inductance as possible.

# NJG1711KC1


www.DataSheet4U.com

## TYPICAL CHARACTERISTICS (LNA, $f_{LO}=706.2\text{MHz}$ , with test circuit)


### Gain, Noise Figure vs. Frequency

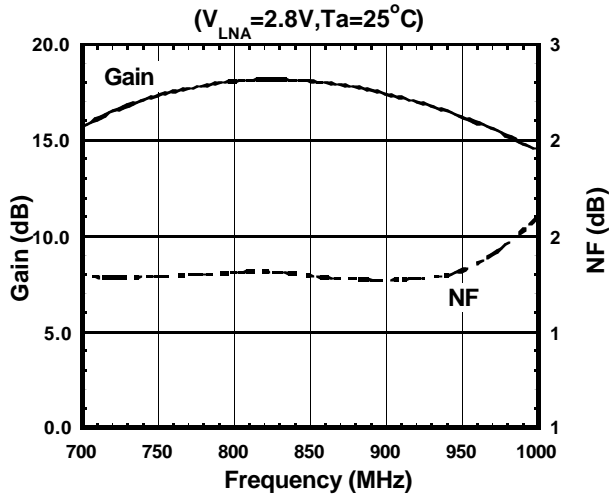


### Pout, Gain vs. Pin

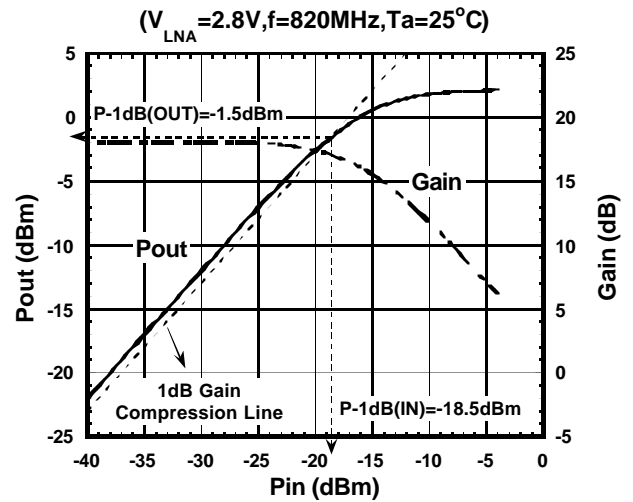

### Pout, IM3 vs. Pin

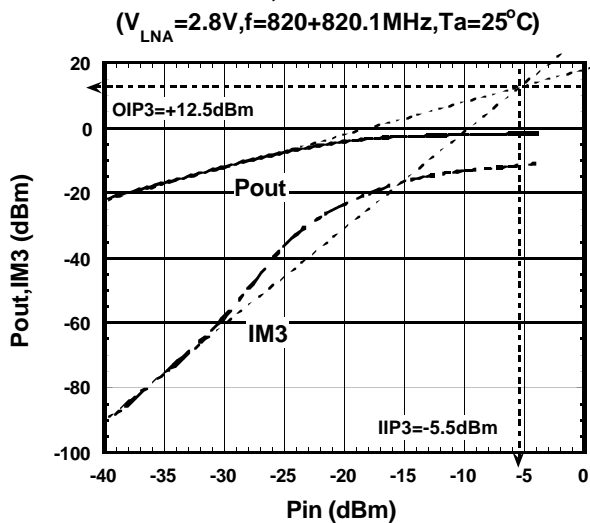


### Input P-1dB, Output P-1dB vs. freq

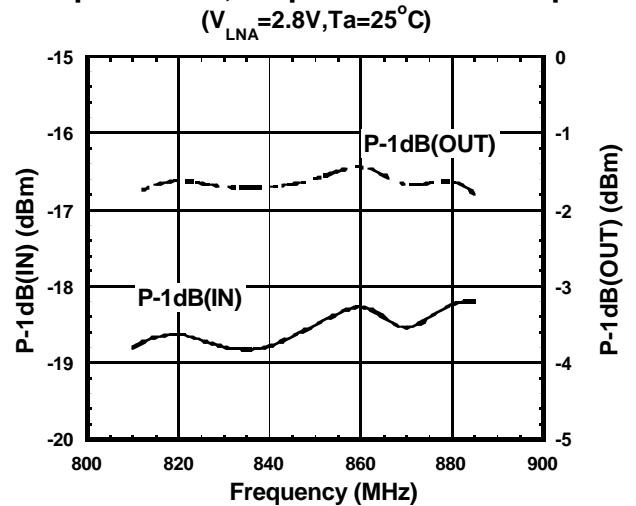

## ■ TYPICAL CHARACTERISTICS (LNA, $f_{LO}=706.2\text{MHz}$ , with test circuit)


### OIP3, IIP3 vs. Frequency

( $V_{LNA}=2.8\text{V}, T_a=25^\circ\text{C}$ )

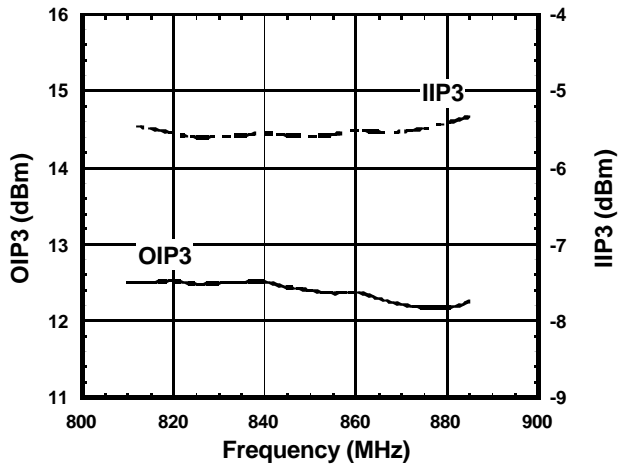


### Gain, Noise Figure vs. $V_{LNA}$

( $f=820\text{MHz}, T_a=25^\circ\text{C}$ )

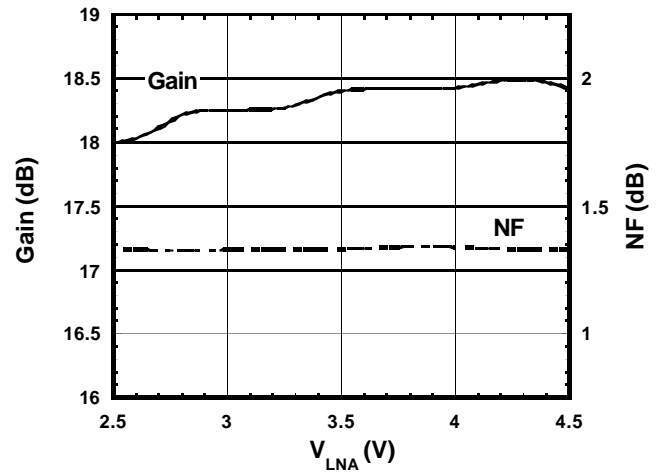


### $I_{LNA}$ vs. $V_{LNA}$

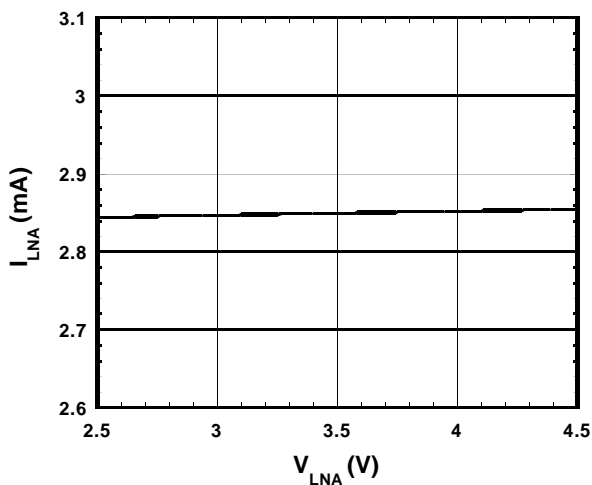

### P-1dB vs. $V_{LNA}$

( $f=820\text{MHz}, T_a=25^\circ\text{C}$ )

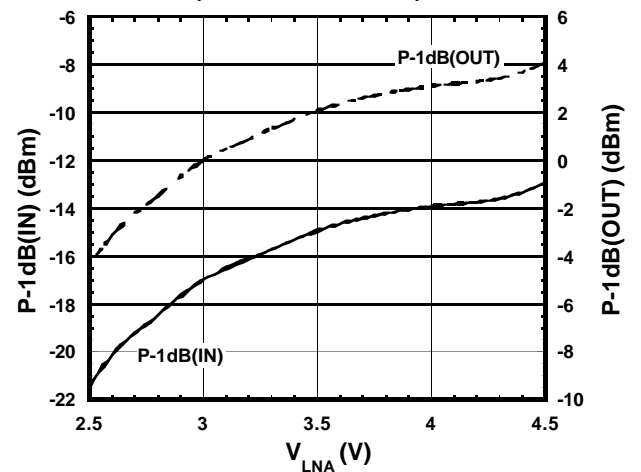

Condition

$$V_{LNA}=2.8\text{V}$$



$$V_{MIX}=V_{LO}=0\text{V}$$

The value of OIP3 and IIP3 shown in typical characteristics are calculated by



$$OIP3 = \frac{3 \times P_{out} - IM3}{2}$$

$$IIP3 = OIP3 - \text{Gain} \quad @ Pin = -35\text{dBm}$$

## TYPICAL CHARACTERISTICS (LNA, $f_{LO}=706.2\text{MHz}$ , with test circuit)

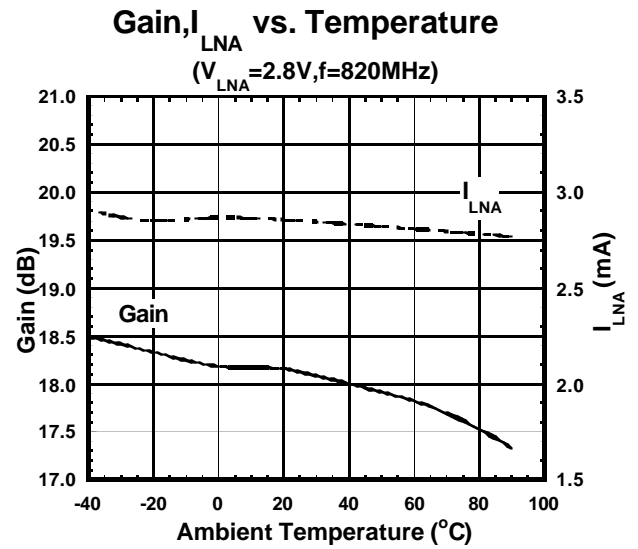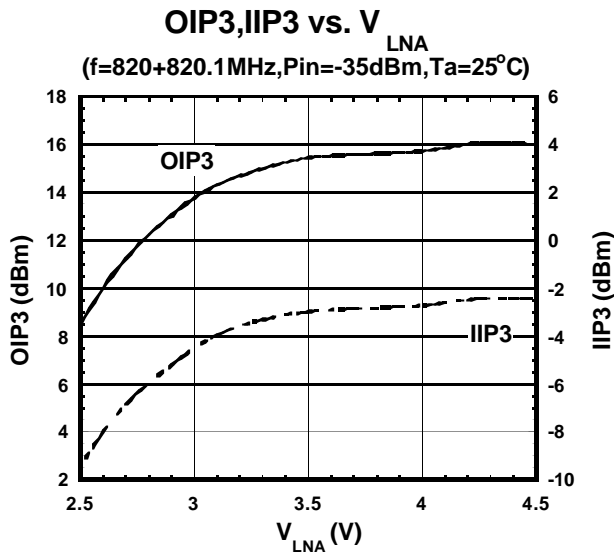

### Noise Figure, P-1dB(OUT) vs. Temperature

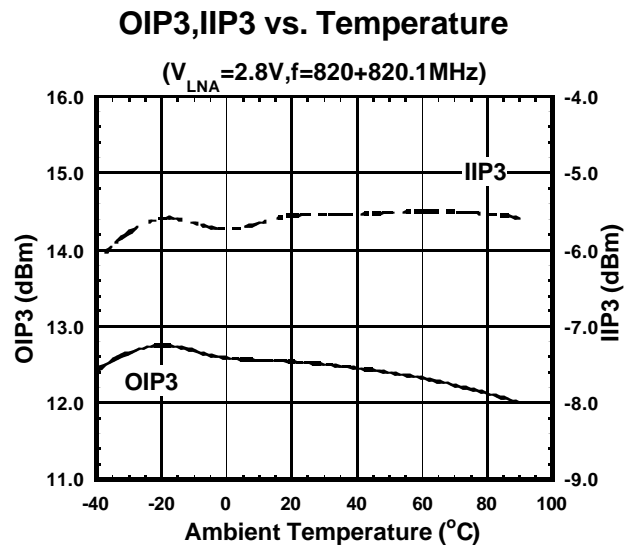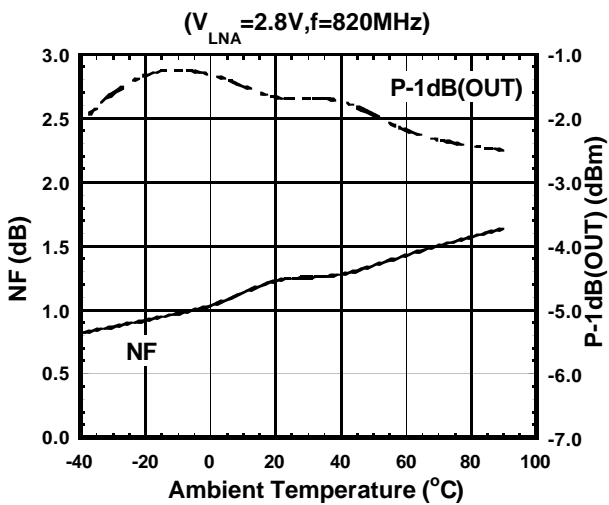

Condition

$$V_{LNA}=2.8\text{V}$$

$$V_{MIX}=V_{LO}=0\text{V}$$


The value of OIP3 and IIP3 shown in typical characteristics are calculated by

$$OIP3 = \frac{3 \times P_{out} - IM3}{2}$$


$$IIP3 = OIP3 - \text{Gain} \quad @ \text{Pin} = -35\text{dBm}$$

## TYPICAL CHARACTERISTICS (LNA, $f_{LO}=706.2\text{MHz}$ , with test circuit)


### S11, S22

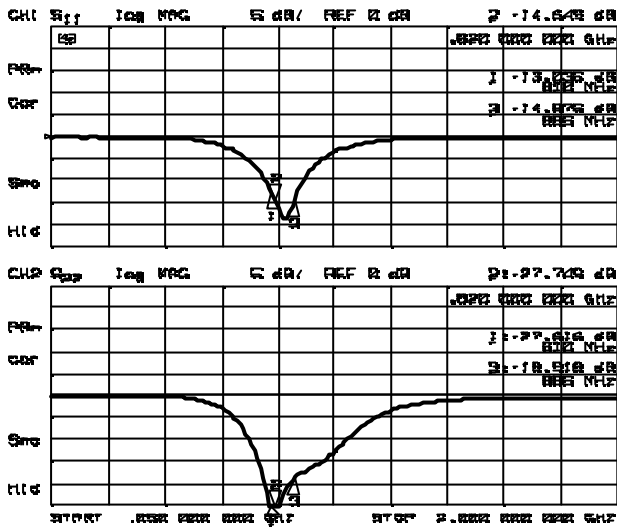


### Zin, Zout

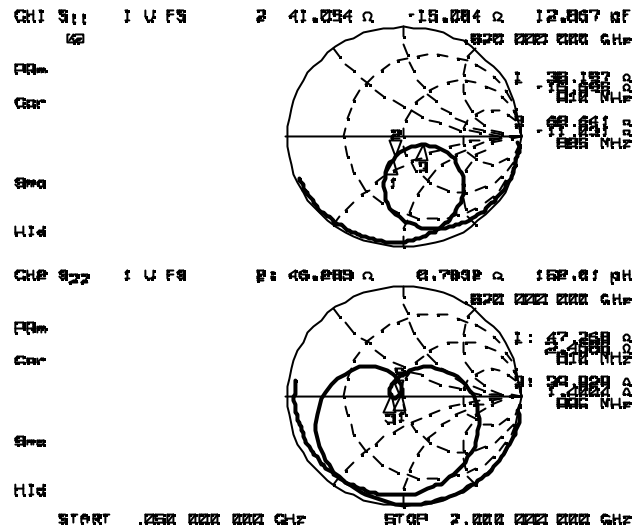

### S21

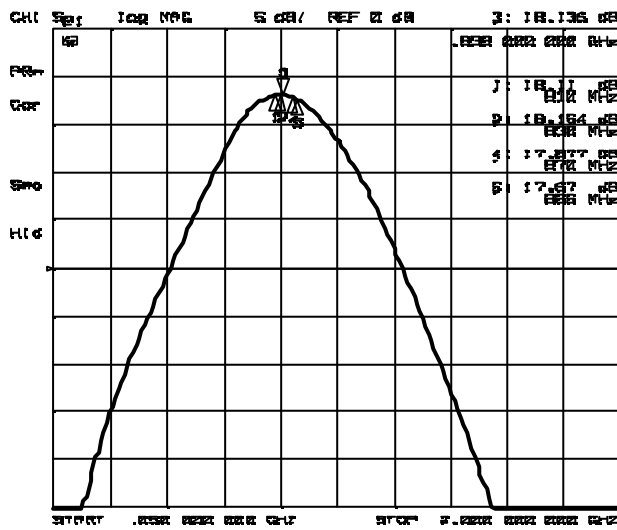

### S12

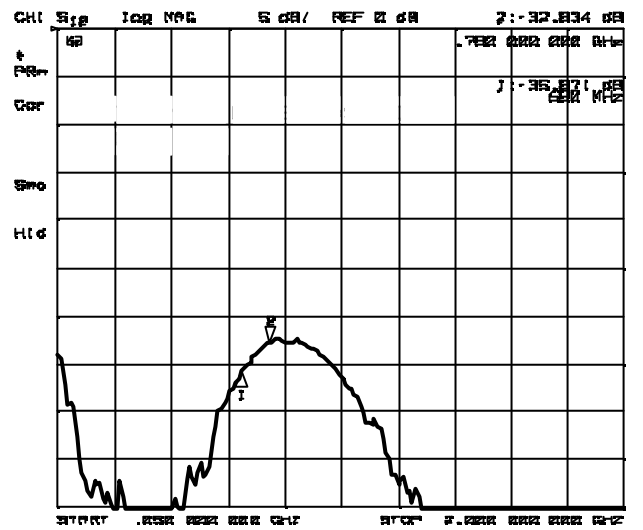


# NJG1711KC1

www.DataSheet4U.com


## TYPICAL CHARACTERISTICS (MIXER, $f_{LO}=706.2\text{MHz}$ , with test circuit)

### Conversion Gain, Noise Figure vs. RF Frequency

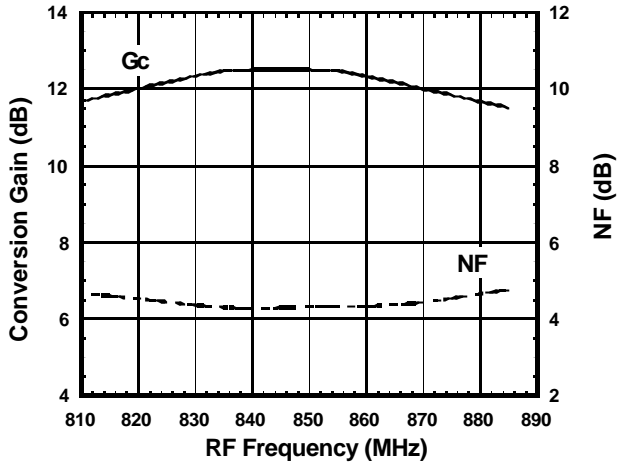


Condition  
 $f_{IF}=113.8\text{MHz}$   
 $P_{RF}=-30\text{dBm}$   
 $P_{LO}=-10\text{dBm}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$   
 Lower LOCAL

### Conversion Gain Noise Figure vs. LO Power

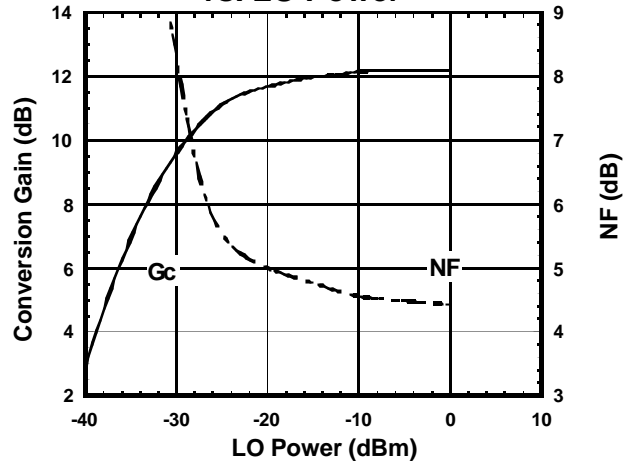

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=706.2\text{MHz}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

### OIP3, IIP3 vs. RF Frequency

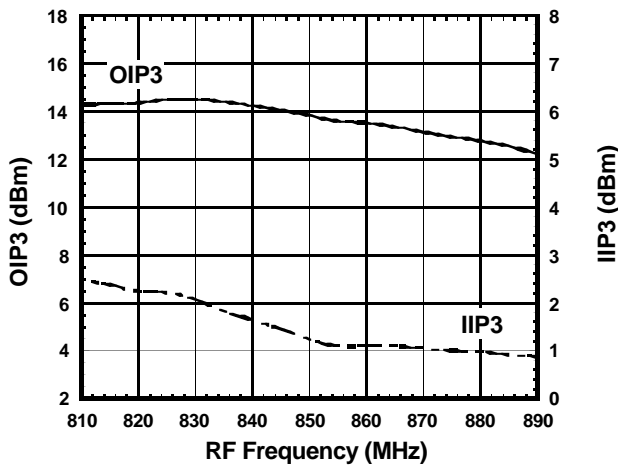


Condition  
 $f_{IF}=113.8\text{MHz}$   
 $P_{RF}=-30\text{dBm}$   
 $P_{LO}=-10\text{dBm}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

$$OIP3 = \frac{3 \times IIP3 - IM3}{2}$$

$IIP3 = OIP3 - Gc$   
 @  $P_{RF} = -30\text{dBm}$

### OIP3, IIP3 vs. LO Power

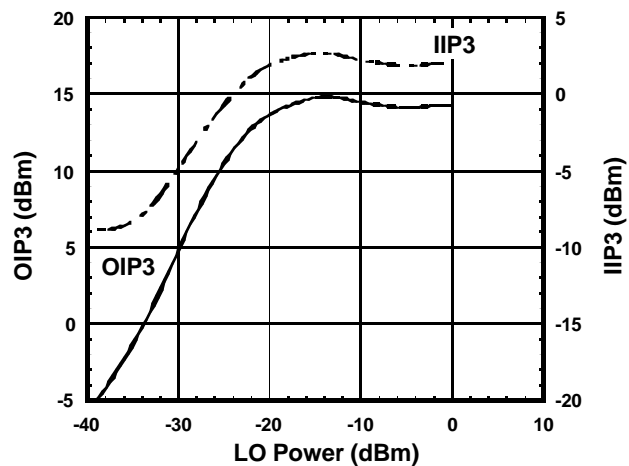

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF1}=820.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=820.1\text{MHz}$   
 $f_{LO}=706.2\text{MHz}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

$$OIP3 = \frac{3 \times IIP3 - IM3}{2}$$


$IIP3 = OIP3 - Gc$   
 @  $P_{RF} = -30\text{dBm}$



## ■ TYPICAL CHARACTERISTICS (MIXER, $f_{LO}=706.2\text{MHz}$ , with test circuit)

### Conversion Gain, Noise Figure


vs.  $V_{MIX}, V_{LO}$

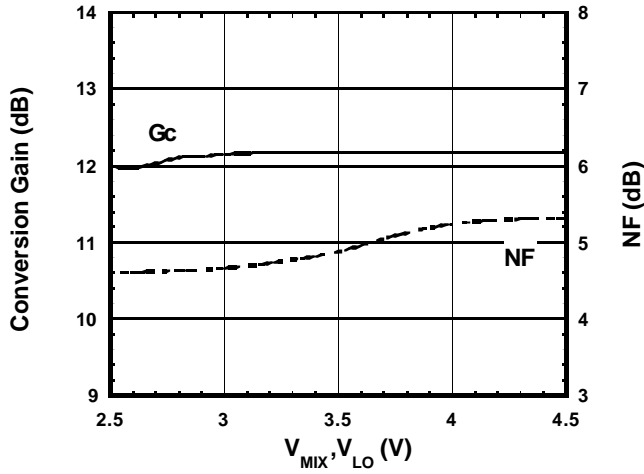

Condition

$f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$

### IIP3, OIP3 vs. $V_{MIX}, V_{LO}$

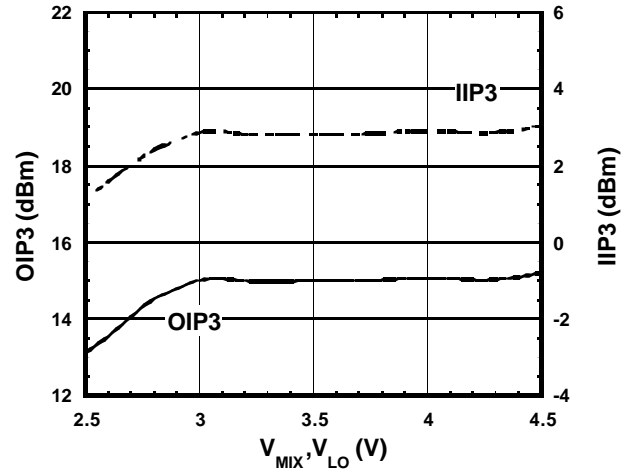


Condition

$f_{IF}=113.8\text{MHz}$   
 $f_{RF1}=820.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=820.1\text{MHz}$   
 $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$

$$OIP3 = \frac{3 \times IIP3 - IM3}{2}$$
  
 $IIP3 = OIP3 - Gc$   
 @  $P_{RF} = -30\text{dBm}$

### IF Output Power vs. RF Power

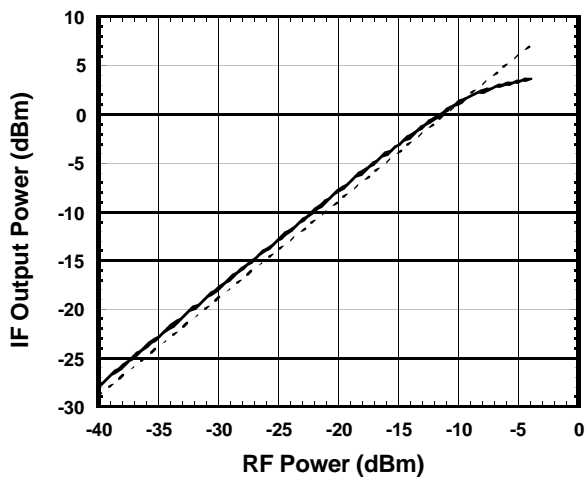

Condition


$f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$   
 $f_{LO}=706.2\text{MHz}$ ,  $P_{LO}=-10\text{dBm}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

# NJG1711KC1

www.DataSheet4U.com


## ■ TYPICAL CHARACTERISTICS (MIXER, $f_{LO}=706.2\text{MHz}$ , with test circuit)

**Conversion Gain vs. RF Frequency  
Temperature Response**

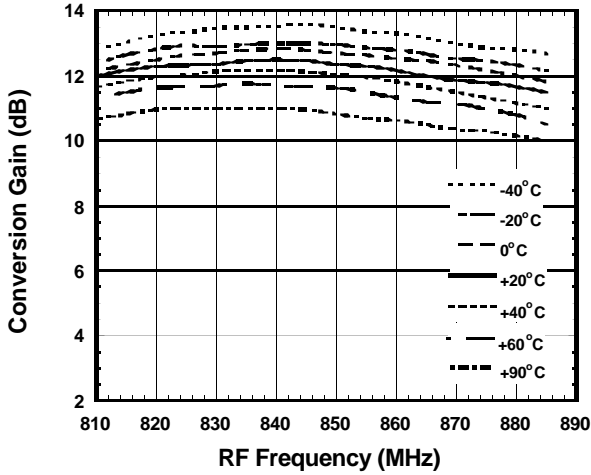


Condition  
 $f_{IF}=113.8\text{MHz}$   
 $P_{RF}=-30\text{dBm}$   
 $P_{LO}=-10\text{dBm}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

**Conversion Gain vs. Local Power  
Temperature Response**

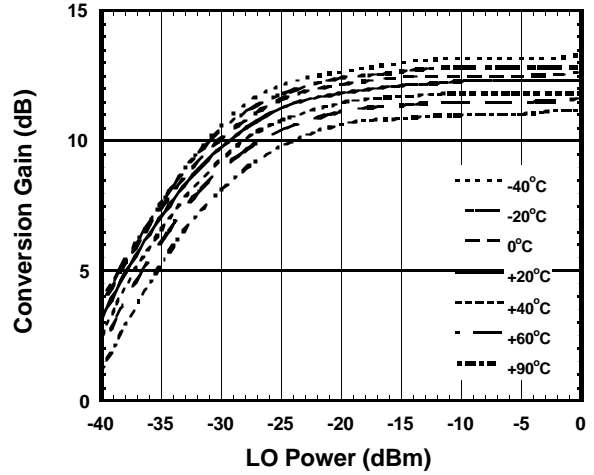


Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=706.2\text{MHz}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

**Noise Figure vs. Local Power  
Temperature Response**

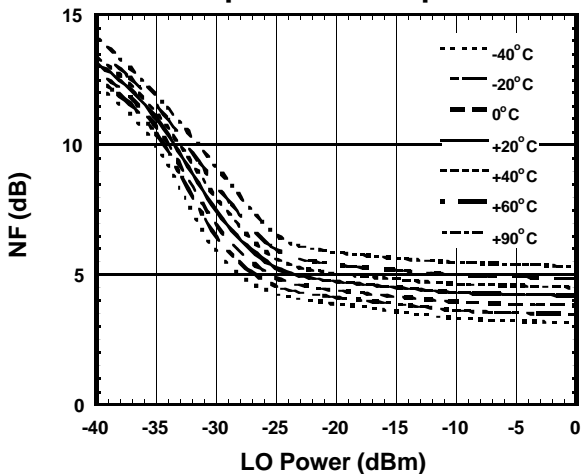

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{LO}=706.2\text{MHz}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

**IIP3 vs. Local Power  
Temperature Response**

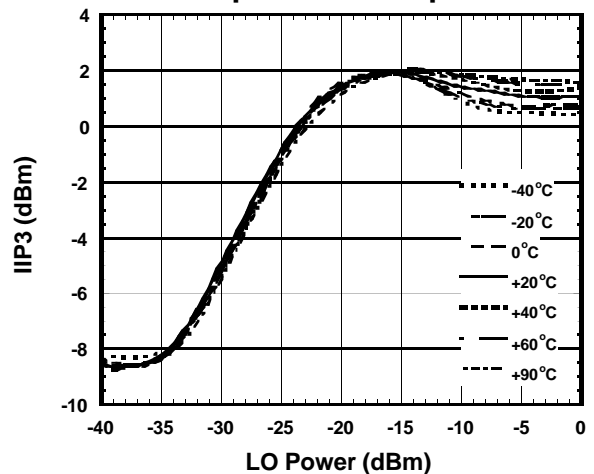


Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF1}=820.0\text{MHz}$ ,  $P_{RF}=-30\text{dBm}$   
 $f_{RF2}=820.1\text{MHz}$   
 $f_{LO}=706.2\text{MHz}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$


$$IIP3 = \frac{3 \times I_F - IM3}{2} - G_c$$

@  $P_{RF} = -30\text{dBm}$


**TYPICAL CHARACTERISTICS (MIXER,  $f_{LO}=706.2\text{MHz}$ , with test circuit)**

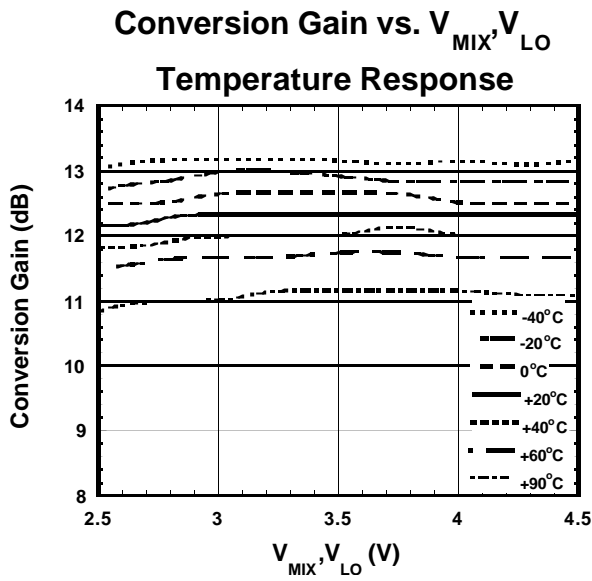

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}, P_{RF}=-30\text{dBm}$   
 $f_{LO}=706.2\text{MHz}, P_{LO}=-10\text{dBm}$

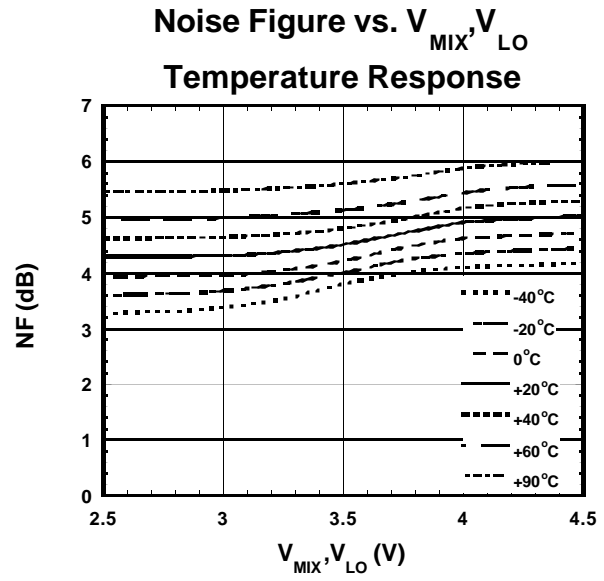

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF}=820\text{MHz}$   
 $f_{LO}=706.2\text{MHz}, P_{LO}=-10\text{dBm}$

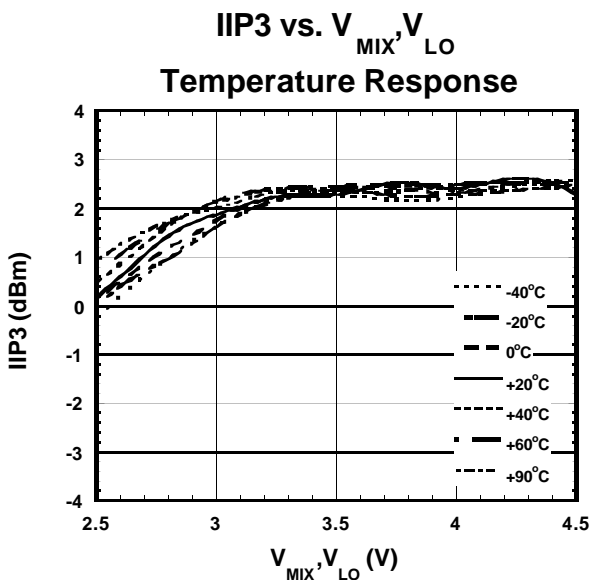

Condition  
 $f_{IF}=113.8\text{MHz}$   
 $f_{RF1}=820.0\text{MHz}, P_{RF}=-30\text{dBm}$   
 $f_{RF2}=820.1\text{MHz}$   
 $f_{LO}=706.2\text{MHz}, P_{LO}=-10\text{dBm}$

$$IIP3 = \frac{3 \times I_F - IM3}{2} - G_c$$



@  $P_{RF} = -30\text{dBm}$

# NJG1711KC1

www.DataSheet4U.com



## TYPICAL CHARACTERISTICS (MIXER, $f_{LO}=706.2\text{MHz}$ , with test circuit)

### MIXER IN PORT IMPEDANCE

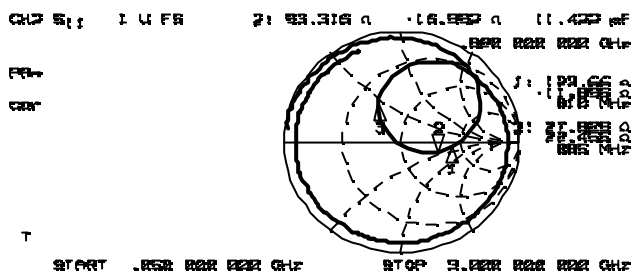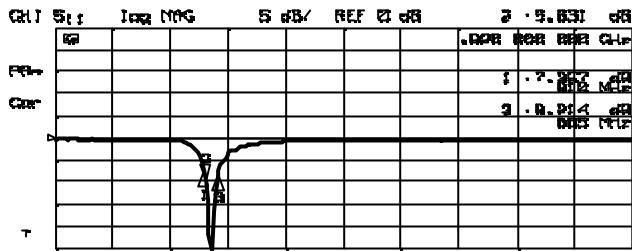



Condition  
 $V_{LNA}=0\text{V}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

### LOCAL IN PORT IMPEDANCE

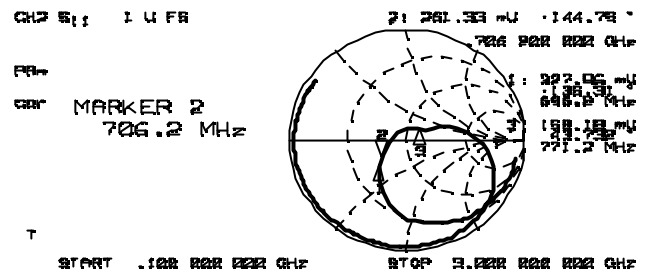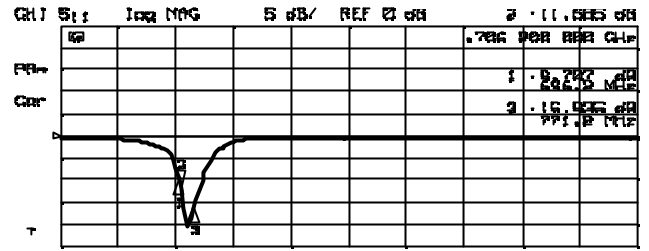


Condition  
 $V_{LNA}=0\text{V}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

### IF OUT PORT IMPEDANCE

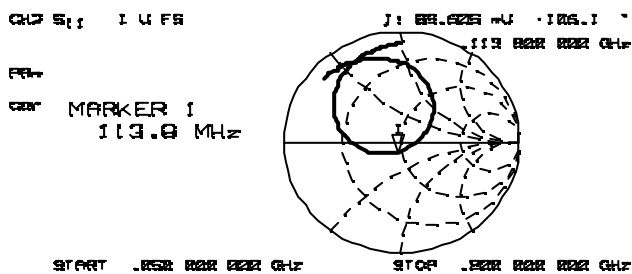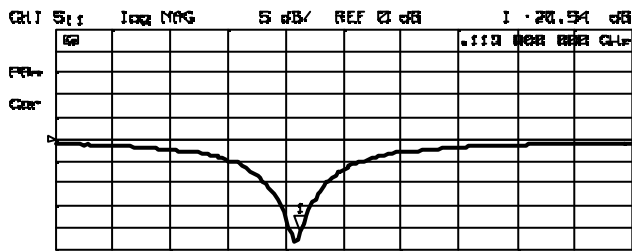

Condition  
 $V_{LNA}=0\text{V}$   
 $V_{MIX}=V_{LO}=2.8\text{V}$

## TEST CIRCUIT

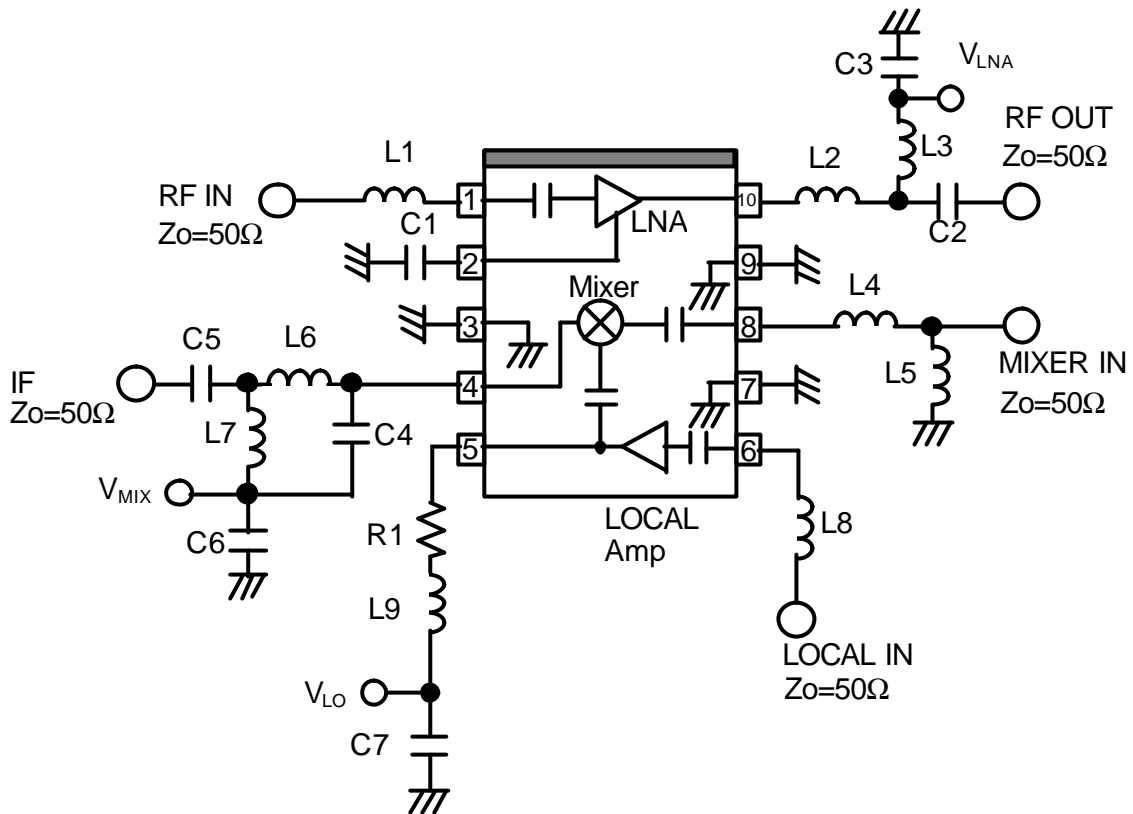

### PARTS LIST


| PART ID | 800MHz BAND  |  | COMMENT                 |
|---------|--|--|-------------------------|
|         | Lower LOCAL  |  |                         |
|         | $f_{LO}=706.2\text{MHz}$<br>$f_{IF}=113.8\text{MHz}$ |  |                         |
| L1      | 33nH   |  | TAIYO-YUDEN (HK1005)    |
| L2      | 39nH   |  | TAIYO-YUDEN (HK1005)    |
| L3      | 12nH   |  | TAIYO-YUDEN (HK1005)    |
| L4      | 15nH   |  | PANASONIC [MEC] (ELJRF) |
| L5      | 4.7nH  |  | PANASONIC [MEC] (ELJRF) |
| L6      | 120nH  |  | TAIYO-YUDEN (HK1005)    |
| L7      | 56nH   |  | TAIYO-YUDEN (HK1005)    |
| L8      | 39nH   |  | TAIYO-YUDEN (HK1005)    |
| L9      | 39nH   |  | TAIYO-YUDEN (HK1005)    |
| C1      | 1000pF   |  | MURATA (GRM36)          |
| C2      | 3pF  |  | MURATA (GRM36)          |
| C3      | 1000pF   |  | MURATA (GRM36)          |
| C4      | 11pF   |  | MURATA (GRM36)          |
| C5      | 1000pF   |  | MURATA (GRM36)          |
| C6      | 0.1uF  |  | MURATA (GRM36)          |
| C7      | 0.1uF  |  | MURATA (GRM36)          |
| R1      | 33Ω  |  | 1005 Size               |

(Note) Please use 1608 type inductor to improve NF characteristics.

# NJG1711KC1

www.DataSheet4U.com

## RECOMMENDED PCB DESIGN

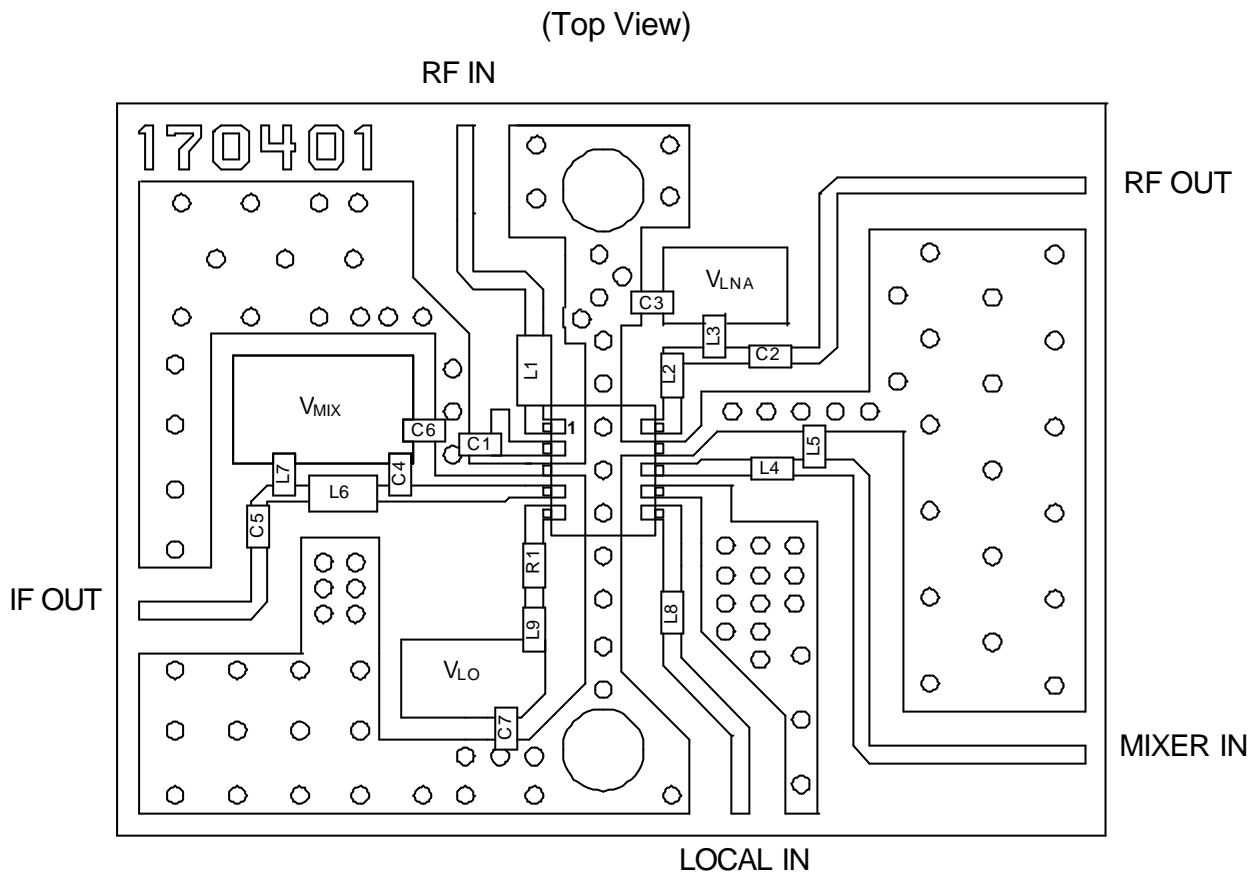

PCB (FR-4): t=0.2mm


MICROSTRIP LINE WIDTH=0.4mm ( $Z_0=50\Omega$ )

PCB SIZE =23.0x17.0mm


### Caution on using devices.

- [1] Please place R1 close to the V<sub>Lo</sub> terminal (5th pin), and L9 to R1.
- [2] Please place C1 close to the LNACAP terminal (2nd pin).
- [3] Please place C3 close to L3.
- [4] Please place C6 close to C4.
- [5] Please place C7 close to L9.


## MEASURING BLOCK DIAGRAM

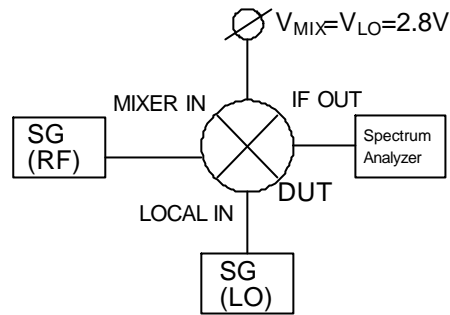

Conversion Gain Measuring Block Diagram

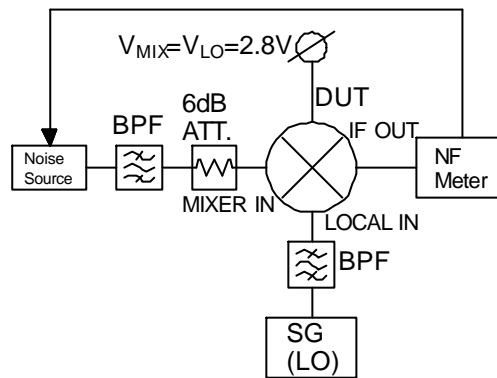

Noise Figure Measuring Block Diagram

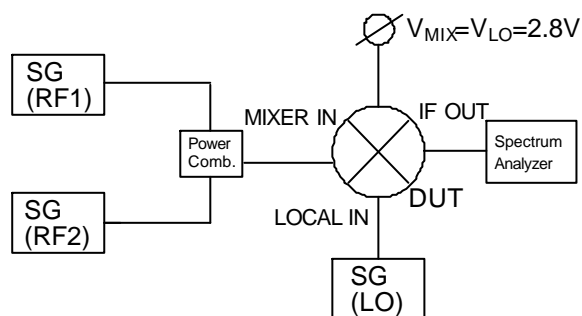


IF, IM3 Measuring Block Diagram

# NJG1711KC1

www.DataSheet4U.com

## PACKAGE OUTLINE (FLP10-C1)

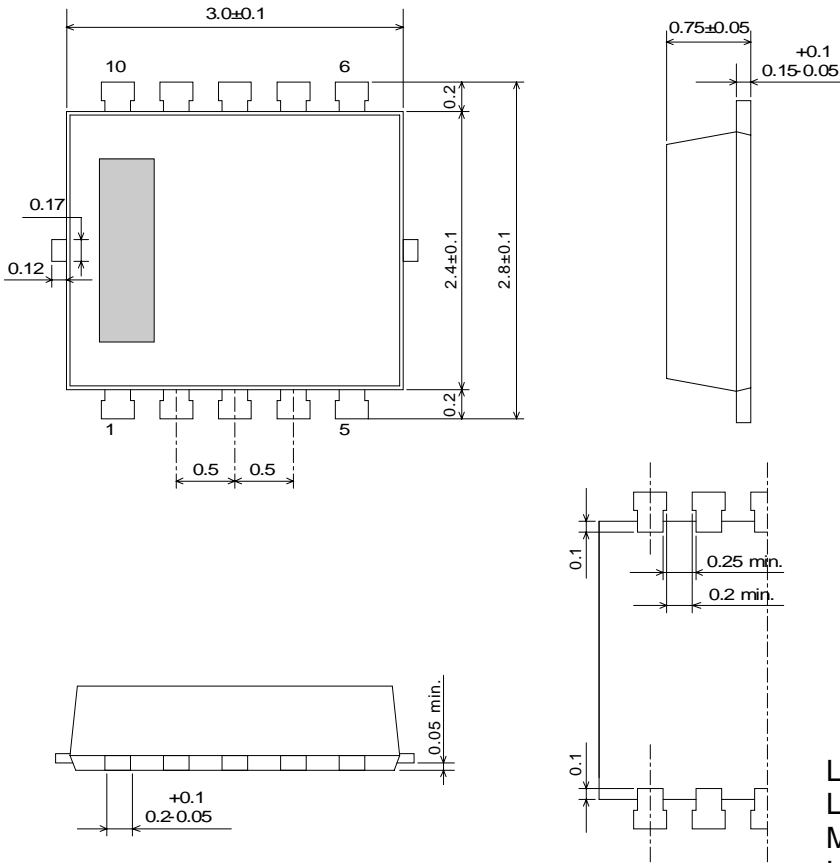

|                     |                  |
|---------------------|------------------|
| Lead material       | : Copper         |
| Lead surface finish | : Solder plating |
| Molding material    | : Epoxy resin    |
| UNIT                | : mm             |
| Weight              | : 15mg           |

### Cautions on using this product

- This product contains Gallium-Arsenide (GaAs) which is a harmful material.
- Do NOT eat or put into mouth.
  - Do NOT dispose in fire or break up this product.
  - Do NOT chemically make gas or powder with this product.
  - To waste this product, please obey the relating law of your country.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.