

HIGH SPEED SINGLE SUPPLY OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The **NJM2742** is a high speed single supply operational amplifier. The low V_{OL} enables to treat small output signal on a single supply.

It has wide supply voltage range, +3 to +32 volt and high slew rate.

The **NJM2742** is suitable for power supply and motor driver units.

■ PACKAGE OUTLINE


**NJM2742D****NJM2742M****NJM2742V****NJM2742RB1**

■ FEATURES

- Single Supply
- Operating Voltage (3 to 32V)
- Low Saturation Output Voltage ($V_{OL} = 0.2V$ typ. at $R_L = 2k\Omega, V^+ = 5V$)
- High Slew Rate (10V/ μ s typ.)
- Bipolar Technology
- Package Outline DIP8,DMP8,SSOP8,TVSP8

■ PIN CONFIGURATION

(Top View)

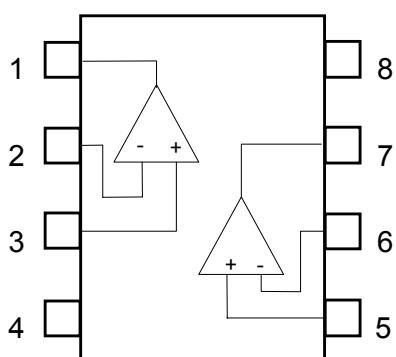

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT1
- 3.A +INPUT1
- 4.V⁻
- 5.B +INPUT2
- 6.B -INPUT2
- 7.B OUTPUT2
- 8.V⁺

NJM2742

www.DataSheet4U.com

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|--|------|
| Supply Voltage | V ⁺ | +36 | V |
| Differential Input Voltage | V _{ID} | ±36 | V |
| Common Mode Input Voltage | V _{IC} | -0.3 to +36 | V |
| Power Dissipation | P _D | 500 (DIP8) 300 (DMP8) 250 (SSOP8) 320 (TVSP8) | mW |
| Operating Temperature Range | To _{pr} | -40 to +85 | °C |
| Storage Temperature Range | T _{stg} | -40 to +150 | °C |

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-------------------------|----------------|----------------|-----|-----|-----|------|
| Operating Voltage Range | V ⁺ | | 3.0 | - | 32 | V |

■ DC CHARACTERISTICS

(V⁺/V⁻=±15V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---------------------------------|---------------------|--|-----------------|---------------|------|------|
| Operating Current | I _{CC} | No Signal | - | 4.3 | 5.5 | mA |
| Input Offset Voltage | V _{IO} | | - | 1.0 | 12 | mV |
| Input Bias Current | I _B | | - | 80 | 400 | nA |
| Input Offset Current | I _{IO} | | - | 5 | 75 | nA |
| Open Loop Voltage Gain | A _V | R _L >2kΩ | 80 | 110 | - | dB |
| Common Mode Rejection | CMR | -15V < V _{IC} < 12.5V | 55 | 75 | - | dB |
| Supply Voltage Rejection | SVR | 3V < V ⁺ < 32V | 70 | 90 | - | dB |
| Maximum Output Voltage 1 | V _{OM1} | R _L >10kΩ | +13.7 /-13.7 | +14 /-14.8 | - | V |
| Maximum Output Voltage 2 | V _{OM2} | R _L >2kΩ | +13.5 /-13.5 | - | - | V |
| Source Output Current | I _{SOURCE} | V _{IN+} =1V, V _{IN-} =0V, V _O =0V | 10 | 30 | - | mA |
| Sink Output Current | I _{SINK} | V _{IN+} =0V, V _{IN-} =1V, V _O =0V | 10 | 30 | - | mA |
| Input Common Mode Voltage Range | V _{ICM} | CMR > 55dB | -15 | - | 12.5 | V |

■ AC CHARACTERISTICS

(V⁺/V⁻=±15V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------------------|-----------------|----------------|-----|------|-----|------------|
| Gain Bandwidth product | GB | f=10kHz | - | 2 | - | MHz |
| Equivalent Input Noise Voltage | V _{NI} | f=1kHz | - | 40 | - | nV/ √Hz |
| Capacitive Load Tolerance | CL | | - | 1000 | - | pF |

■ TRANSIENT CHARACTERISTICS

(V⁺/V⁻=±15V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------|--------|----------------|-----|-----|-----|------|
| Slew Rate | SR | | - | 10 | - | V/μs |

■ DC CHARACTERISTICS(V⁺=+5V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---------------------------------|---------------------|--|-----|-----|-----|------|
| Operating Current | I _{CC} | No Signal | - | 3.3 | 4.5 | mA |
| Input Offset Voltage | V _{IO} | | - | 1.0 | 12 | mV |
| Input Bias Current | I _B | | - | 80 | 400 | nA |
| Input Offset Current | I _{IO} | | - | 5 | 75 | nA |
| Open Loop Voltage Gain | A _V | R _L >2kΩ | 80 | 110 | - | dB |
| Common Mode Rejection | CMR | 0V < V _{IC} < 2.8V | 50 | 60 | - | dB |
| Supply Voltage Rejection | SVR | 3V < V ⁺ < 32V | 70 | 90 | - | dB |
| Maximum Output Voltage | V _{OH} | R _L =2kΩ | 3.7 | 4.0 | - | V |
| | V _{OL} | R _L =2kΩ | - | 0.1 | 0.2 | |
| Source Output Current | I _{SOURCE} | V _{IN+} =1V, V _{IN-} =0V, V _O =2.5V | 10 | 30 | - | mA |
| Sink Output Current | I _{SINK} | V _{IN+} =0V, V _{IN-} =1V, V _O =2.5V | 10 | 30 | - | mA |
| Input Common Mode Voltage Range | V _{ICM} | CMR > 50dB | 0 | - | 2.8 | V |

■ AC CHARACTERISTICS(V⁺=+5V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------------------|-----------------|----------------|-----|------|-----|------------|
| Gain Bandwidth product | GB | f=10kHz | - | 2 | - | MHz |
| Equivalent Input Noise Voltage | V _{NI} | f=1kHz | - | 40 | - | nV/ √Hz |
| Capacitive Load Tolerance | CL | | - | 1000 | - | pF |







■ TRANSIENT CHARACTERISTICS(V⁺=+5V, Ta=25°C)





| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------|--------|----------------|-----|-----|-----|------|
| Slew Rate | SR | | - | 7 | - | V/μs |

Note: The common mode input voltage range of NJM2742 is shifted toward the V- for single supply use.

At the low operating voltage, the center potential of the V+ and V- may be out of the common mode voltage range. In this case, shift the common mode input voltage toward the V-.







■ TYPICAL CHARACTERISTICS

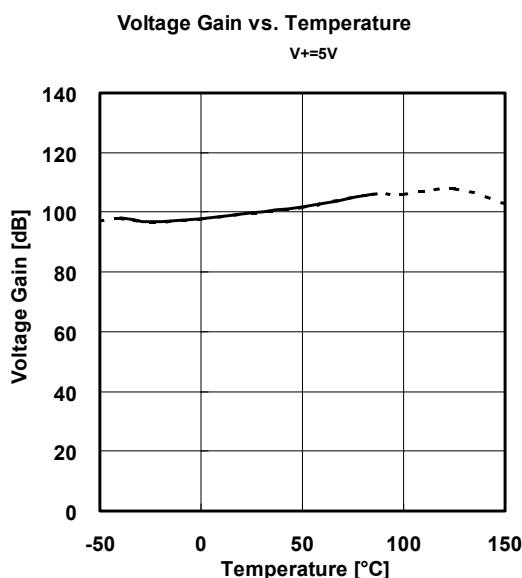
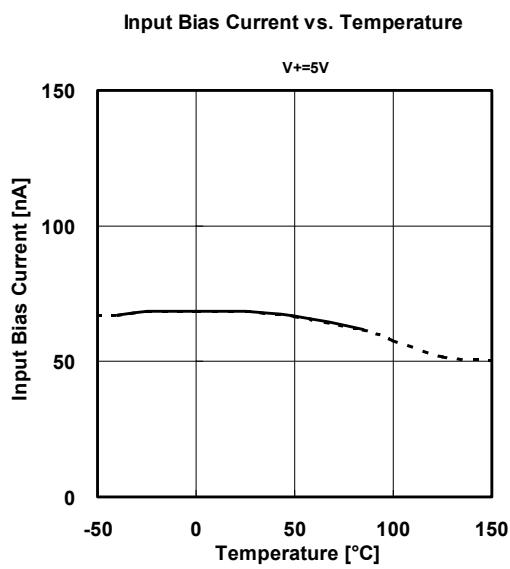
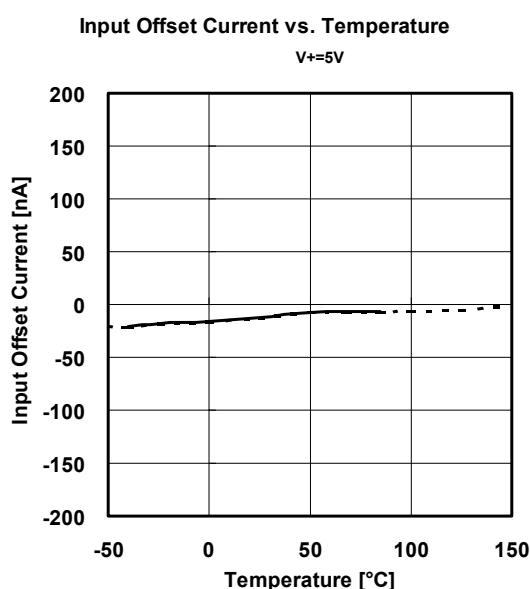
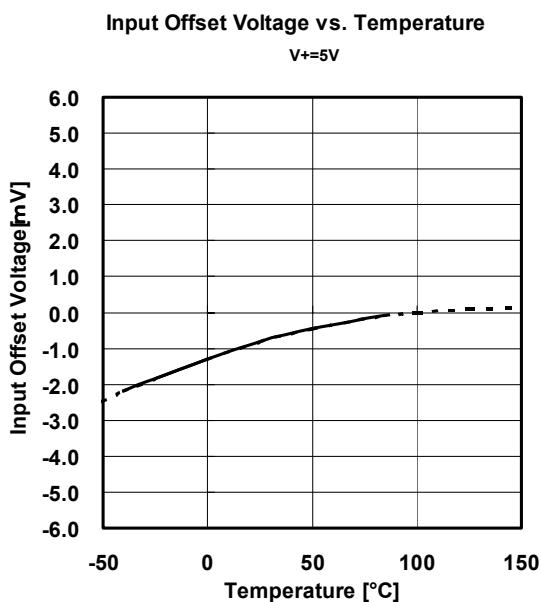
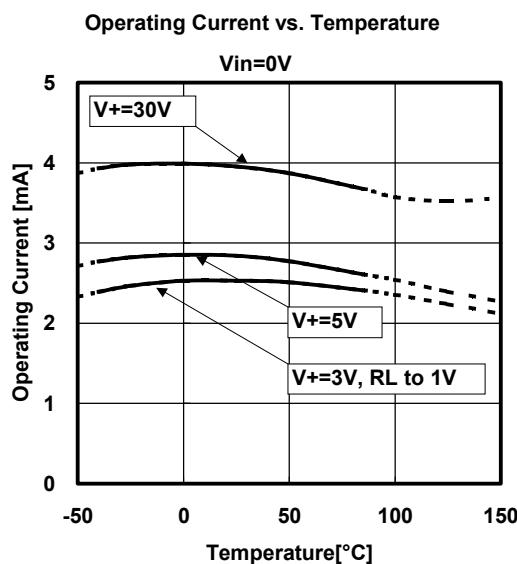
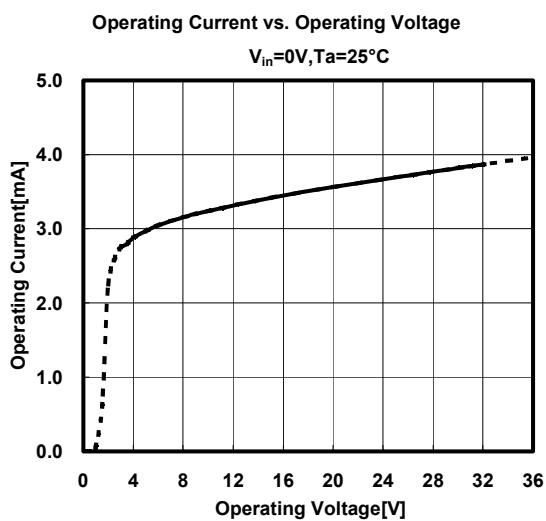



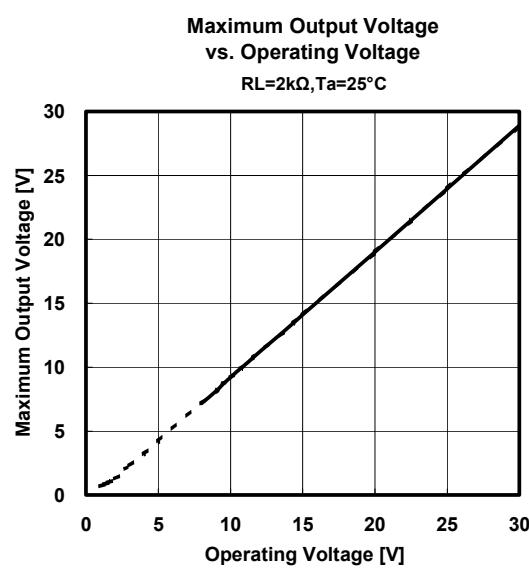
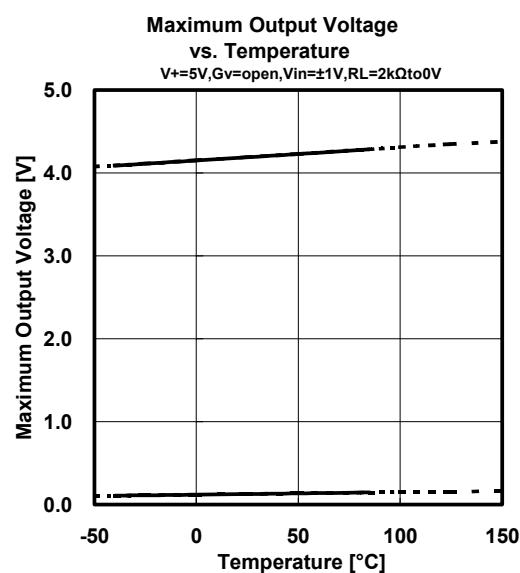
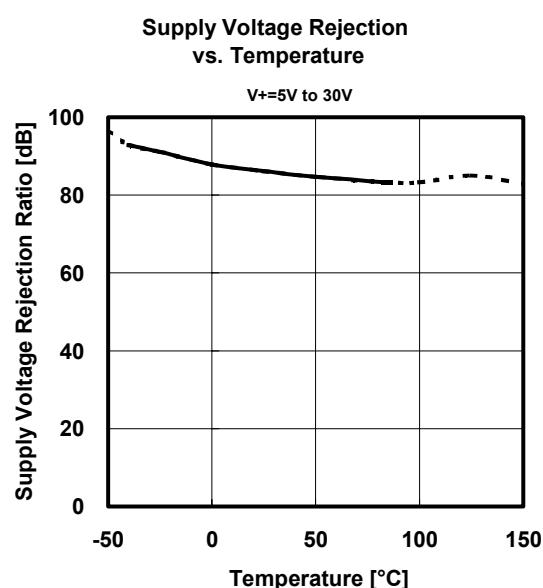
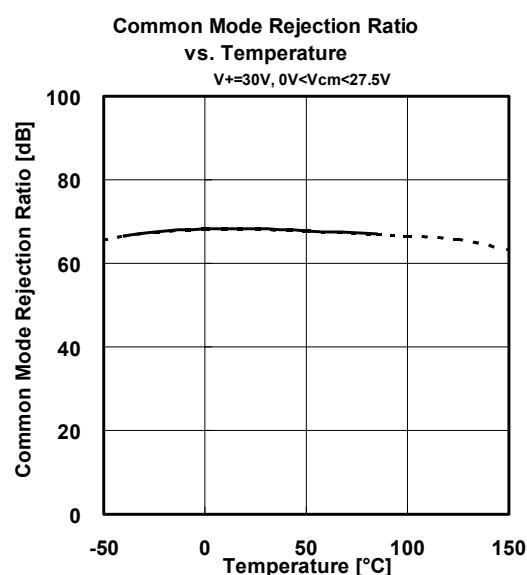


NJM2742

www.DataSheet4U.com

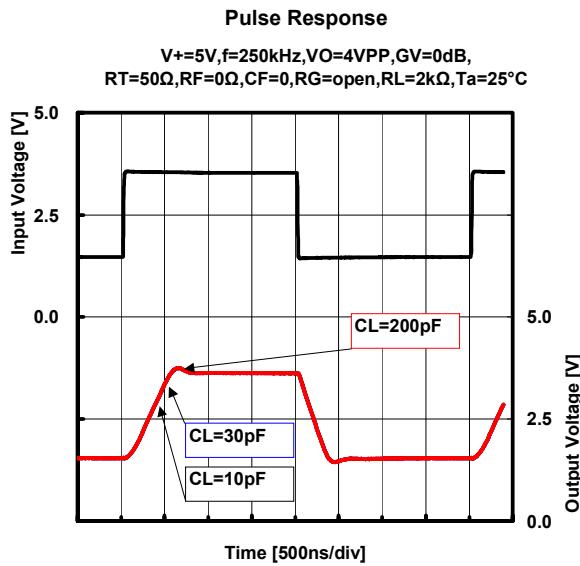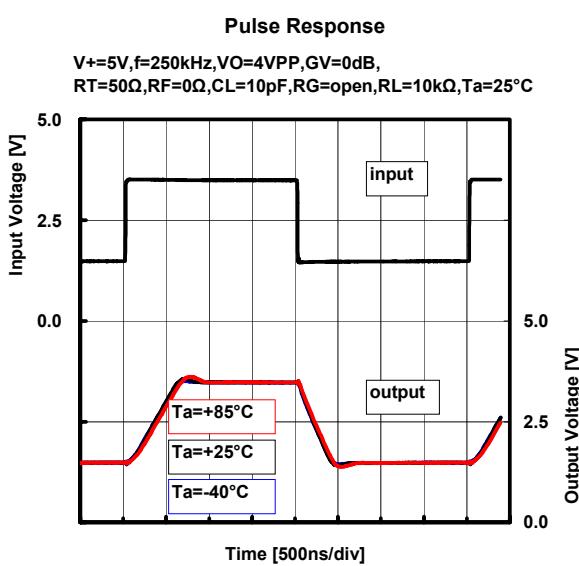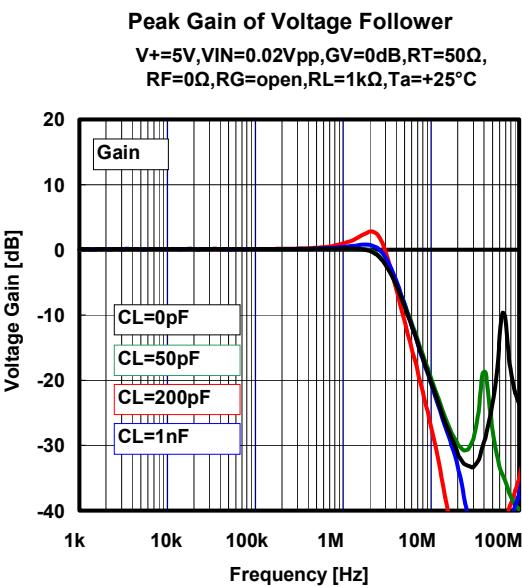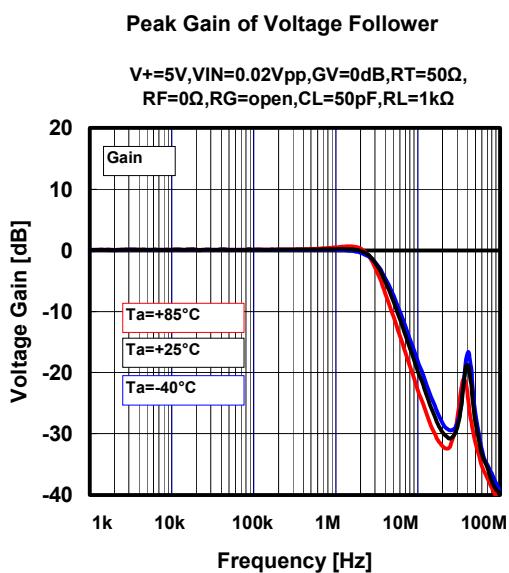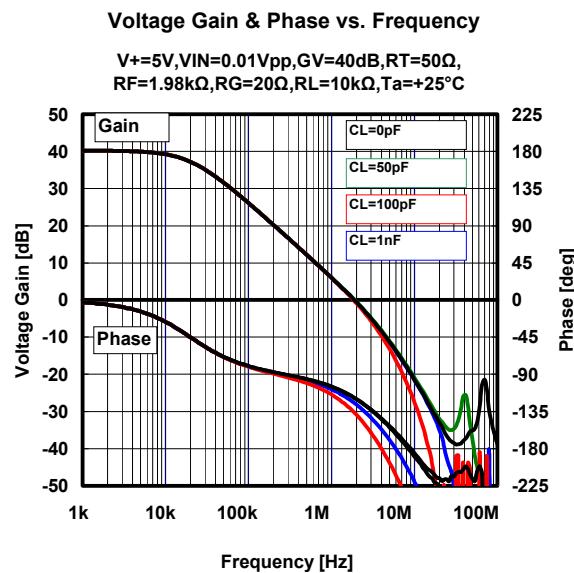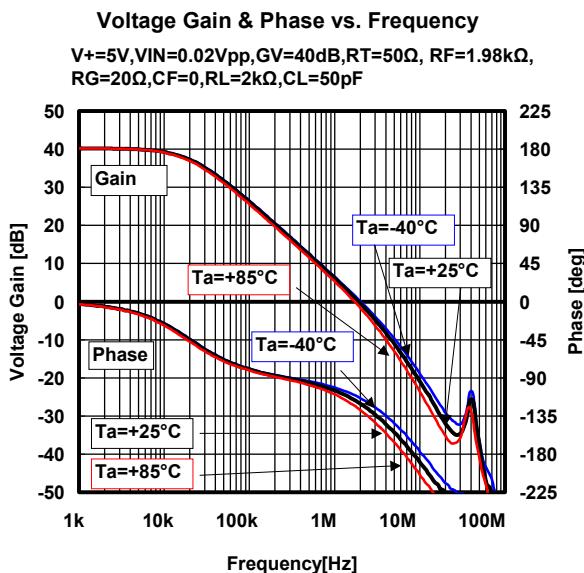


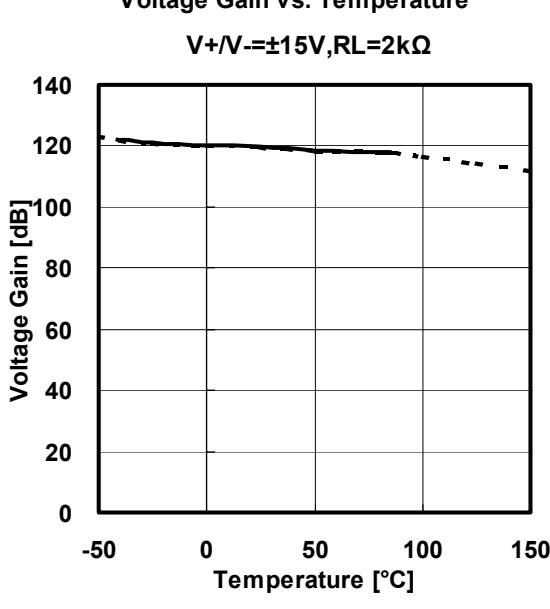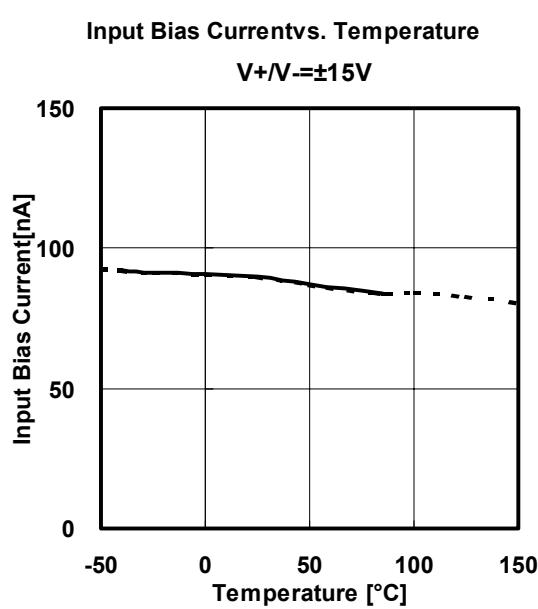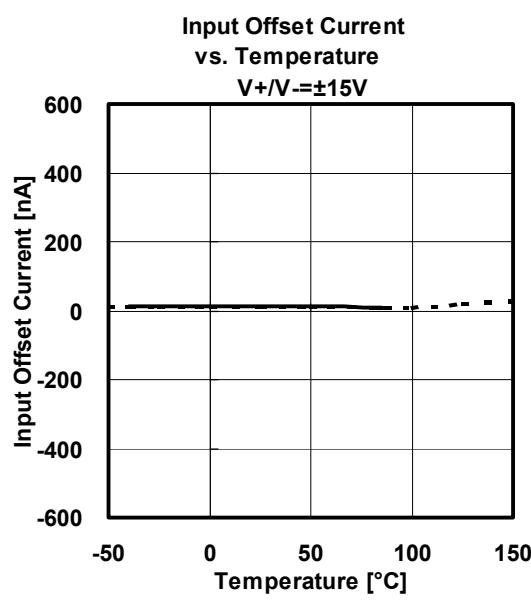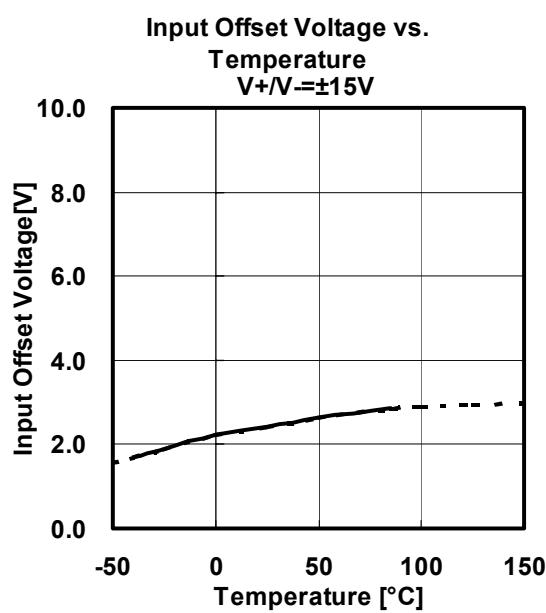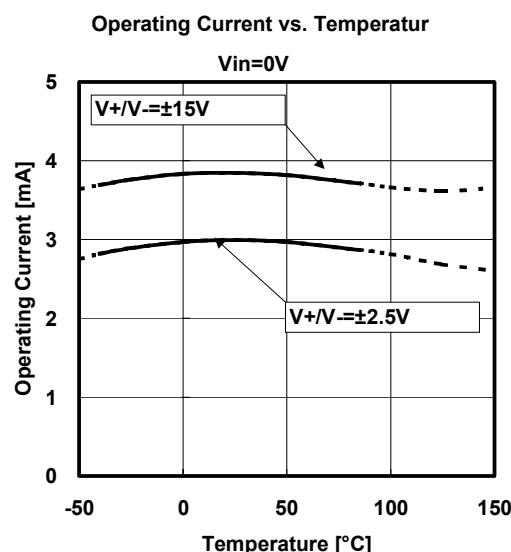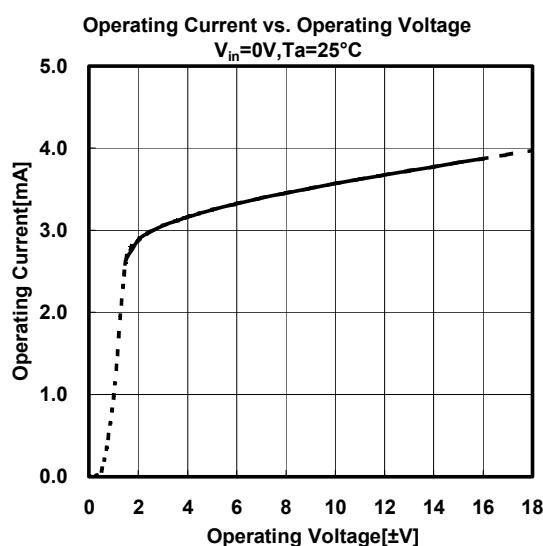

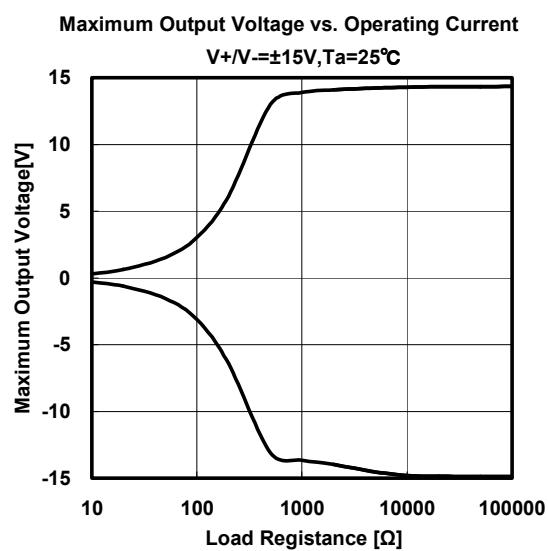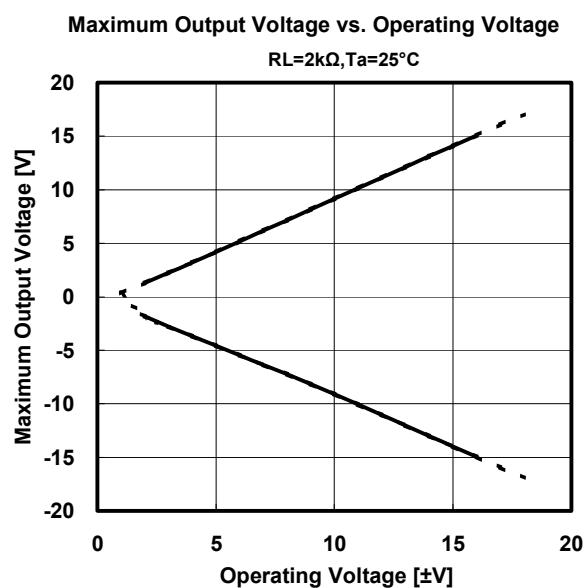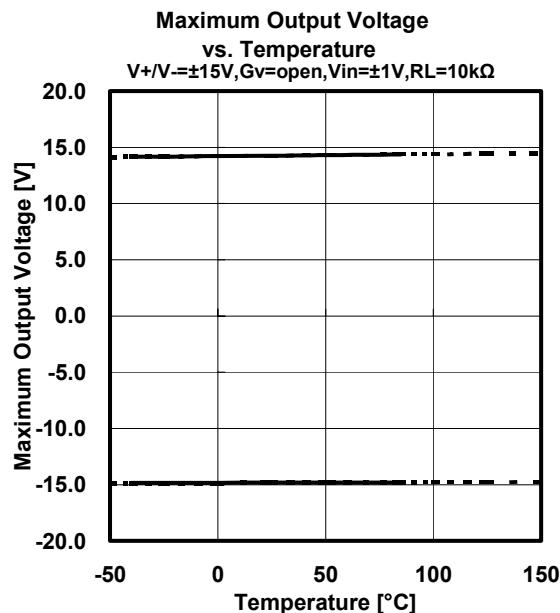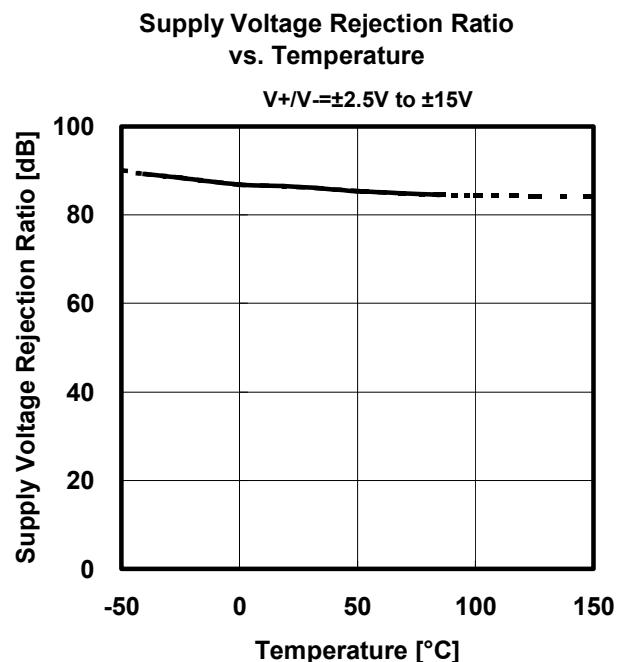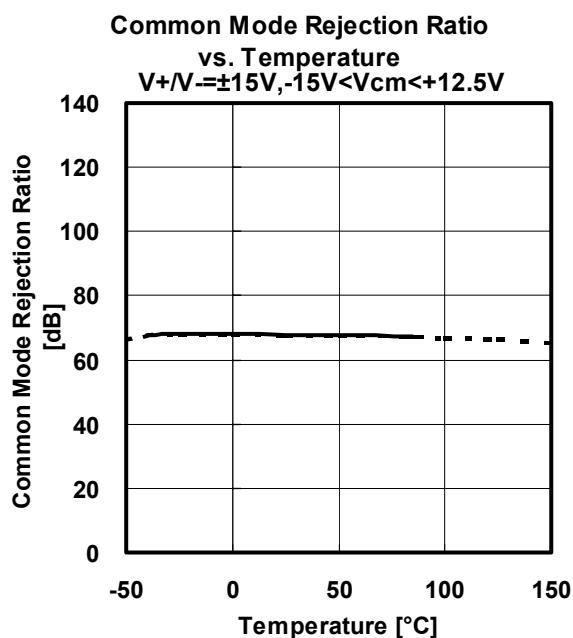


Voltage Gain & Phase vs. Frequency

$V_+/V_- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 40dB$, $RT = 50\Omega$,
 $RF = 1.98k\Omega$, $RG = 20\Omega$, $CF = 0$, $RL = 2k\Omega$, $CL = 50pF$

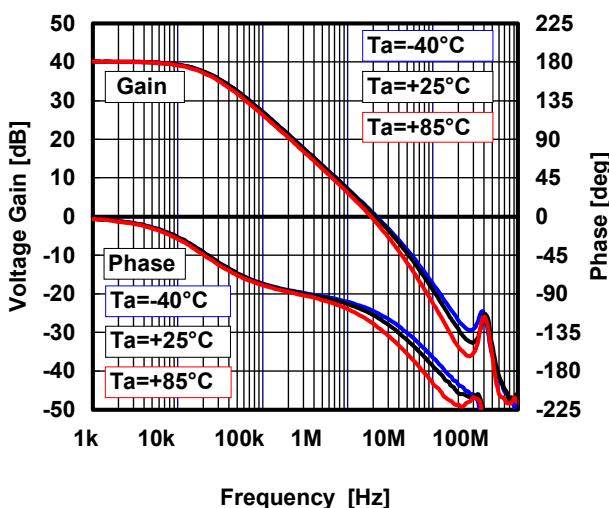


Voltage Gain & Phase vs. Frequency

$V_+/V_- = \pm 15V$, $V_{IN} = 0.01V_{pp}$, $GV = 40dB$, $RT = 50\Omega$,
 $RF = 1.98k\Omega$, $RG = 20\Omega$, $RL = 10k\Omega$, $T_a = +25^\circ C$

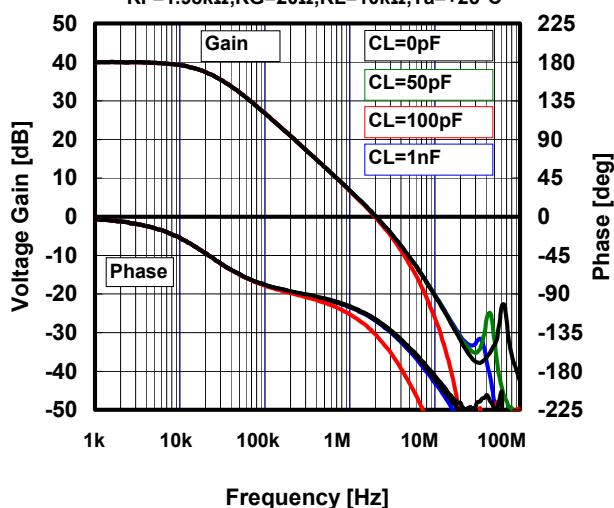


Peak Gain of Voltage Follower

$V_+/V_- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 0dB$, $RT = 50\Omega$, $RF = 0$,
 $RG = \text{open}$, $CF = 0$, $RL = 2k\Omega$, $CL = 50pF$

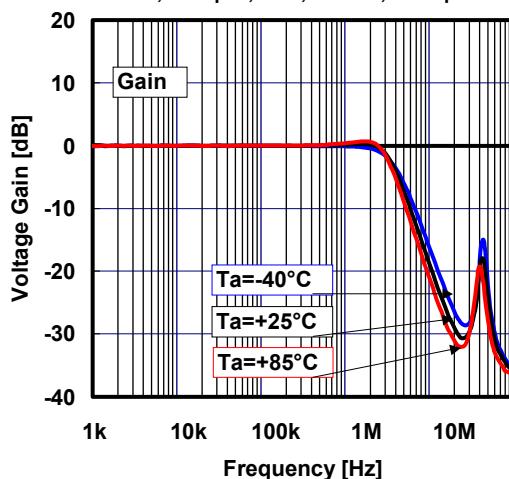


Peak Gain of Voltage Follower

$V_+/V_- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 0dB$, $RT = 50\Omega$,
 $RF = 0\Omega$, $RG = \text{open}$, $RL = 10k\Omega$, $T_a = +25^\circ C$

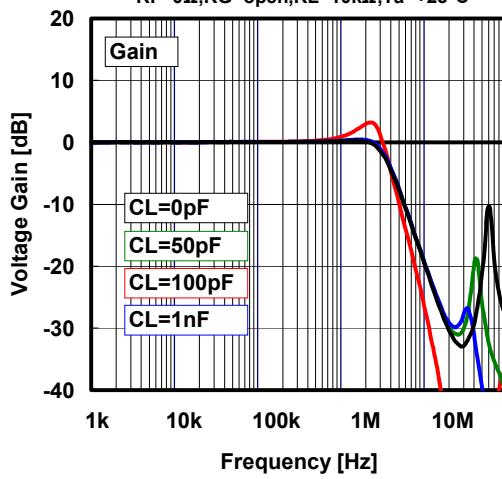


Pulse Response

$V_+/V_- = \pm 15V$, $f = 250kHz$, $V_O = 4V_{PP}$, $GV = 0dB$,
 $RT = 50\Omega$, $RF = 0\Omega$, $CF = 0$, $RG = \text{open}$, $CL = 50pF$, $RL = 10k\Omega$

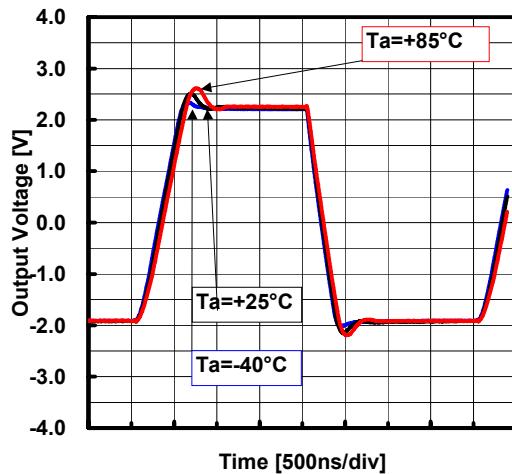

Pulse Response

$V_+/V_- = \pm 15V$, $f = 250kHz$, $V_O = 4V_{PP}$, $GV = 0dB$,
 $RT = 50\Omega$, $RF = 0\Omega$, $CF = 0$, $RG = \text{open}$, $RL = 10k\Omega$, $T_a = +25^\circ C$

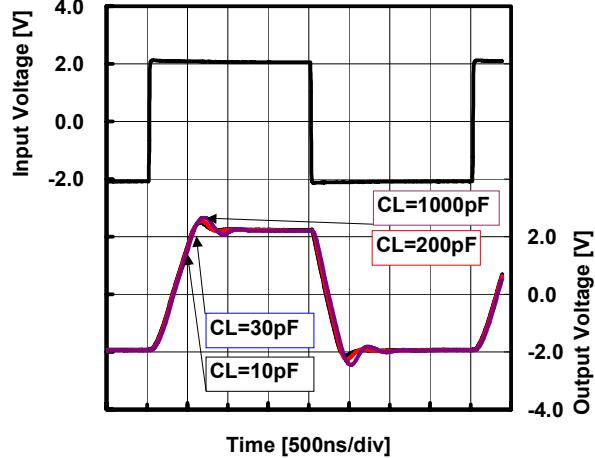

NJM2742

www.DataSheet4U.com

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.