

GENERAL DESCRIPTION

OB3613 is a high power factor, highly integrated buck regulator with advanced features to provide high efficiency control and high precision constant current output for LED lighting applications.

The proprietary CC control scheme is used and the system can achieve high power factor with constant on-time control scheme.

OB3613 offers comprehensive protection coverage with auto-recovery features including LED open loop protection, LED short circuit protection, cycle-by-cycle current limiting, built-in leading edge blanking (LEB), VDD under voltage lockout (UVLO), etc.

OB3613 is offered in SOT23-6 package.


FEATURES

- Buck topology with high power factor
- High precision constant current regulation at universal AC input
- Low system cost and high efficiency
- Quasi-Resonant operation
- Programmable CC regulation
- LED short circuit protection
- LED open loop protection
- Cycle-by-cycle current limiting
- Built-in leading edge blanking (LEB)
- VDD under voltage lockout with hysteresis
- VDD over voltage protection
- Over temperature protection (OTP)

APPLICATIONS

- LED lighting


TYPICAL APPLICATION

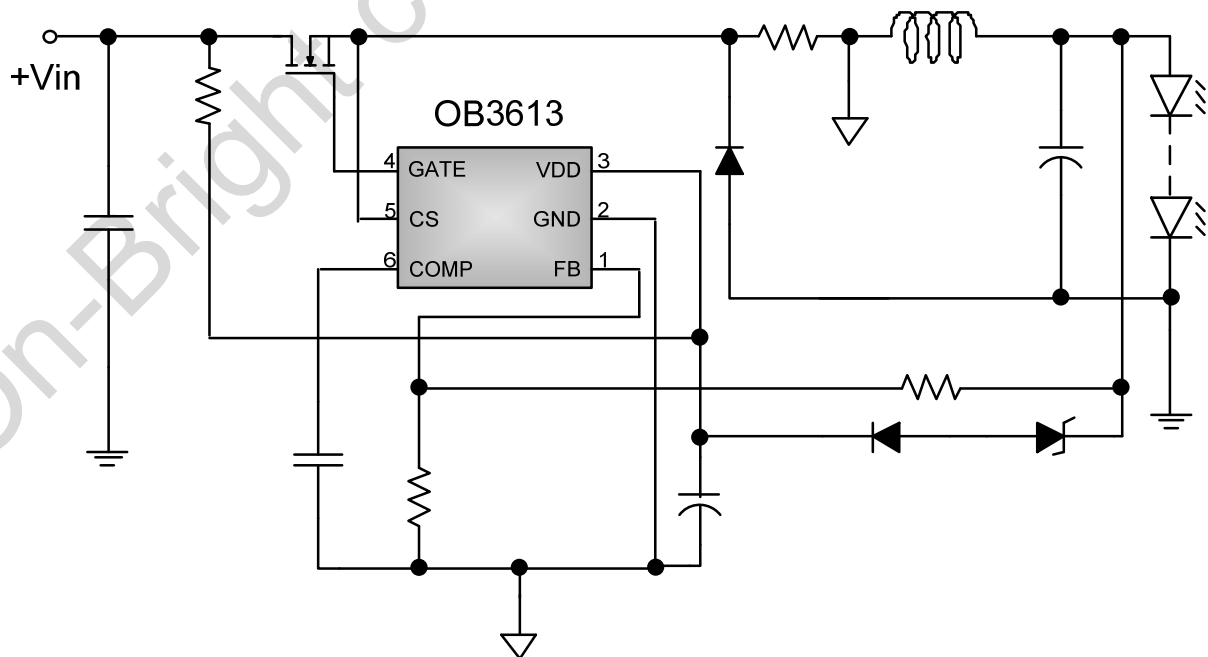

GENERAL INFORMATION

Pin Configuration

The pin map is shown as below for SOT23-6.

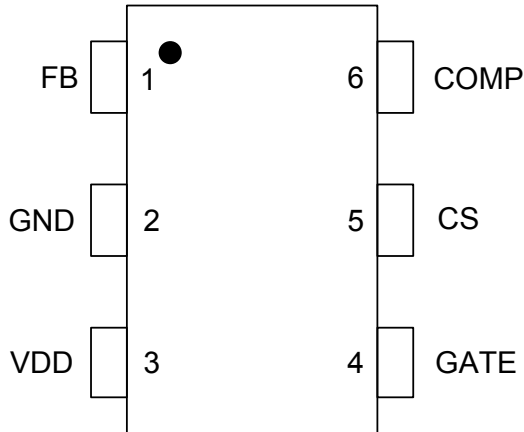

Ordering Information

Part Number	Description
OB3613MP	SOT23-6, Pb-free, T&R

Note: All Devices are offered in Pb-free Package if not otherwise noted.


Package Dissipation Rating

Package	R θ JA (°C/W)
SOT23-6	200


Absolute Maximum Ratings

Parameter	Value
VDD Voltage	-0.3 to 40V
Gate Voltage	-0.3 to 13V
CS Input Voltage	-0.3 to 7V
FB Input Voltage	-0.3 to 7V
Min/Max Operating Junction Temperature T _j	-40 to 150 °C
Min/Max Storage Temperature T _{stg}	-55 to 150 °C
Lead Temperature (Soldering, 10secs)	260 °C

Note: Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute maximum-rated conditions for extended periods may affect device reliability.

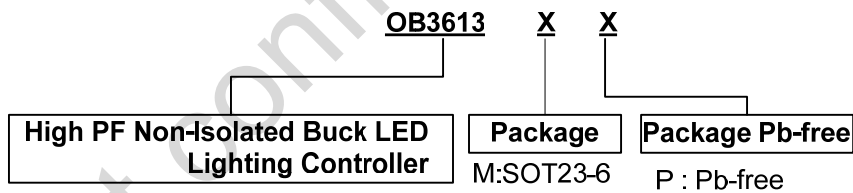

Marking Information




Y: Year Code
 WW: Week Code(01-52)
 ZZZ: Lot Code
 S: Internal Code(Optional)

TERMINAL ASSIGNMENTS

Pin Num	Pin Name	I/O	Description
1	FB	I	The voltage feedback from auxiliary winding. Connected to resistor divider from auxiliary winding reflecting output voltage.
2	GND	P	Power Ground.
3	VDD	P	Power supply Input.
4	GATE	O	Gate driver output for power MOSFET.
5	CS	I	Current sensing terminal.
6	COMP	O	Loop compensation pin. A capacitor is connected between COMP and GND.

BLOCK DIAGRAM






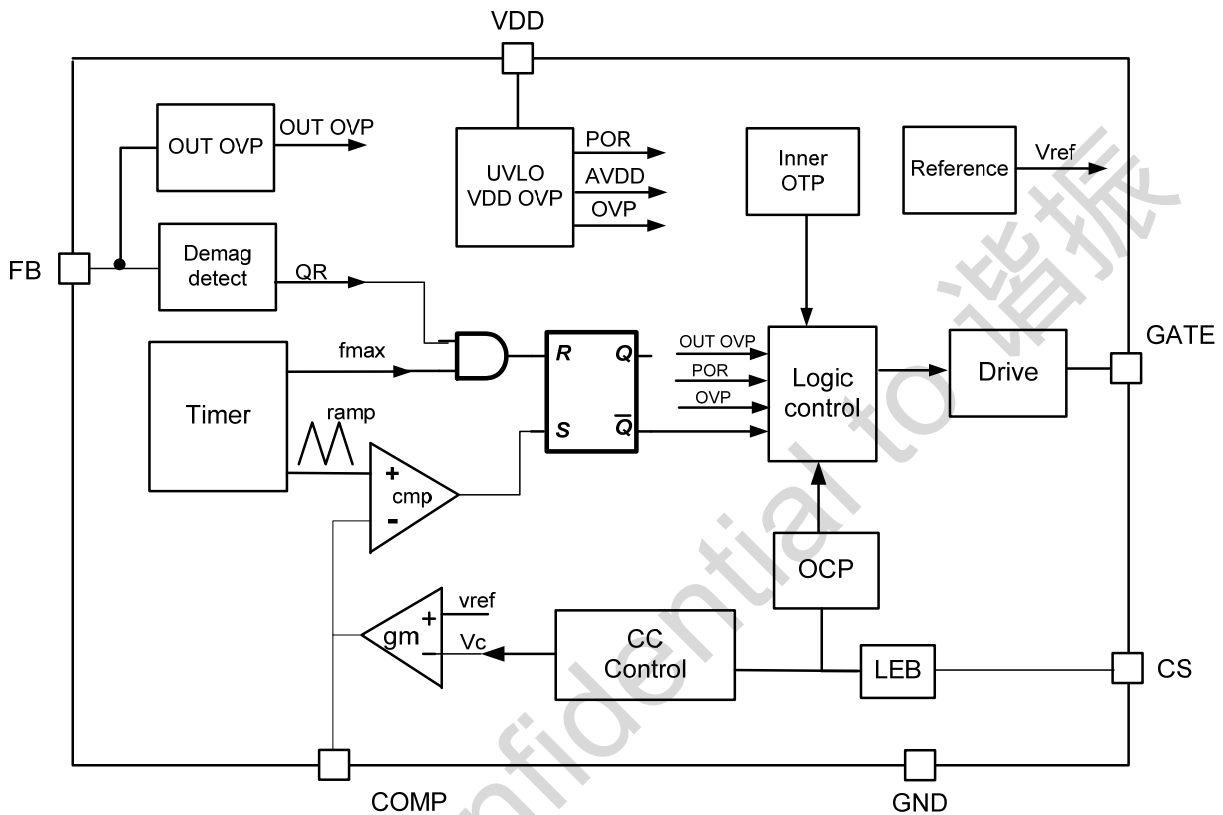


ELECTRICAL CHARACTERISTICS

(TA = 25°C, VDD=20V, if not otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ.	Max	Unit
Supply Voltage (VDD) Section						
I _{start-up}	Start up current	VDD=UVLO(OFF)-1V		3	7	uA
I _{op}	Operation current	VDD=20V, no loading		1.5	2.2	mA
UVLO(OFF)	VDD under voltage lockout exit		24	25.5	27	V
UVLO(ON)	VDD under voltage lockout enter		8	9	10	V
VDD_OVP	VDD Over Voltage Protection		32	35	38	V
Current Sense Input Section						
TLEB	LEB time			0.3		us
Vth_ocp	Over Current Threshold	FB>0.45V	1.0	1.15	1.3	V
		FB<0.45V		0.5		V
FB Input Section						
Vout_ovp	Output Over Voltage Protection		3.4	3.5	3.6	V
Vout_scp	Output Short Circuit Protection		0.35	0.45	0.55	V
QR Section						
Fmax	Maximum Working Frequency		90	100	110	KHz
Toff_max	Maximum Off Time	COMP=4.2V	56	70	84	us
Toff_min	Minimum Off Time	CS>0.15V		2		us
		CS<0.15V		0.5		us
Ton_max	Maximum On Time	COMP=4.2V	19	25	31	us
Error Amplifier Section						
Vref	Error Amplifier Reference Voltage		0.196	0.200	0.204	V
Gm	Error Amplifier Transconductance			50		us
Isource_max	Error Amplifier Maximum Source Current			10		uA
Isink_max	Error Amplifier Maximum Sink Current			50		uA
Vclamp_COMP	COMP Pin Down_clamp Voltage			1.2		V
Gate Driver Section						
Vol	Output Low Level	Iout=10mA			1	V
Voh	Output High Level	Iout=10mA	6			V
Vclamp	Output up-Clamping Voltage			12		V
Tr	Rising Edge Time	Cl=1nF		110		ns
Tf	Falling Edge Time	Cl=1nF		70		ns

CHARACTERIZATION PLOTS

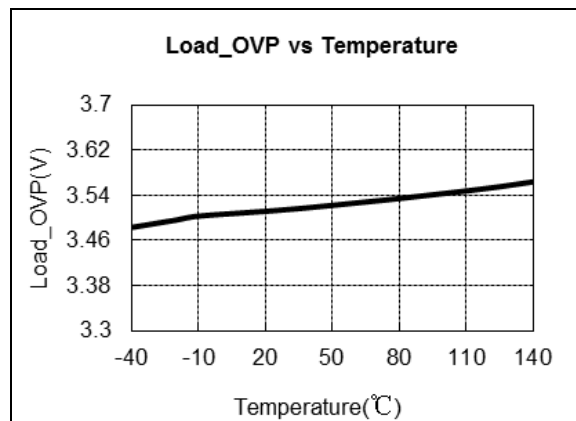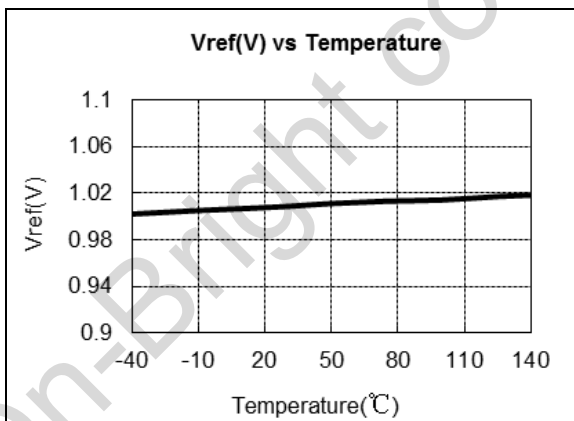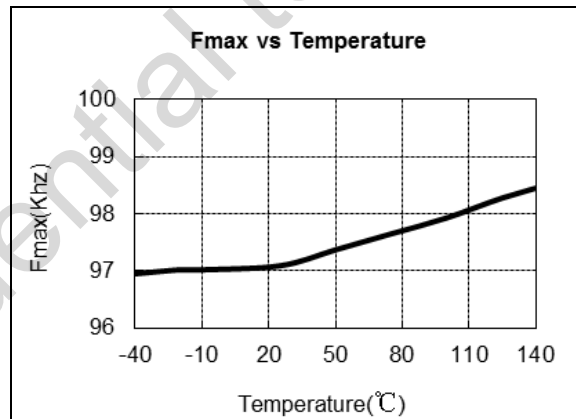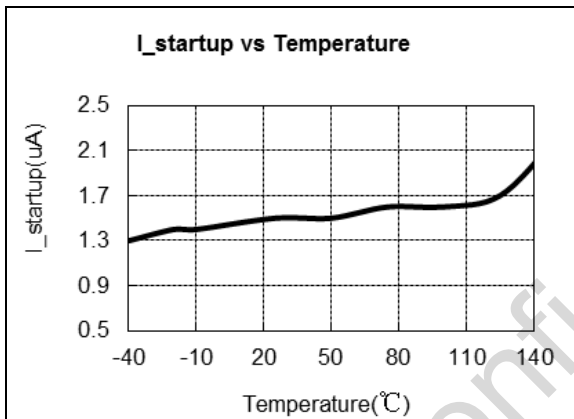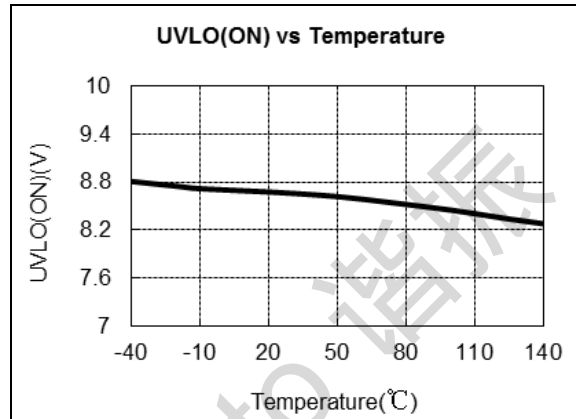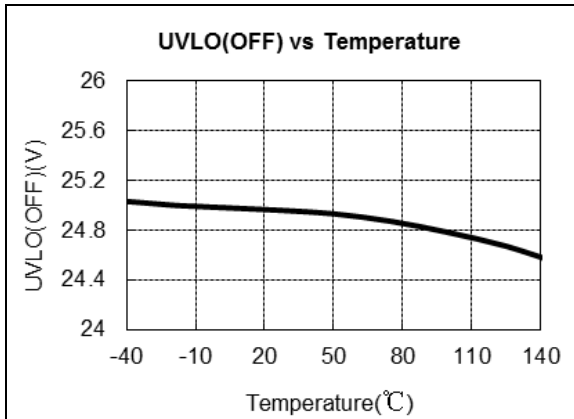

OPERATION DESCRIPTION

OB3613 is a high power factor, highly integrated buck regulator with advanced features to provide high efficiency control and high precision constant current output for LED lighting applications.

- **Start up Control**

Low start-up current is designed in OB3613 so that VDD could be charged up above UVLO threshold with small charging current. A large value startup resistor can therefore be used to minimize the power loss in application.

The capacitor at COMP pin is pulled up quickly during starting up until its voltage reaches 1.2V. Then the error amplifier charges the COMP pin capacitor with a transconductance of about 500uS (typical), and the Gate drives external power MOSFET at minimum frequency for low power dissipation. At the startup, the threshold voltage of OCP is set at 0.5V (typical). When the voltage at FB pin reaches 0.45V (typical), the threshold voltage of OCP is increased to 1V (typical). When the voltage at FB pin increases and reaches 1.2V (typical), the transconductance of error amplifier is reduced to 50uS (typical).

- **LED Constant Current Regulation**

OB3613 uses the constant current control method to accurately control the LED current. It detects LED current and forces the average LED current equals to the ratio of reference voltage to resistance at CS pin as shown in the equation below.

$$I_{LED} = \frac{V_{ref}}{R_{CS}}$$

Rcs — The sensing resistor connected between the MOSFET source and the GND pin of IC.

Vref — Internal reference voltage.

- **PFC**

The duration of the turn on period t_{on} is generated by comparing an internal fixed saw-tooth wave with the voltage on the COMP pin. During steady state operation, the voltage on the COMP pin V_{comp} is slowly varying due to a large external capacitor connected at the COMP pin, therefore the turn on time t_{on} is constant. In a buck topology, constant turn on time.

- **Current Sensing and Leading Edge Blanking**

Cycle-by-Cycle current limiting (OCP) is offered in OB3613. The switching current is detected by a sense resistor connected between the CS pin and GND. An internal leading edge blanking circuit chops off the sense voltage spike at initial MOSFET on state due to wheel diode reverse recovery so that the external RC filter is no longer required. The current limit comparator is disabled at this blanking time and thus the external MOSFET cannot be turned off during this blanking time.

- **LED Open/Output OVP Protection**

When LED string is open, an output over-voltage condition is monitored independently by the voltage at pin FB. During normal operation, when the voltage at FB pin exceeds a threshold of approximately 3.5V (typical), the over-voltage protection function is activated and the GATE is turned off immediately until VDD voltage drops below UVLO (ON), and the device enters power on startup sequence thereafter.

- **VDD Over Voltage Protection**

VDD is supplied from the BUCK output as shown in the typical application diagram. When VDD is higher than 35V (typical), VDD OVP protection is triggered and GATE is shut down, and the device enters power on startup sequence thereafter.

- **LED Short Circuit Protection**


When LED string is short, the voltage at FB pin drops to below a threshold of approximately 0.45V (typical), the IC will work at minimum frequency and the threshold voltage of OCP is reduced to 0.5V (typical). The power dissipation is greatly reduced in this way. When the VDD voltage drops to UVLO(ON), the device enters power on startup sequence thereafter.

- **Gate Driver**

The GATE pin is connected to the gate of an external power switch. An internal 12V (typical) clamp is added for MOSFET gate protection at high VDD voltage. When VDD voltage drops below UVLO(ON), the GATE pin is internally pulled low to maintain the off state.

PACKAGE MECHANICAL DATA

SOT-23-6L PACKAGE OUTLINE DIMENSIONS

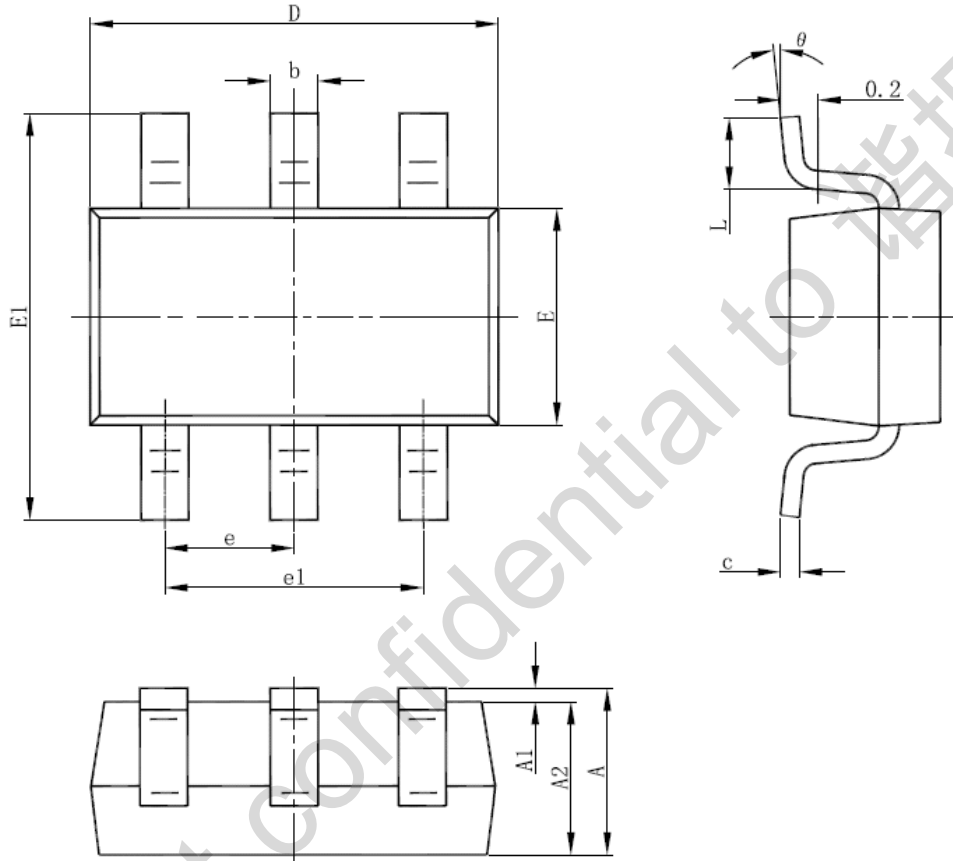

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.000	1.450	0.039	0.057
A1	0.000	0.150	0.000	0.006
A2	0.900	1.300	0.035	0.051
b	0.300	0.500	0.012	0.020
c	0.080	0.220	0.003	0.009
D	2.800	3.020	0.110	0.119
E	1.500	1.726	0.059	0.068
E1	2.600	3.000	0.102	0.118
e	0.950 (BSC)		0.037 (BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
theta	0°	8°	0°	8°

IMPORTANT NOTICE

RIGHT TO MAKE CHANGES

On-Bright Electronics Corp. reserves the right to make corrections, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

WARRANTY INFORMATION

On-Bright Electronics Corp. warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used to the extent it deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

On-Bright Electronics Corp. assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using On-Bright's components, data sheet and application notes. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

LIFE SUPPORT

On-Bright Electronics Corp.'s products are not designed to be used as components in devices intended to support or sustain human life. On-bright Electronics Corp. will not be held liable for any damages or claims resulting from the use of its products in medical applications.

MILITARY

On-Bright Electronics Corp.'s products are not designed for use in military applications. On-Bright Electronics Corp. will not be held liable for any damages or claims resulting from the use of its products in military applications.