



High Efficiency Synchronous Boost Converter With Dual Independent 1.5A Current Sources

■ General Description

The OCP81373 is a dual LED flash driver that provides a high level of adjustability within a small solution size. The OCP81373 utilizes a 2-MHz or 4-MHz fixed-frequency synchronous boost converter to provide power to the dual 1.5A constant current LED sources. The total LED current the OCP81373 boost can deliver is 1.5A ($I_{LED1} + I_{LED2}$). The dual 128 level current sources provide the flexibility to adjust the current ratios between LED1 and LED2 with each driver capable of delivering a maximum of 1.5A. An adaptive regulation method ensures the current sources remain in regulation and maximizes efficiency.

Features of the OCP81373 are controlled via an I²C-compatible interface. These features include: hardware flash and hardware torch pins (STROBE and TORCH/TEMP), a TX interrupt, and an NTC thermistor monitor. The device offers independently programmable currents in each output leg to drive the LEDs in a Flash or Movie Mode (Torch) condition.

The 2-MHz or 4-MHz switching frequency options, overvoltage protection (OVP), and adjustable current limit allow for the use of tiny, low-profile inductors and (10- μ F) ceramic capacitors. The device operates over a -40°C to 85°C ambient temperature range.

● Features

- 1.5A Total Allowed LED Current During Operation
- Dual Independent LED Current Source Programmability
- Accurate and Programmable LED Current Range from 2.92mA to 1.5A
- Optimized Flash LED Current During Low Battery Conditions (IVFM)
- Grounded Cathode LED Operation for Improved Thermal Management
- Small Solution Size: <16mm²
- Hardware Strobe Enable (STROBE)
- Synchronization Input for RF Power Amplifier Pulse Events (TX)
- Hardware Torch Enable (TORCH/TEMP)
- Remote NTC Monitoring (TORCH/TEMP)
- 400-kHz I²C-Compatible Interface
 - OCP81373(I²C Address=0x63)

● Applications

- Camera Phone White LED Flash

■ **Pin Configuration**
WLCSP-12B (Top View)

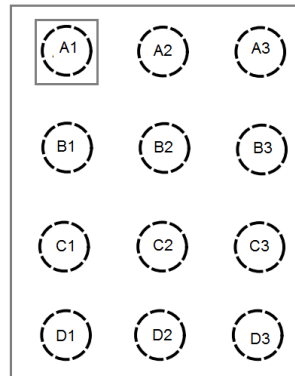


Figure 1, Pin Assignments of OCP81373

| Pin Name | Pin No. | I/O | Pin Function |
|------------|-----------|-----|--|
| | WLCSP-12B | | |
| GND | A1 | P | Ground |
| IN | A2 | I | Input voltage connection. Connect IN to the input supply and bypass to GND with a 10 μ F or larger ceramic capacitor. |
| SDA | A3 | I/O | Serial data input/output in the I ² C Mode on OCP81373. |
| SW | B1 | P | Drain Connection for Internal NMOS and Synchronous PMOS Switches. |
| STROBE | B2 | I/O | Active high hardware flash enable. Drive STROBE high to turn on Flash pulse. Internal pulldown resistor 300k Ω between STROBE and GND |
| SCL | B3 | I/O | Serial clock input for OCP81373 |
| OUT | C1 | O | Step-up DC/DC Converter Output. Connect a 10 μ F ceramic capacitor between this terminal and GND. |
| HWEN | C2 | I | Active high enable pin. High = Standby, Low = Shutdown/Reset. Internal pulldown resistor of 300k Ω between HWEN and GND. |
| TORCH/TEMP | C3 | I | Torch terminal input or threshold detector for NTC temperature sensing and current scale back. |
| LED2 | D1 | O | High-side current source output for flash LED. |
| TX | D2 | I | Configurable dual polarity power amplifier synchronization input. Internal pulldown resistor of 300k Ω between TX and GND. |
| LED1 | D3 | O | High-side current source output for flash LED. |

■ Typical Application Circuit


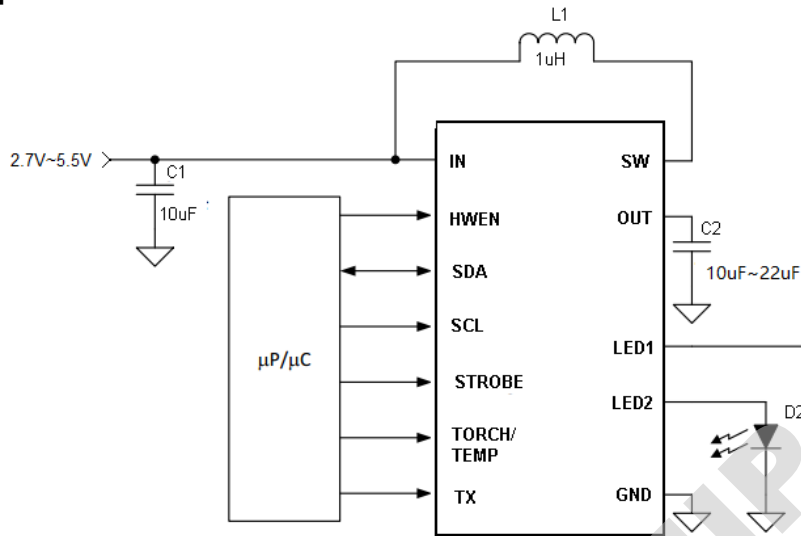


Figure 2, Typical Application Circuit of OCP81373

■ Ordering Information

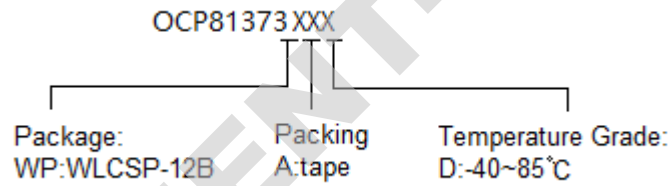

| Part Number | Driver Capability | Package Type | Package Qty | Temperature | Eco Plan | Lead/Ball Finish |
|--------------|-------------------|--------------|---------------------------|-------------|----------|------------------|
| OCP81373WPAD | 1.5A | WLCSP-12B | 7-in reel 3000pcs/reel | -40~85°C | Green | Cu Sn |

注：想进一步了解产品咨询，请直接点击[申请样品](#)。我们会第一时间联系您！谢谢！