

PHASE-LOCKED-LOOP WITH VCO

FEATURES

- Low power consumption
- Centre frequency of up to 17 MHz (typ.) at $V_{CC} = 4.5$ V
- Choice of three phase comparators: EXCLUSIVE-OR; edge-triggered JK flip-flop; edge-triggered RS flip-flop
- Excellent VCO frequency linearity
- VCO-inhibit control for ON/OFF keying and for low standby power consumption
- Minimal frequency drift
- Operating power supply voltage range: VCO section 3.0 to 6.0 V digital section 2.0 to 6.0 V
- Zero voltage offset due to op-amp buffering
- Output capability: standard
- I_{CC} category: MSI

| SYMBOL | PARAMETER | CONDITIONS | TYPICAL | | UNIT |
|----------|---|--|---------|-----|------|
| | | | HC | HCT | |
| f_0 | VCO centre frequency | $C_1 = 40 \text{ pF}$ $R_1 = 3 \text{ k}\Omega$ $V_{CC} = 5 \text{ V}$ | 19 | 19 | MHz |
| C_I | input capacitance (pin 5) | | 3.5 | 3.5 | pF |
| C_{PD} | power dissipation capacitance per package | notes 1 and 2 | 24 | 24 | pF |

GND = 0 V; $T_{amb} = 25^\circ\text{C}$

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_0)$$
 where:
 f_i = input frequency in MHz C_L = output load capacitance in pF
 f_0 = output frequency in MHz V_{CC} = supply voltage in V
 $\sum (C_L \times V_{CC}^2 \times f_0)$ = sum of outputs
2. Applies to the phase comparator section only (VCO disabled).
For power dissipation of the VCO and demodulator sections see Figs 22, 23 and 24.

PACKAGE OUTLINES

16-lead DIL; plastic (SOT38Z).
16-lead mini-pack; plastic (SO16; SOT109A).

GENERAL DESCRIPTION

The 74HC/HCT4046A are high-speed Si-gate CMOS devices and are pin compatible with the "4046" of the "4000B" series. They are specified in compliance with JEDEC standard no. 7A. The 74HC/HCT4046A are phase-locked-loop circuits that comprise a linear voltage-controlled oscillator (VCO) and three different phase comparators (PC1, PC2 and PC3) with a common signal input amplifier and a common comparator input.

The signal input can be directly coupled to large voltage signals, or indirectly coupled (with a series capacitor) to small voltage signals. A self-bias input circuit keeps small voltage signals within the linear region of the input amplifiers. With a passive low-pass filter, the "4046A" forms a second-order loop PLL. The excellent VCO linearity is achieved by the use of linear op-amp techniques.

(continued on next page)

APPLICATIONS

- FM modulation and demodulation
- Frequency synthesis and multiplication
- Frequency discrimination
- Tone decoding
- Data synchronization and conditioning
- Voltage-to-frequency conversion
- Motor-speed control

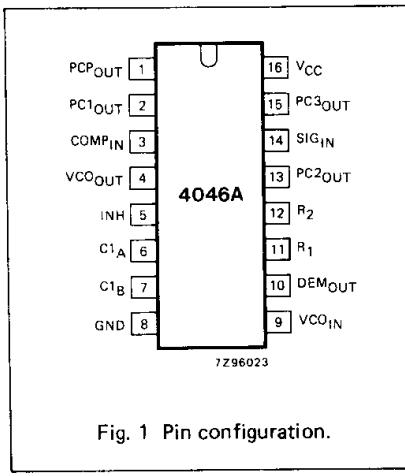


Fig. 1 Pin configuration.

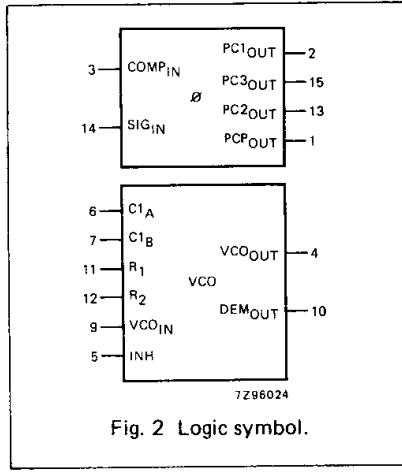


Fig. 2 Logic symbol.

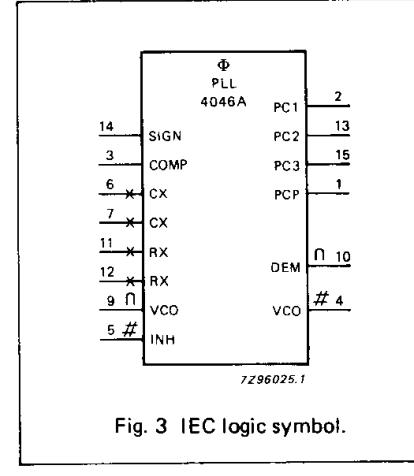


Fig. 3 IEC logic symbol.

PIN DESCRIPTION

| PIN NO. | SYMBOL | NAME AND FUNCTION |
|---------|--------------------|-------------------------------|
| 1 | PCP _{OUT} | phase comparator pulse output |
| 2 | PC1 _{OUT} | phase comparator 1 output |
| 3 | COMP _{IN} | comparator input |
| 4 | VCO _{OUT} | VCO output |
| 5 | INH | inhibit input |
| 6 | C1 _A | capacitor C1 connection A |
| 7 | C1 _B | capacitor C1 connection B |
| 8 | GND | ground (0 V) |
| 9 | VCO _{IN} | VCO input |
| 10 | DEM _{OUT} | demodulator output |
| 11 | R ₁ | resistor R1 connection |
| 12 | R ₂ | resistor R2 connection |
| 13 | PC2 _{OUT} | phase comparator 2 output |
| 14 | SIG _{IN} | signal input |
| 15 | PC3 _{OUT} | phase comparator 3 output |
| 16 | VCC | positive supply voltage |

VCO output signal has a duty factor of 50% (maximum expected deviation 1%), if the VCO input is held at a constant DC level. A LOW level at the inhibit input (INH) enables the VCO and demodulator, while a HIGH level turns both off to minimize standby power consumption.

The only difference between the HC and HCT versions is the input level specification of the INH input. This input disables the VCO section. The sections of the comparator are identical, so that there is no difference in the SIG_{IN} (pin 14) or COMP_{IN} (pin 3) inputs between the HC and HCT versions.

Phase comparators

The signal input (SIG_{IN}) can be directly coupled to the self-biasing amplifier at pin 14, provided that the signal swing is between the standard HC family input logic levels. Capacitive coupling is required for signals with smaller swings.

Phase comparator 1 (PC1)

This is an EXCLUSIVE-OR network. The signal and comparator input frequencies (f_i) must have a 50% duty factor to obtain the maximum locking range. The transfer characteristic of PC1, assuming ripple ($f_r = 2f_i$) is suppressed, is:

$$V_{DEMOUT} = \frac{V_{CC}}{\pi} (\phi_{SIGIN} - \phi_{COMPIN})$$

where V_{DEMOUT} is the demodulator output at pin 10;

$V_{DEMOUT} = V_{PC1OUT}$ (via low-pass filter).

GENERAL DESCRIPTION (Cont'd)

VCO

The VCO requires one external capacitor C1 (between C1_A and C1_B) and one external resistor R1 (between R₁ and GND) or two external resistors R1 and R2 (between R₁ and GND, and R₂ and GND). Resistor R1 and capacitor C1 determine the frequency range of the VCO. Resistor R2 enables the VCO to have a frequency offset if required.

The high input impedance of the VCO simplifies the design of low-pass filters by giving the designer a wide choice of

resistor/capacitor ranges. In order not to load the low-pass filter, a demodulator output of the VCO input voltage is provided at pin 10 (DEM_{OUT}). In contrast to conventional techniques where the DEM_{OUT} voltage is one threshold voltage lower than the VCO input voltage, here the DEM_{OUT} voltage equals that of the VCO input. If DEM_{OUT} is used, a load resistor (R_S) should be connected from DEM_{OUT} to GND; if unused, DEM_{OUT} should be left open. The VCO output (VCO_{OUT}) can be connected directly to the comparator input (COMP_{IN}), or connected via a frequency-divider. The

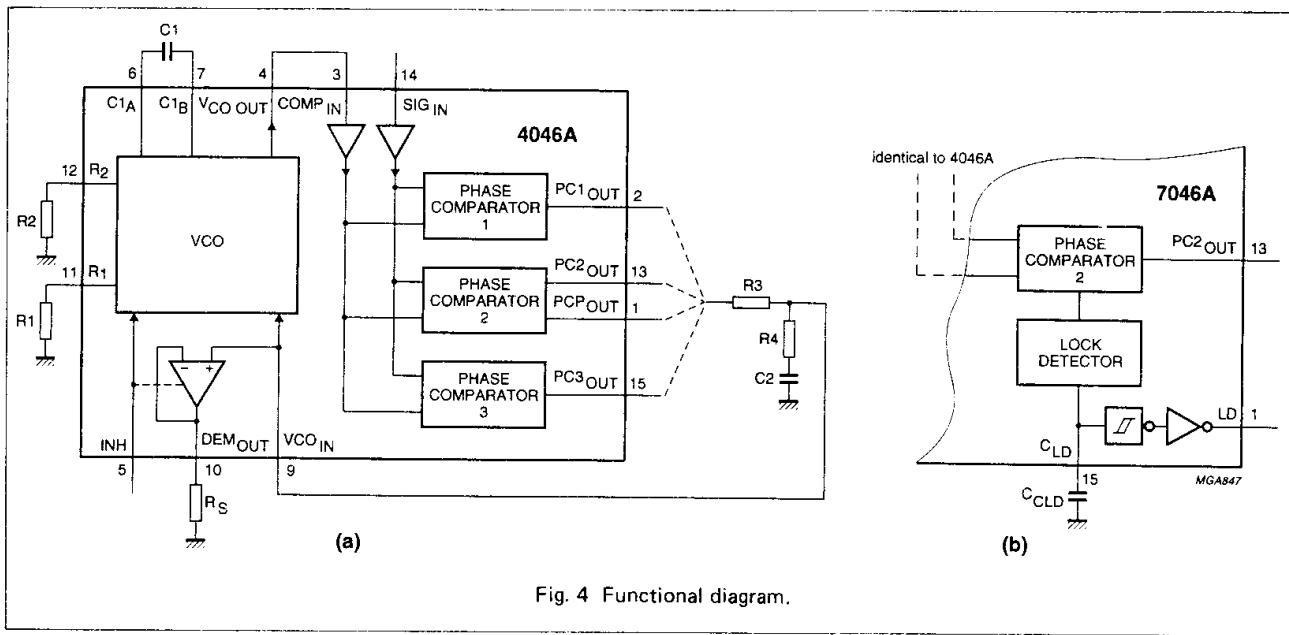


Fig. 4 Functional diagram.

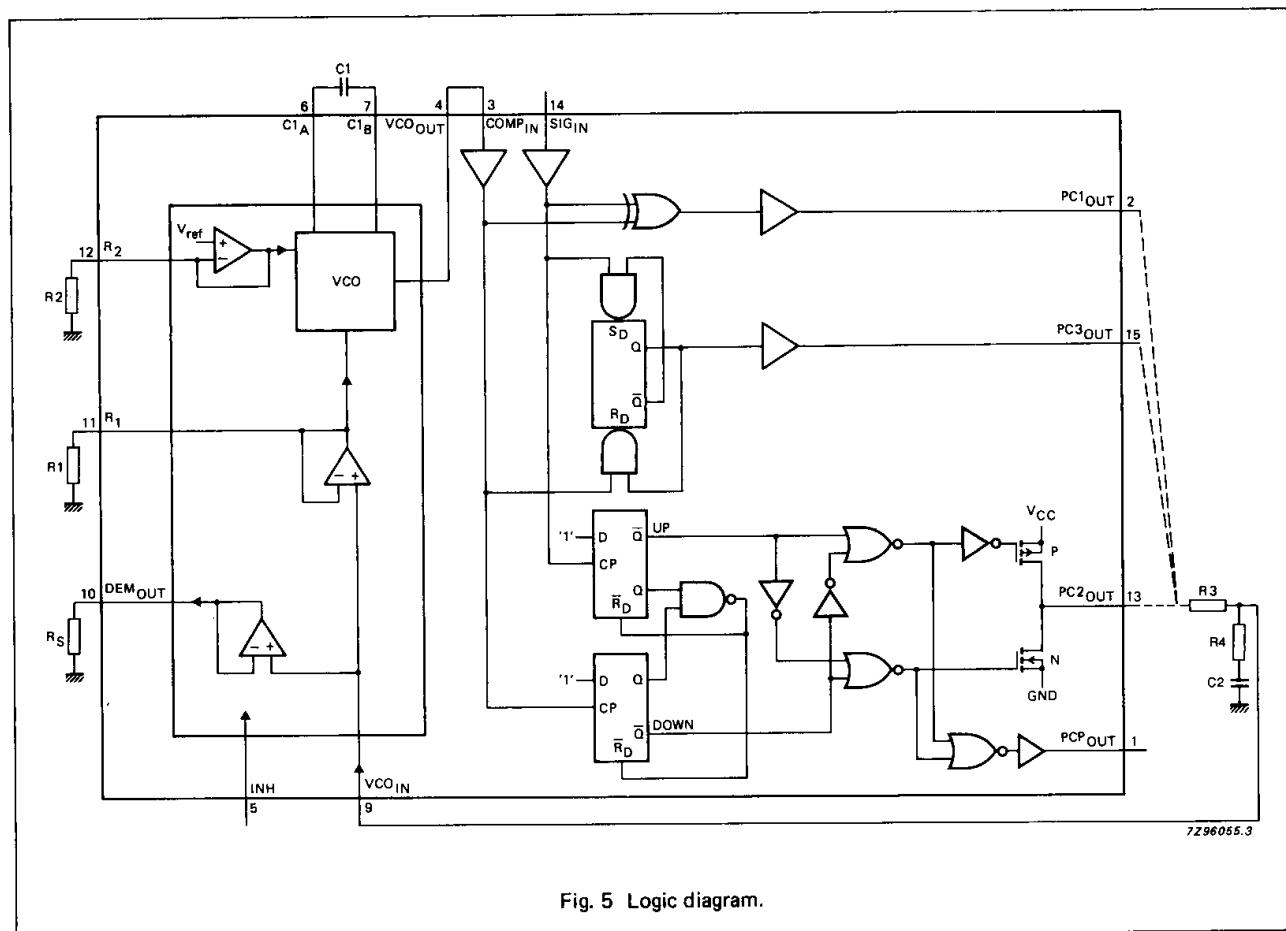




Fig. 5 Logic diagram.

The phase comparator gain is:

$$K_p = \frac{V_{CC}}{\pi} (V/r)$$

The average output voltage from PC1, fed to the VCO input via the low-pass filter and seen at the demodulator output at pin 10 (V_{DEMOUT}), is the resultant of the phase differences of signals (SIG_{IN}) and the comparator input (COMPIN) as shown in Fig. 6. The average of V_{DEMOUT} is equal to $1/2 V_{CC}$ when there is no signal or noise at SIG_{IN} and with this input the VCO oscillates at the centre frequency (f_o). Typical waveforms for the PC1 loop locked at f_o are shown in Fig. 7.

The frequency capture range ($2f_C$) is defined as the frequency range of input signals on which the PLL will lock if it was initially out-of-lock. The frequency lock range ($2f_L$) is defined as the frequency range of input signals on which the loop will stay locked if it was initially in lock. The capture range is smaller or equal to the lock range.

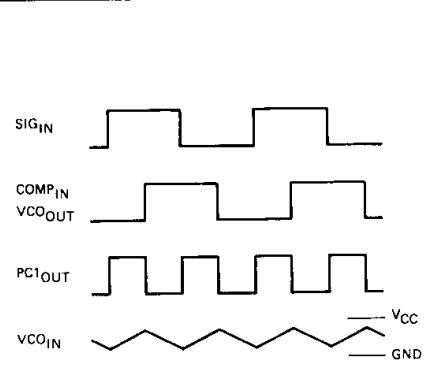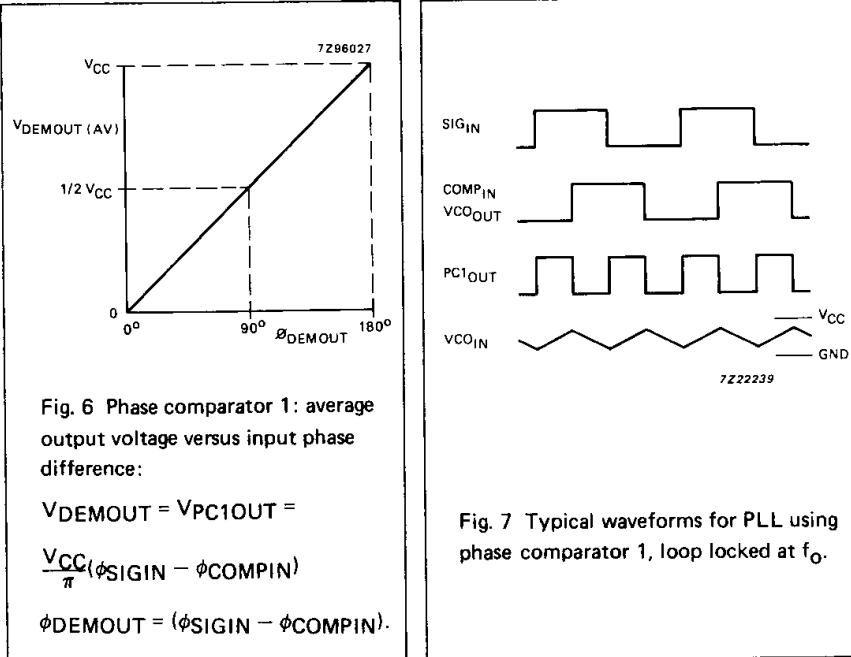

GENERAL DESCRIPTION (Cont'd)**Phase comparators (Cont'd)**

With PC1, the capture range depends on the low-pass filter characteristics and can be made as large as the lock range. This configuration retains lock even with very noisy input signals. Typical behaviour of this type of phase comparator is that it can lock to input frequencies close to the harmonics of the VCO centre frequency.

Phase comparator 2 (PC2)

This is a positive edge-triggered phase and frequency detector. When the PLL is using this comparator, the loop is controlled by positive signal transitions and the duty factors of SIG_{IN} and $COMP_{IN}$ are not important. PC2 comprises two D-type flip-flops, control-gating and a 3-state output stage. The circuit functions as an up-down counter (Fig. 5) where SIG_{IN} causes an up-count and $COMP_{IN}$ a down-count. The transfer function of PC2, assuming ripple ($f_r = f_i$) is suppressed, is:

$$V_{DEMOUT} = \frac{V_{CC}}{4\pi} (\phi_{SIGIN} - \phi_{COMPIN})$$

where V_{DEMOUT} is the demodulator output at pin 10;
 $V_{DEMOUT} = V_{PC2OUT}$ (via low-pass filter).

The phase comparator gain is:

$$K_p = \frac{V_{CC}}{4\pi} (V/r).$$

V_{DEMOUT} is the resultant of the initial phase differences of SIG_{IN} and $COMP_{IN}$ as shown in Fig. 8. Typical waveforms for the PC2 loop locked at f_0 are shown in Fig. 9.

When the frequencies of SIG_{IN} and $COMP_{IN}$ are equal but the phase of SIG_{IN} leads that of $COMP_{IN}$, the p-type output driver at $PC2_{OUT}$ is held "ON" for a time corresponding to the phase difference (ϕ_{DEMOUT}). When the phase of SIG_{IN} lags that of $COMP_{IN}$, the n-type driver is held "ON".

When the frequency of SIG_{IN} is higher than that of $COMP_{IN}$, the p-type output driver is held "ON" for most of the input signal cycle time, and for the remainder of the cycle both n and p-type drivers are "OFF" (3-state). If the SIG_{IN} frequency

is lower than the $COMP_{IN}$ frequency, then it is the n-type driver that is held "ON" for most of the cycle. Subsequently, the voltage at the capacitor (C2) of the low-pass filter connected to $PC2_{OUT}$ varies until the signal and comparator inputs are equal in both phase and frequency. At this stable point the voltage on C2 remains constant as the PC2 output is in 3-state and the VCO input at pin 9 is a high impedance. Also in this condition, the signal at the phase comparator pulse output (PCP_{OUT}) is a HIGH level and so can be used for indicating a locked condition.

Thus, for PC2, no phase difference exists between SIG_{IN} and $COMP_{IN}$ over the full frequency range of the VCO. Moreover, the power dissipation due to the low-pass filter is reduced because both p and n-type drivers are "OFF" for most of the signal input cycle. It should be noted that the PLL lock range for this type of phase comparator is equal to the capture range and is independent of the low-pass filter. With no signal present at SIG_{IN} the VCO adjusts, via PC2, to its lowest frequency.

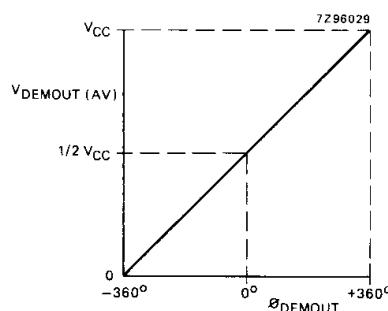


Fig. 8 Phase comparator 2: average output voltage versus input phase difference:

$$V_{DEMOUT} = V_{PC2OUT} = \frac{V_{CC}}{4\pi} (\phi_{SIGIN} - \phi_{COMPIN})$$

$$\phi_{DEMOUT} = (\phi_{SIGIN} - \phi_{COMPIN}).$$

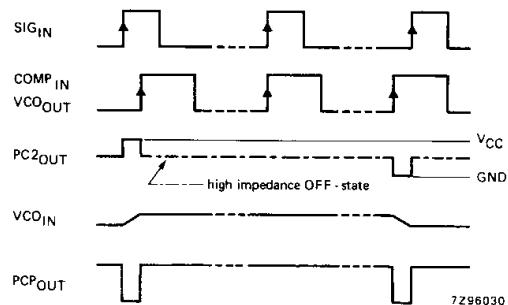


Fig. 9 Typical waveforms for PLL using phase comparator 2, loop locked at f_0 .

Phase comparator 3 (PC3)

This is a positive edge-triggered sequential phase detector using an RS-type flip-flop. When the PLL is using this comparator, the loop is controlled by positive signal transitions and the duty factors of SIG_{IN} and $COMP_{IN}$ are not important. The transfer characteristic of PC3, assuming ripple ($f_r = f_i$) is suppressed, is:

$$V_{DEMOUT} = \frac{V_{CC}}{2\pi} (\phi_{SIGIN} - \phi_{COMPIN})$$

where V_{DEMOUT} is the demodulator output at pin 10;

$V_{DEMOUT} = V_{PC3OUT}$ (via low-pass filter).

The phase comparator gain is:

$$K_p = \frac{V_{CC}}{2\pi} (V/r).$$

The average output from PC3, fed to the VCO via the low-pass filter and seen at the demodulator output at pin 10 (V_{DEMOUT}), is the resultant of the phase differences of SIG_{IN} and $COMP_{IN}$ as shown in Fig. 10. Typical waveforms for the PC3 loop locked at f_o are shown in Fig. 11.

The phase-to-output response characteristic of PC3 (Fig. 10) differs from that of PC2 in that the phase angle between SIG_{IN} and $COMP_{IN}$ varies between 0° and 360° and is 180° at the

centre frequency. Also PC3 gives a greater voltage swing than PC2 for input phase differences but as a consequence the ripple content of the VCO input signal is higher. The PLL lock range for this type of phase comparator and the capture range are dependent on the low-pass filter. With no signal present at SIG_{IN} the VCO adjusts, via PC3, to its lowest frequency.

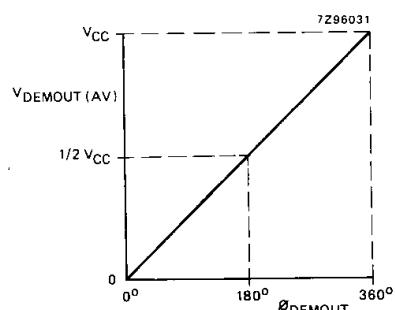


Fig. 10 Phase comparator 3: average output voltage versus input phase difference:

$$V_{DEMOUT} = V_{PC3OUT} =$$

$$\frac{V_{CC}}{2\pi} (\phi_{SIGIN} - \phi_{COMPIN})$$

$$\phi_{DEMOUT} = (\phi_{SIGIN} - \phi_{COMPIN}).$$

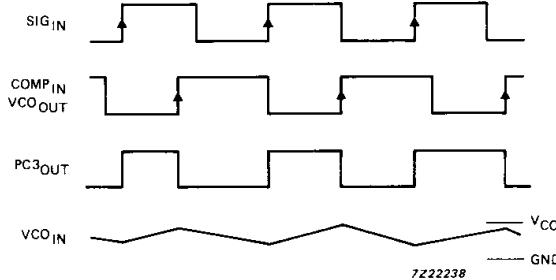


Fig. 11 Typical waveforms for PLL using phase comparator 3, loop locked at f_o .

RECOMMENDED OPERATING CONDITIONS FOR 74HC/HCT

| SYMBOL | PARAMETER | 74HC | | | 74HCT | | | UNIT | CONDITIONS |
|---------------------------------|--|------|------|--------------------|-------|------|-----------------|------|---|
| | | min. | typ. | max. | min. | typ. | max. | | |
| V _{CC} | DC supply voltage | 3.0 | 5.0 | 6.0 | 4.5 | 5.0 | 5.5 | V | |
| V _{CC} | DC supply voltage if VCO section is not used | 2.0 | 5.0 | 6.0 | 4.5 | 5.0 | 5.5 | V | |
| V _I | DC input voltage range | 0 | | V _{CC} | 0 | | V _{CC} | V | |
| V _O | DC output voltage range | 0 | | V _{CC} | 0 | | V _{CC} | V | |
| T _{amb} | operating ambient temperature range | -40 | | +85 | -40 | | +85 | °C | see DC and AC CHARACTERISTICS |
| T _{amb} | operating ambient temperature range | -40 | | +125 | -40 | | +125 | °C | |
| t _r , t _f | input rise and fall times (pin 5) | | 6.0 | 1000 500 400 | | 6.0 | 500 | ns | V _{CC} = 2.0 V V _{CC} = 4.5 V V _{CC} = 6.0 V |

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | MIN. | MAX. | UNIT | CONDITIONS |
|---|-----------------------------------|------|------|------|---|
| V _{CC} | DC supply voltage | -0.5 | +7 | V | |
| ±I _{IK} | DC input diode current | | 20 | mA | for V _I < -0.5 V or V _I > V _{CC} + 0.5 V |
| ±I _{OK} | DC output diode current | | 20 | mA | for V _O < -0.5 V or V _O > V _{CC} + 0.5 V |
| ±I _O | DC output source or sink current | | 25 | mA | for -0.5 V < V _O < V _{CC} + 0.5 V |
| ±I _{CC} : ±I _{GND} | DC V _{CC} or GND current | | 50 | mA | |
| T _{stg} | storage temperature range | -65 | +150 | °C | |
| P _{tot} | power dissipation per package | | | | for temperature range: -40 to +125 °C 74HC/HCT |
| | plastic DIL | | 750 | mW | above +70 °C: derate linearly with 12 mW/K |
| | plastic mini-pack (SO) | | 500 | mW | above +70 °C: derate linearly with 8 mW/K |

DC CHARACTERISTICS FOR 74HC**Quiescent supply current**

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | | UNIT | TEST CONDITIONS | | | | |
|-----------------|--|-----------------------|------|------|------------|------|-------------|-------|------|----------------------|---|--|--|--|
| | | 74HC | | | | | | | | V _{CC} V | OTHER | | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | | | |
| I _{CC} | quiescent supply current (VCO disabled) | | | 8.0 | | 80.0 | | 160.0 | μA | 6.0 | pins 3, 5, and 14 at V _{CC} ; pin 9 at GND; I _g at pins 3 and 14 to be excluded | | | |

Phase comparator section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | | UNIT | TEST CONDITIONS | | | | | | |
|------------------|--|-----------------------|-------------------|----------------------------|--------------------|----------------------------|--------------------|-----------------------------|------|--------------------------|---|---|--|--|--|--|
| | | 74HC | | | | | | | | V _{CC} V | V _I | OTHER | | | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | | | | | |
| V _{IH} | DC coupled HIGH level input voltage SIG _{IN} , COMP _{IN} | 1.5 3.15 4.2 | 1.2 2.4 3.2 | | 1.5 3.15 4.2 | | 1.5 3.15 4.2 | | V | 2.0 4.5 6.0 | | | | | | |
| V _{IL} | DC coupled LOW level input voltage SIG _{IN} , COMP _{IN} | | 0.8 2.1 2.8 | 0.5 1.35 1.8 | | 0.5 1.35 1.8 | | 0.5 1.35 1.8 | V | 2.0 4.5 6.0 | | | | | | |
| V _{OH} | HIGH level output voltage PCP _{OUT} , PC _n OUT | 1.9 4.4 5.9 | 2.0 4.5 6.0 | | 1.9 4.4 5.9 | | 1.9 4.4 5.9 | | V | 2.0 4.5 6.0 | V _{IH} or V _{IL} | −I _O = 20 μA −I _O = 20 μA −I _O = 20 μA | | | | |
| V _{OH} | HIGH level output voltage PCP _{OUT} , PC _n OUT | 3.98 5.48 | 4.32 5.81 | | 3.84 5.34 | | 3.7 5.2 | | V | 4.5 6.0 | V _{IH} or V _{IL} | −I _O = 4.0 mA −I _O = 5.2 mA | | | | |
| V _{OL} | LOW level output voltage PCP _{OUT} , PC _n OUT | 0 0 0 | 0.1 0.1 0.1 | | 0.1 0.1 0.1 | | 0.1 0.1 0.1 | | V | 2.0 4.5 6.0 | V _{IH} or V _{IL} | I _O = 20 μA I _O = 20 μA I _O = 20 μA | | | | |
| V _{OL} | LOW level output voltage PCP _{OUT} , PC _n OUT | | 0.15 0.16 | 0.26 0.26 | | 0.33 0.33 | | 0.4 0.4 | V | 4.5 6.0 | V _{IH} or V _{IL} | I _O = 4.0 mA I _O = 5.2 mA | | | | |
| ±I _I | input leakage current SIG _{IN} , COMP _{IN} | | | 3.0 7.0 18.0 30.0 | | 4.0 9.0 23.0 38.0 | | 5.0 11.0 27.0 45.0 | μA | 2.0 3.0 4.5 6.0 | V _{CC} or GND | | | | | |
| ±I _{OZ} | 3-state OFF-state current PC ₂ OUT | | | 0.5 | | 5.0 | | 10.0 | μA | 6.0 | V _{IH} or V _{IL} | V _O = V _{CC} or GND | | | | |
| R _I | input resistance SIG _{IN} , COMP _{IN} | | 800 250 150 | | | | | | kΩ | 3.0 4.5 6.0 | V _I at self-bias operating point; ΔV _I = 0.5 V; see Figs 12, 13 and 14 | | | | | |

DC CHARACTERISTICS FOR 74HC (Cont'd)

VCO section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T_{amb} ($^{\circ}$ C) | | | | | | | | UNIT | TEST CONDITIONS | | | | | | |
|--------------------|--|---------------------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|------------|-------------------|------------------------------------|--|--|--|--|--|--|
| | | 74HC | | | | | | | | | V _{CC} V | V _I | OTHER | | | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | | | | | | |
| V _{IH} | HIGH level input voltage INH | 2.1 3.15 4.2 | 1.7 2.4 3.2 | | 2.1 3.15 4.2 | | 2.1 3.15 4.2 | | | V | 3.0 4.5 6.0 | | | | | | |
| V _{IL} | LOW level input voltage INH | | 1.3 2.1 2.8 | 0.9 1.35 1.8 | | 0.9 1.35 1.8 | | 0.9 1.35 1.8 | V | 3.0 4.5 6.0 | | | | | | | |
| V _{OH} | HIGH level output voltage VCO _{OUT} | 2.9 4.4 5.9 | 3.0 4.5 6.0 | | 2.9 4.4 5.9 | | 2.9 4.4 5.9 | | | V | 3.0 4.5 6.0 | V _{IH} or V _{IL} | −I _O = 20 μ A | | | | |
| V _{OH} | HIGH level output voltage VCO _{OUT} | 3.98 5.48 | 4.32 5.81 | | 3.84 5.34 | | 3.7 5.2 | | | V | 4.5 6.0 | V _{IH} or V _{IL} | −I _O = 4.0 mA −I _O = 5.2 mA | | | | |
| V _{OL} | LOW level output voltage VCO _{OUT} | | 0 0 0 | 0.1 0.1 0.1 | | 0.1 0.1 0.1 | | 0.1 0.1 0.1 | V | 3.0 4.5 6.0 | V _{IH} or V _{IL} | I _O = 20 μ A | | | | | |
| V _{OL} | LOW level output voltage VCO _{OUT} | | 0.15 0.16 | 0.26 0.26 | | 0.33 0.33 | | 0.4 0.4 | V | 4.5 6.0 | V _{IH} or V _{IL} | I _O = 4.0 mA I _O = 5.2 mA | | | | | |
| V _{OL} | LOW level output voltage C1 _A , C1 _B | | | 0.40 0.40 | | 0.47 0.47 | | 0.54 0.54 | V | 4.5 6.0 | V _{IH} or V _{IL} | I _O = 4.0 mA I _O = 5.2 mA | | | | | |
| ±I _I | input leakage current INH, VCO _{IN} | | | 0.1 | | 1.0 | | 1.0 | μ A | 6.0 | V _{CC} or GND | | | | | | |
| R1 | resistor range | 3.0 3.0 3.0 | | 300 300 300 | | | | | k Ω | 3.0 4.5 6.0 | | | note 1 | | | | |
| R2 | resistor range | 3.0 3.0 3.0 | | 300 300 300 | | | | | k Ω | 3.0 4.5 6.0 | | | note 1 | | | | |
| C1 | capacitor range | 40 40 40 | | no limit | | | | | pF | 3.0 4.5 6.0 | | | | | | | |
| V _{VCOIN} | operating voltage range at VCO _{IN} | 1.1 1.1 1.1 | | 1.9 3.4 5.9 | | | | | V | 3.0 4.5 6.0 | | | over the range specified for R1; for linearity see Figs 20 and 21. | | | | |

Note

1. The parallel value of R1 and R2 should be more than 2.7 k Ω . Optimum performance is achieved when R1 and/or R2 are/is > 10 k Ω .

Demodulator section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | |
|------------------|---|-----------------------|-------------------|-------------------|------------|------|-------------|------|----------------------|-------------------|---|--|
| | | 74HC | | | | | | | V _{CC} V | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | |
| R _S | resistor range | 50 50 50 | | 300 300 300 | | | | | kΩ | 3.0 4.5 6.0 | at R _S > 300 kΩ the leakage current can influence V _{DEMOUT} | |
| V _{OFF} | offset voltage V _{COPIN} to V _{DEMOUT} | | ±30 ±20 ±10 | | | | | | mV | 3.0 4.5 6.0 | V _I = V _{VCOIN} = 1/2 V _{CC} ; values taken over R _S range; see Fig. 15 | |
| R _D | dynamic output resistance at DEMOUT | | 25 25 25 | | | | | | Ω | 3.0 4.5 6.0 | V _{DEMOUT} = 1/2 V _{CC} | |

AC CHARACTERISTICS FOR 74HC

Phase comparator section

GND = 0 V; $t_r = t_f = 6$ ns; $C_L = 50$ pF

| SYMBOL | PARAMETER | T_{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | |
|-------------------|--|----------------|---------------------|-----------------|------------|-----------------|-------------|------------------|-----------------|--------------------------|---------------|--|
| | | 74HC | | | | | | | V _{CC} | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | |
| t_{PHL}/t_{PLH} | propagation delay SIG _{IN} , COMPIN to PC ₁ OUT | | 63 23 18 | 200 40 34 | | 250 50 43 | | 300 60 51 | ns | 2.0 4.5 6.0 | Fig. 16 | |
| t_{PHL}/t_{PLH} | propagation delay SIG _{IN} , COMPIN to PC _{POUT} | | 96 35 28 | 340 68 58 | | 425 85 72 | | 510 102 87 | ns | 2.0 4.5 6.0 | Fig. 16 | |
| t_{PHL}/t_{PLH} | propagation delay SIG _{IN} , COMPIN to PC ₃ OUT | | 77 28 22 | 270 54 46 | | 340 68 58 | | 405 81 69 | ns | 2.0 4.5 6.0 | Fig. 16 | |
| t_{PZH}/t_{PZL} | 3-state output enable time SIG _{IN} , COMPIN to PC ₂ OUT | | 83 30 24 | 280 56 48 | | 350 70 60 | | 420 84 71 | ns | 2.0 4.5 6.0 | Fig. 17 | |
| t_{PHZ}/t_{PLZ} | 3-state output disable time SIG _{IN} , COMPIN to PC ₂ OUT | | 99 36 29 | 325 65 55 | | 405 81 69 | | 490 98 83 | ns | 2.0 4.5 6.0 | Fig. 17 | |
| t_{THL}/t_{TLH} | output transition time | | 19 7 6 | 75 15 13 | | 95 19 16 | | 110 22 19 | ns | 2.0 4.5 6.0 | Fig. 16 | |
| $V_I(p-p)$ | AC coupled input sensitivity (peak-to-peak value) at SIG _{IN} or COMPIN | | 9 11 15 33 | | | | | | mV | 2.0 3.0 4.5 6.0 | $f_i = 1$ MHz | |

VCO section

GND = 0 V; $t_r = t_f = 6$ ns; $C_L = 50$ pF

| SYMBOL | PARAMETER | T_{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | |
|------------------|---|---------------------|----------------------|------|----------------------|------|-------------|------|-----------------|-------------------|--|--|
| | | 74HC | | | | | | | V _{CC} | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | typ. | max. | min. | max. | | | | |
| $\Delta f/T$ | frequency stability with temperature change | | | | 0.20 0.15 0.14 | | | | %/K | 3.0 4.5 6.0 | $V_I = V_{VCOIN} = 1/2 V_{CC}$; $R_1 = 100 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 100 \text{ pF}$; see Fig. 18 | |
| f_o | VCO centre frequency (duty factor = 50%) | 3.0 11.0 13.0 | 10.0 17.0 21.0 | | | | | | MHz | 3.0 4.5 6.0 | $V_{VCOIN} = 1/2 V_{CC}$; $R_1 = 3 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 40 \text{ pF}$; see Fig. 19 | |
| Δf_{VCO} | VCO frequency linearity | | 1.0 0.4 0.3 | | | | | | % | 3.0 4.5 6.0 | $R_1 = 100 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 100 \text{ pF}$; see Figs 20 and 21 | |
| δ_{VCO} | duty factor at VCO _{OUT} | | 50 50 50 | | | | | | % | 3.0 4.5 6.0 | | |

DC CHARACTERISTICS FOR 74HCT**Quiescent supply current**

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | |
|------------------|--|-----------------------|------|------|------------|------|-------------|-------|----------------------|------------------|--|--|
| | | 74HCT | | | | | | | V _{CC} V | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | |
| I _{CC} | quiescent supply current (VCO disabled) | | | 8.0 | | 80.0 | | 160.0 | μA | 6.0 | pins 3, 5 and 14 at V _{CC} ; pin 9 at GND; I _l at pins 3 and 14 to be excluded | |
| ΔI _{CC} | additional quiescent supply current per input pin for unit load coefficient is 1 (note 1) V _I = V _{CC} − 2.1 V | | 100 | 360 | | 450 | | 490 | μA | 4.5 to 5.5 | pins 3 and 14 at V _{CC} ; pin 9 at GND; I _l at pins 3 and 14 to be excluded | |

Note1. The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given above.To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

| INPUT | UNIT LOAD COEFFICIENT |
|-------|--------------------------|
| INH | 1.00 |

DC CHARACTERISTICS FOR 74HCT

Phase comparator section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | | | UNIT | TEST CONDITIONS | | | | | | |
|------------------|--|-----------------------|------|------|------------|------|-------------|------|----|------|--|---|-------|--|--|--|--|
| | | 74HCT | | | | | | | | | V _{CC} V | V _I | OTHER | | | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | | | | | | |
| V _{IH} | DC coupled HIGH level input voltage SIG _{IN} , COMPIN | 3.15 | 2.4 | | | | | | V | 4.5 | | | | | | | |
| V _{IL} | DC coupled LOW level input voltage SIG _{IN} , COMPIN | | 2.1 | 1.35 | | | | | V | 4.5 | | | | | | | |
| V _{OH} | HIGH level output voltage PCPOUT, PC _n OUT | 4.4 | 4.5 | | 4.4 | | 4.4 | | V | 4.5 | V _{IH} or V _{IL} | −I _O = 20 μA | | | | | |
| V _{OH} | HIGH level output voltage PCPOUT, PC _n OUT | 3.98 | 4.32 | | 3.84 | | 3.7 | | V | 4.5 | V _{IH} or V _{IL} | −I _O = 4.0 mA | | | | | |
| V _{OL} | LOW level output voltage PCPOUT, PC _n OUT | | 0 | 0.1 | | 0.1 | | 0.1 | V | 4.5 | V _{IH} or V _{IL} | I _O = 20 μA | | | | | |
| V _{OL} | LOW level output voltage PCPOUT, PC _n OUT | | 0.15 | 0.26 | | 0.33 | | 0.4 | V | 4.5 | V _{IH} or V _{IL} | I _O = 4.0 mA | | | | | |
| ±I _I | input leakage current SIG _{IN} , COMPIN | | | 30 | | 38 | | 45 | μA | 5.5 | V _{CC} or GND | | | | | | |
| ±I _{OZ} | 3-state OFF-state current PC ₂ OUT | | | 0.5 | | 5.0 | | 10.0 | μA | 5.5 | V _{IH} or V _{IL} | V _O = V _{CC} or GND | | | | | |
| R _I | input resistance SIG _{IN} , COMPIN | | 250 | | | | | | kΩ | 4.5 | V _I at self-bias operating point; ΔV _I = 0.5 V; see Figs 12, 13 and 14 | | | | | | |

DC CHARACTERISTICS FOR 74HCT

VCO section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | | | |
|--------------------|---|-----------------------|------|----------|------------|------|-------------|------|----------------------|----------------|--|--|--|--|
| | | 74HCT | | | | | | | V _{CC} V | V _I | OTHER | | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | | | |
| V _{IH} | HIGH level input voltage INH | 2.0 | 1.6 | | 2.0 | | 2.0 | | V | 4.5 to 5.5 | | | | |
| V _{IL} | LOW level input voltage INH | | 1.2 | 0.8 | | 0.8 | | 0.8 | V | 4.5 to 5.5 | | | | |
| V _{OH} | HIGH level output voltage VCO _{OUT} | 4.4 | 4.5 | | 4.4 | | 4.4 | | V | 4.5 | V _{IH} or V _{IL} | | | |
| V _{OH} | LOW level output voltage VCO _{OUT} | 3.98 | 4.32 | | 3.84 | | 3.7 | | V | 4.5 | V _{IH} or V _{IL} | | | |
| V _{OL} | LOW level output voltage VCO _{OUT} | | 0 | 0.1 | | 0.1 | | 0.1 | V | 4.5 | V _{IH} or V _{IL} | | | |
| V _{OL} | LOW level output voltage C1 _A , C1 _B (test purposes only) | | 0.15 | 0.26 | | 0.33 | | 0.4 | V | 4.5 | V _{IH} or V _{IL} | | | |
| V _{OL} | LOW level output voltage C1 _A , C1 _B (test purposes only) | | | 0.40 | | 0.47 | | 0.54 | V | 4.5 | V _{IH} or V _{IL} | | | |
| ±I _I | input leakage current INH, VCO _{IN} | | | 0.1 | | 1.0 | | 1.0 | µA | 5.5 | V _{CC} or GND | | | |
| R1 | resistor range | 3.0 | | 300 | | | | | kΩ | 4.5 | | | | |
| R2 | resistor range | 3.0 | | 300 | | | | | kΩ | 4.5 | | | | |
| C1 | capacitor range | 40 | | no limit | | | | | pF | 4.5 | | | | |
| V _{VCOIN} | operating voltage range at VCO _{IN} | 1.1 | | 3.4 | | | | | V | 4.5 | over the range specified for R1; for linearity see Figs 20 and 21. | | | |

Note

1. The parallel value of R1 and R2 should be more than 2.7 kΩ. Optimum performance is achieved when R1 and/or R2 are/is > 10 kΩ.

DC CHARACTERISTICS FOR 74HCT

Demodulator section

Voltages are referenced to GND (ground = 0 V)

| SYMBOL | PARAMETER | T _{amb} (°C) | | | | | | UNIT | TEST CONDITIONS | | | |
|------------------|---|-----------------------|------|------|------------|------|-------------|------|----------------------|-------|---|--|
| | | 74HCT | | | | | | | V _{CC} V | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | |
| R _S | resistor range | 50 | | 300 | | | | | kΩ | 4.5 | at R _S > 300 kΩ the leakage current can influence V _{DEMOUT} | |
| V _{OFF} | offset voltage V _{COPIN} to V _{DEMOUT} | | ±20 | | | | | | mV | 4.5 | V _I = V _{VCOIN} = 1/2 V _{CC} ; values taken over R _S range; see Fig. 15 | |
| R _D | dynamic output resistance at DEMOUT | | 25 | | | | | | Ω | 4.5 | V _{DEMOUT} = 1/2 V _{CC} | |

AC CHARACTERISTICS FOR 74HCT

Phase comparator section

GND = 0 V; $t_r = t_f = 6 \text{ ns}$; $C_L = 50 \text{ pF}$





| SYMBOL | PARAMETER | T_{amb} ($^{\circ}\text{C}$) | | | | | | UNIT | TEST CONDITIONS | | | |
|---------------------------------|--|---|------|------|------------|------|-------------|------|----------------------|-------|-----------------------|--|
| | | 74HCT | | | | | | | V_{CC} V | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | min. | max. | min. | max. | | | | |
| $t_{\text{PHL}}/t_{\text{PLH}}$ | propagation delay $\text{SIG}_{\text{IN}}, \text{COMP}_{\text{IN}}$ to PC_1OUT | | 23 | 40 | | 50 | | 60 | ns | 4.5 | Fig. 16 | |
| $t_{\text{PHL}}/t_{\text{PLH}}$ | propagation delay $\text{SIG}_{\text{IN}}, \text{COMP}_{\text{IN}}$ to PC_2OUT | | 35 | 68 | | 85 | | 102 | ns | 4.5 | Fig. 16 | |
| $t_{\text{PHL}}/t_{\text{PLH}}$ | propagation delay $\text{SIG}_{\text{IN}}, \text{COMP}_{\text{IN}}$ to PC_3OUT | | 28 | 54 | | 68 | | 81 | ns | 4.5 | Fig. 16 | |
| $t_{\text{PZH}}/t_{\text{PZL}}$ | 3-state output enable time $\text{SIG}_{\text{IN}}, \text{COMP}_{\text{IN}}$ to PC_2OUT | | 30 | 56 | | 70 | | 84 | ns | 4.5 | Fig. 17 | |
| $t_{\text{PHZ}}/t_{\text{PLZ}}$ | 3-state output disable time $\text{SIG}_{\text{IN}}, \text{COMP}_{\text{IN}}$ to PC_2OUT | | 36 | 65 | | 81 | | 98 | ns | 4.5 | Fig. 17 | |
| $t_{\text{THL}}/t_{\text{TLH}}$ | output transition time | | 7 | 15 | | 19 | | 22 | ns | 4.5 | Fig. 16 | |
| V_1 (p–p) | AC coupled input sensitivity (peak-to-peak value) at SIG_{IN} or COMP_{IN} | | 15 | | | | | | mV | 4.5 | $f_i = 1 \text{ MHz}$ | |

VCO section

GND = 0 V; $t_r = t_f = 6 \text{ ns}$; $C_L = 50 \text{ pF}$

| SYMBOL | PARAMETER | T_{amb} ($^{\circ}\text{C}$) | | | | | | UNIT | TEST CONDITIONS | | | |
|-------------------------|---|---|------|------|------------|------|-------------|------|----------------------|-------|--|--|
| | | 74HCT | | | | | | | V_{CC} V | OTHER | | |
| | | +25 | | | −40 to +85 | | −40 to +125 | | | | | |
| | | min. | typ. | max. | typ. | max. | min. | max. | | | | |
| $\Delta f/T$ | frequency stability with temperature change | | | | 0.15 | | | | %/K | 4.5 | $V_1 = V_{\text{VCOIN}}$ within recommended range; $R_1 = 100 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 100 \text{ pF}$; see Fig. 18b | |
| f_o | VCO centre frequency (duty factor = 50%) | 11.0 | 17.0 | | | | | | MHz | 4.5 | $V_{\text{VCOIN}} = 1/2 V_{\text{CC}}$; $R_1 = 3 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 40 \text{ pF}$; see Fig. 19 | |
| Δf_{VCO} | VCO frequency linearity | | 0.4 | | | | | | % | 4.5 | $R_1 = 100 \text{ k}\Omega$; $R_2 = \infty$; $C_1 = 100 \text{ pF}$; see Figs 20 and 21 | |
| δ_{VCO} | duty factor at VCO_{OUT} | | 50 | | | | | | % | 4.5 | | |

FIGURE REFERENCES FOR DC CHARACTERISTICS

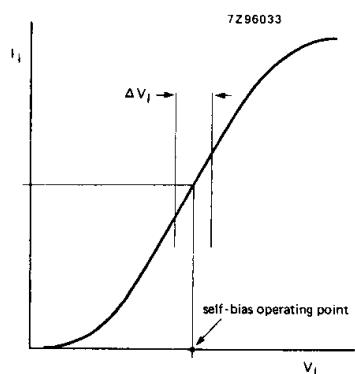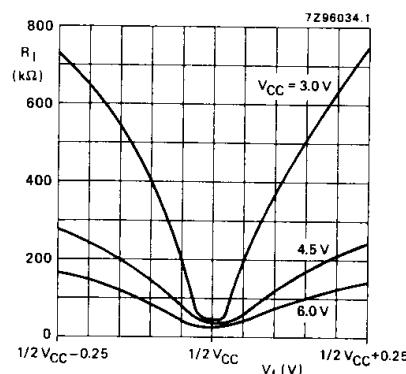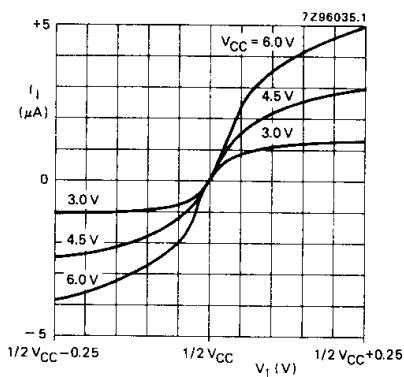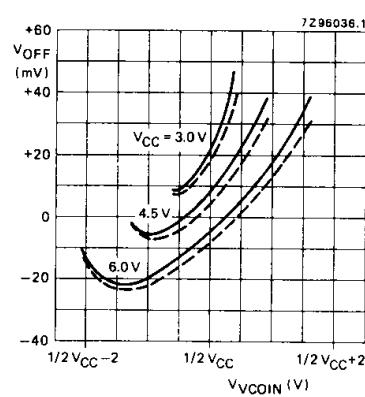Fig. 12 Typical input resistance curve at SIG_{IN}, COMP_{IN}.Fig. 13 Input resistance at SIG_{IN}, COMP_{IN} with $\Delta V_I = 0.5\text{ V}$ at self-bias point.Fig. 14 Input current at SIG_{IN}, COMP_{IN} with $\Delta V_I = 0.5\text{ V}$ at self-bias point.Fig. 15 Offset voltage at demodulator output as a function of VCO_{IN} and R_S .

AC WAVEFORMS

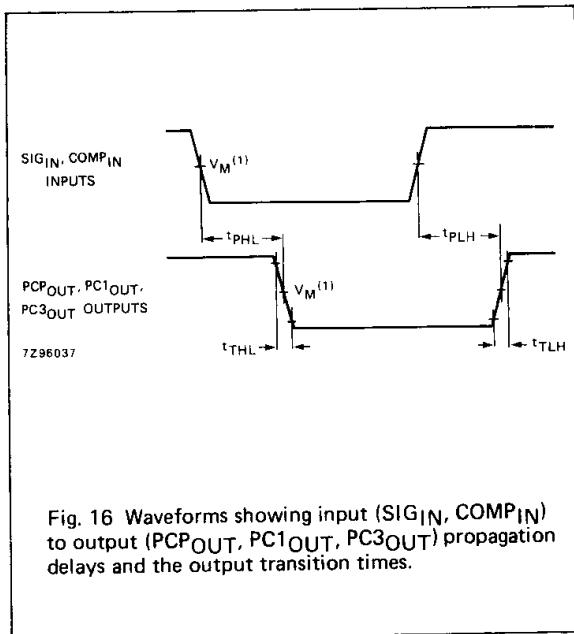


Fig. 16 Waveforms showing input (SIG_{IN} , $COMP_{IN}$) to output (PCP_{OUT} , $PC1_{OUT}$, $PC3_{OUT}$) propagation delays and the output transition times.

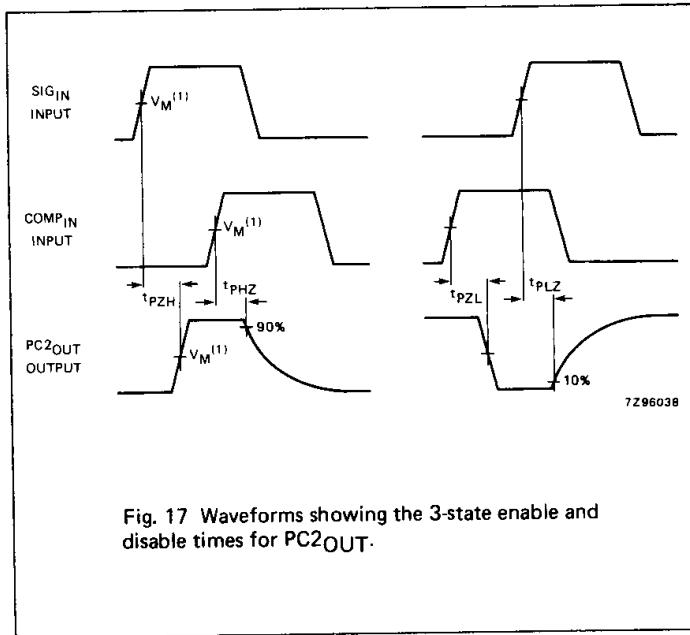


Fig. 17 Waveforms showing the 3-state enable and disable times for $PC2_{OUT}$.

Note to AC waveforms

(1) HC : $V_M = 50\%$; $V_I = GND$ to V_{CC} .

AC WAVEFORMS (Continued)

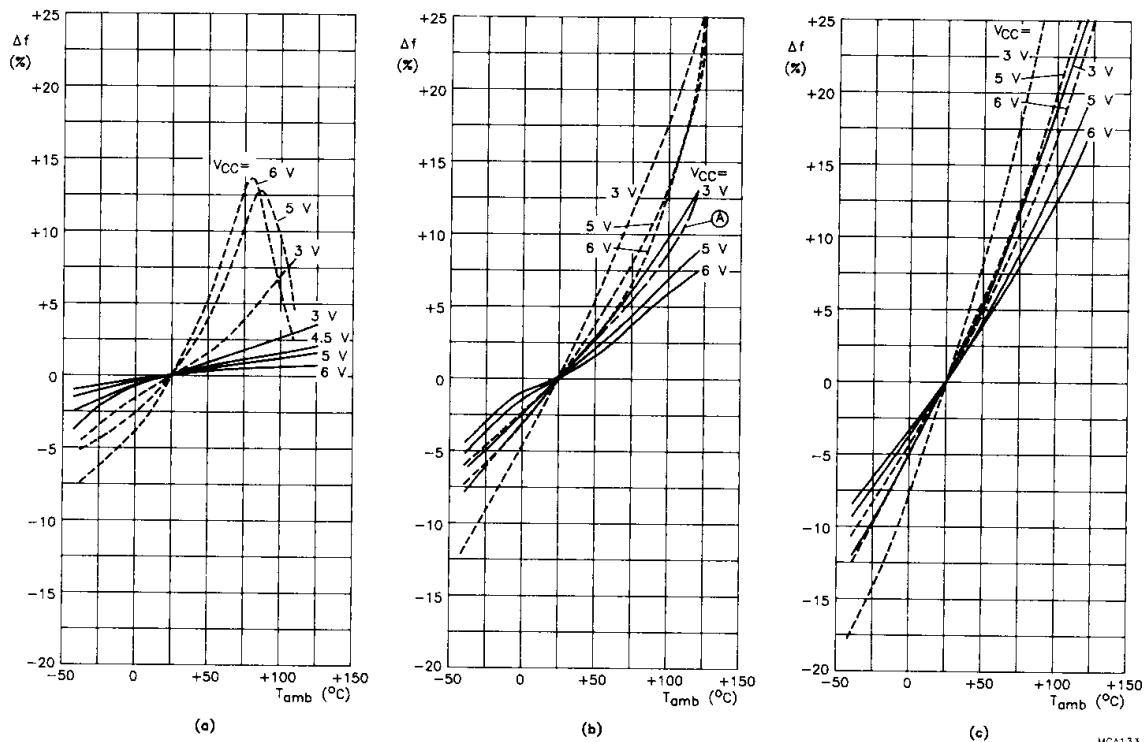


Fig.18 Frequency stability of the VCO as a function of ambient temperature with supply voltage as a parameter.
— without offset ($R_2 = \infty$): (a) $R_1 = 3 \text{ k}\Omega$; (b) $R_1 = 10 \text{ k}\Omega$; (c) $R_1 = 300 \text{ k}\Omega$.
- - - with offset ($R_1 = \infty$): (a) $R_2 = 3 \text{ k}\Omega$; (b) $R_2 = 10 \text{ k}\Omega$; (c) $R_2 = 300 \text{ k}\Omega$.
In (b), the frequency stability for $R_1 = R_2 = 10 \text{ k}\Omega$ at 5 V is also given (curve A). This curve is set by the total VCO bias current, and is not simply the addition of the two $10 \text{ k}\Omega$ stability curves. $C_1 = 100 \text{ pF}$; $V_{VCO\ IN} = 0.5 \text{ V}_{CC}$.

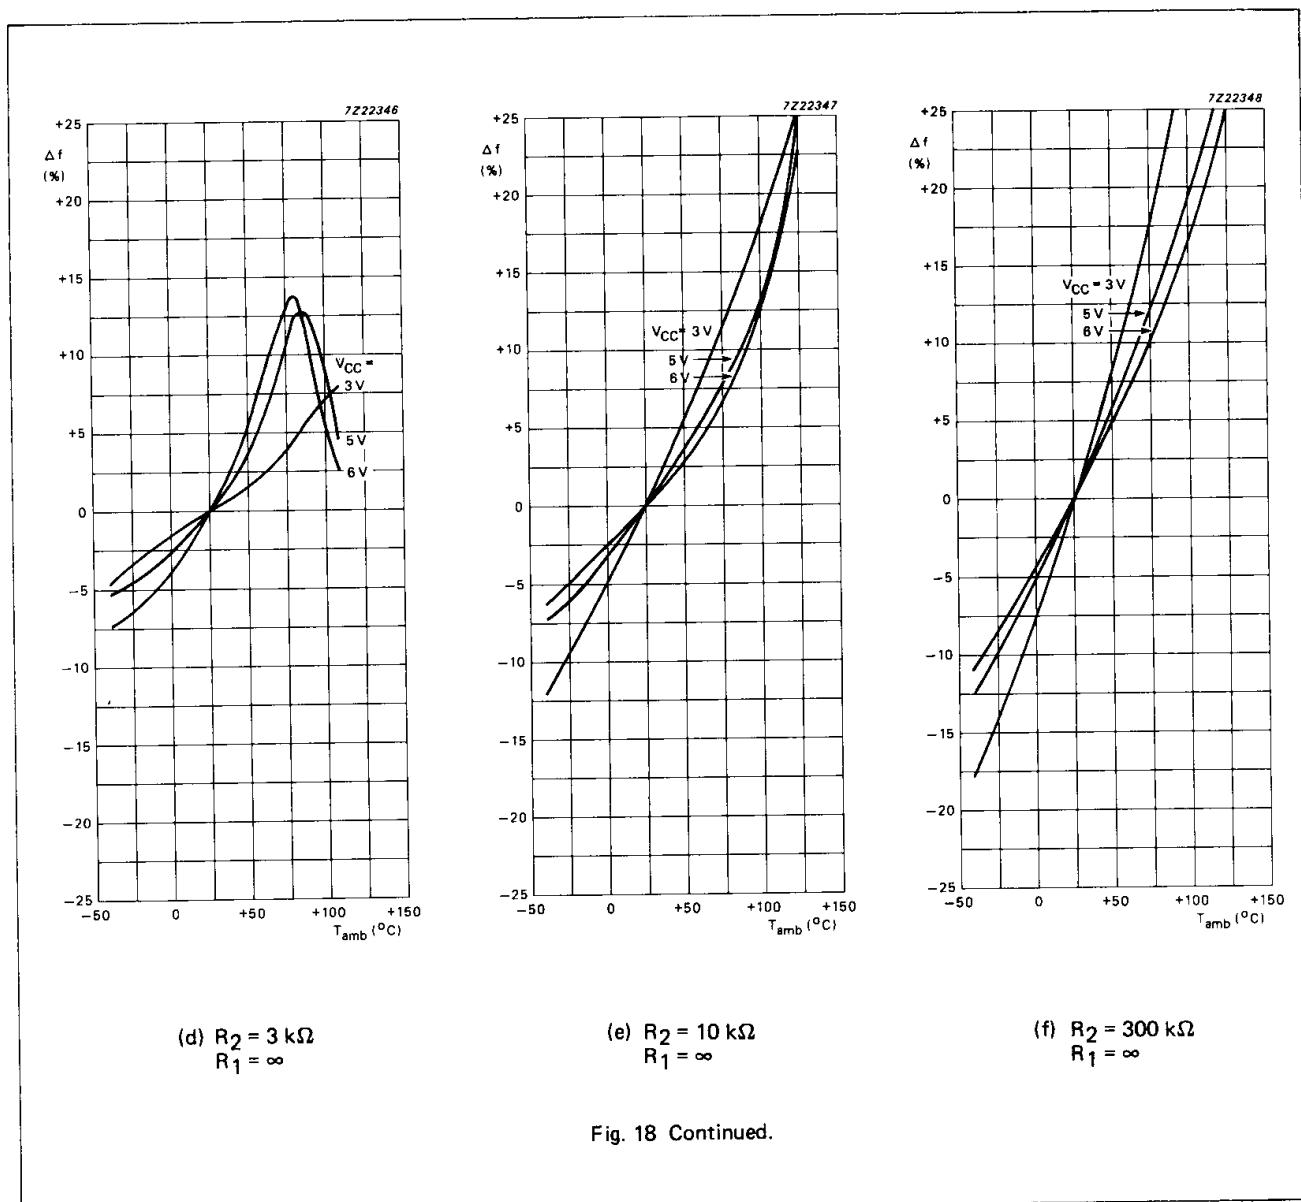


Fig. 18 Continued.

Note to Fig. 18

To obtain optimum temperature stability, C1 must be as small as possible but larger than 100 pF.

AC WAVEFORMS (Continued)

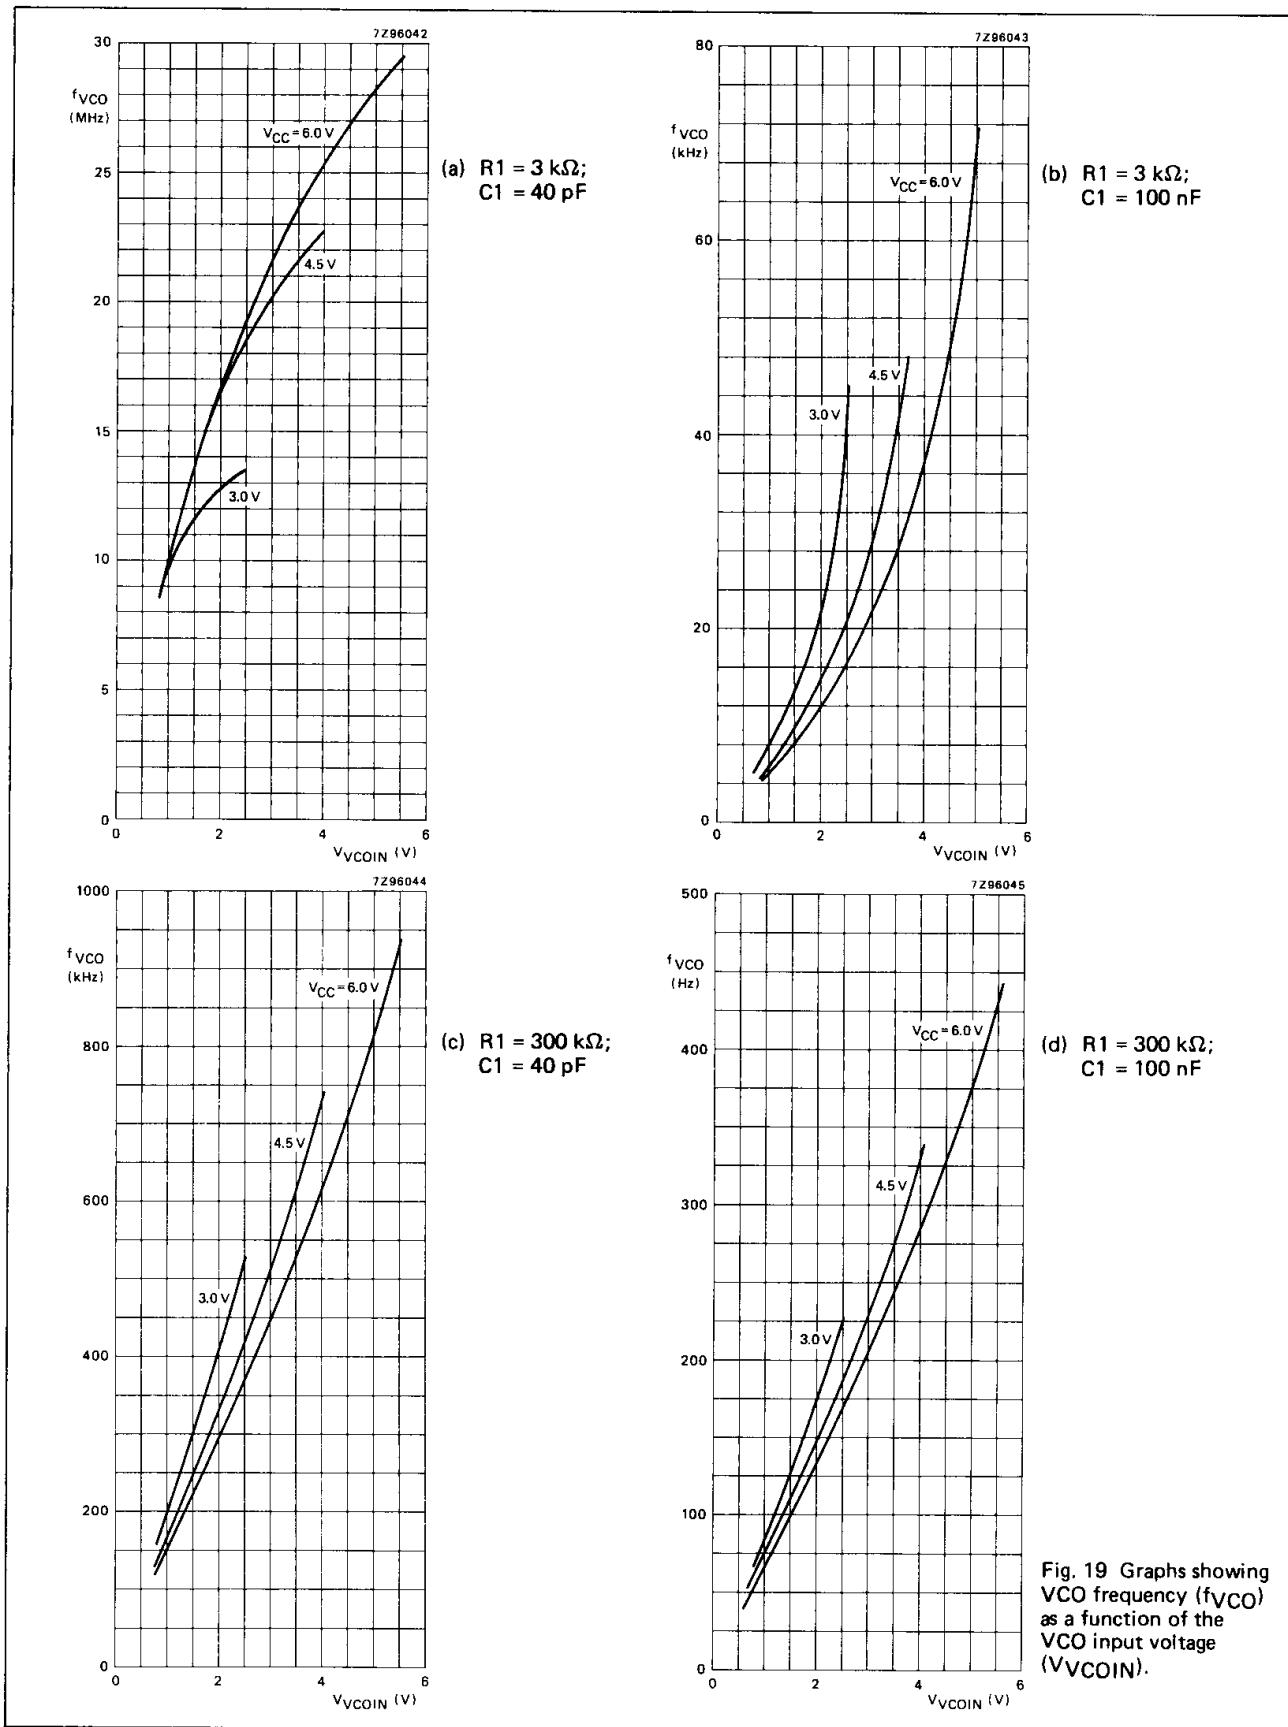


Fig. 19 Graphs showing
VCO frequency (f_{VCO})
as a function of the
VCO input voltage
(V_{VCOIN}).

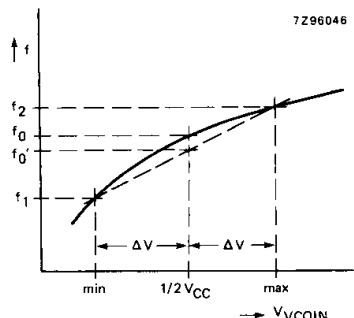


Fig. 20 Definition of VCO frequency linearity:
 $\Delta V = 0.5$ V over the V_{CC} range:
 for VCO linearity

$$f'_0 = \frac{f_1 + f_2}{2},$$

$$\text{linearity} = \frac{f'_0 - f_0}{f'_0} \times 100\%$$

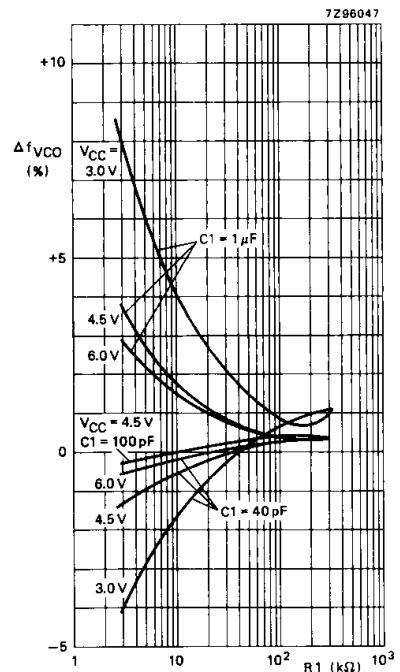


Fig. 21 Frequency linearity as a function of R_1 ,
 C_1 and V_{CC} : $R_2 = \infty$ and $\Delta V = 0.5$ V.

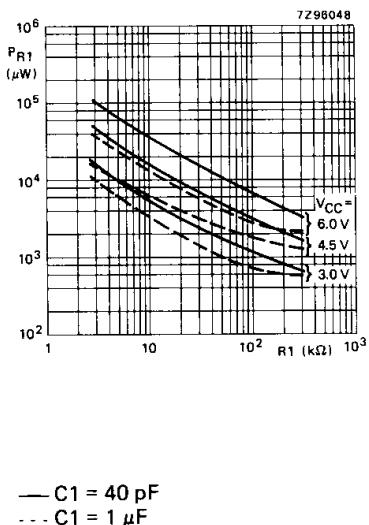


Fig. 22 Power dissipation versus the
 value of R_1 : $C_L = 50$ pF; $R_2 = \infty$;
 $V_{VCOIN} = 1/2 V_{CC}$; $T_{amb} = 25$ °C.

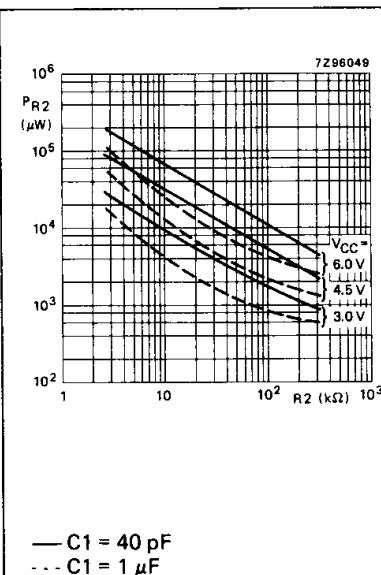


Fig. 23 Power dissipation versus the
 value of R_2 : $C_L = 50$ pF; $R_1 = \infty$;
 $V_{VCOIN} = GND = 0$ V; $T_{amb} = 25$ °C.

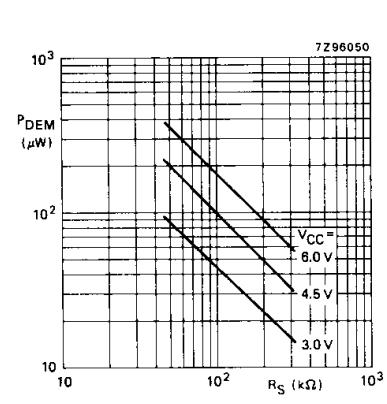


Fig. 24 Typical dc power dissipation of
 demodulator sections as a function of R_S :
 $R_1 = R_2 = \infty$; $T_{amb} = 25$ °C;
 $V_{VCOIN} = 1/2 V_{CC}$.



APPLICATION INFORMATION



This information is a guide for the approximation of values of external components to be used with the 74HC/HCT4046A in a phase-lock-loop system.

References should be made to Figs 29, 30 and 31 as indicated in the table.

Values of the selected components should be within the following ranges:

- R1 between 3 k Ω and 300 k Ω ;
- R2 between 3 k Ω and 300 k Ω ;
- R1 + R2 parallel value > 2.7 k Ω ;
- C1 greater than 40 pF.
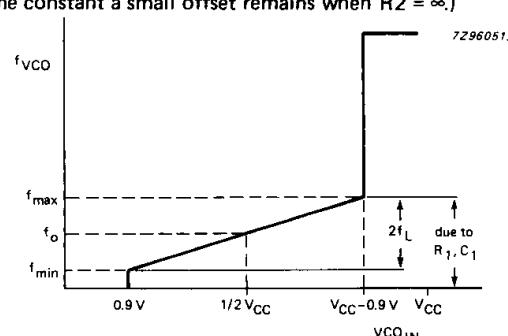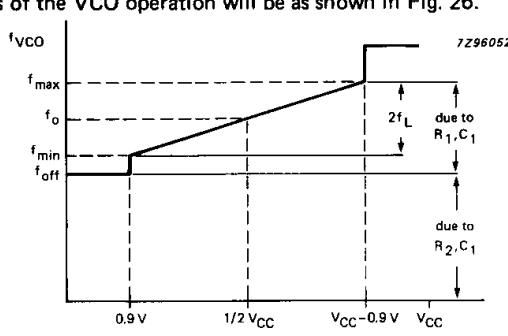
| SUBJECT | PHASE COMPARATOR | DESIGN CONSIDERATIONS |
|------------------------------------|------------------|---|
| VCO frequency without extra offset | PC1, PC2 or PC3 | <p>VCO frequency characteristic With $R_2 = \infty$ and R_1 within the range $3 \text{ k}\Omega < R_1 < 300 \text{ k}\Omega$, the characteristics of the VCO operation will be as shown in Fig. 25. (Due to R_1, C_1 time constant a small offset remains when $R_2 = \infty$.)</p>  <p>Fig. 25 Frequency characteristic of VCO operating without offset: f_o = centre frequency; $2f_L$ = frequency lock range.</p> |
| | | <p>Selection of R_1 and C_1 Given f_o, determine the values of R_1 and C_1 using Fig. 29.</p> |
| | | <p>Given f_{\max} and f_o, determine the values of R_1 and C_1 using Fig. 29, use Fig. 31 to obtain $2f_L$ and then use this to calculate f_{\min}.</p> |
| VCO frequency with extra offset | PC1, PC2 or PC3 | <p>VCO frequency characteristic With R_1 and R_2 within the ranges $3 \text{ k}\Omega < R_1 < 300 \text{ k}\Omega$, $3 \text{ k}\Omega < R_2 < 300 \text{ k}\Omega$, the characteristics of the VCO operation will be as shown in Fig. 26.</p>  <p>Fig. 26 Frequency characteristic of VCO operating with offset: f_o = centre frequency; $2f_L$ = frequency lock range.</p> |
| | | <p>Selection of R_1, R_2 and C_1 Given f_o and f_L, determine the value of product R_1C_1 by using Fig. 31. Calculate f_{off} from the equation $f_{\text{off}} = f_o - 1.6f_L$. Obtain the values of C_1 and R_2 by using Fig. 30. Calculate the value of R_1 from the value of C_1 and the product R_1C_1.</p> |
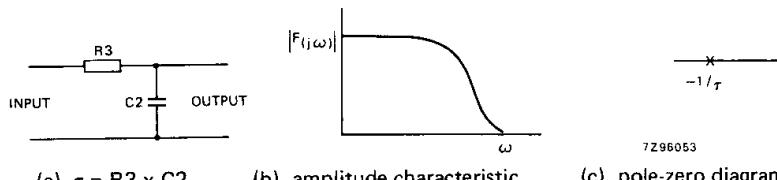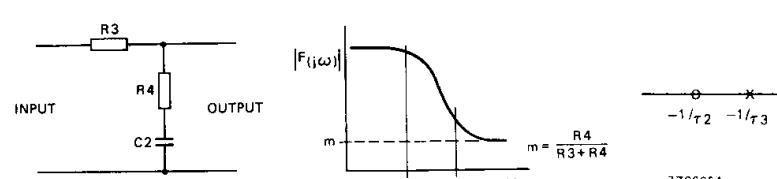
| SUBJECT | PHASE COMPARATOR | DESIGN CONSIDERATIONS |
|---|------------------|---|
| PLL conditions with no signal at the SIGIN input | PC1 | VCO adjusts to f_0 with $\phi_{DEMOUT} = 90^\circ$ and $V_{VCOIN} = 1/2 V_{CC}$ (see Fig. 6). |
| | PC2 | VCO adjusts to f_0 with $\phi_{DEMOUT} = -360^\circ$ and $V_{VCOIN} = \text{min.}$ (see Fig. 8). |
| | PC3 | VCO adjusts to f_0 with $\phi_{DEMOUT} = -360^\circ$ and $V_{VCOIN} = \text{min.}$ (see Fig. 10). |
| PLL frequency capture range | PC1, PC2 or PC3 | <p>Loop filter component selection</p>  <p>(a) $\tau = R3 \times C2$ (b) amplitude characteristic (c) pole-zero diagram</p> <p>A small capture range ($2f_c$) is obtained if $2f_c \approx 1/\pi (\sqrt{2\pi f_L/\tau})$</p> |
| | | <p>Fig. 27 Simple loop filter for PLL without offset; $R3 \geq 500 \Omega$.</p>  <p>(a) $\tau_1 = R3 \times C2$; (b) amplitude characteristic (c) pole-zero diagram</p> <p>$\tau_2 = R4 \times C2$ $\tau_3 = (R3 + R4) \times C2$</p> |
| | | <p>Fig. 28 Simple loop filter for PLL with offset; $R3 + R4 \geq 500 \Omega$.</p> |
| PLL locks on harmonics at centre frequency | PC1 or PC3 | yes |
| | PC2 | no |
| noise rejection at signal input | PC1 | high |
| | PC2 or PC3 | low |
| AC ripple content when PLL is locked | PC1 | $f_r = 2f_i$, large ripple content at $\phi_{DEMOUT} = 90^\circ$ |
| | PC2 | $f_r = f_i$, small ripple content at $\phi_{DEMOUT} = 0^\circ$ |
| | PC3 | $f_r = f_i$, large ripple content at $\phi_{DEMOUT} = 180^\circ$ |

APPLICATION INFORMATION (Continued)

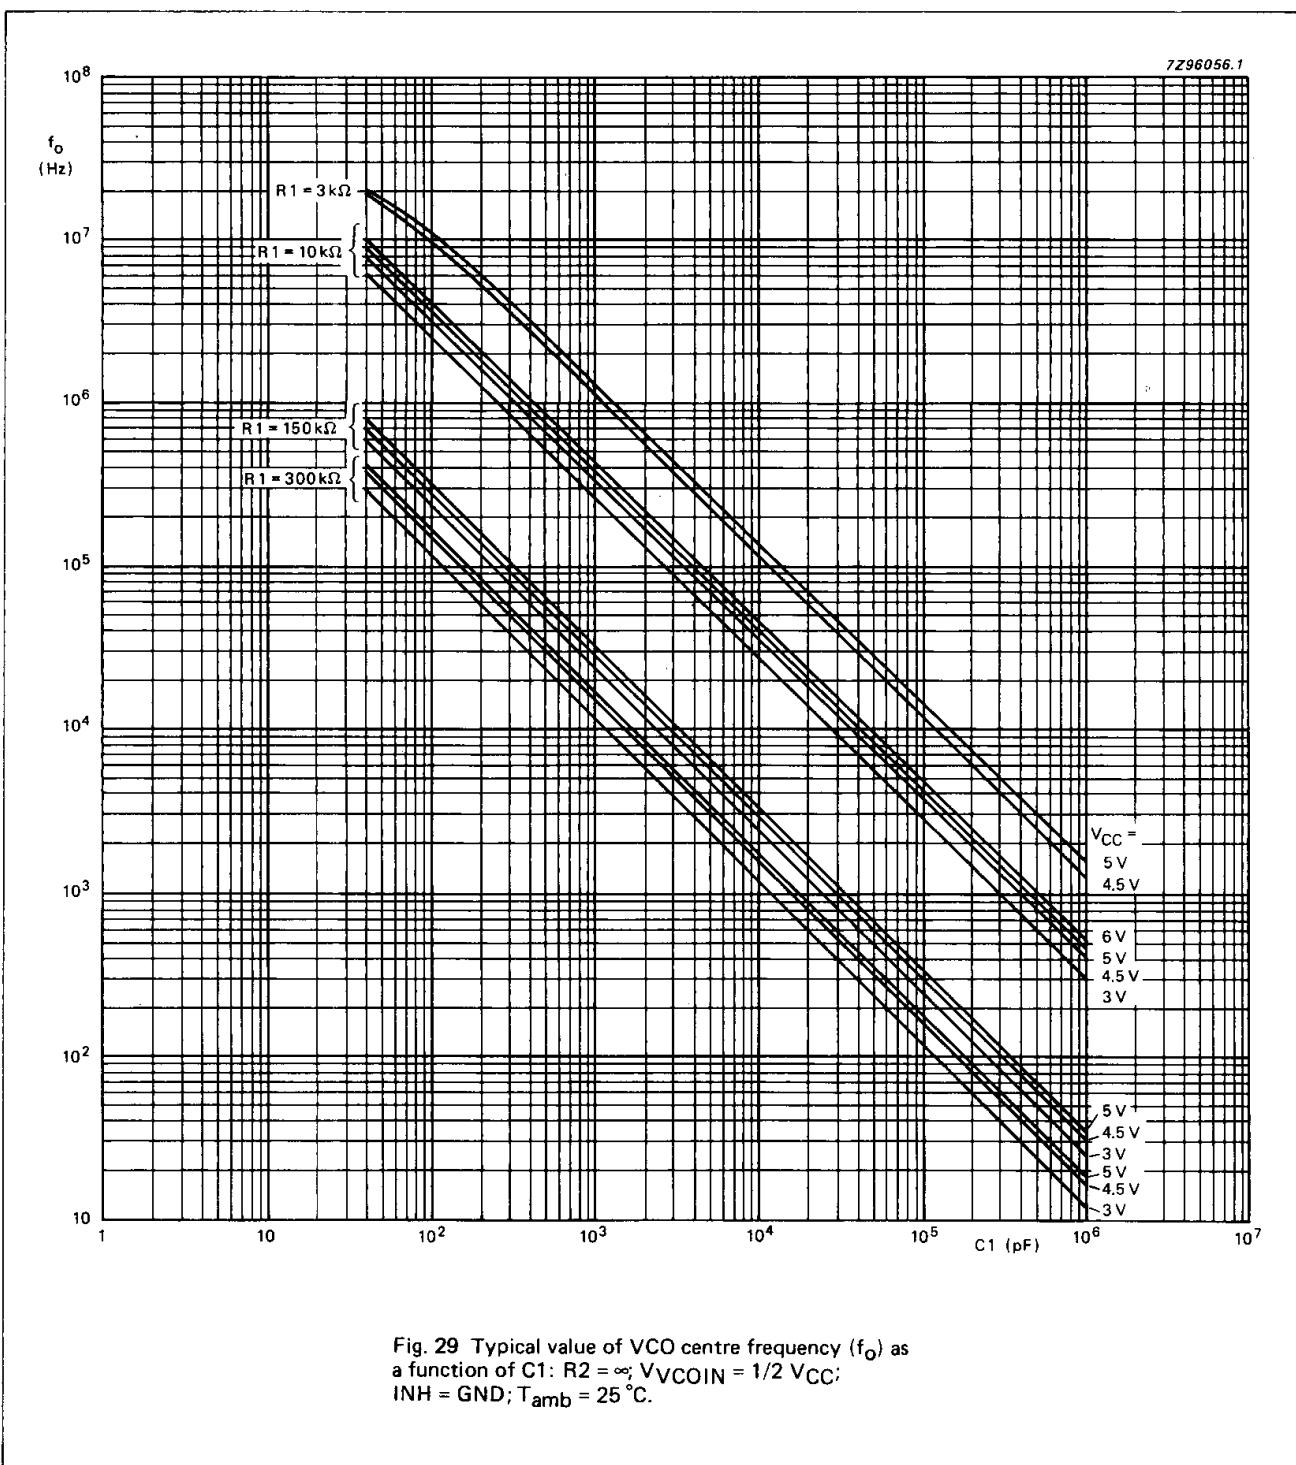


Fig. 29 Typical value of VCO centre frequency (f_0) as a function of $C1$: $R2 = \infty$; $V_{VCOIN} = 1/2 V_{CC}$; $INH = GND$; $T_{amb} = 25^\circ C$.

Notes to Fig. 29

1. To obtain optimum VCO performance, $C1$ must be as small as possible but larger than 100 pF .
2. Interpolation for various values of $R1$ can be easily calculated because, a constant $R1C1$ product will produce almost the same VCO output frequency.


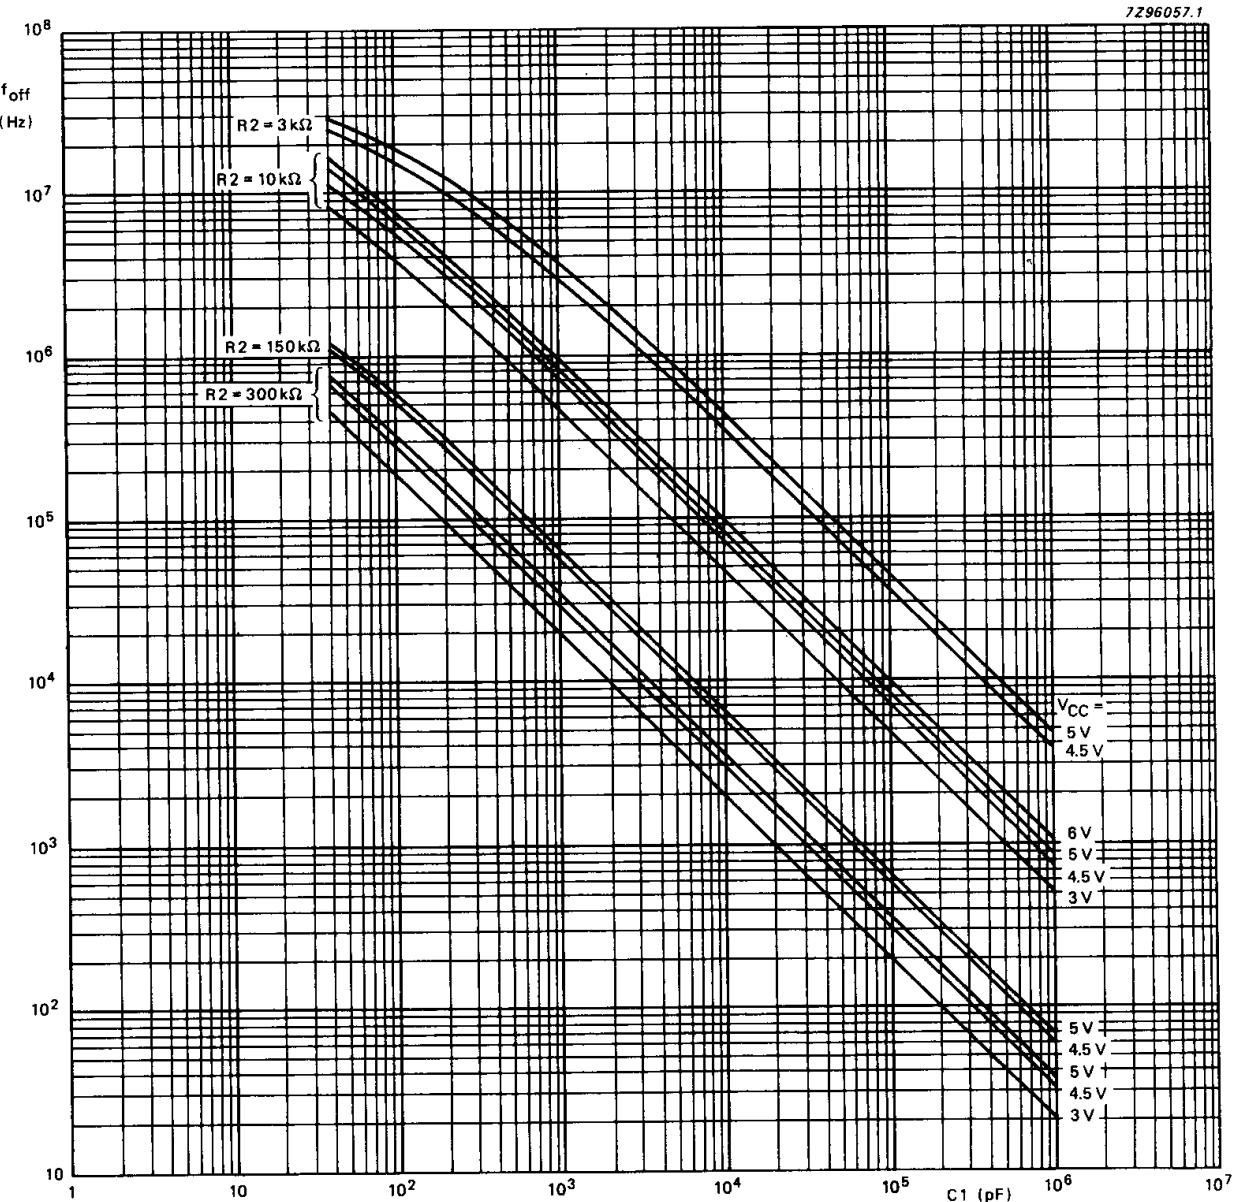


Fig. 30 Typical value of frequency offset as a function of C_1 : $R_1 = \infty$; $V_{\text{VCOIN}} = 1/2 V_{\text{CC}}$; INH = GND; $T_{\text{amb}} = 25^\circ\text{C}$.

Notes to Fig. 30

1. To obtain optimum VCO performance, C_1 must be as small as possible but larger than 100 pF.
2. Interpolation for various values of R_2 can be easily calculated because, a constant $R_2 C_1$ product will produce almost the same VCO output frequency.

APPLICATION INFORMATION (Continued)

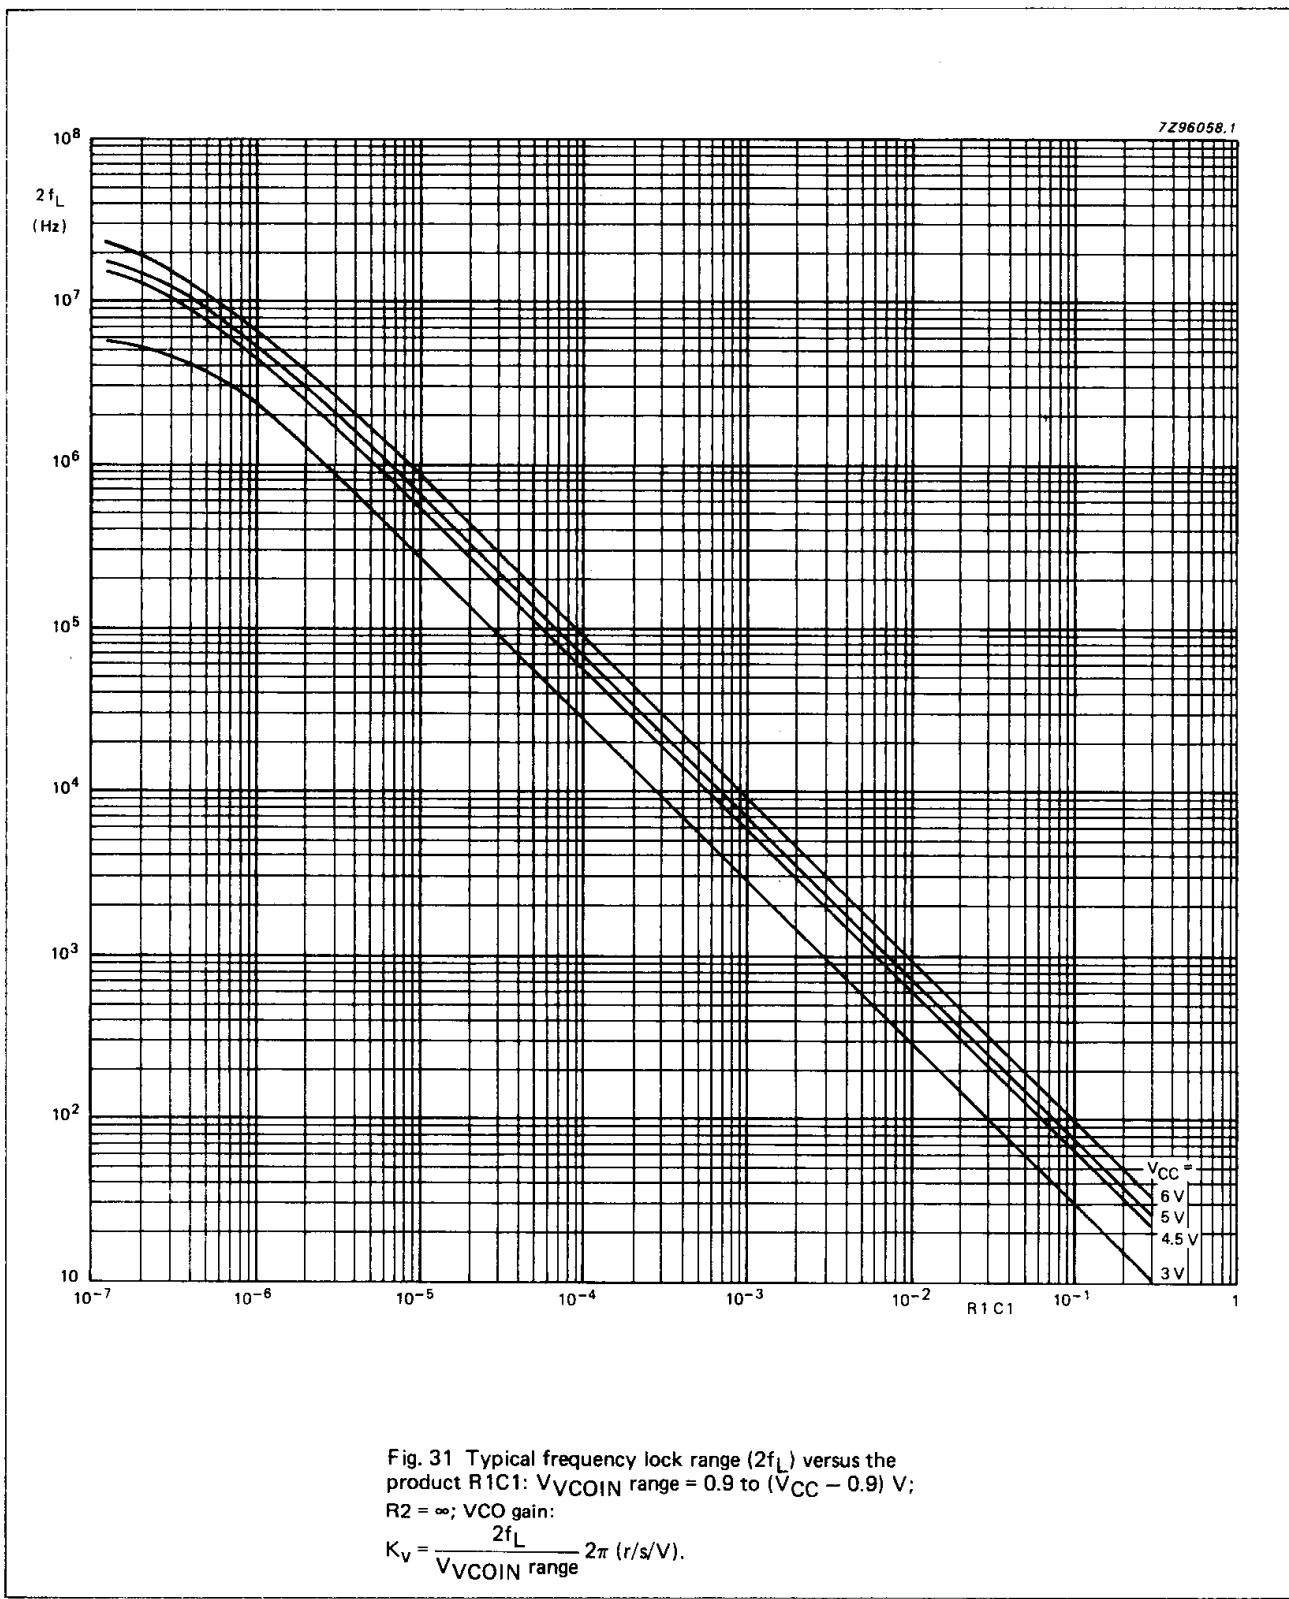

PLL design example

The frequency synthesizer, used in the design example shown in Fig. 32, has the following parameters:

Output frequency: 2 MHz to 3 MHz
frequency steps : 100 kHz
settling time : 1 ms
overshoot : < 20%

The open-loop gain is $H(s) \times G(s) = K_p \times K_f \times K_o \times K_n$.

Where:

K_p = phase comparator gain
 K_f = low-pass filter transfer gain
 K_o = K_V/s VCO gain
 K_n = $1/n$ divider ratio

The programmable counter ratio K_n can be found as follows:

$$N_{\min.} = \frac{f_{\text{out}}}{f_{\text{step}}} = \frac{2 \text{ MHz}}{100 \text{ kHz}} = 20$$

$$N_{\max.} = \frac{f_{\text{out}}}{f_{\text{step}}} = \frac{3 \text{ MHz}}{100 \text{ kHz}} = 30$$

The VCO is set by the values of R1, R2 and C1, $R_2 = 10 \text{ k}\Omega$ (adjustable).

The values can be determined using the information in the section "DESIGN CONSIDERATIONS".

With $f_o = 2.5 \text{ MHz}$ and $f_L = 500 \text{ kHz}$ this gives the following values ($V_{CC} = 5.0 \text{ V}$):

$R_1 = 10 \text{ k}\Omega$
 $R_2 = 10 \text{ k}\Omega$
 $C_1 = 500 \text{ pF}$

The VCO gain is:

$$K_v = \frac{2f_L \times 2 \times \pi}{0.9 - (V_{CC} - 0.9)} = \frac{1 \text{ MHz}}{3.2} \times 2\pi \approx 2 \times 10^6 \text{ r/s/V}$$

The gain of the phase comparator is:

$$K_p = \frac{V_{CC}}{4 \times \pi} = 0.4 \text{ V/r.}$$

The transfer gain of the filter is given by:

$$K_f = \frac{1 + \tau_2 s}{1 + (\tau_1 + \tau_2)s}$$

Where:

$$\tau_1 = R_3 C_2 \text{ and } \tau_2 = R_4 C_2.$$

The characteristics equation is:

$$1 + H(s) \times G(s) = 0.$$

This results in:

$$s^2 + \frac{1 + K_p \times K_v \times K_n \times \tau_2}{(\tau_1 + \tau_2)} s +$$

$$\frac{K_p \times K_v \times K_n}{(\tau_1 + \tau_2)} = 0.$$

The natural frequency ω_n is defined as follows:

$$\omega_n = \sqrt{\frac{K_p \times K_v \times K_n}{(\tau_1 + \tau_2)}}.$$

and the damping value ξ is defined as follows:

$$\xi = \frac{1}{2\omega_n} \times \frac{1 + K_p \times K_v \times K_n \times \tau_2}{(\tau_1 + \tau_2)}.$$

In Fig. 33 the output frequency response to a step of input frequency is shown.

The overshoot and settling time percentages are now used to determine ω_n . From Fig. 33 it can be seen that the damping ratio $\xi = 0.45$ will produce an overshoot of less than 20% and settle to within 5% at $\omega_{nt} = 5$. The required settling time is 1 ms. This results in:

$$\omega_n = \frac{5}{t} = \frac{5}{0.001} = 5 \times 10^3 \text{ r/s.}$$

Rewriting the equation for natural frequency results in:

$$(\tau_1 + \tau_2) = \frac{K_p \times K_v \times K_n}{\omega_n^2}.$$

The maximum overshoot occurs at $N_{\max.}$:

$$(\tau_1 + \tau_2) = \frac{0.4 \times 2 \times 10^6}{5000^2 \times 30} = 0.0011 \text{ s.}$$

When $C_2 = 470 \text{ nF}$, then

$$R_4 = \frac{(\tau_1 + \tau_2) \times 2 \times \omega_n \times \xi - 1}{K_p \times K_v \times K_n \times C_2} = 315 \Omega$$

now R_3 can be calculated:

$$R_3 = \frac{\tau_1}{C_2} - R_4 = 2 \text{ k}\Omega.$$

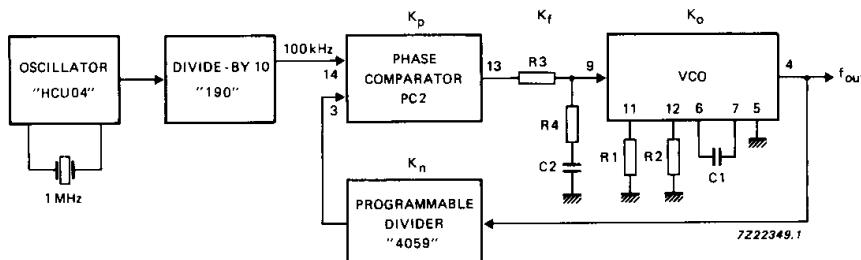


Fig. 32 Frequency synthesizer.

Note

For an extensive description and application example please refer to application note ordering number 9398 649 90011.
Also available a computer design program for PLL's ordering number 9398 961 10061.

APPLICATION INFORMATION (Continued)

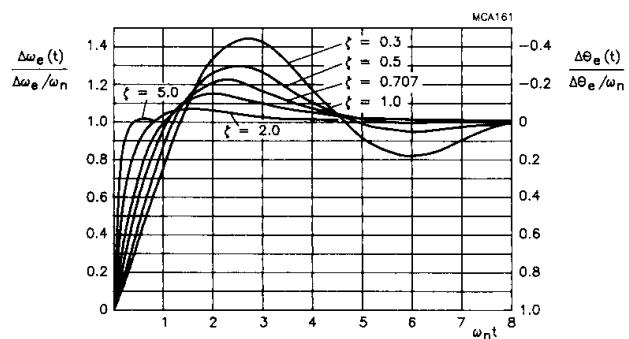


Fig. 33 Type 2, second order frequency step response.

Since the output frequency is proportional to the VCO control voltage, the PLL frequency response can be observed with an oscilloscope by monitoring pin 9 of the VCO. The average frequency response, as calculated by the Laplace method, is found experimentally by smoothing this voltage at pin 9 with a simple RC filter, whose time constant is long compared to the phase detector sampling rate but short compared to the PLL response time.

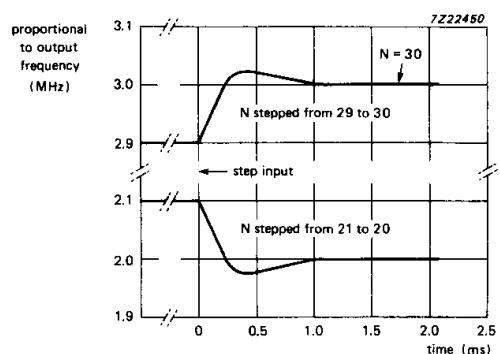


Fig. 34 Frequency compared to the time response.