

PC922

High Power OPIC Photocoupler

※ Lead forming type (I type) and taping reel type (P type) are also available. (**PC922I/PC922P**)

※※ TÜV (VDE 0884) approved type is also available as an option.

■ Features


1. Built-in base amplifier for inverter drive
2. High power (I_{O1} : MAX. 0.5A (DC))
(I_{O2P} : MAX. 2.0A (pulse))
3. High isolation voltage between input and output (V_{iso} : 5 000V_{rms})
4. High noise reduction type
5. High speed response (t_{PHL} , t_{PLH} : MAX. 5 μ s)
6. High sensitivity (I_{FLH} : MAX. 3mA)
7. Recognized by UL, file No. E64380

■ Applications

1. Inverter controlled air conditioners
2. Small capacitance general purpose inverters

■ Outline Dimensions

(Unit : mm)

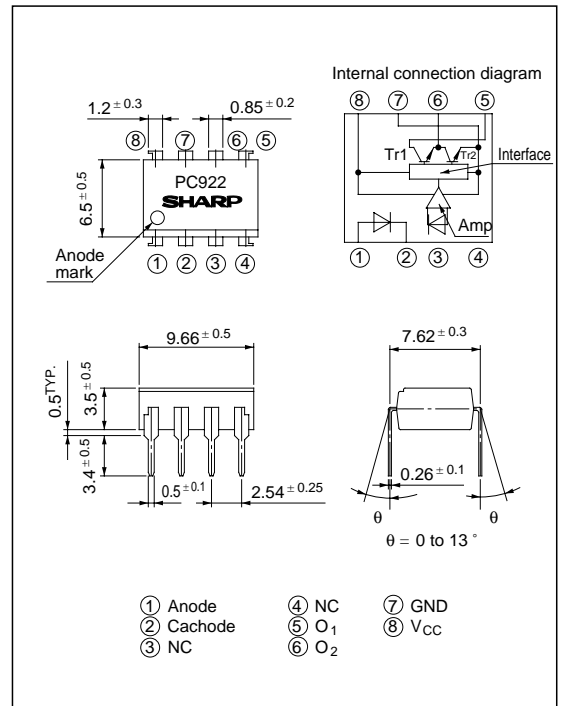

* " OPIC " (Optical IC) is a trademark of the SHARP Corporation.

An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Absolute Maximum Ratings

($T_a = T_{opr}$ unless otherwise specified)

| | Parameter | Symbol | Rating | Unit |
|--------|---------------------------------------|-----------|---------------|------------------|
| Input | Forward current | I_F | 25 | mA |
| | *1 Reverse voltage | V_R | 6 | V |
| | Supply voltage | V_{CC} | 18 | V |
| Output | O ₁ output current | I_{O1} | 0.5 | A |
| | *2 O ₁ peak output current | I_{O1P} | 1.0 | A |
| | O ₂ output current | I_{O2} | 0.6 | A |
| | *2 O ₂ peak output current | I_{O2P} | 2.0 | A |
| | O ₁ output voltage | V_{O1} | 18 | V |
| | Power dissipation | P_O | 500 | mW |
| | Total power dissipation | P_{tot} | 550 | mW |
| | *3 Isolation voltage | V_{iso} | 5 000 | V _{rms} |
| | Operating temperature | T_{opr} | - 20 to + 80 | °C |
| | Storage temperature | T_{stg} | - 55 to + 125 | °C |
| | *4 Soldering temperature | T_{sol} | 260 | °C |

*1 $T_a = 25^\circ\text{C}$

*2 Pulse width $\leq 5 \mu\text{s}$, Duty ratio: 0.01

*3 40 to 60% RH, AC for 1 minute,

$T_a = 25^\circ\text{C}$

*4 For 10 seconds

Electro-optical Characteristics

($T_a = T_{opr}$ unless otherwise specified)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | Fig. | |
|--|---|---|---|---|-----------|------------------|------------------|---------------|---|
| Input | Forward voltage | V_{F1} | $T_a = 25^\circ\text{C}, I_F = 5\text{mA}$ | - | 1.1 | 1.4 | V | - | |
| | | V_{F2} | $T_a = 25^\circ\text{C}, I_F = 0.2\text{mA}$ | 0.6 | 0.9 | - | V | - | |
| | Reverse current | I_R | $T_a = 25^\circ\text{C}, V_R = 3\text{V}$ | - | - | 10 | μA | - | |
| | Terminal capacitance | C_t | $T_a = 25^\circ\text{C}, V = 0, f = 1\text{kHz}$ | - | 30 | 250 | pF | - | |
| Operating supply voltage | | V_{CC} | | 5.4 | - | 13 | V | - | |
| Output | O_1 low level output voltage | V_{O1L} | $V_{CC} = 6\text{V}, I_{O1} = 0.4\text{A},$ $R_{L1} = 10\Omega, I_F = 5\text{mA}$ | - | 0.2 | 0.4 | V | 1 | |
| | O_2 high level output voltage | V_{O2H} | $V_{CC} = 6\text{V}, I_{O2} = -0.4\text{A},$ $I_F = 5\text{mA}$ | 4.5 | 5.0 | - | V | 2 | |
| | O_2 low level output voltage | V_{O2L} | $V_{CC} = 6\text{V}, I_{O2} = 0.5\text{A}, I_F = 0$ | - | 0.2 | 0.4 | V | - | |
| | O_1 leak current | I_{O1L} | $V_{CC} = 13\text{V}, I_F = 0$ | - | - | 200 | μA | 3 | |
| | O_2 leak current | I_{O2L} | $V_{CC} = 13\text{V}, I_F = 5\text{mA}$ | - | - | 200 | μA | 4 | |
| | High level supply current | I_{CCH} | $T_a = 25^\circ\text{C}, V_{CC} = 6\text{V}, I_F = 5\text{mA}$ | - | 9 | 13 | mA | - | |
| | | | $V_{CC} = 6\text{V}, I_F = 5\text{mA}$ | - | - | 17 | mA | - | |
| Low level supply current | I_{CCL} | $T_a = 25^\circ\text{C}, V_{CC} = 6\text{V}, I_F = 0$ | - | 11 | 15 | mA | - | | |
| | | $V_{CC} = 6\text{V}, I_F = 0$ | - | - | 20 | mA | - | | |
| Transfer characteristics | *5 "Low→High" threshold input current | I_{FLH} | $T_a = 25^\circ\text{C}, V_{CC} = 6\text{V},$ $R_{L1} = 5\Omega, R_{L2} = 10\Omega$ | 0.3 | 1.5 | 3.0 | mA | 5 | |
| | | | $V_{CC} = 6\text{V}, R_{L1} = 5\Omega$ $R_{L2} = 10\Omega$ | 0.2 | - | 5.0 | mA | 5 | |
| | Isolation resistance | R_{ISO} | $T_a = 25^\circ\text{C}, \text{DC} = 500\text{V}$ 40 to 60% RH | 5×10^{10} | 10^{11} | - | Ω | - | |
| | Response time | "Low→High" propagation delay time | t_{PLH} | $T_a = 25^\circ\text{C}, V_{CC} = 6\text{V}$ $I_F = 5\text{mA}, R_{L1} = 5\Omega$ $R_{L2} = 10\Omega$ | - | 2 | 5 | μs | 6 |
| | | "High→Low" propagation delay time | t_{PHL} | | - | 2 | 5 | μs | |
| | | Rise time | t_r | | - | 0.2 | 1 | μs | |
| | | Fall time | t_f | | - | 0.1 | 1 | μs | |
| | Instantaneous common mode rejection voltage "Output : High level" | CM_H | $T_a = 25^\circ\text{C}, V_{CM} = 600\text{V}^{(\text{peak})}$ $I_F = 5\text{mA}, R_{L1} = 470\Omega, R_{L2} = 1\text{k}\Omega,$ $\Delta V_{O2H} = 0.5\text{V}$ | -1 500 | - | - | V/ μs | 7 | |
| Instantaneous common mode rejection voltage "Output : Low level" | CM_L | $T_a = 25^\circ\text{C}, V_{CM} = 600\text{V}^{(\text{peak})}$ $I_F = 0, R_{L1} = 470\Omega, R_{L2} = 1\text{k}\Omega$ $\Delta V_{O2L} = 0.5\text{V}$ | 1 500 | - | - | V/ μs | 7 | | |

*5 I_{FLH} represents forward current when output goes from low to high.

Truth Table

| Input | O_2 Output | Tr. 1 | Tr. 2 |
|-------|--------------|-------|-------|
| ON | High level | ON | OFF |
| OFF | Low level | OFF | ON |

■ Test Circuit

Fig. 1

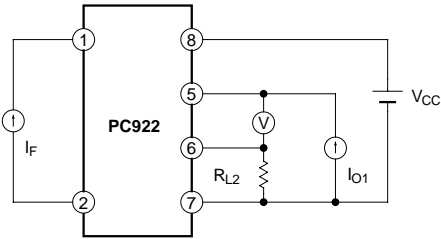


Fig. 2

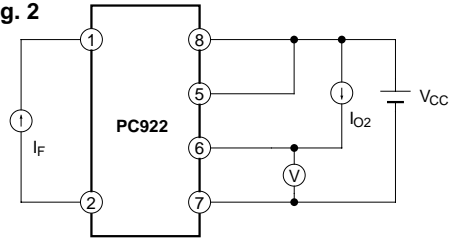


Fig. 3

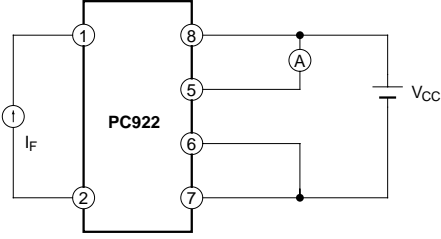


Fig. 4

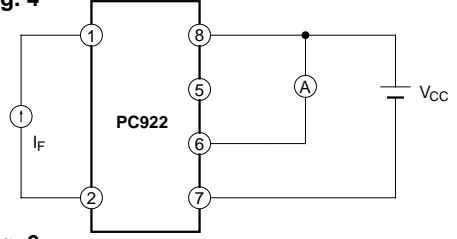


Fig. 5

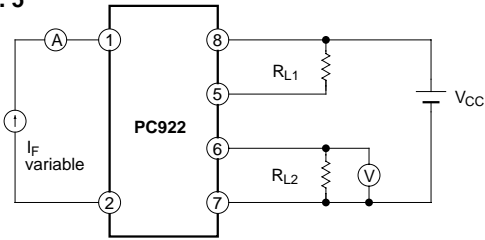


Fig. 6

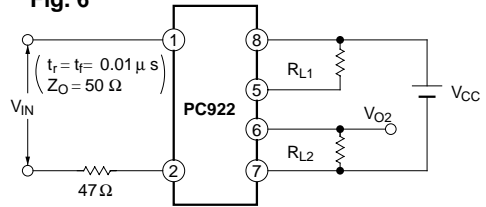


Fig. 7




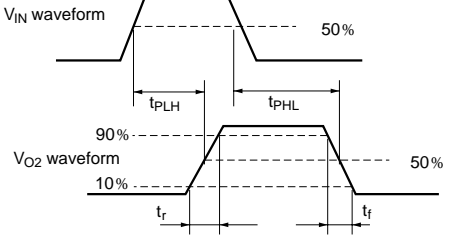
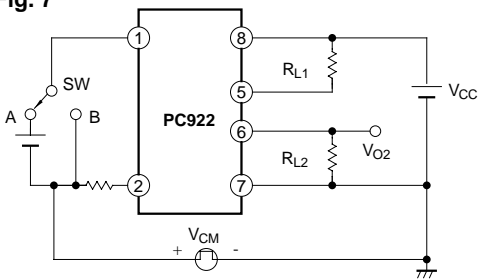


Fig. 8 Forward Current vs. Ambient Temperature

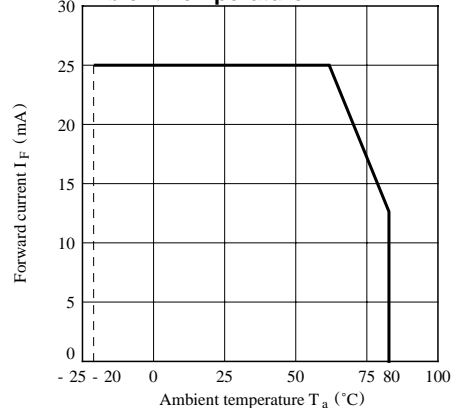


Fig. 9-a Power Dissipation vs. Ambient Temperature

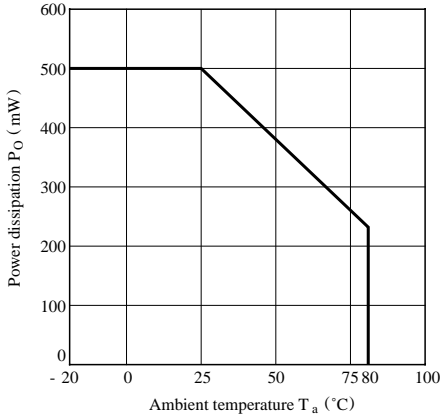


Fig. 9-b Power Dissipation vs. Ambient Temperature

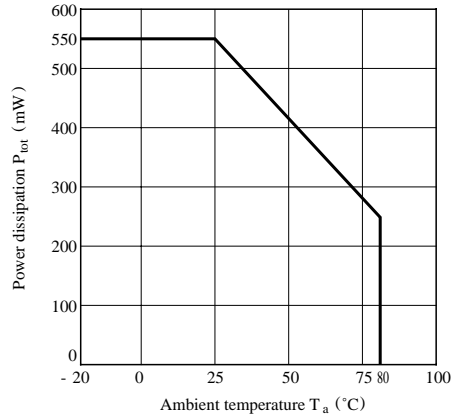


Fig. 10 Forward Current vs. Forward Voltage

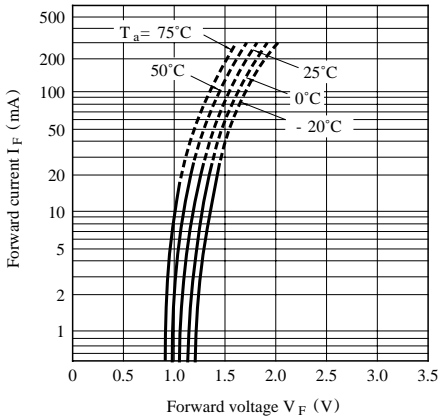


Fig.11 “ Low→High ” Relative Threshold Input Current vs. Supply Voltage

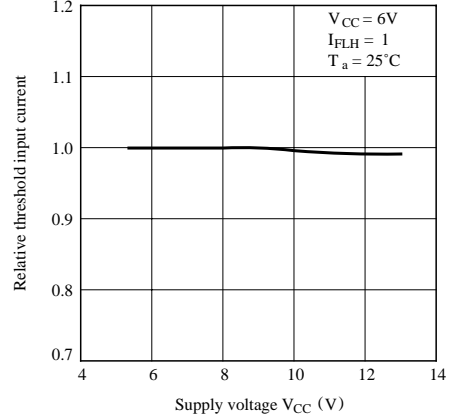


Fig.12 “ Low→High ” Relative Threshold Input Current vs. Ambient Temperature

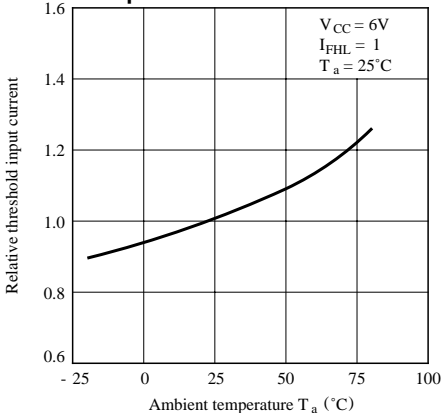


Fig.13 O₁ Low Level Output Voltage vs. O₁ Output Current

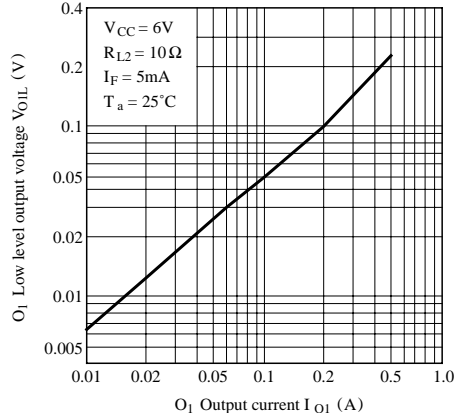


Fig.14 O₁ Low Level Output Voltage vs. Ambient Temperature

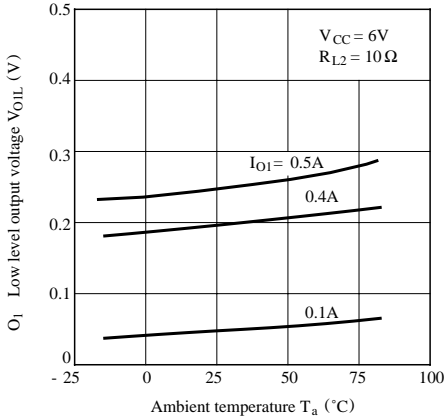


Fig.15 O₂ High Level Output Voltage vs. O₂ Output Current

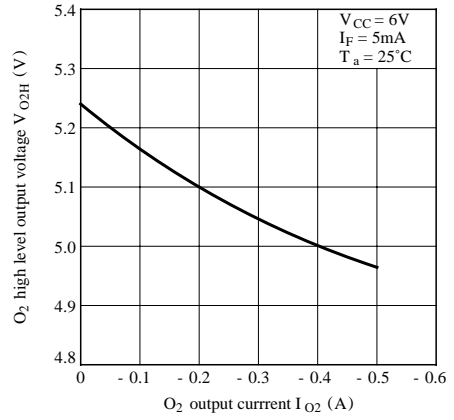


Fig.16 O₂ High Level Output Voltage vs. Ambient Temperature

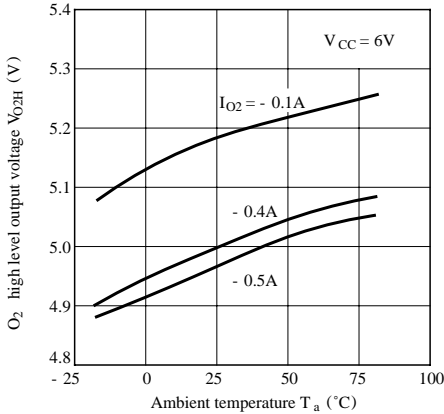


Fig.17 O₂ Low Level Output Voltage vs. O₂ Output Current

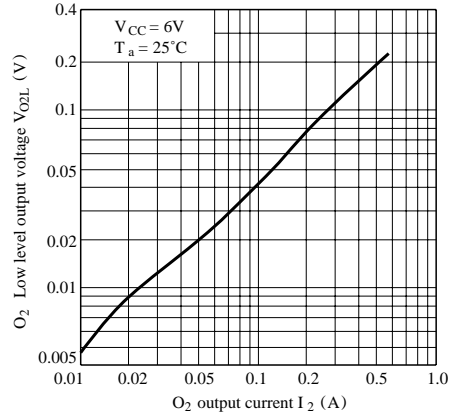


Fig.18 O₂ Low Level Output Voltage vs. Ambient Temperature

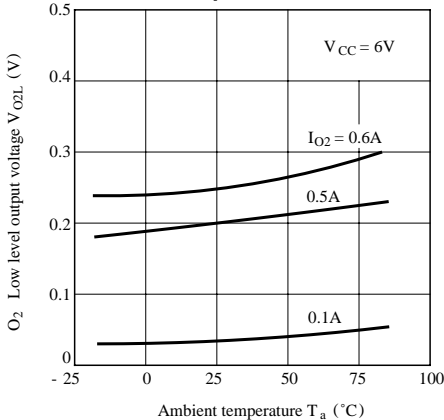


Fig.19 High Level Supply Current vs. Supply Voltage

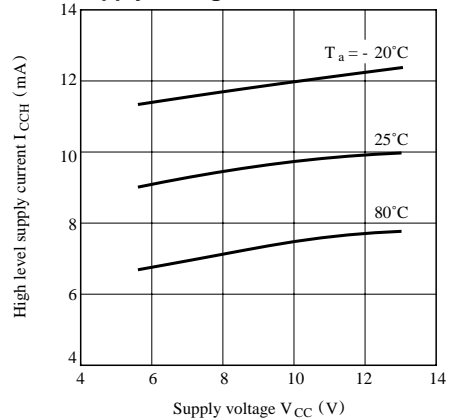


Fig.20 Low Level Supply Current vs. Supply Voltage

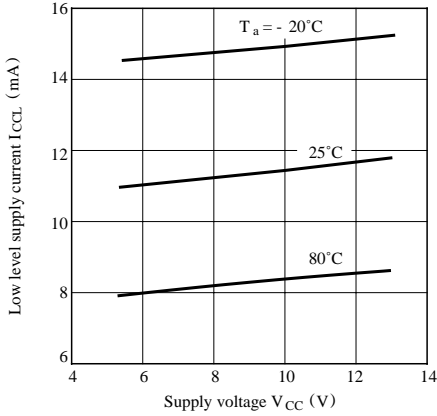


Fig.21 Propagation Delay Time vs. Forward Current

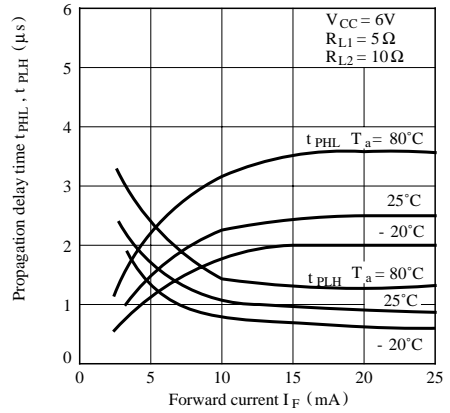


Fig.22 Propagation Delay Time vs. Ambient Temperature



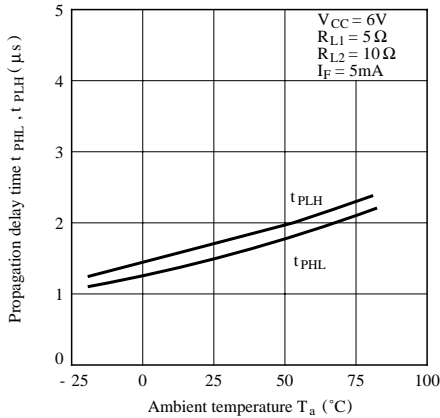


Fig.23 O_2 Peak Output Current vs. O_2 Low Level Output Voltage

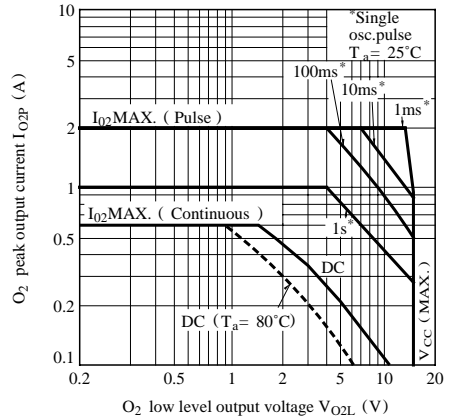

Application Circuit

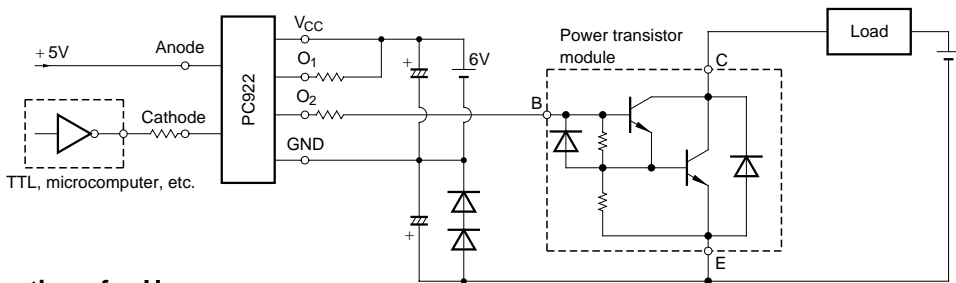

Precautions for Use

- (1) It is recommended that a by-pass capacitor of more than $0.01 \mu\text{F}$ is added between V_{CC} and GND near the device in order to stabilize power supply line.
- (2) Handle this product the same as with other integrated circuits against static electricity.
- (3) As for other general cautions, refer to the chapter "Precautions for Use".