


Bi-directional 18V Ultra Low Capacitance ESD Protector

Description


The PESDREC2XD18VBX is an ultra low capacitance ESD protection device specifically designed to protect high-speed lines. It protects sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other voltage induced transient events. They feature large cross-sectional area junctions for conducting high transient currents, offer desirable electrical characteristics for board level protection, such as fast response time, low operating voltage. It gives designer the flexibility to protect one unidirectional line in applications where arrays are not practical.



DFN0603-2L(Bottom View)

Feature

- Ultra-Low capacitance: 0.15pF
- 45W peak pulse power per line ($t_p = 8/20\mu s$)
- DFN0603-2L package
- Response time is typically < 1 ns
- Bidirectional configurations
- Low clamping voltage
- RoHS compliant
- Transient protection for data lines to IEC 61000-4-2(ESD) $\pm 15kV$ (air), $\pm 15kV$ (contact); IEC 61000-4-5 (Lightning) 6A (8/20us)



Circuit Diagram



Marking (Top View)

Applications


- Cell phone handsets and accessories
- Personal digital assistants (PDA's)
- Notebooks, desktops, and servers
- Portable instrumentation
- Cordless phones
- Digital cameras
- Peripherals

Mechanical Characteristics

- Mounting position: Any
- Qualified max reflow temperature: 260°C
- Device meets MSL 1 requirements
- DFN0603-2L without plating

Electronics Parameter

Symbol	Parameter
V_{RWM}	Reverse stand-off voltage
I_R	Reverse leakage current
V_{BR}	Reverse breakdown voltage
I_{BR}	Reverse breakdown current
V_{CL}	Clamping voltage
V_{TRIG}	Reverse trigger voltage
I_{TRIG}	Reverse trigger current
V_{HOLD}	Reverse holding voltage
I_{HOLD}	Reverse holding current
I_{PP}	Peak pulse current

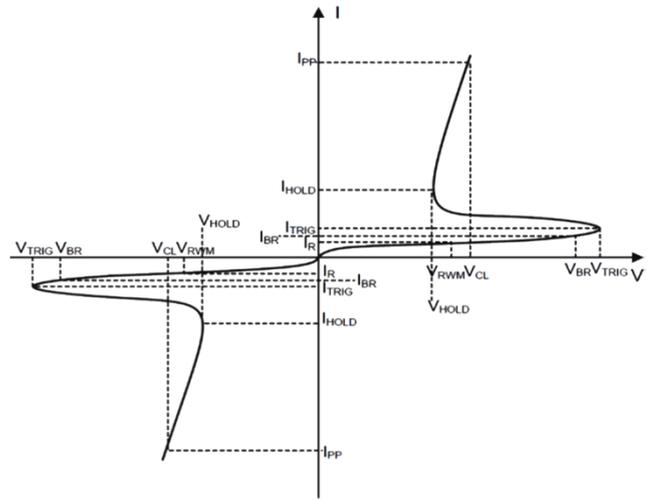







Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}	-	-	-	18	V
Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	19	23.6	26	V
Reverse Leakage Current	I_R	$V_{RWM} = 18\text{V}$	-	-	1	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$	-	2.5	4.0	V
		$I_{PP} = 6\text{A}, t_p = 8/20\mu\text{s}$	-	6.0	9.0	
Dynamic resistance ¹⁾	R_{DYN}	-	-	0.25	-	Ω
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$	-	0.15	0.2	pF


Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	45	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PP}	6.0	A
Lead Soldering Temperature	T_L	260 (10 sec)	$^{\circ}\text{C}$
Junction and Storage Temperature Range	T_J, T_{STG}	-55~+150	$^{\circ}\text{C}$
ESD Protection-Contact Discharge	V_{ESD}	± 15	kV
ESD Protection-Air Discharge	V_{ESD}	± 15	kV

Typical Characteristics

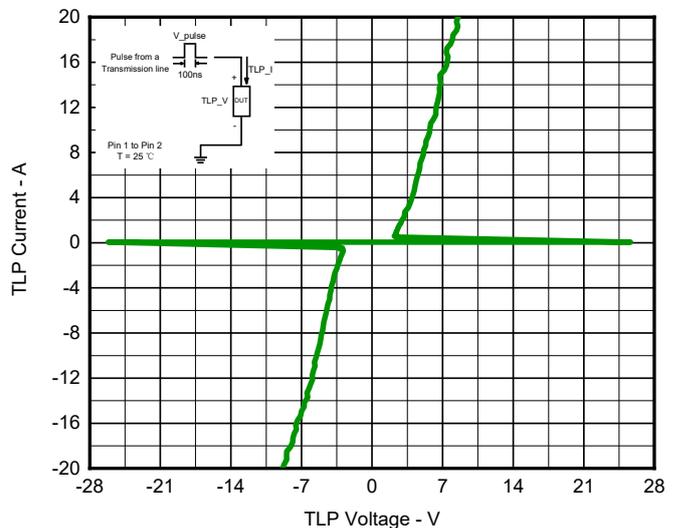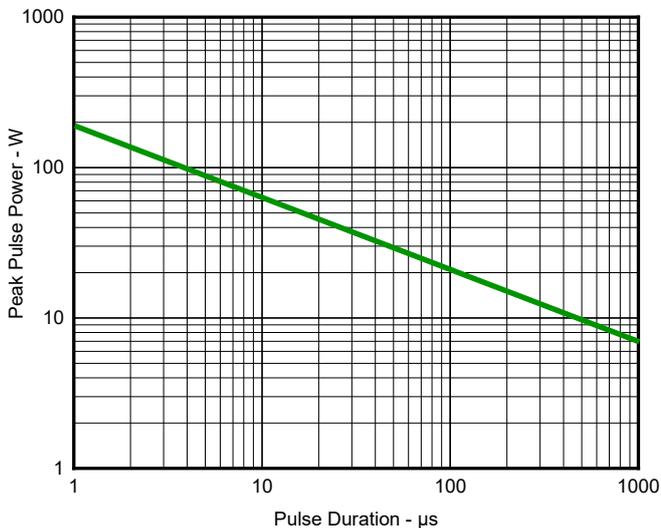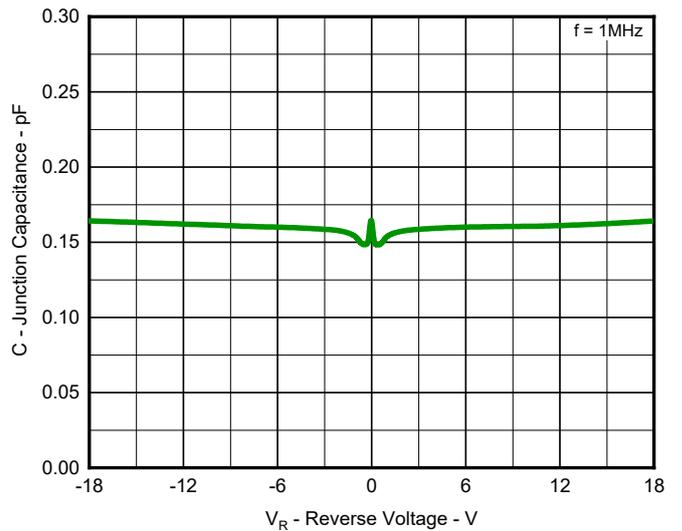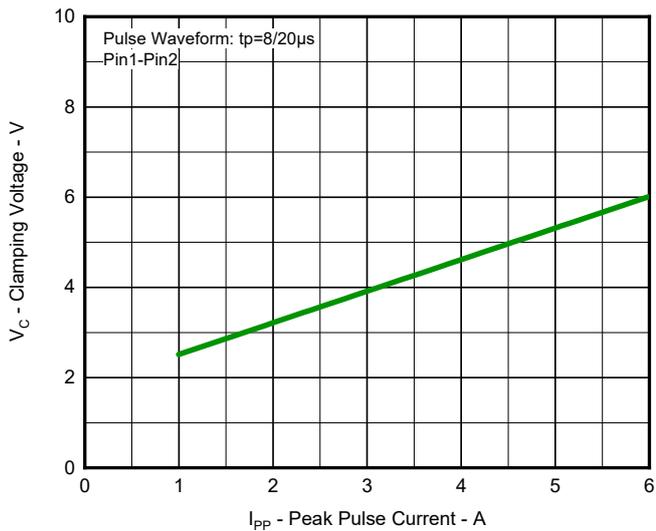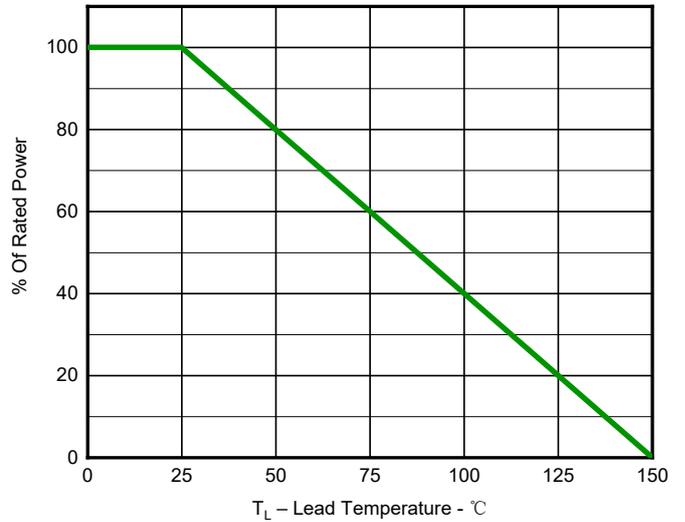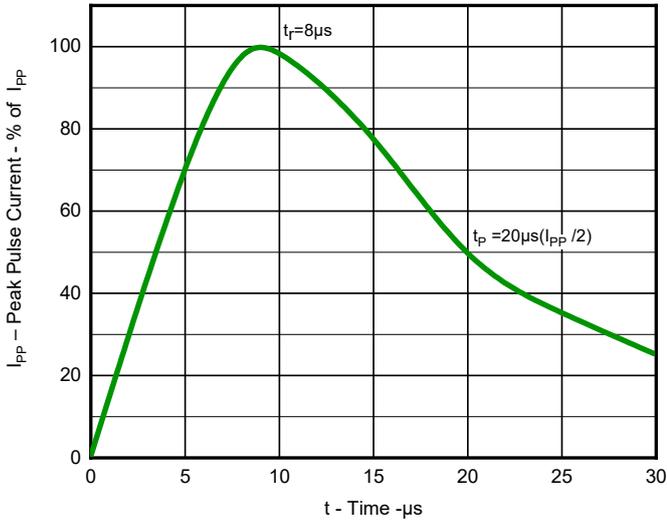


Solder Reflow Recommendation

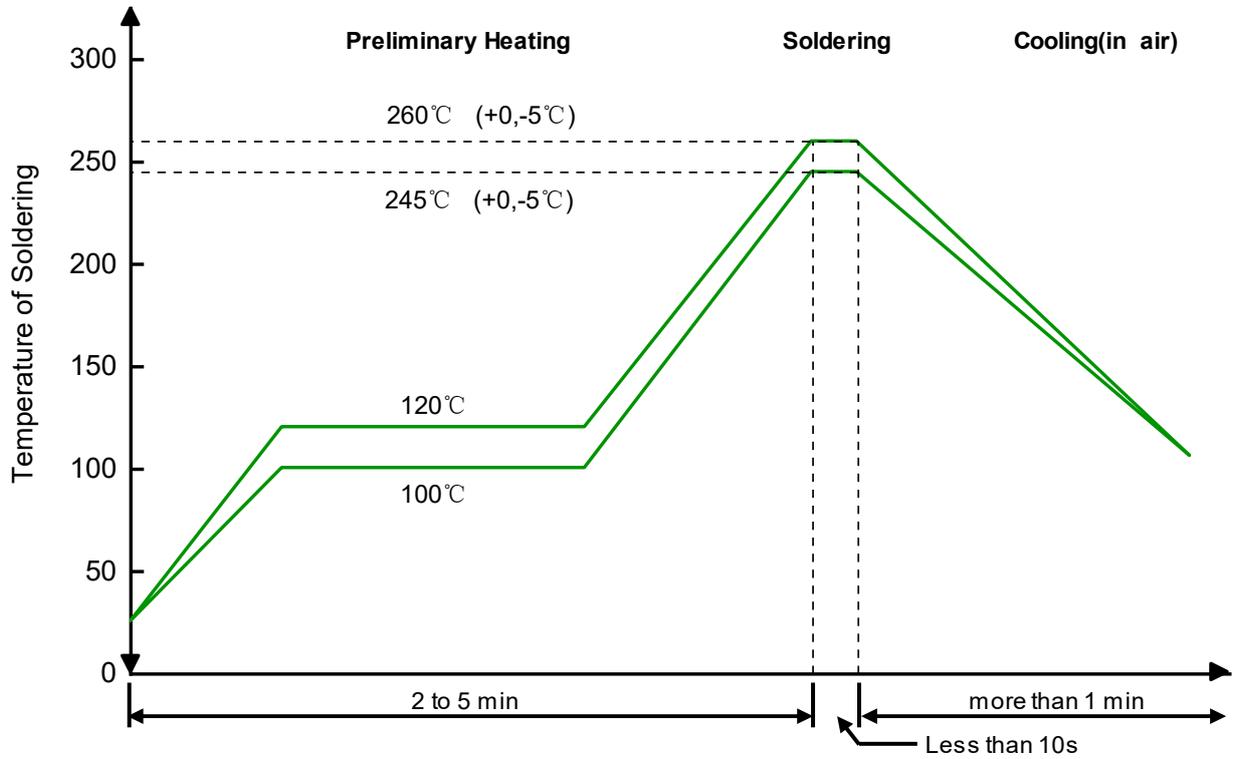

Remark: Pb free for 260°C; Pb for 245°C.

Load with information

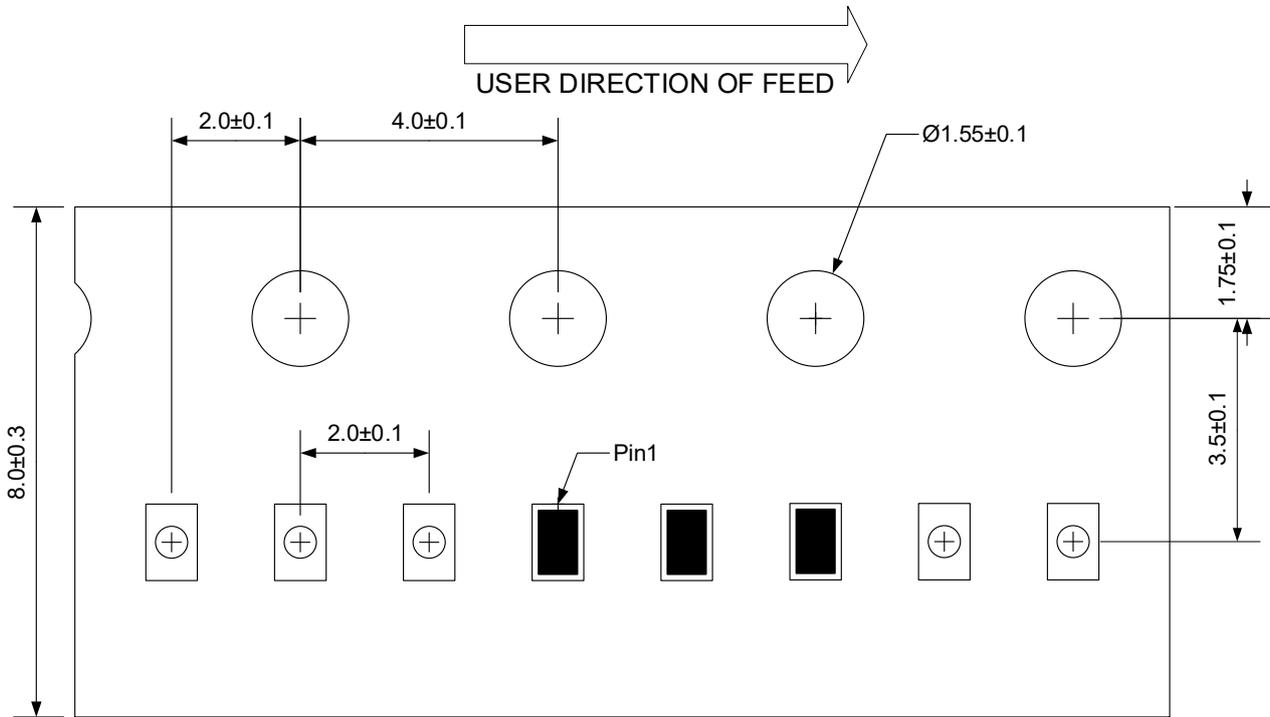

Unit:mm

Ordering information


Device	Package	Reel	Shipping
PESDREC2XD18VBX	DFN0603-2L	7"	10000 / Tape & Reel

PCB Design


For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:

- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.


Product dimension (DFN0603-2L)

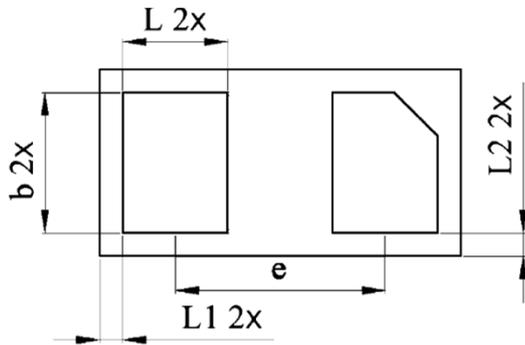

Bottom View

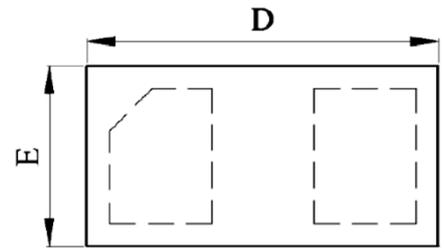


Top View

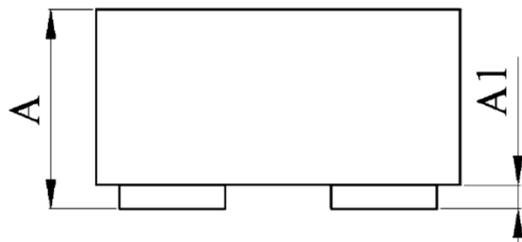

Side View

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	0.28	0.34	0.011	0.013
A1	0.00	0.05	0.000	0.002
b	0.215	0.265	0.008	0.010
D	0.59	0.64	0.023	0.025
E	0.29	0.34	0.011	0.013
e	0.36 BSC		0.014 BSC	
L	0.155	0.205	0.006	0.008
L1	0.040 BSC		0.002 BSC	
L2	0.040 BSC		0.002 BSC	

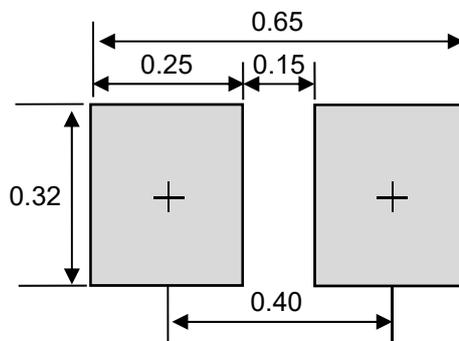

Unit: mm

Suggested PCB Layout

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.