

PH5553A2NA1

R08DS0068EJ0100

Rev.1.00

Nov 07, 2012

Ambient Light Sensor

DESCRIPTION

The PH5553A2NA1 is a digital ambient light sensor for I²C bus interfaces and includes a 16-bit AD converter. This product has spectral characteristics close to human eye sensitivity and outputs digital signals corresponding to the ambient brightness.

The PH5553A2NA1 can be used to improve the performance and reduce the power consumption of digital equipment such as FPD TV sets and mobile phones, by enabling automatic brightness control and automatic switching on and off of lighting systems.

FEATURES

- Small and thin SON package 2.55 x 1.56 x 0.55 mm
- Built-in 16-bit AD converter
- I²C bus interface 1.8 V reference supply voltage
- Spectral characteristics close to human eye sensitivity
Peak sensitivity wavelength 550 nm TYP.
- Light source dependence with mounting the device can be reduced by the spectral characteristics adjustment function from visible region to infrared region.
- The calculation after illuminance output is not necessary by selecting the spectral characteristics from 16 patterns of those.
- Illuminance detection of wide region can be realized.


Minimum detectable illuminance	0.1 lx
Maximum detectable illuminance	65 535 lx
- Pb-free

APPLICATIONS

- FPD TV sets, displays
- Mobile phones, smartphones
- Notebook PCs, tablet PCs
- DSCs, DVCs
- FA equipment
- Lighting systems, etc.


PACKAGE DIMENSIONS (UNIT: mm)

TOP VIEW

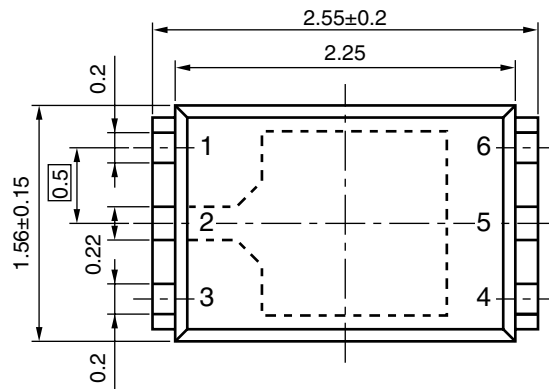


Remark Pin 1 is distinguishable by the shape of the lead frame.

SIDE VIEW

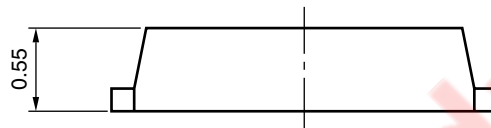

BOTTOM VIEW

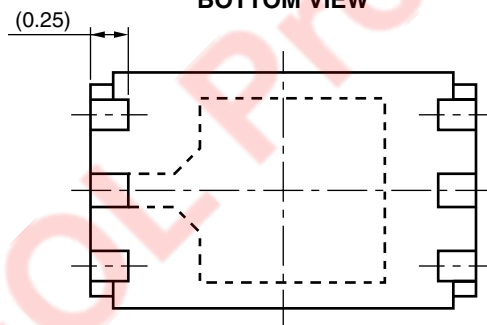


Remark () indicates nominal dimensions.

Pin No.	Terminal	I/O	Function
1	V _{DD}	-	Supply Voltage
2	GND	-	GND
3	V _{IO}	-	I ² C bus interface reference supply voltage
4	SCL	I	I ² C bus SCL
5	TEST	-	Test (Be sure to connect to GND.)
6	SDA	IO	I ² C bus SDA

MARKING

(Bottom View)

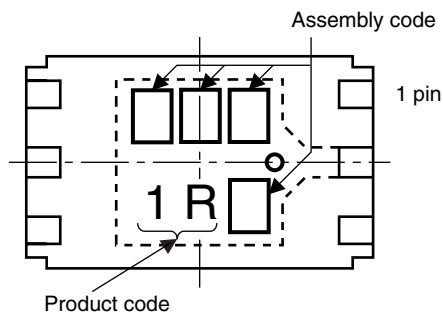

ORDERING INFORMATION

Part Number	Order Number	Solder Plating Specification	Packing Style
PH5553A2NA1-E4	PH5553A2NA1-E4-Y-A	Pb-Free	Embossed Tape 5 000 pcs/reel

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V _{DD}	4.5	V
I ² C Reference Voltage	V _{IO}	V _{DD}	V
Power Dissipation*1	P _D	135	mW
Operating Temperature	T _A	-30 to +85	°C
Storage Temperature	T _{stg}	-40 to +100	°C

Note: *1. Mounted on glass epoxy board (18 mm × 13 mm × 1.0 mm)

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{DD}	2.4	3.0	3.6	V
I ² C Reference Voltage	V _{IO}	1.65	-	V _{DD}	V

ELECTRO-OPTICAL CHARACTERISTICS


($T_A = 25^\circ\text{C}$, $V_{DD} = 3.0\text{ V}$, $V_{IO} = 1.8\text{ V}$, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Supply Current 1	I_{DD1}	$E_v = 100\text{ lx}^{*1}$		130	290	μA
Supply Current 2	I_{DD2}	$E_v = 100\text{ lx}^{*1}$, power-down		0.01	1	μA
Peak Sensitivity Wavelength	λ_p	PD bit = "1000"		550		nm
Dark Sensor Output	–	$E_v = 0\text{ lx}$, PD bit = "1000", GCSW bit = 1			4	count
Illuminance Count	–	$E_v = 1\,000\text{ lx}^{*1}$, PD bit = "1000", GCSW bit = 1	700	1\,000	1\,300	count
Multiplying Factor of Illuminance Count ($\times 1$)	GCL	PD bit = "1000", GCSW bit = 1, RSLTN bit = 0		1		count/lx
Multiplying Factor of Illuminance Count ($\times 10$)	GCL	PD bit = "1000", GCSW bit = 0, RSLTN bit = 0		10		count/lx
H-Resolution Mode Resolution	HRM	GCSW bit = 1, RSLTN bit = 0		1		count
L-Resolution Mode Resolution	LRM	GCSW bit = 1, RSLTN bit = 1		16		count
Measurement Time in H-Resolution Mode	HRt	RSLTN bit = 0		330	495	ms
Measurement Time in L-Resolution Mode	LRt	RSLTN bit = 1		21	32	ms
I ² C SCL Clock Frequency	f_{SCL}				400	kHz
I ² C Bus Free Time	t_{BUF}		1.3			μs
I ² C Hold Time for START Condition	t_{HDSTA}		0.6			μs
I ² C Set-up Time for START Condition	t_{SUSTA}		0.6			μs
I ² C Set-up Time for STOP Condition	t_{SUSTO}		0.6			μs
I ² C Data Hold Time	t_{HDDAT}		0		0.9	μs
I ² C Data Set-up Time	t_{SUDAT}		100			ns
I ² C 'L' Period of the SCL Clock	t_{LOW}		1.3			μs
I ² C 'H' Period of the SCL Clock	t_{HIGH}		0.6			μs
I ² C 'L' Output Voltage 1 at SDA	V_{OL1}	$V_{IO} > 2\text{V}$, $I_{IO} = 3\text{mA}$	0		0.4	V
I ² C 'L' Output Voltage 2 at SDA	V_{OL2}	$V_{IO} \leq 2\text{V}$, $I_{IO} = 2\text{mA}$	0		$0.2 \times V_{IO}$	V
I ² C 'L' Input Voltage at SCL, SDA	V_{IL}		-0.5		$0.3 \times V_{IO}$	V
I ² C 'H' Input Voltage at SCL, SDA	V_{IH}		$0.7 \times V_{IO}$	–	V_{IO}	V

Note: *1 Fluorescent light

I²C BUS INTERFACE SPECIFICATION

1. I²C Bus Interface Timing Chart

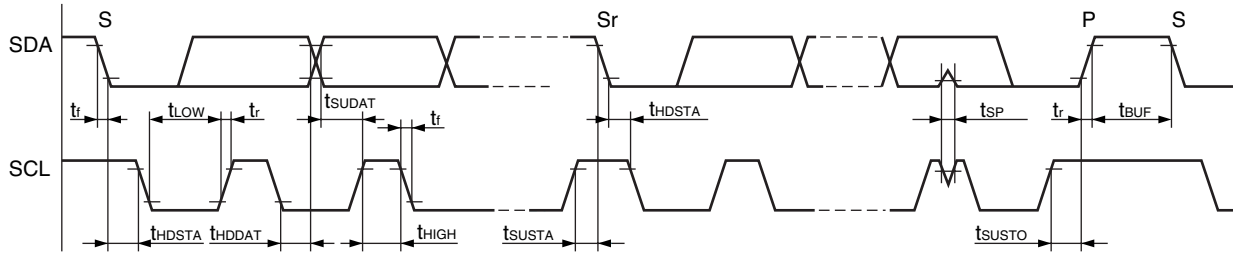


S :START Condition
 Sr :Repeated START Condition
 P :STOP Condition

2. Slave Address


“1100100”.

3. I²C Protocols

(1) Write Format

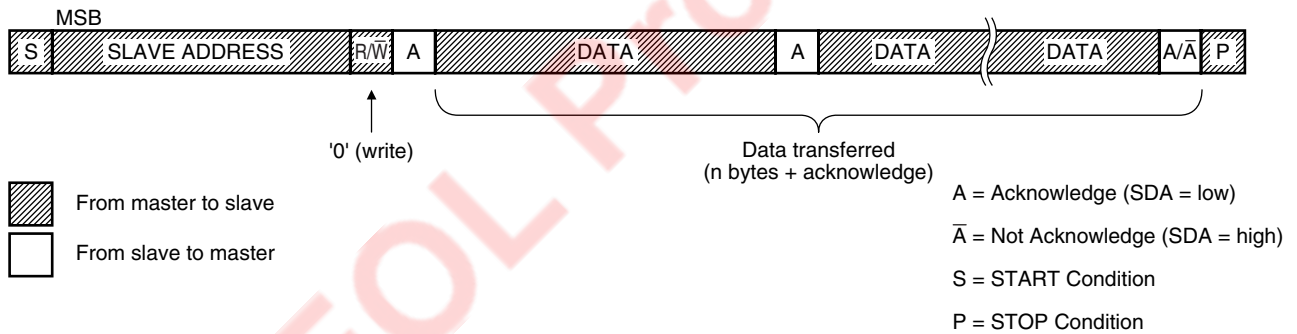

(2) Read Format

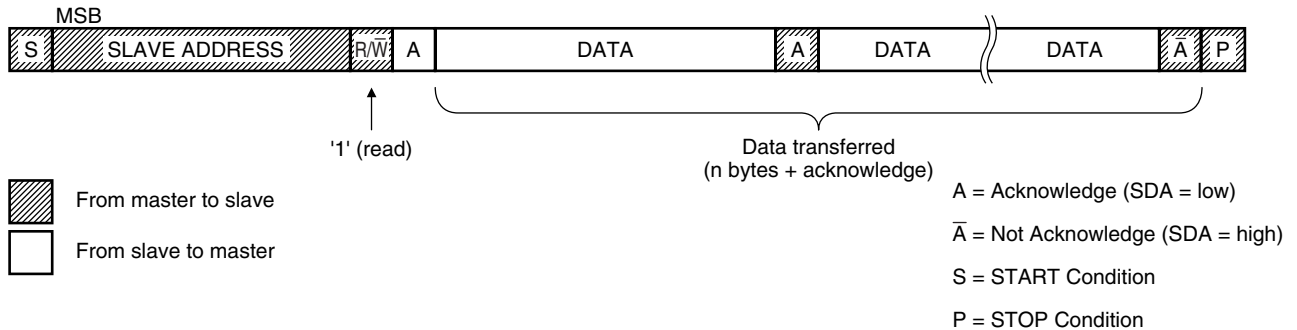

REGISTER MAP

1. Set values with Write operation

(a) Register1

0	0	0	0	0	0	0	0	default
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Timemanu	Register Address		SWRST	STOP	RSLTN	GCSW	PWR	

(b) Register2

0	0	0	0	1	0	0	0	default
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	
0 (fixed)	Reserved	Reserved	Reserved	PD4	PD3	PD2	PD1	

- 1) Timemanu : Measurement time manual set (1: Enable measurement time set by Register3 and Register4)
- 2) Register Address : Register address set during read operation
- 3) SWRST : Register reset (Initial values are restored by setting this bit to 1.)
- 4) STOP : Stops lux measurement after the current ADC cycle. The lux data measured last is retained. The ADC enters standby mode (1: Stop)
- 5) RSLTN : Illuminance count resolution selection (1: 16 count resolution, 0: 1 count resolution)
- 6) GCSW : Illuminance count gain selection (1: 1 count/lx, 0: 10 count/lx)
- 7) PWR : Power control switch (1: Power on, 0: Power off (standby state))
- 8) PD1 to PD4 : Spectral characteristics adjustment

2. Set values with Write Operation (Control with 4 Byte Unit (When Timemanu = 1))

When Timemanu = 1, measurement time is enabled to be changed by transferring Register1 and Register2 followed by Register3 and Register4.

(a) Register3 (when RSLTN = 0)

0	1	0	1	0	0	0	0	default
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Illuminance measurement time counter 0H in H-Resolution mode lower 8 bit (when RSLTN = 0)								

(b) Register4 (when RSLTN = 0)

1	1	0	0	0	0	1	1	default
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	
Illuminance measurement time counter 1H in H-Resolution mode upper 8 bit (when RSLTN = 0)								

(c) Register3 (when RSLTN = 1)

0	0	1	1	0	1	0	1	default
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Illuminance measurement time counter 2H in L-Resolution mode lower 8 bit (when RSLTN = 1)								

(d) Register4 (when RSLTN = 1)

0	0	0	0	1	1	0	0	default
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	
Illuminance measurement time counter 3H in L-Resolution mode upper 8 bit (when RSLTN = 1)								

Method for obtaining measurement time

$$\text{Measurement time (ms)} = \text{Set value} / 600 \times 4$$

3. Return Value during Read Operation (When Register Address = 00)

0	0	0	0	0	0	0	0	default
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Illuminance count measurements Upper 8bits								

0	0	0	0	0	0	0	0	default
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	
Illuminance count measurements Upper 8bits								

4. Return Value during Read Operation (When Register Address = 01)

0	0	0	0	0	0	0	0	default
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Timemanu	Register Address	SWRST	STOP	RSLTN	GCSW	PWR		

0	0	0	0	1	0	0	0	default
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	
0 (fixed)	Reserved	Reserved	Reserved	PD4	PD3	PD2	PD1	


5. Return Value during Read Operation (When Register Address = 10)

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Illuminance measurement time counter 0H in H-Resolution mode lower 8 bit (when RSLTN = 0)							
Illuminance measurement time counter 2H in L-Resolution mode lower 8 bit (when RSLTN = 1)							


Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8
Illuminance measurement time counter 1H in H-Resolution mode upper 8 bit (when RSLTN = 0)							
Illuminance measurement time counter 3H in L-Resolution mode upper 8 bit (when RSLTN = 1)							

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, $V_{DD} = 3.0\text{ V}$, $V_{IO} = 1.8\text{ V}$, unless otherwise specified)


SPECTRAL SENSITIVITY CHARACTERISTICS

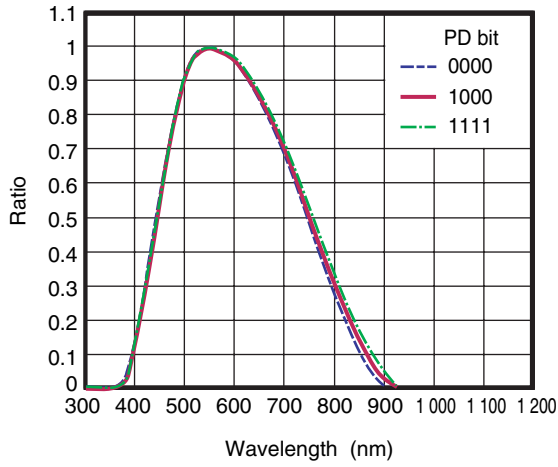


LIGHT SOURCE SENSITIVITY VARIATION

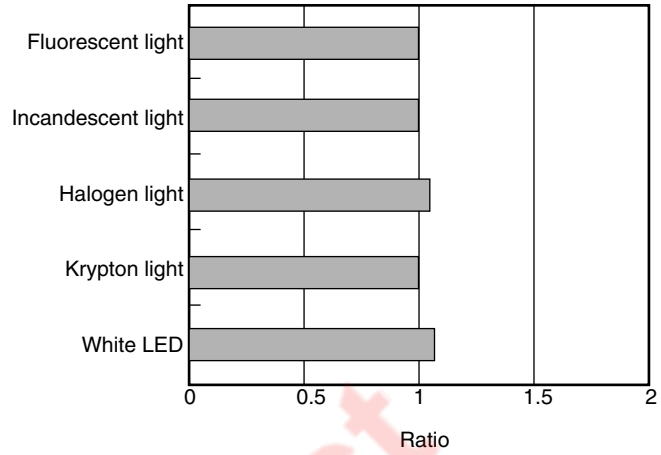

DIRECTIONAL CHARACTERISTICS 1

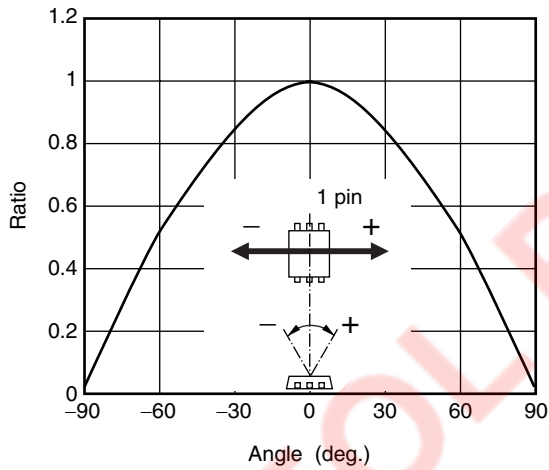


DIRECTIONAL CHARACTERISTICS 2

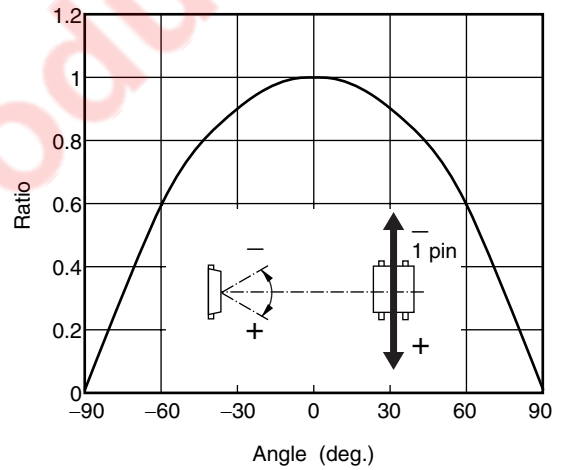


Remark The graphs indicate nominal characteristics.


ILLUMINANCE vs. ILLUMINANCE COUNT

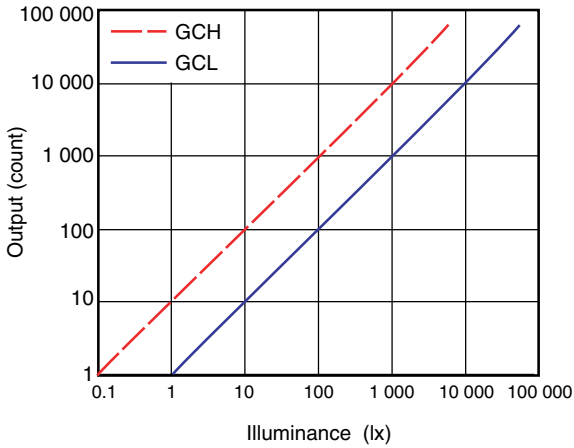


TEMPERATURE DEPENDENCY OF ILLUMINANCE COUNT AT 0 lx

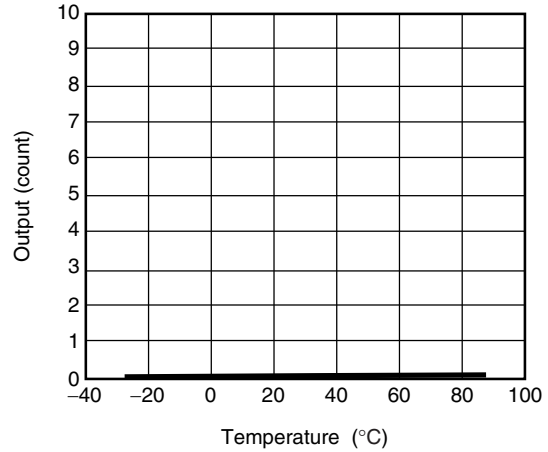


TEMPERATURE DEPENDENCY OF ILLUMINANCE COUNT AT 100 lx (NORMALIZED AT 25°C)

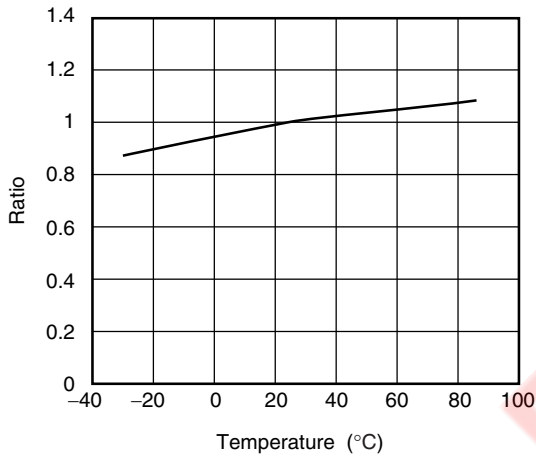

V_{DD} DEPENDENCY OF ILLUMINANCE COUNT AT 100 lx (NORMALIZED AT V_{DD} = 3 V)

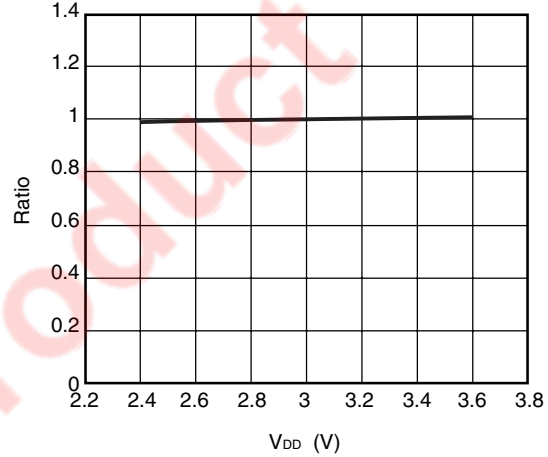


PD BIT SET DEPENDENCY OF ILLUMINANCE COUNT (NORMALIZED AT PD BIT = 1000, FLUORESCENT LIGHT)

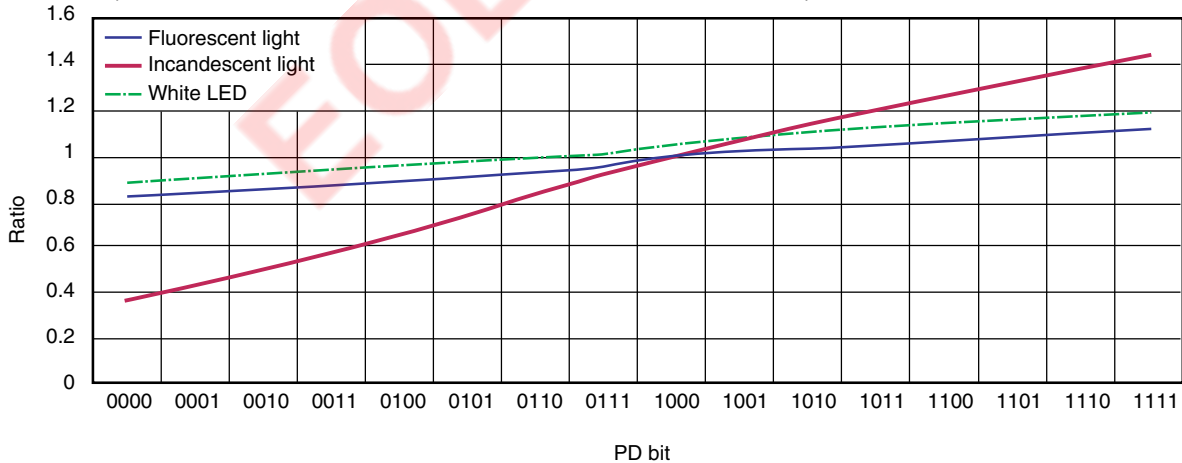


Remark The graphs indicate nominal characteristics.

TAPING SPECIFICATIONS (UNIT: mm)

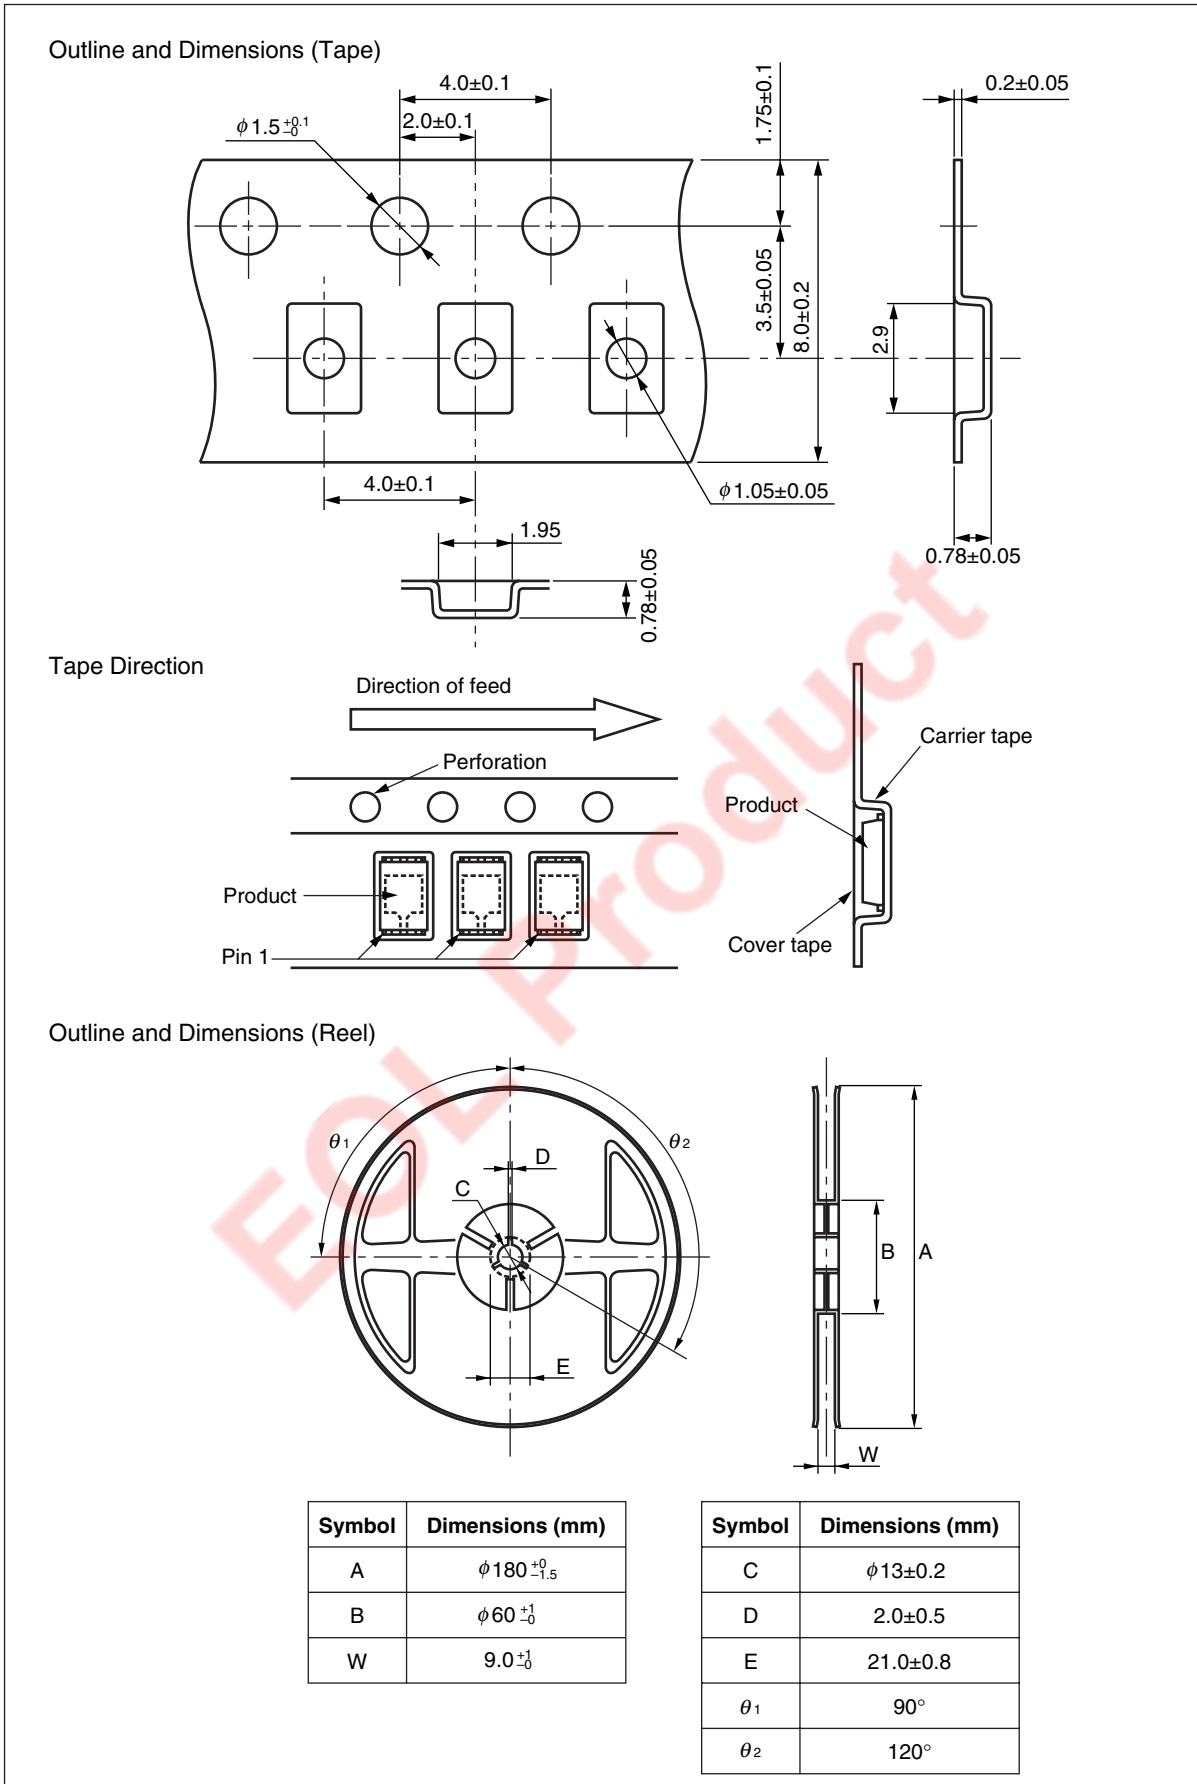

RECOMMENDED MOUNT PAD DIMENSIONS (Unit: mm)

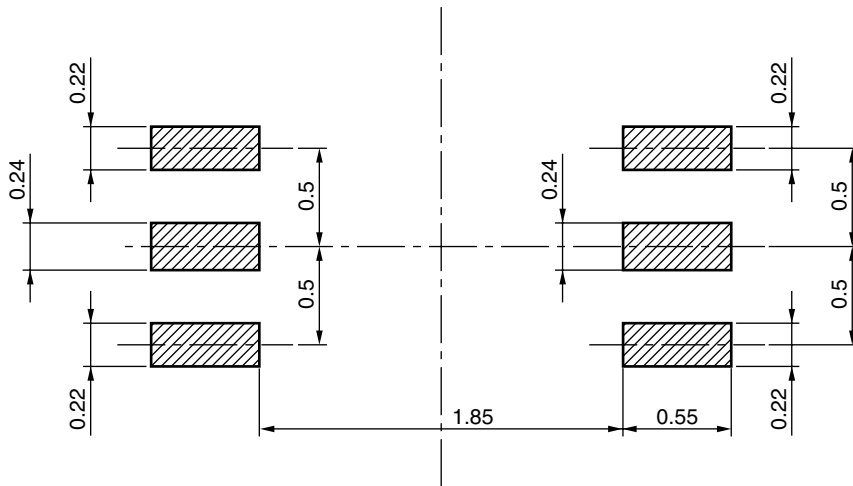

Remark All dimensions in this figure must be evaluated before use.

EOL Product

NOTES ON HANDLING

1. Recommended reflow soldering conditions

(including infrared reflow, convection reflow, and infrared + convection reflow)

- (1) This product is dry-packed with desiccant in order to avoid moisture absorption.
- (2) After breaking the seal, reflow soldering must be done within 168 hours under the recommended temperature profile shown below.
- (3) If more than 168 hours have passed after breaking the seal, the baking process must be done by using a tape and reel.

Baking conditions: Once, with tape and reel, $60\pm 5^{\circ}\text{C}$, 10 to 24 hours

After the baking process, this product must be stored under conditions of 30°C or below, 70% RH or below, and reflow soldering must be done within 168 hours.


<Storage conditions after breaking seal>

- Storage conditions : 30°C or below, 70% RH or below
- Maximum storage period after breaking seal : 168 hours (Second reflow soldering must be completed within 168 hours.)

<Reflow soldering conditions>

- Peak reflow temperature : 260°C or below (Package surface temperature)
- Maximum number of reflows : 2
- No repair by hand soldering
- Maximum chlorine content of rosin flux (percentage mass) : 0.2% or less

Recommended Temperature Profile of Reflow

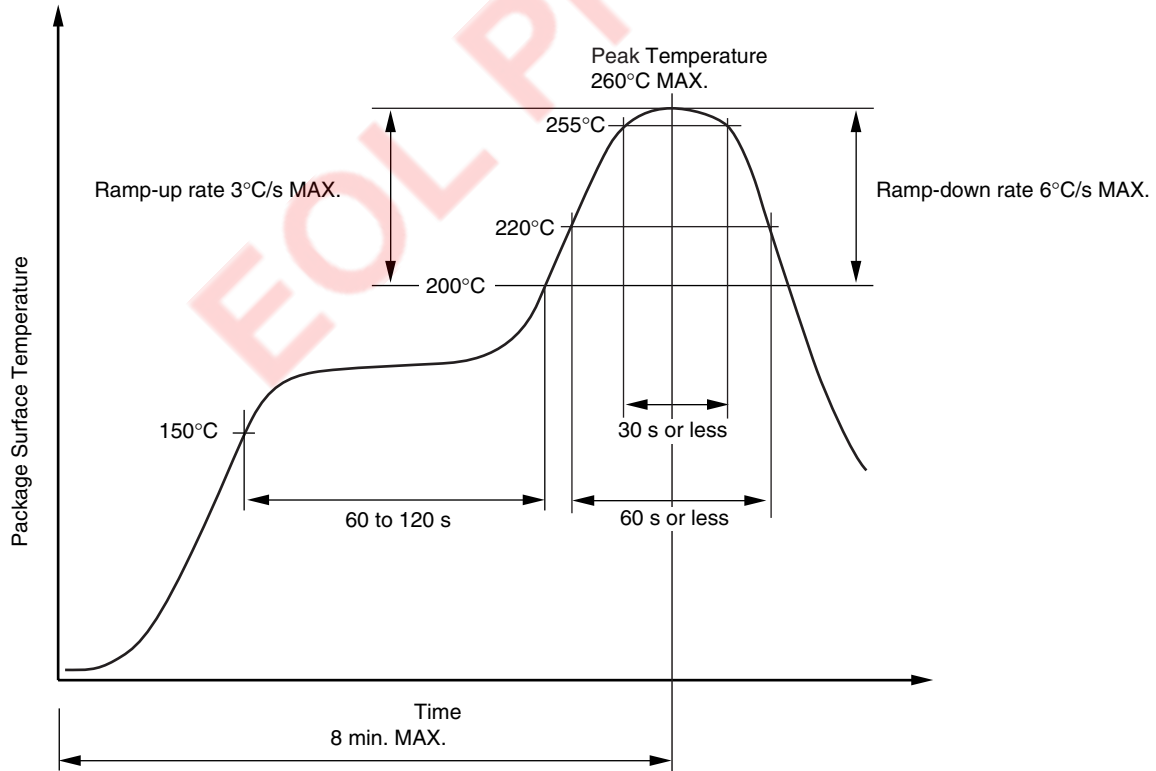

Revision History	PH5553A2NA1 Data Sheet
-------------------------	-------------------------------

Rev.	Date	Description	
		Page	Summary
1.00	Nov 07, 2012	-	First edition issued

EOL Product

All trademarks and registered trademarks are the property of their respective owners.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

California Eastern Laboratories, Inc.
4590 Patrick Henry Drive, Santa Clara, California 95054, U.S.A.
Tel: +1-408-919-2500, Fax: +1-408-988-0279

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141