

Crystal Image through
Imaging Innovation

PIXELPLUS



*Preliminary
Datasheet*

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

PK5210K

Rev 0.5

Last update : 15. Oct. 2020

*6th Floor, Gyeonggi R&DB Center, 906-5 Iui-dong, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-766, Korea
Tel : 82-31-888-5300, FAX : 82-31-888-5398*

*Copyright © 2020 Pixelplus Co.,Ltd
All RIGHTS RESERVED*

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

Table of Contents

Features	5
General Description	6
Chip Architecture	7
Frame Structure	8
Pixel Data Format	9
Parallel Formatter	10
Vsync and Hsync	12
PCLK	14
Digital Parallel Interface	15
Recommended Power Sequence	17
Clock	18
PLL	18
Clock Divider	19
PLL and Clock Setting Sequence	20
STDBY Mode	21
System Reset	21
I2C Interface	22
I2C Communication	22
Register Update Timing	24
Initialization Timing for I2C interface	24
Exposure Control	25
Integration Time	25
Global Gain	26
Digital Gain	27
Exposure factor update control	27
Genlock	28
Genlock Configuration	28
Genlock Sync Method	28
Test Pattern (TP) Control	31
ISP	33
Noise Reduction (NR)	33
Adaptive Digital Gain (ADG)	34
ISP Digital gain	34
Compress	34
Lens Shading Compensation (LSC)	35
MIPI	37
Reference For Design	37
MIPI Clock Relations	37
MIPI Global Operation	38
Low Level Protocol	42
MIPI Electrical Characteristics	45
Electrical Characteristics	49
DC Characteristics	49
AC Characteristics	51
Register Map	52

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

List of Figures

1. Chip architecture	7
2. Default frame structure(top view)	8
3. Bayer color filter pattern	9
4. Mirror	9
5. Parallel format timing	10
6. Parallel format	10
7. Sync drop	12
8. Hsync all lines	12
9. Vsync polarity	13
10. Hsync polarity	13
11. PCLK polarity	14
12. Timing diagram of power-on/off sequence	17
13. Clock divider	18
14. Clock setting sequence	20
15. Soft reset	21
16. I2C functional description	23
17. Available timing for I2C communication after system reset.	24
18. Fundamental concept of integration time	25
19. Globalgain's gain	26
20. Genlock Sync configuration with external MPU	28
21. Genlock Sync configuration with another the PK5210K	28
22. GENLOCK reference signal waveform	28
23. Example of timing diagram @master mode	29
24. Example of timing diagram @slave mode	29
25. Example of timing diagram @genlock sync mode	29
26. Test image	32
27. ISP Data flow	33
28. Compress	34
29. LSC center control	36
30. LSC gain fitting with LSC center and LSC scale	36
31. MIPI block diagram	37
32. MIPI clock relations diagram	37
33. MIPI raw12 frame format	38
34. MIPI transmission order	39
35. MIPI PAD levels	39
36. MIPI low level protocol	42
37. MIPI short packet structure	43
38. MIPI long packet structure	44
39. MIPI multiple packet	45
40. D-PHY signaling levels	46
41. Data to clock timing	48
42. Timing diagram of SCL and SDA	51

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

List of Tables

1. Key Performance Parameter	6
2. Register Table - Frame structure	8
3. Register Table - Mirror	9
4. Register Table - Parallel format	11
5. Register Table - Active data(data_cmlamp = enable)	11
6. Register Table - Data clamp	11
7. Register Table - Sync control	13
8. Register Table - PCLK control	14
9. Register Table - digital parallel interface	15
10. Recommended power-on/off sequence	17
11. Register Table - PLL	18
12. Register Table - Clock divider	19
13. Register Table - STDBY mode	21
14. Register Table - Soft reset	21
15. I2C update timing control	24
16. Register Table - Integration time	25
17. Register Table - Global Gain	26
18. Register Table - Digital gain	27
19. Register Table - Exposure register update	27
20. Register Table - genlock sync mode	30
21. Register Table - Test pattern ctrl	31
22. Register Table - NR	33
23. Register Table - ADG	34
24. Register Table - ISP digital gain	34
25. Register Table - Compress	35
26. Register Table - LSC	36
27. MIPI clock with lane and frame rate	38
28. Register Table - MIPI and LVDS mode setting	38
29. Lane states description	40
30. Register Table - MIPI PAD control	40
31. MIPI Data Type and Data ID	44
32. Register Table - MIPI packet control	44
33. LP transmitter DC characteristics	46
34. LP transmitter DC characteristics	46
35. HS transmitter DC characteristics	47
36. HS transmitter AC characteristics	47
37. MIPI clock signal spec	48
38. DC characteristics	49
39. 2-wire serial interface characteristics	51
40. Register Table - Group A	52
41. Register Table - Group B	54
42. Register Table - Group F	55
43. Register Table - Group G	56
44. Register Table - Group H	57
45. Register Table - Group I	58
46. Register Table - Control register map	59

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Features

- 1960x1120 effective pixel array with RGB bayer color filters and micro-lens
- Output Format
 - Combine & compressed RGB bayer
 - Tone-mapped RGB bayer
 - Separate RGB bayer
- Output Interface
 - DVP(Digital Video Parallel) 12-bit
 - 1/2/4-lane MIPI
- High dynamic range
- Auto black level compensation
- Programmable frame size, frame rate, window size, exposure and white balance gain
- Horizontal/Vertical mirroring
- Image processing : DPC, Combine, Compress, ADG(Adaptive Digital Gain), Tone-mapping
- External synchronization support (Genlock)
- Chip address selection PAD (2EA)
- Software reset
- On-chip phase locked loop (PLL)
- I2C Interface support
- SKIP, Cropping (Row)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

General Description

The PK5210K is a 1/2.7-inch CMOS image sensor. It is a Bayer sensor with an effective pixel array of 1960 (width) x 1120 (height). The PK5210K can generate a 12-bit combine & compressed RGB Bayer data or a 12-bit tone-mapped RGB Bayer data at maximum frame rate of 30 FPS through MIPI serial interface or DVP(Digital Video Parallel) 12-bit interface. On-chip sensor functions can be controlled through I2C interface.

Table 1 Key Performance Parameter

Parameter	Typical value
Pixel size	3.0 [um] x 3.0 [um]
Effective pixel array	1960(H) x 1120(V)
Effective image area	5.880 [mm] x 3.360 [mm]
Optical format	1/2.7 [inch]
Input clock frequency	27 [MHz]
Output interface	DVP(Digital Video Parallel) 12-bit MIPI serial interface with 1/2/4 lane
Max. frame rate	30 [FPS]
Dark signal	47.3 [e/sec]
Sensitivity	35.6K [e/lux*sec]
Power supply	HVDD : 1.8 ~ 3.3 [V] @ DVP / 3.3 [V] @ MIPI AVDD : 3.3 [V] DVDD : 1.2 [V] DVDDM : 1.2 [V]
Power consumption	TBD
Operating Temp. (fully functional Temp.)	TBD
Dynamic range	120 [dB]
SNR	44.9 [dB]
Package Type	TBD

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Chip Architecture

The PK5210K has a 1960 x 1128 total pixel array and includes column/row driver circuits for reading out pixel data progressively. CDS circuit reduces noises generated from various sources, which mainly are resulted from process variations. The fixed error signal level caused by pixel process variation can be reduced by sampling the difference between the output and the reset level of the pixel. Each of R, G, and B pixel output can be multiplied by different gain factors to balance the color of images under various light conditions. The analog signals are converted into digital data of one line at a time and each line data is streamed out column by column. The Bayer RGB data passes through a sequence of image signal processing to produce bayer output data. Image signal processing includes operations such as DPC, Combine, Compress, Tone-mapping and adaptive digitalgain(ADG). The PK5210K supports output interfaces such as a 12-bit parallel and the MIPI. The control of internal functions and output signal timings can be enabled by modifying registers directly through a 2-wire serial interface called I2C.

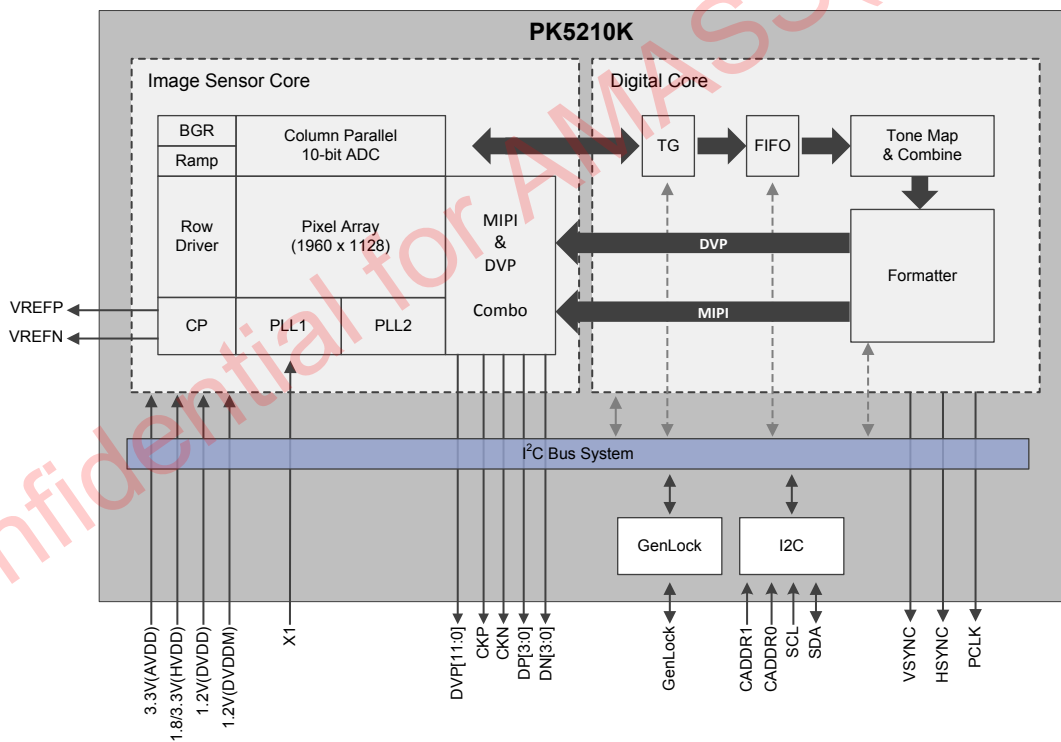


Figure 1 Chip architecture

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Frame Structure

The size of a frame is determined by framewidth and frameheight registers. One frame consists of (framewidth + 1) columns and (frameheight + 1) rows, where the size of one frame is allowed to be larger than the total pixel array size. Window determines the output image size, and its default size is 1920 x 1080 pixels. It is possible to define a specific region of the frame by a determined window. Pixel scanning is performed row by row on entire frame. Frame row counter and frame column counter, which are limited by framewidth and frameheight values respectively, are used to indicate the current coordinate of pixel being scanning. The column counter value increase by every pixel clock (pclk). every time the column counter reaches maximum value, the row counter value increase. **Figure 2** shows the default frame structure and the window position of the PK5210K with origin point (0,0) in the top right corner .

Default Frame Structure

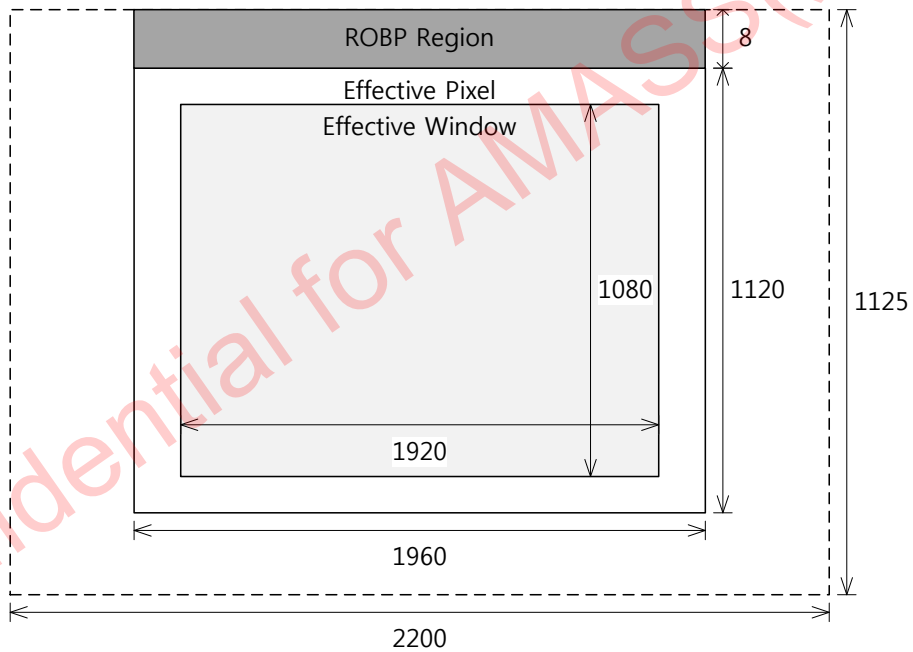


Figure 2 Default frame structure(top view)

Table 2 Register Table - Frame structure

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
framewidth_h	A	06	[4:0]	0x08	RW	aev	Framewidth High Byte (must be larger than window width)
framewidth_l	A	07	[7:0]	0x97	RW	aev	Framewidth Low Byte (must be larger than window width)
fheight_a_h	A	08	[4:0]	0x04	RW	aev	Frameheight High Byte (must be larger than window height)
fheight_a_l	A	09	[7:0]	0x7C	RW	aev	Frameheight Low Byte (must be larger than window height)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Pixel Data Format

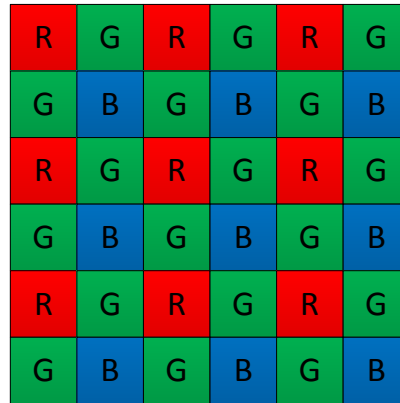


Figure 3 Bayer color filter pattern

The pixel array is covered by Bayer color filters as shown in the Figure 3. Since each pixel can have only one type of filter on it, only one color component can be produced by a pixel. PK5210K provides RGB Bayer pattern data through a 10-bit channel which it passes one pixel data to the output bus at every pclk.

The PK5210K provides horizontal, vertical mirror which respectively reverse the sensor data readout order horizontally and vertically. Figure 4 shows a normal image and a mirrored image.

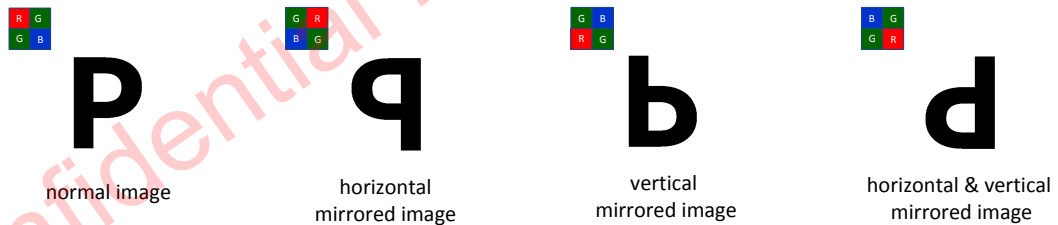


Figure 4 Mirror

Table 3 shows registers relevant to mirror.

Table 3 Register Table - Mirror

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mirror	A	05	[1:0]	0x00	RW	aev	Image Inversion mirror[1] : vertical inversion mirror[0] : horizontal inversion

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Parallel Formatter

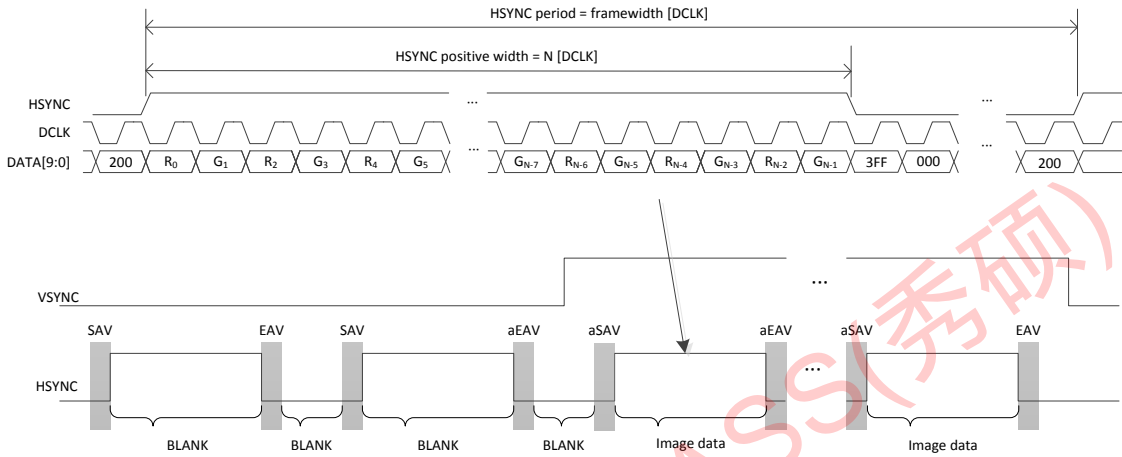


Figure 5 Parallel format timing

The parallel data is controlled by format header, also called timing reference sequence (TRS). The TRS indicates Start or End of video and is included with pixel data during serial transfer. Figure 6 shows TRS and vertical timing.

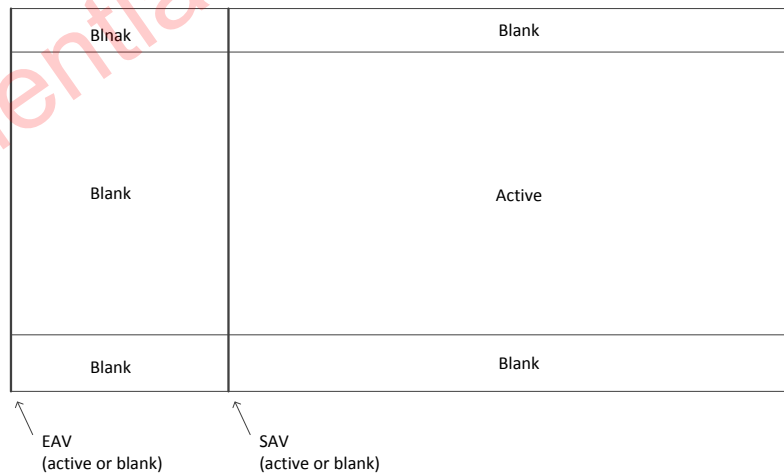


Figure 6 Parallel format

SAV, EAV, aEAV, aSAV and blank data shown in Figure 6 are generated as follows.

```

SAV = {sync_CCIR_FF, sync_CCIR_00, sync_CCIR_00, sync_blankSAV}
EAV = {sync_CCIR_FF, sync_CCIR_00, sync_CCIR_00, sync_blankEAV}
aSAV = {sync_CCIR_FF, sync_CCIR_00, sync_CCIR_00, sync_activeSAV}
aEAV = {sync_CCIR_FF, sync_CCIR_00, sync_CCIR_00, sync_activeEAV}
BLANK = {sync_CCIR_80, sync_CCIR_10} - - - {sync_CCIR_80, sync_CCIR_10}
    
```

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 4 Register Table - Parallel format

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
sync_blankEAV_h	A	63	[3:0]	0x0B	RW		Blanking EAV control High Byte
sync_blankEAV_l	A	64	[7:0]	0x60	RW		Blanking EAV control Low Byte
sync_blankSAV_h	A	65	[3:0]	0x0A	RW		Blanking SAV control High Byte
sync_blankSAV_l	A	66	[7:0]	0xB0	RW		Blanking SAV control Low Byte
sync_activeEAV_h	A	67	[3:0]	0x09	RW		Active EAV control High Byte
sync_activeEAV_l	A	68	[7:0]	0xD0	RW		Active EAV control Low Byte
sync_activeSAV_h	A	69	[3:0]	0x08	RW		Active SAV control High Byte
sync_activeSAV_l	A	6A	[7:0]	0x00	RW		Active SAV control Low Byte
sync_CCIR_FF_h	A	6B	[3:0]	0x0F	RW		Format header control 0 (FF) High Byte
sync_CCIR_FF_l	A	6C	[7:0]	0xFF	RW		Format header control 0 (FF) Low Byte
sync_CCIR_00_h	A	6D	[3:0]	0x00	RW		Format header control 1 (00) High Byte
sync_CCIR_00_l	A	6E	[7:0]	0x00	RW		Format header control 1 (00) Low Byte
sync_CCIR_80_h	A	6F	[3:0]	0x08	RW		Blank data control 0 (80) High Byte
sync_CCIR_80_l	A	70	[7:0]	0x00	RW		Blank data control 0 (80) Low Byte
sync_CCIR_10_h	A	71	[3:0]	0x01	RW		Blank data control 1 (10) High Byte
sync_CCIR_10_l	A	72	[7:0]	0x00	RW		Blank data control 1 (10) Low Byte

When data_clamp is enabled, active data is clamped by data_min and data_max as shown in Table 5. data_min determine minimum value of active data, and data_max determine maximum value of active data. Table 6 shows registers relevant to data clamp.

Table 5 Register Table - Active data(data_cmlamp = enable)

output bit	data_min	data_max
MSB 8bit	010h	FE0h
MSB 9bit	008h	FF0h
MSB 10bit	004h	FF8h
MSB 11bit	002h	FFCh
MSB 12bit	001h	FFEh

Table 6 Register Table - Data clamp

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
data_clamp	A	AE	[1]	1'b0	RW	aev	Effective data clamping enable 1'b0 : disable 1'b1 : enable
data_min_h	A	B0	[3:0]	0x00	RW		Minimum active data High Byte
data_min_l	A	B1	[7:0]	0x00	RW		Minimum active data Low Byte
data_max_h	A	B2	[3:0]	0x0F	RW		Maximum active data High Byte
data_max_l	A	B3	[7:0]	0xFF	RW		Maximum active data Low Byte

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Vsync and Hsync

By manipulating vsyncstartrow0, vsyncstoprow0, and vsynccolumn0 register value, start and stop positions of vsync are controlled. sync_drop register allows user to drop vsync or hsync. Figure 7 shows 4 different cases of sync_drop. In addition, sync_hsyncAllLines enables hsync during vsync blank region. Figure 8 shows operation of sync_hsyncAllLines.

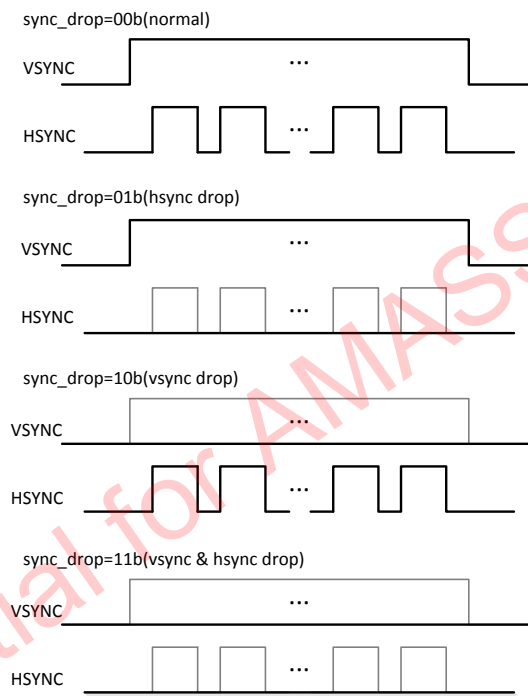


Figure 7 Sync drop

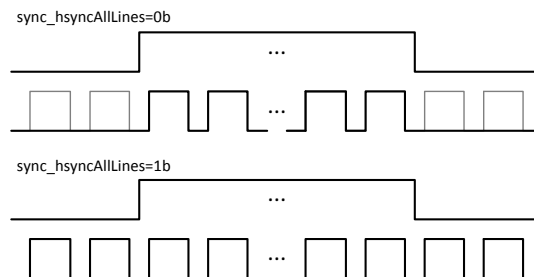


Figure 8 Hsync all lines

sync_vsyncPolarity, sync_hsyncPolarity registers invert vsync, hsync signal respectively. The inversion functions are shown in Figure 9, Figure 10.

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

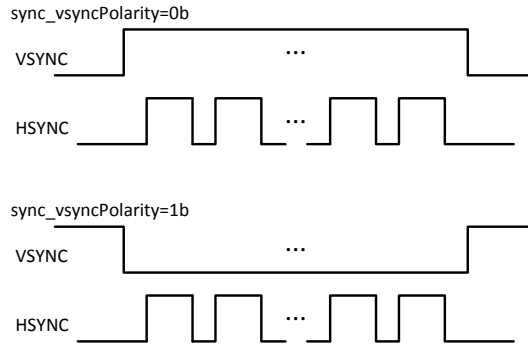


Figure 9 Vsync polarity

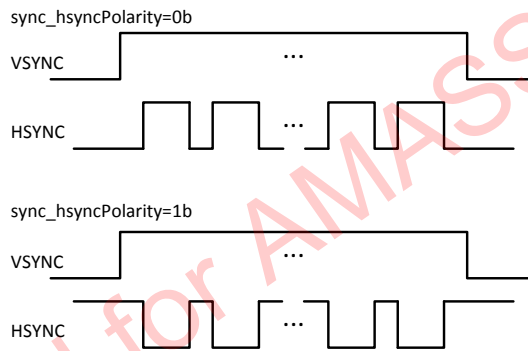


Figure 10 Hsync polarity

Table 7 Register Table - Sync control

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
vsyncstartrow0_h	A	74	[4:0]	0x00	RW	aev	Parallel interface - Vertical sync start control High Byte MIPI interface @ Virtual channel 0 - Frame start control High Byte
vsyncstartrow0_l	A	75	[7:0]	0x17	RW	aev	Parallel interface - Vertical sync start control Low Byte MIPI interface @ Virtual channel 0 - Frame start control Low Byte
vsyncstoprow0_h	A	76	[4:0]	0x04	RW	aev	Parallel interface - Vertical sync end control High Byte MIPI interface @ Virtual channel 0 - Frame end control High Byte
vsyncstoprow0_l	A	77	[7:0]	0x5F	RW	aev	Parallel interface - Vertical sync end control Low Byte MIPI interface @ Virtual channel 0 - Frame end control Low Byte
vsynccolumn0_h	A	78	[4:0]	0x00	RW	aev	Internal vsync 0 start point High Byte @ column counter
vsynccolumn0_l	A	79	[7:0]	0x02	RW	aev	Internal vsync 0 start point Low Byte @ column counter

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
sync_drop	A	AD	[6:5]	2'b00	RW	aev	Vsync, hsync drop control 2'b00 : No drop 2'b01 : vsync drop 2'b10 : hsync drop 2'b11 : hsync and vsync drop
sync_vsyncPolarity	A	AE	[6]	1'b0	RW	aev	Vsync polarity change 1'b0 : disable 1'b1 : enable
sync_hsyncPolarity	A	AE	[4]	1'b0	RW	aev	Hsync polarity change 1'b0 : disable 1'b1 : enable
sync_hsyncAllLines	A	AE	[5]	1'b0	RW	aev	Hsync output all lines enable(black and active) 1'b0 : No hsync during vertical blank 1'b1 : hsync during vertical blank

PCLK

PCLK inversion can be enabled via pclk_pol register as shown in Figure 11.

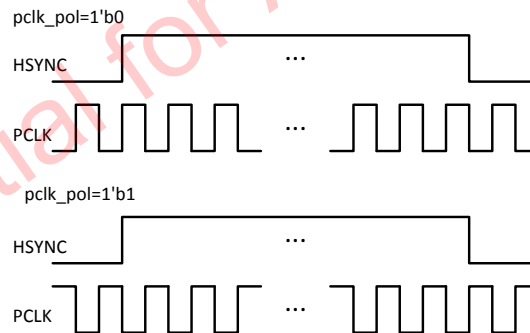


Figure 11 PCLK polarity

Table 8 Register Table - PCLK control

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
pclk_polarity	A	25	[2]	1'b0	RW		Change PCLK phase

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Digital Parallel Interface

The digital parallel interface uses VSYNC, HSYNC, PCLK, D[11:0] PIN. Table 9 shows digital parallel interface control registers.

Table 9 Register Table - digital parallel interface

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
pclk_pad_en	A	25	[3]	1'b0	RW		PCLK pad enable 1'b0 : disable 1'b1 : enable
pclk_drv	A	24	[5:4]	2'b00	RW		PCLK pad drivability control
dly_digi_PCLK	A	24	[3:0]	4'b0000	RW		PCLK timing delay delay = dly_digi_PCLK*0.4 ns
vsync_pad_en	A	25	[7]	1'b0	RW		Vsync pad enable 1'b0 : disable 1'b1 : enable
hsync_drv	A	25	[6:5]	2'b00	RW		Hsync Pad drivability control
hsync_pad_en	A	25	[4]	1'b0	RW		Hsync pad enable 1'b0 : disable 1'b1 : enable
pad_drv	A	24	[7:6]	2'b00	RW		Data pad drivability control
dpad_swap	A	25	[1]	1'b0	RW		Data pad swap option 1'b0 : [MSB:LSB] 1'b1 : [LSB:MSB]
d11_pad_en	A	26	[7]	1'b0	RW		D11 pad control 1'b0 : disable 1'b1 : enable
d10_pad_en	A	26	[6]	1'b0	RW		D10 pad control 1'b0 : disable 1'b1 : enable
d9_pad_en	A	26	[5]	1'b0	RW		D9 pad control 1'b0 : disable 1'b1 : enable
d8_pad_en	A	26	[4]	1'b0	RW		D8 pad control 1'b0 : disable 1'b1 : enable
d7_pad_en	A	26	[3]	1'b0	RW		D7 pad control 1'b0 : disable 1'b1 : enable
d6_pad_en	A	26	[2]	1'b0	RW		D6 pad control 1'b0 : disable 1'b1 : enable
d5_pad_en	A	26	[1]	1'b0	RW		D5 pad control 1'b0 : disable 1'b1 : enable
d4_pad_en	A	26	[0]	1'b0	RW		D4 pad control 1'b0 : disable

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							1'b1 : enable
d3_pad_en	A	27	[7]	1'b0	RW		D3 pad control 1'b0 : disable 1'b1 : enable
d2_pad_en	A	27	[6]	1'b0	RW		D2 pad control 1'b0 : disable 1'b1 : enable
d1_pad_en	A	27	[5]	1'b0	RW		D1 pad control 1'b0 : disable 1'b1 : enable
d0_pad_en	A	27	[4]	1'b0	RW		D0 pad control 1'b0 : disable 1'b1 : enable

Confidential for AMASS (秀碩)

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Recommended Power Sequence

- AVDD : Analog Block (external 3.3[V])
- HVDD : IO (external 1.8[V], 3.3[V] / MIPI only 3.3[V])
- DVDD : TG&ISP (external 1.2[V])
- DVDDM : MIPI (external 1.2[V])

Table 10 Recommended power-on/off sequence

Symbol	Descriptions	Min	Typ	Max	Unit
t1	From HVDD rising to DVDD rising	0	-	100	ms
t2	From DVDD rising to AVDD&DVDDM rising	0	-	100	ms
t3	Sensor reset time	8	-	-	MCLK
t4	From AVDD&DVDDM falling to DVDD falling	0	-	-	ms
t5	From DVDD falling to HVDD falling	0	-	-	ms

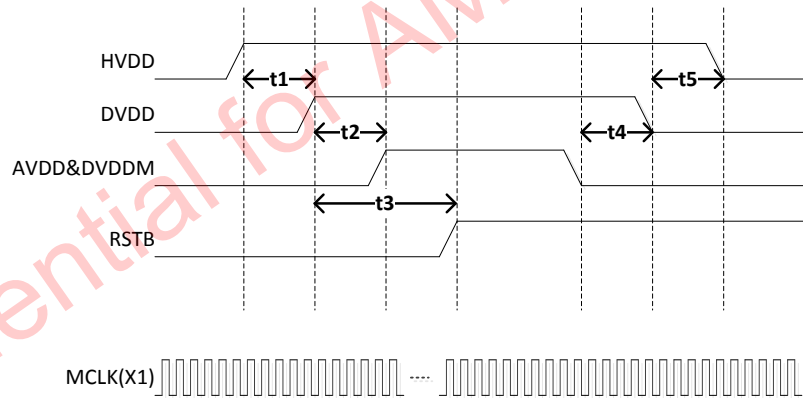


Figure 12 Timing diagram of power-on/off sequence

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Clock

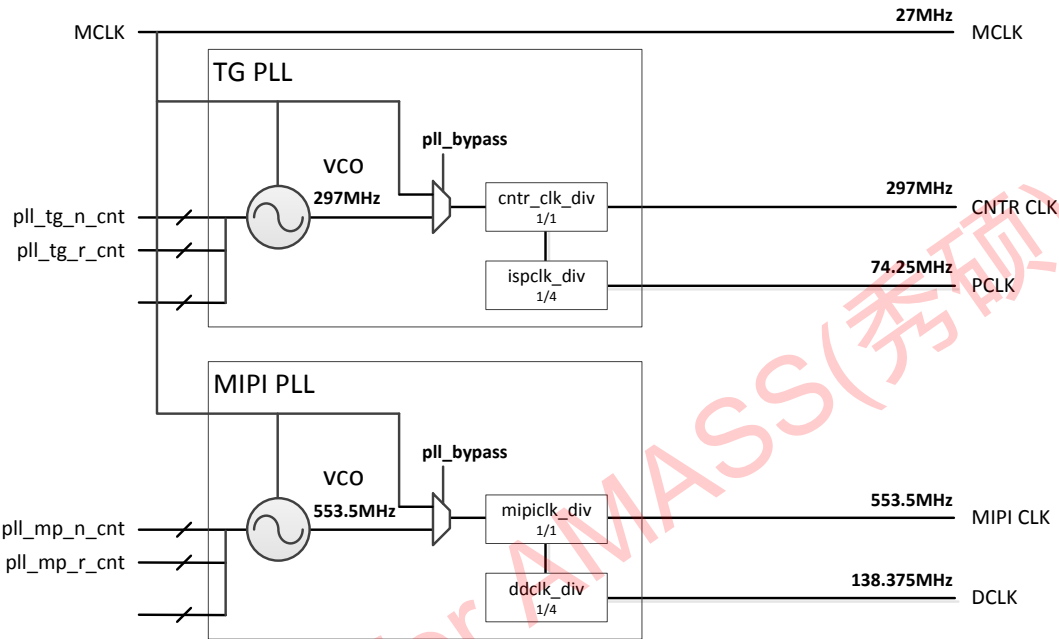


Figure 13 Clock divider

- MCLK : PLL input clock
- VCO : PLL output clock
- CNTR CLK : Clock for Counter
- PCLK : The counter values increase at the pace of pclk.
- MIPI CLK : Clock for MIPI
- DCLK : Clock for formatter

PLL

- Frequency of MCLK(PLL input clock) should be $MCLK > 3.375MHz$.
- Frequency of VCO(PLL output clock) should be $120MHz \leq VCO \leq 606MHz$.

$$VCO = MCLK \times pll_n_cnt / pll_r_cnt$$

- T_{Lock} (PLL Lock time) should be $T_{Lock} > 20\mu s$.

Table 11 Register Table - PLL

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
pll_bypass	A	4E	[4]	1'b1	RW		PLL bypass

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							1'b0 : use pll mode 1'b1 : pll bypass mode
plltg_pd	A	4E	[5]	1'b1	RW		PLL1 power down mode 1'b0 : pll1 power on 1'b1 : pll1 power down
pll_tg_n_cnt	A	51	[7:0]	0x2C	RW		TG PLL multiplication factor
pll_tg_r_cnt	A	52	[4:0]	0x04	RW		TG PLL division factor
pllmp_pd	A	4E	[3]	1'b1	RW		PLL2 power down mode 1'b0 : pll2 power on 1'b1 : pll2 power down
pll_mp_n_cnt	A	53	[7:0]	0x2C	RW		MIPI PLL multiplication factor
pll_mp_r_cnt	A	54	[4:0]	0x04	RW		MIPI PLL division factor

Clock Divider

Table 12 Register Table - Clock divider

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
clkoff	A	23	[3]	1'b0	RW		Clock pad kill enable 1'b0 : disable (not kill) 1'b1 : enable (kill)
adcclk_div	A	56	[7:6]	2'b00	RW	aev	ADC clock divider $isp_clk = vco1 / (2^{adcclk_div})$
ispclk_div	A	56	[5:4]	2'b10	RW	aev	ISP clock divider $isp_clk = vco1 / (2^{ispclk_div})$
mipiclk_div	A	57	[7:6]	2'b01	RW	aev	MIPI clock divider $mipi_clk = vco2 / (2^{mipiclk_div})$
ddclk_div	A	57	[4:3]	2'b10	RW	aev	MIPI byte clock divider $ddclk = vco2 / (2^{ddclk_div})$
isp_clk_en	A	58	[7]	1'b1	RW	aev	isp clock enable
tm_clk_en	A	58	[6]	1'b1	RW	aev	tone map clock enable

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

PLL and Clock Setting Sequence

- When using PLL, set-up sequence, show **Figure 14**, is necessary.
- I2C update timing register, `i2c_control_1`, is changed before setting clock dividers to immediately apply clock divider settings.

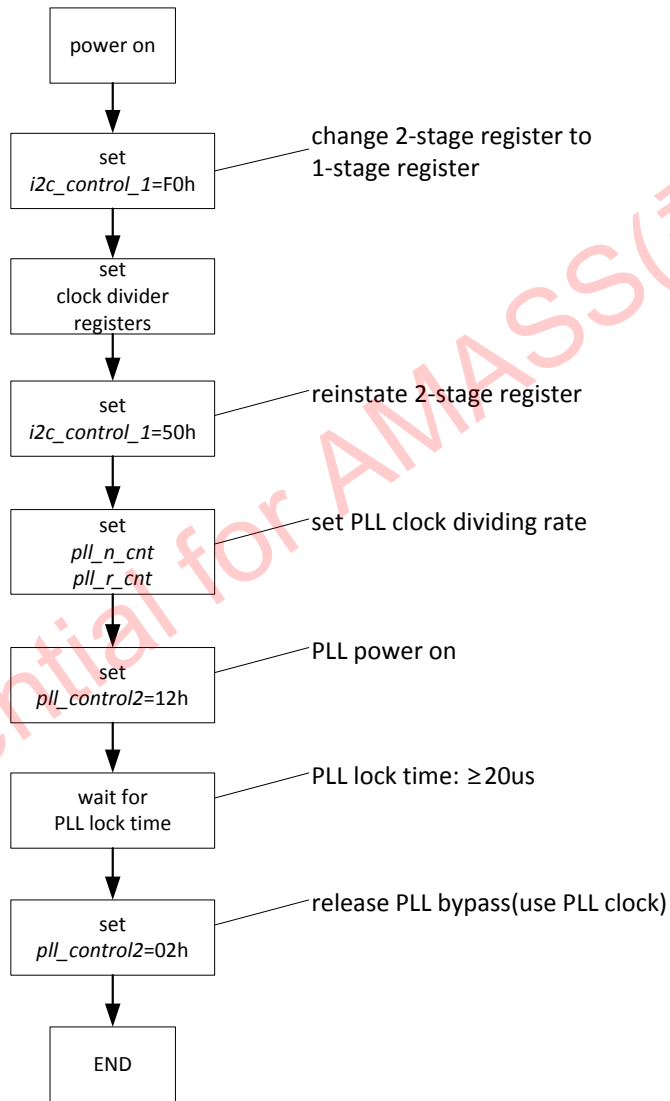


Figure 14 Clock setting sequence

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

STDBY Mode

The PK5210K provide hardware standby. Hardware standby mode is controlled by PWRDN PAD. I2C communication cannot be used while hardware standby mode is set.

Table 13 Register Table - STDBY mode

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
stdby_level	A	23	[5:4]	2'b10	RW		Output data pad stdby level selector 2'b00 : low 2'b01 : high 2'b1x : hiz

System Reset

The PK5210K has two methods to reset: hard reset and soft reset. Hard reset signal from RSTB PAD must remain low (active low) for at least 8 master clocks to correctly reset the sensor. All registers are set to their default values after reset.

Figure 15 shows device soft reset by setting softreset register through I2C interface. When softreset register is set, async_rstb (asynchronous reset) and sync_rstb signal changes from 1 to 0 and holds for 1 clock of SCL. Afterward, async_rstb is set back to 1 while sync_rstb holds 0 for another 16 clocks of pclk for stable reset operation. Therefore, PK5210K requires at least 1 clock of SCL and 16 clocks of pclk to perform a soft reset operation.

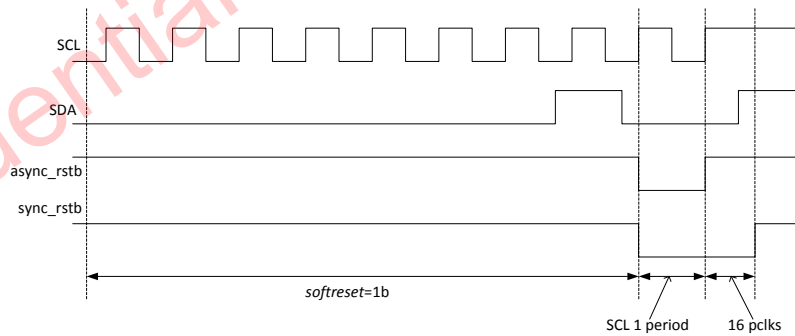


Figure 15 Soft reset

Table 14 Register Table - Soft reset

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
softreset	A	20	[0]	0x00	RW		Soft reset 1'b0 : disable 1'b1 : enable (after succesful reset value reverts to 0)

I2C Interface

I2C Communication


I2C communication is a serial interface which utilizes SCL/SDA lines to transfer 8-bit data per transaction. PK5210K includes only I2C slave function and requires external master to access the internal registers. Each transaction requires 8-bit data and 1-bit acknowledge bit. There are four types of operations supported in PK5210K's I2C operation: single write, multiple write, single read, multiple read.

In single write operation, after the start state, 7-bit slave address and write bit are transmitted from master device to PK5210K. If correct slave address is detected, PK5210K reply with acknowledge bit as confirmation of valid address. Then master device transmits register address and waits for acknowledge bit from PK5210K. Lastly, 8-bit data is sent to PK5210K and waits for acknowledge bit again. Once acknowledge bit is recieved, master device announces the stop state to terminate I2C communication.

Multiple write operation works exactly the same until stop state procedure. Instead of announcing the stop state, master device transmits more data. If PK5210K detects multiple write operation, any data stream following the first 8-bit is stored in subsequent register addresses of the first register address.

Read operation consists of two sub-procedure: address write and data read. The procedure is performed exactly same as register address write procedure from single write operation. Afterward, master device announces repeated start and transmit slave address with read bit. When PK5210K detects read operation, PK5210K sends acknowledge bit to master device, then reads register corresponding to register address. PK5210K transmits read data to master device and waits for master device to respond. If master device responds with no acknowledge bit followed by stop state, read operation is terminated. On the other hand, if master device responds with acknowledge, PK5210K reads the subsequent register and transmits again. As long as master device replies with acknowledge bit after each data transaction, PK5210K will continuously read the subsequent register and transmit until no acknowlodge bit followed by stop state is presented. If only one 8-bit data is read, the procedure is single read operation. whereas, reading more than 8-bit data is multiple read operation. [Figure 16](#) shows read/write operation of I2C communication.

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

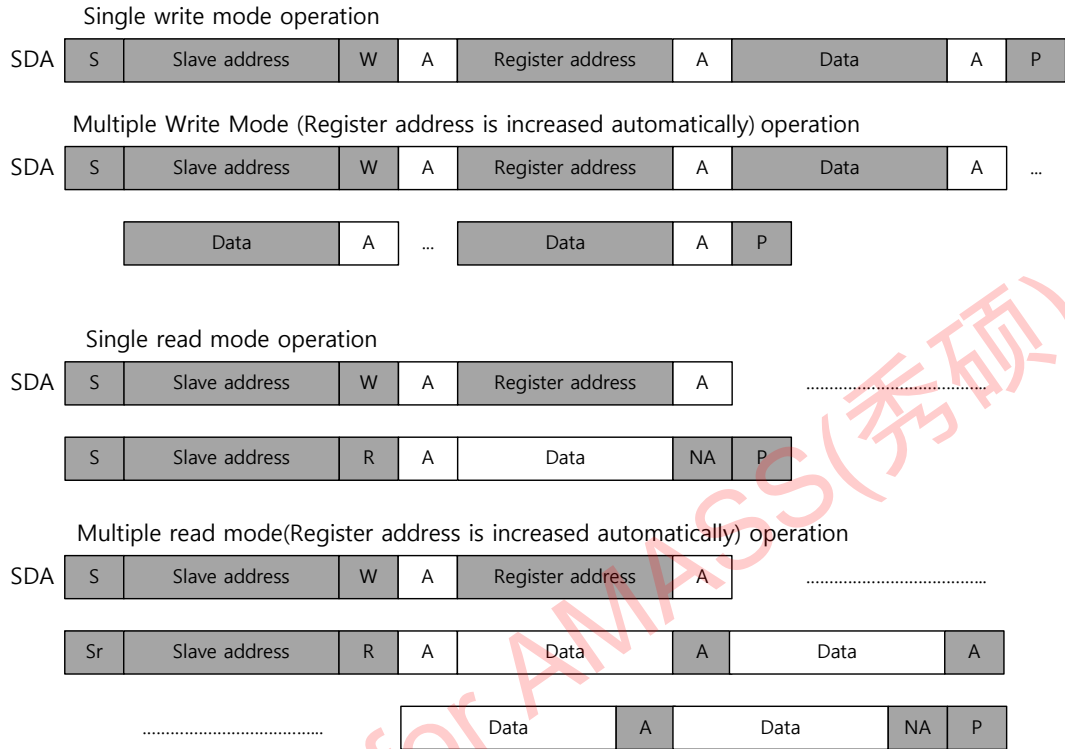

Slave address can be extended 74h to 77h by CADDR0_PAD / CADDR1_PAD

CADDR1_PAD	1'b0	1'b0	1'b1	1'b1
CADDR0_PAD	1'b0	1'b1	1'b0	1'b1
slave address	74h	75h	76h	77h
write address	E8h	EAh	ECh	Eeh
read address	E9h	EBh	EDh	EFh

R/W : Read/Write selection, High = read / Low = write
 A : Acknowledge bit, NA : No Acknowledge, DATA : 8-bit data. P : Stop condition
 S : Start condition, Sr : Repeated start(start without preceding stop)

Figure 16 I2C functional description

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register Update Timing

Registers has three different types of update timing: "aev" and "autov" update, regular update. Registers with "aev" and "autov" update type update new values from I2C write operation at the last line of the frame. Whereas, registers with regular update type apply new values immediately after I2C write operation. However, By changing updatecontrol register value, register updates for "aev" and "autov" type can either be disabled or be updated immediately.

"m_wr" update registers only updates MPU genlock related registers. When "m_wr" is set, MPU genlock related registers value are updated and applied to the system in the next frame.

"wr_en" update registers only applies to exposure related registers (integration time, global gain, digital gain). Due to exposure controls being split across several registers which leads to unreliable exposure updates if updated one by one, all exposure related registers' update timing is control by reg_wr_en register. When reg_wr_en register is set, "wr_en" update registers are updated simultaneously.

Table 15 shows registers relevant to register update control.

Table 15 I2C update timing control

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
updatecontrol	A	1A	[7:4]	4'b0101	RW		Control I2C register with autov, aev update type LSB 2-bit updatecontrol[1:0] controls aev update and MSB 2-bit updatecontrol[3:2] controls autov update 2'b00 : no update 2'b01 : aev update 2'b1x : immediate aev update
wr_en	B	8D	[0]	0x00	RW		Update exposure related register 1'b0 : no update 1'b1 : wr_en set
wr_en_off	B	8E	[0]	0x00	RW		Update exposure related register 1'b0 : update @ wr_en = 1'b1 1'b1 : Immediately update
mpu_gen_write	B	59	[0]	0x0	RW		Genlock I2C register update

Initialization Timing for I2C interface

Register control through I2C communication is possible at the point where 16 pclk has passed after RSTB becomes high (refer to Figure 17).

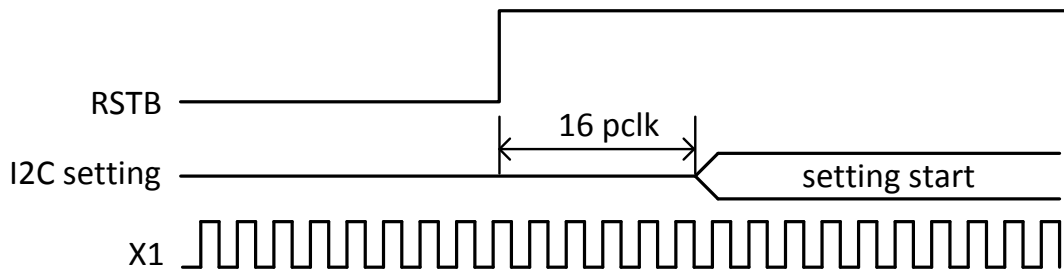


Figure 17 Available timing for I2C communication after system reset.

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Exposure Control

Integration Time

PK5210K employs rolling shutter¹ for capturing image. Reset operation initializes ROBP and active pixel region in sequence row by row. Readout process reads pixel data stored in photodetector at the identical order and speed as reset operation. The difference in time between reset and readout operation is known as integration time (refer to Figure 18). Integration time controls photodetector's level of exposure to light. Integration time can be adjusted in line unit level (line inttime) and column unit level (column inttime). Under the assumption of fixed frame structure, the maximum line inttime is "frame height - 5" and column inttime is "frame width - 1". Upper 16 bits of inttime register represent number of lines for line inttime and lower 8 bits of inttime register represent number of column inttime, where number of column changes in framewidth/256 increment.

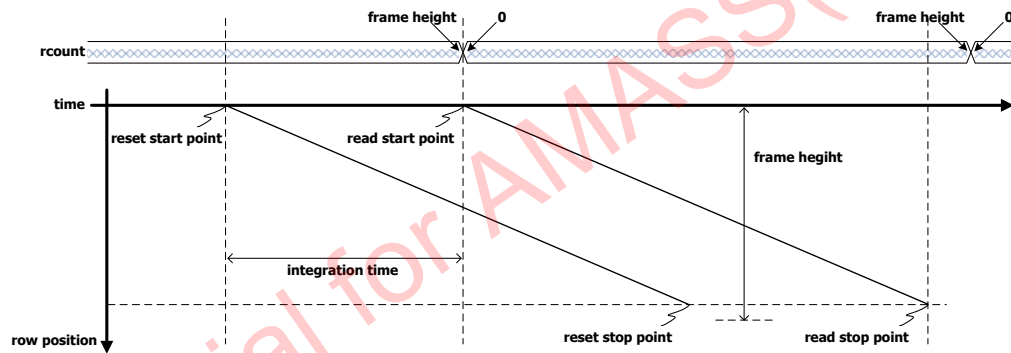


Figure 18 Fundamental concept of integration time

Table 16 shows registers relevant to integration time.

Table 16 Register Table - Integration time

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
inttime_h	B	6E	[7:0]	0x01	RW	wr_en	Integration time 0 (line) High Byte
inttime_m	B	6F	[7:0]	0x40	RW	wr_en	Integration time 0 (line) Low Byte
inttime_l	B	70	[7:0]	0x00	RW	wr_en	Integration time 0 (column)
inttime_vs_h	B	71	[7:0]	0x00	RW	wr_en	Integration time 1 (line) High Byte
inttime_vs_m	B	72	[7:0]	0x02	RW	wr_en	Integration time 1 (line) Low Byte
inttime_vs_l	B	73	[7:0]	0x00	RW	wr_en	Integration time 1 (column)
frmvar_en	B	04	[7]	1'b0	RW	aev	Variable frame enable 1'b0 : disable 1'b1 : enable

¹Image capture method in which each frame is scanned row by row instead of capturing entire frame at once

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Global Gain

Global gain affects analog gain level of comparators, which determines Bayer data values. In PK5210K, global gain is ranged from 0x00 to 0x6F.

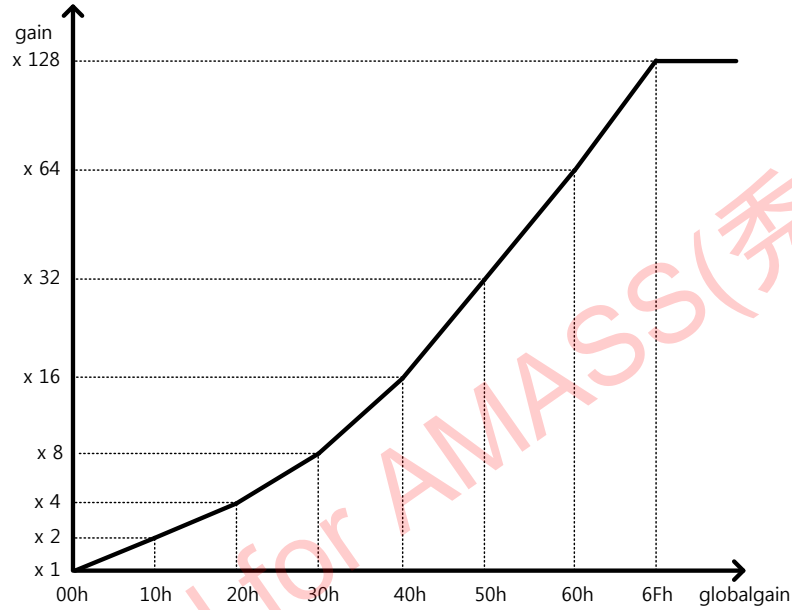


Figure 19 Globalgain's gain

Table 17 shows registers relevant to global gain.

Table 17 Register Table - Global Gain

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
globalgain	B	74	[7:0]	0x00	RW	wr_en	Analog gain

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Digital Gain

Analog signal is converted to digital value through ADC operation, and the digital value can be amplified by digital gain. digitalgain register's upper 4 bits are positive integer and lower 4 bits are fraction.

Table 18 shows registers relevant to digital gain

Table 18 Register Table - Digital gain

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
digitalgain_l	B	75	[7:0]	0x10	RW	wr_en	Digital gain of long data
digitalgain_s	B	76	[7:0]	0x10	RW	wr_en	Digital gain of short data
digitalgain_vs	B	77	[7:0]	0x10	RW	wr_en	Digital gain of very short data

Exposure factor update control

If the exposure factor is changed over several frames, the brightness of the screen changes for each frame, which causes hunting. Therefore, exposure related registers are updated at once and the brightness of the screen is not changed many times.

- If wr_en = 1'b1, exposure register is updated. and then wr_en = 1'b0.
- If wr_en_off = 1'b1, wr_en is disabled.

Table 19 shows registers relevant to exposure register update

Table 19 Register Table - Exposure register update

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
wr_en	B	8D	[0]	0x00	RW		Update exposure related register 1'b0 : no update 1'b1 : wr_en set
wr_en_off	B	8E	[0]	0x00	RW		Update exposure related register 1'b0 : update @ wr_en = 1'b1 1'b1 : Immediately update

Genlock

Genlock Configuration

Generator locking (genlock) synchronizes internal synchronous timing of master and slave. The PK5210K includes genlock sync method to achieve genlock.

- Genlock Sync Method

Master device generates reference synchronous signal, which outputs via GENLOCK pad. Slave device receives the reference synchronous signal via its GENLOCK pad to achieve genlock. Figure 20 shows example of genlock sync set-up for using external MPU as master, whereas Figure 21 uses the PK5210K as master.
- GENLOCK signal

Slave device requires at least 4 pclk width of the reference synchronous signal for reliable genlock operation (refer to Figure 22). If the PK5210K is the master device, the signal width can be adjusted by changing genlock_width register.

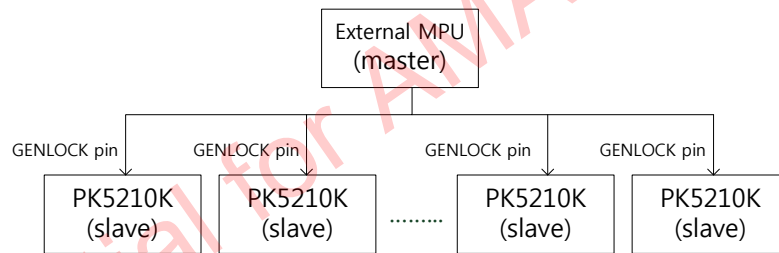


Figure 20 Genlock Sync configuration with external MPU

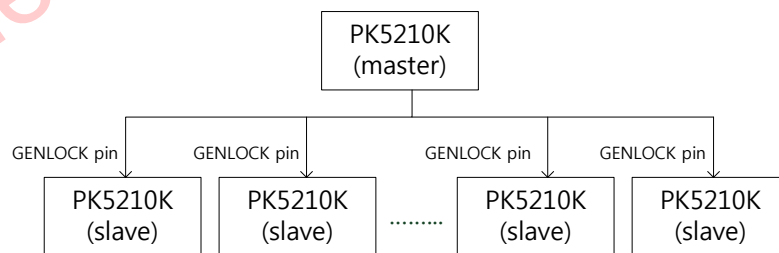


Figure 21 Genlock Sync configuration with another the PK5210K

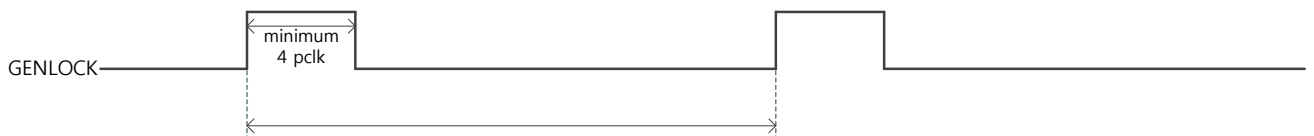


Figure 22 GENLOCK reference signal waveform

Genlock Sync Method

- Genlock Master Mode (genlock_master = 1'b1)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

In the case of the PK5210K acting as the master device, if internal rcount and ccount value are equal to rcount_genlock and ccount_genlock respectively, master device outputs the reference synchronous signal via GENLOCK pad and the signal remains high for genlock_width * pclk.

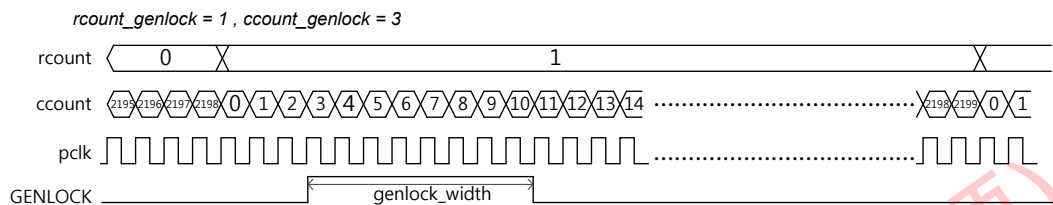


Figure 23 Example of timing diagram @master mode

- Genlock Slave Mode (genlock_master = 1'b0)
 In the case of the PK5210K acting as the slave device, if the slave device receives reference synchronous signal from master device via GENLOCK pad, internal rcount and ccount are initialized to rcount_genlock and (ccount_genlock + 1) respectively at rising edge of the signal.

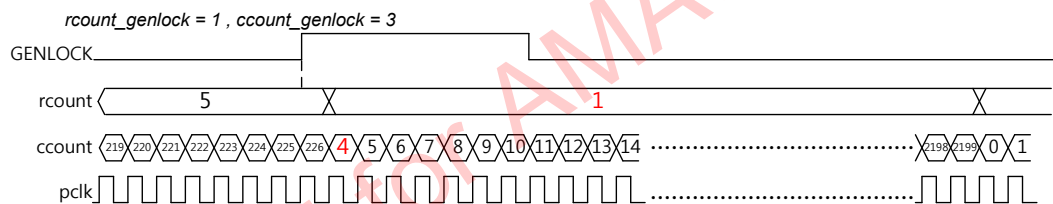


Figure 24 Example of timing diagram @slave mode

Note If the synchronization timing difference between master and slave is large, sudden shift in brightness may occur in slave device's image.

Figure 25 shows timing diagram of genlock sync method with the PK5210K as master device.

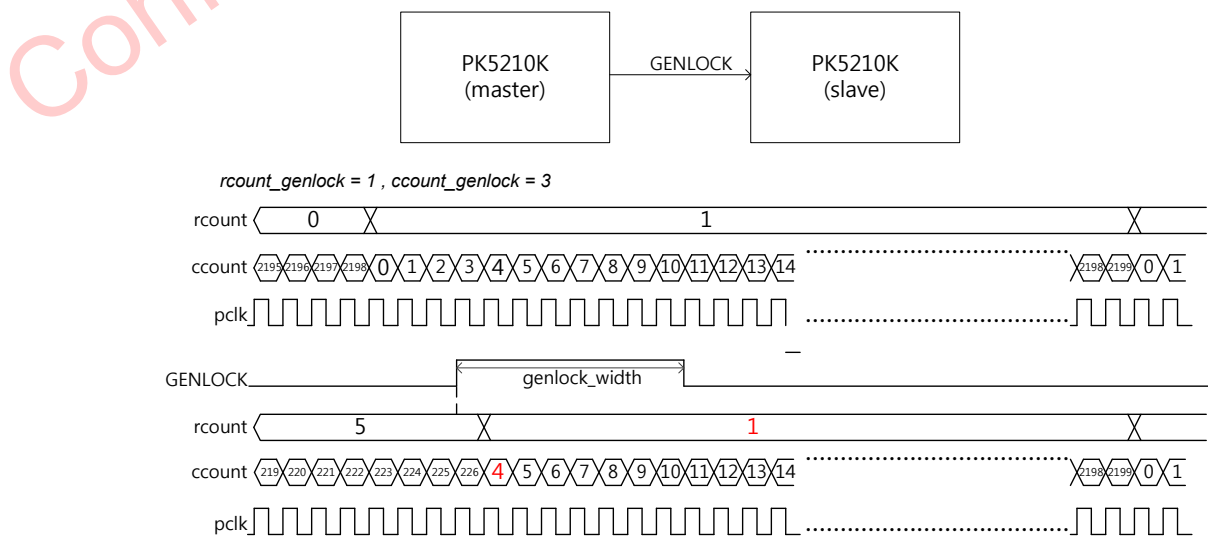


Figure 25 Example of timing diagram @genlock sync mode

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 20 shows registers relevant to genlock sync method.

Table 20 Register Table - genlock sync mode

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
genlock_pad_en	A	25	[0]	1'b0	RW		GENLOCK pad enable 1'b0 : disable 1'b1 : enable
genlock_en	B	0A	[5]	1'b0	RW		GENLOCK enable 1'b0 : disable 1'b1 : enable
genlock_master	B	0A	[4]	1'b0	RW		GENLOCK master 1'b0 : slave 1'b1 : master
rcount_genlock_h	B	50	[4:0]	0x00	RW		Genlock row count High Byte
rcount_genlock_l	B	51	[7:0]	0x01	RW		Genlock row count Low Byte
ccount_genlock_h	B	52	[4:0]	0x00	RW		Genlock column count High Byte
ccount_genlock_l	B	53	[7:0]	0x01	RW		Genlock column count Low Byte
genlock_width	B	54	[7:0]	0x10	RW		Genlock pulse width

Confidential for AMBA (秀碩)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Test Pattern (TP) Control

TP control generates test images from ISP block. Test images type can be selected by setting tp_ctrl_0 registers. In case of test image types from 0x15 to 0x1A values for tp_ctrl_0, tp_ctrl_1/2/3/4 registers are used as color values and the following rule shows how the color value is determined:


- R : {tp_ctrl_1_h, tp_ctrl_1_l[1:0]}
- Gr : {tp_ctrl_2_h, tp_ctrl_2_l[1:0]}
- Gb : {tp_ctrl_3_h, tp_ctrl_3_l[1:0]}
- B : {tp_ctrl_4_h, tp_ctrl_4_l[1:0]}

Table 21 shows registers relevant to Test Pattern ctrl

Table 21 Register Table - Test pattern ctrl

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
tp_seq	B	11	[4:3]	2'b00	RW		Test pattern block input sequence selection
tp_seq_vs	B	11	[2:1]	2'b00	RW		Test pattern block input sequence selection for very short
tp_control_0	B	BC	[7:0]	0x00	RW		Test pattern selection
tp_control_1_h	B	BD	[7:0]	0x00	RW		R color for test pattern High Byte
tp_control_1_l	B	BE	[7:0]	0x00	RW		R color for test pattern Low Byte
tp_control_2_h	B	BF	[7:0]	0x00	RW		G1 color for test pattern High Byte
tp_control_2_l	B	C0	[7:0]	0x00	RW		G1 color for test pattern Low Byte
tp_control_3_h	B	C1	[7:0]	0x00	RW		G2 color for test pattern High Byte
tp_control_3_l	B	C2	[7:0]	0x00	RW		G2 color for test pattern Low Byte
tp_control_4_h	B	C3	[7:0]	0x00	RW		B color for test pattern High Byte
tp_control_4_l	B	C4	[7:0]	0x00	RW		B color for test pattern Low Byte
tp_width_h	B	C5	[2:0]	0x07	RW		Test pattern width for color bar pattern High Byte
tp_width_l	B	C6	[7:0]	0xA8	RW		Test pattern width for color bar pattern Low Byte

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

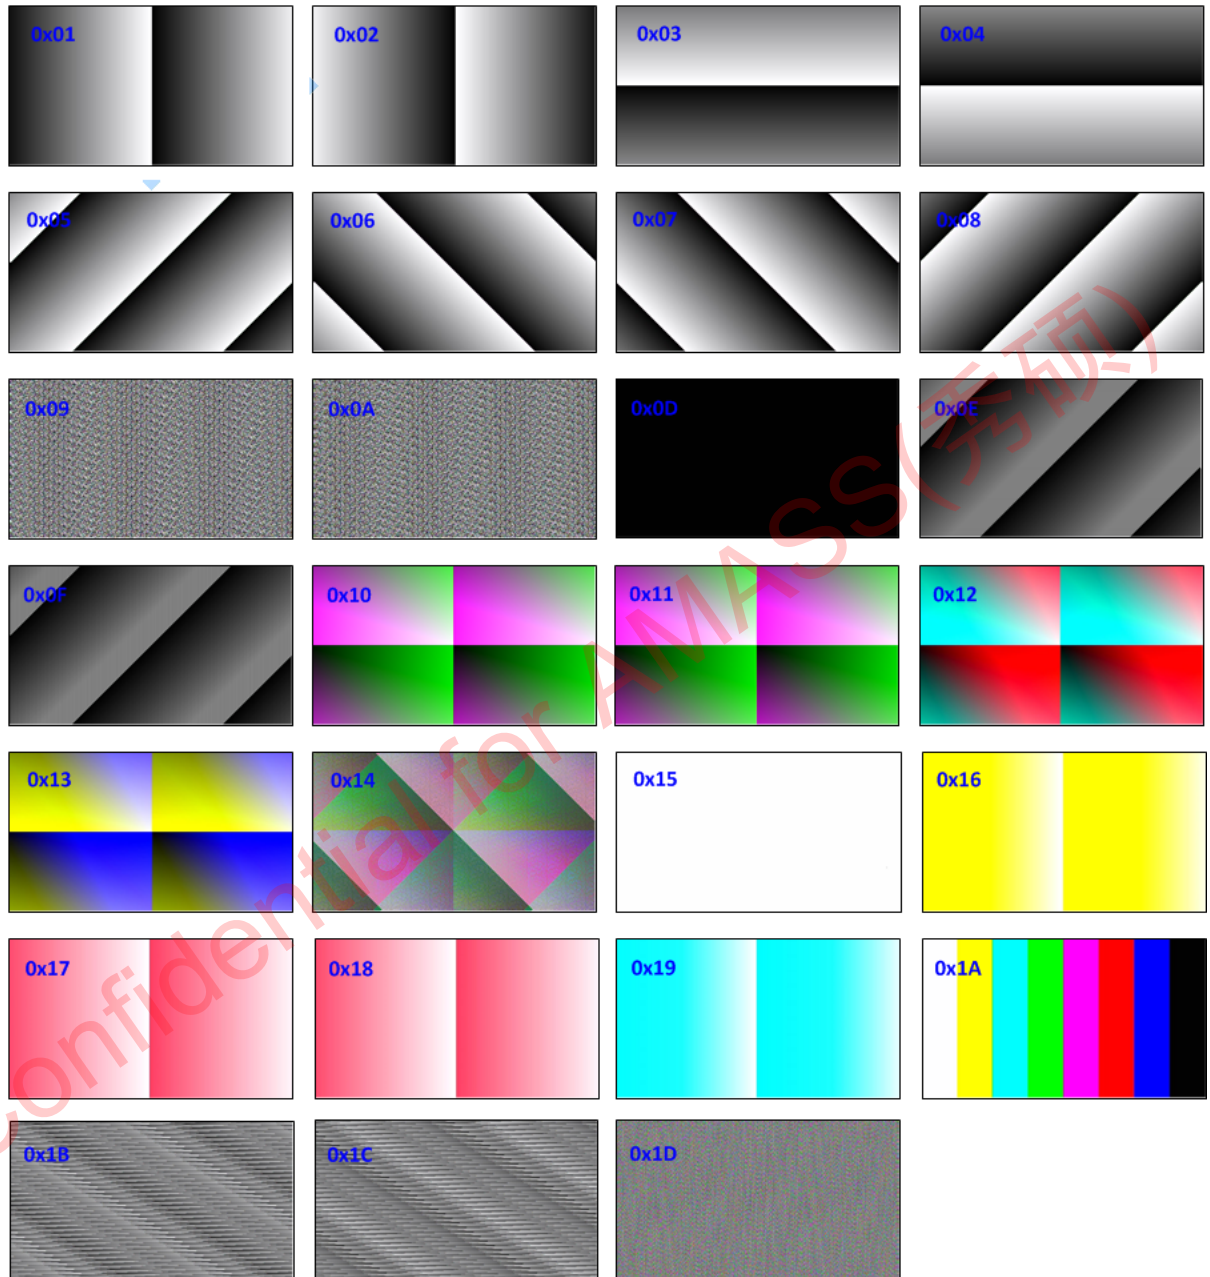

tp_control_1, tp_control_2, tp_control_3, tp_control_4 = 0xFF

Figure 26 Test image

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

ISP

The ISP combines three images (long, short, and very-short) to create one WDR image. Then, the WDR image is tone mapped and output as an SDR image. The process from input to output includes features to improve image quality.

Figure 27 is shown the ISP data flow

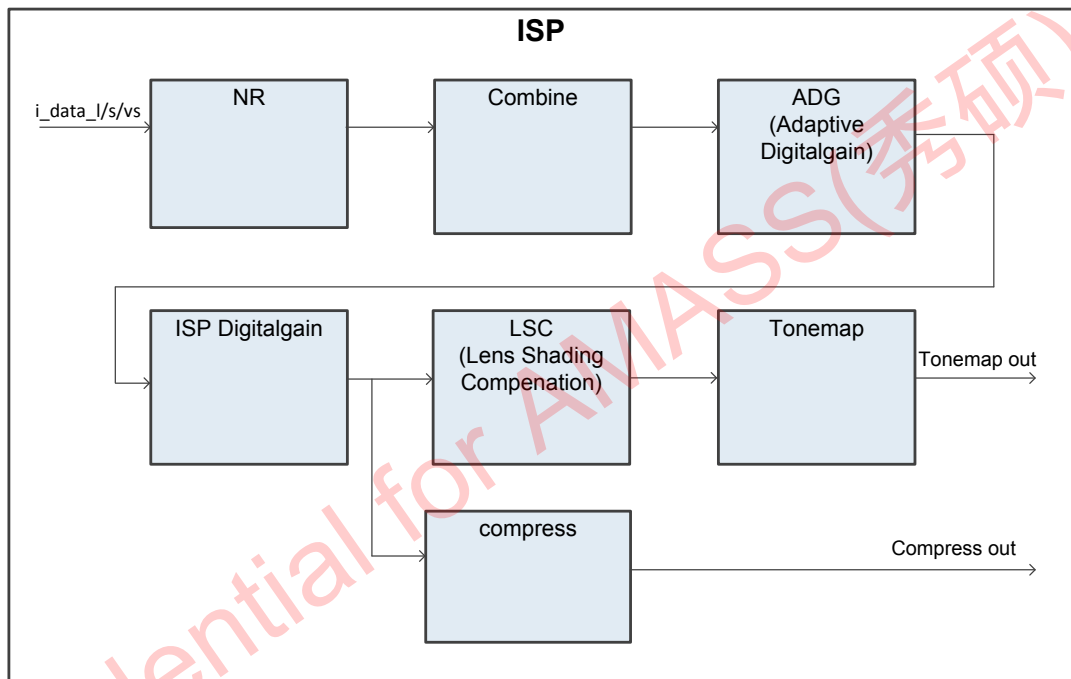


Figure 27 ISP Data flow

Noise Reduction (NR)

NR controls long, short and very-short images respectively. It is enabled when `nr_en_l`, `nr_en_s`, and `nr_en_vs` are set to 1'b1 respectively. The NR intensity is adjusted according to the `nr_ratio` setting. The larger the `nr_ratio` value (Max:FFh) is used, the NR effect decreases.

Table 22 Register Table - NR

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
<code>nr_en_l</code>	G	06	[7]	1'b0	RW	aev	NR enable (long) 1'b0 : disable 1'b1 : enable
<code>nr_en_s</code>	G	06	[6]	1'b0	RW	aev	NR enable (short) 1'b0 : disable 1'b1 : enable
<code>nr_en_vs</code>	G	06	[5]	1'b0	RW	aev	NR enable (very-short) 1'b0 : disable 1'b1 : enable

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
nr_ratio_l	G	37	[7:0]	0x08	RW	aev	NR strength control (long)
nr_ratio_s	G	3A	[7:0]	0x08	RW	aev	NR strength control (short)
nr_ratio_vs	G	3D	[7:0]	0x08	RW	aev	NR strength control (very-short)

Adaptive Digital Gain (ADG)

ADG is a function to apply digital gain for each pixel differently. The gain value can be adjusted by setting ADG_ratio[3:0]. In ADG_ratio [3: 0] ≤ 2h, there is no effect, and in 3h ≤ bin_ratio [3: 0] ≤ Ch, x0.5 gain increases with each increment.

Table 23 Register Table - ADG

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
ADG_ratio	I	BD	[7:0]	0x08	RW	aev	ADG ratio (02h = x1)

ISP Digital gain

ISP digital gain function is enabled by setting isp_dgain_en to 1'b1. digitalgain can be adjusted by setting d gain_ isp.

Table 24 Register Table - ISP digital gain

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
isp_dgain_en	G	06	[0]	1'b0	RW	aev	ISP digitalgain enable 1'b0 : disable 1'b1 : enable
dgain_ isp	I	88	[7:0]	0x00	RW	aev	ISP digitalgain (10h = x1, ... , FFh = x15.9735)

Compress

Compress makes the WDR image into a 12 bits image. Compress is processed in PWL (Piece-Wise Linear) method with 4 knee points as shown in Figure 28.

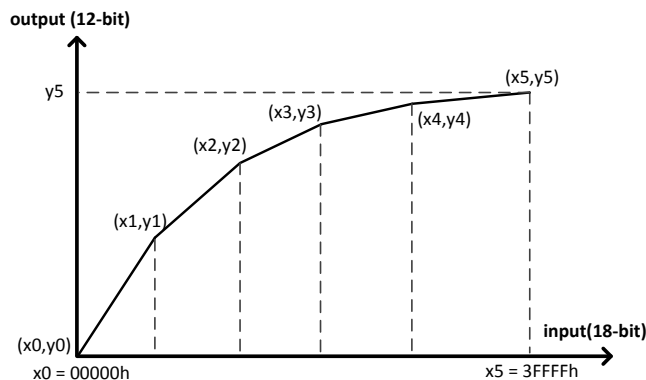


Figure 28 Compress

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 25 Register Table - Compress

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
cmp_x1_h	G	B5	[1:0]	0x00	RW	aev	Explanatory variable point 1 for compress
cmp_x1_m	G	B6	[7:0]	0x40	RW	aev	Explanatory variable point 1 for compress
cmp_x1_l	G	B7	[7:0]	0x00	RW	aev	Explanatory variable point 1 for compress
cmp_x2_h	G	B8	[1:0]	0x00	RW	aev	Explanatory variable point 2 for compress
cmp_x2_m	G	B9	[7:0]	0x80	RW	aev	Explanatory variable point 2 for compress
cmp_x2_l	G	BA	[7:0]	0x00	RW	aev	Explanatory variable point 2 for compress
cmp_x3_h	G	BB	[1:0]	0x01	RW	aev	Explanatory variable point 3 for compress
cmp_x3_m	G	BC	[7:0]	0x00	RW	aev	Explanatory variable point 3 for compress
cmp_x3_l	G	BD	[7:0]	0x00	RW	aev	Explanatory variable point 3 for compress
cmp_x4_h	G	BE	[1:0]	0x02	RW	aev	Explanatory variable point 4 for compress
cmp_x4_m	G	BF	[7:0]	0x00	RW	aev	Explanatory variable point 4 for compress
cmp_x4_l	G	C0	[7:0]	0x00	RW	aev	Explanatory variable point 4 for compress
cmp_y0_h	G	C1	[3:0]	0x00	RW	aev	Dependent variable point 0 for compress
cmp_y0_l	G	C2	[7:0]	0x00	RW	aev	Dependent variable point 0 for compress
cmp_y1_h	G	C3	[3:0]	0x04	RW	aev	Dependent variable point 1 for compress
cmp_y1_l	G	C4	[7:0]	0x00	RW	aev	Dependent variable point 1 for compress
cmp_y2_h	G	C5	[3:0]	0x06	RW	aev	Dependent variable point 2 for compress
cmp_y2_l	G	C6	[7:0]	0x00	RW	aev	Dependent variable point 2 for compress
cmp_y3_h	G	C7	[3:0]	0x08	RW	aev	Dependent variable point 3 for compress
cmp_y3_l	G	C8	[7:0]	0x80	RW	aev	Dependent variable point 3 for compress
cmp_y4_h	G	C9	[3:0]	0x0C	RW	aev	Dependent variable point 4 for compress
cmp_y4_l	G	CA	[7:0]	0x00	RW	aev	Dependent variable point 4 for compress
cmp_y5_h	G	CB	[3:0]	0x0F	RW	aev	Dependent variable point 5 for compress
cmp_y5_l	G	CC	[7:0]	0xFF	RW	aev	Dependent variable point 5 for compress

Lens Shading Compensation (LSC)

LSC is a function to correct the darkening of the position away from the center of the image due to lens shading. LSC function control elements are LSC center and LSC scale, and the description of each is as follows.

- LSC center
 As shown in [Figure 29](#), adjust LSC center with lens_x and lens_y settings. It is used when the center of the lens and the center of the image sensor do not match.
- LSC scale
 As shown in [Figure 30](#), set the lens_scale to adjust the gain according to the distance from the LSC center. The larger the lens_scale value, the greater the LSC effect.

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

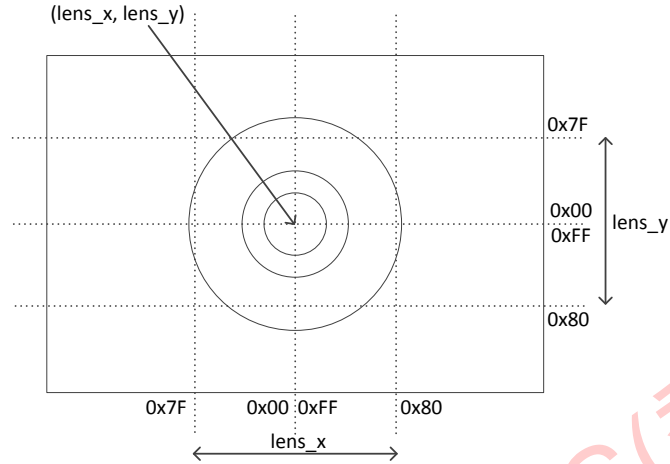


Figure 29 LSC center control

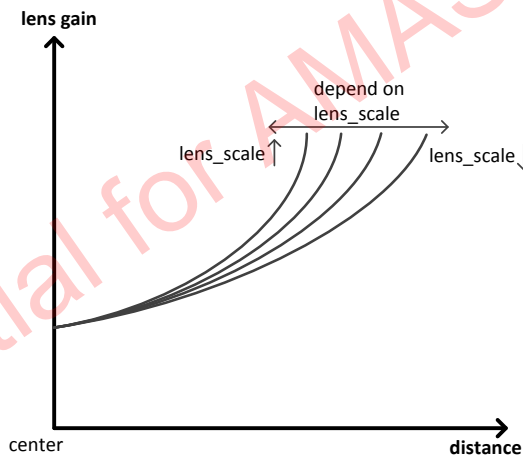


Figure 30 LSC gain fitting with LSC center and LSC scale

Table 26 Register Table - LSC

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
lens_en	H	04	[6]	1'b0	RW	aev	Lens shading compensation enable 1'b0 : disable 1'b1 : enable
lens_scale	H	80	[7:0]	0x80	RW	aev	LSC scale control
lens_x	H	81	[7:0]	0x00	RW	aev	LSC center control
lens_y	H	82	[7:0]	0x00	RW	aev	LSC center control

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

MIPI

Reference For Design

MIPI design in the PK5210K is based on “MIPI Alliance Standard for Camera Serial Interface 2 (CSI-2), Version 1.00” and “MIPI Alliance Standard for D-PHY, Version 0.65” specification documents. Output of MIPI consists of one clock lane and two data lanes.

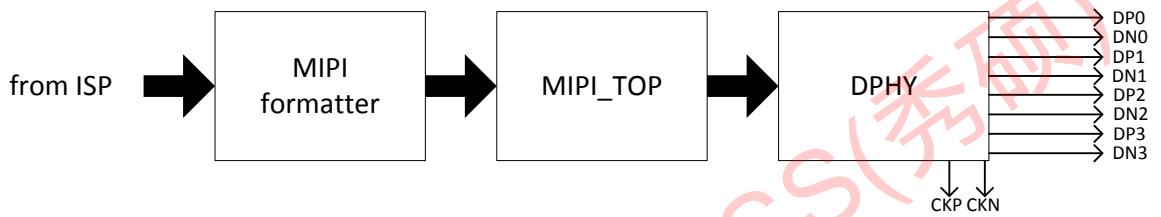


Figure 31 MIPI block diagram

MIPI Clock Relations

Figure 32 shows Clock and MIPI operation. The mipi_clk operates at a frequency four times faster than dclk. In addition, it is used for generating MIPI data and clock lane signal. The dclk is clock rate determined by isp_clk, raw bit, MIPI lane. Table 27 shows clock rate setting.

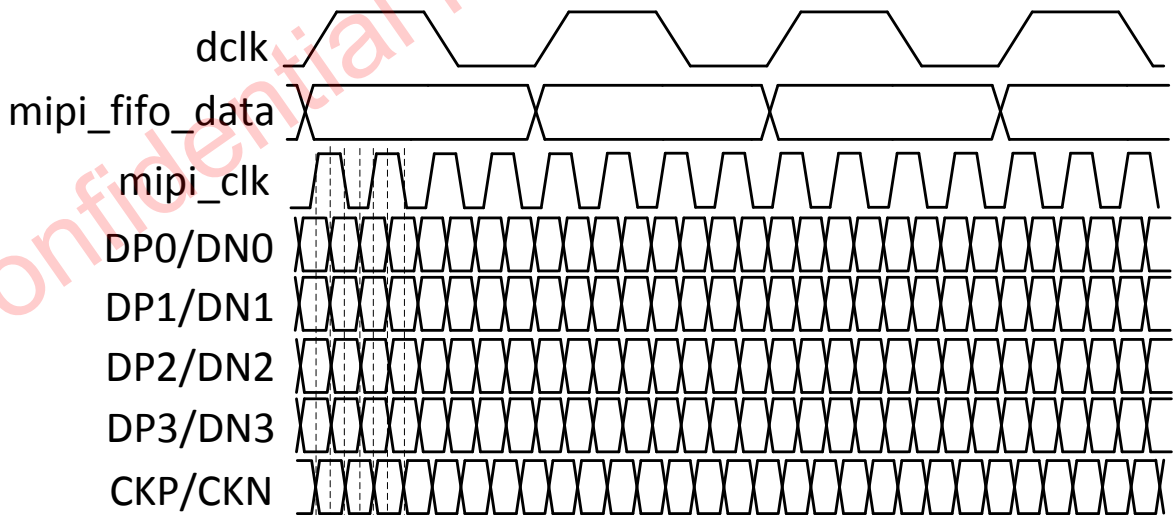


Figure 32 MIPI clock relations diagram

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 27 MIPI clock with lane and frame rate

FPS	clock domain	MIPI 1 lane	MIPI 2 lane	MIPI 4 lane
		raw 12-bit(Mhz)	raw 12-bit(Mhz)	raw 12-bit(Mhz)
30fps	pclk	74.25	74.25	74.25
	dclk	111.375	55.6875	27.84375
	mipi_clk	445.5	222.75	111.375
	PLL2	445.5	445.5	445.5
	PLL1	297	297	297

Figure 33 shows raw 12-bit format.

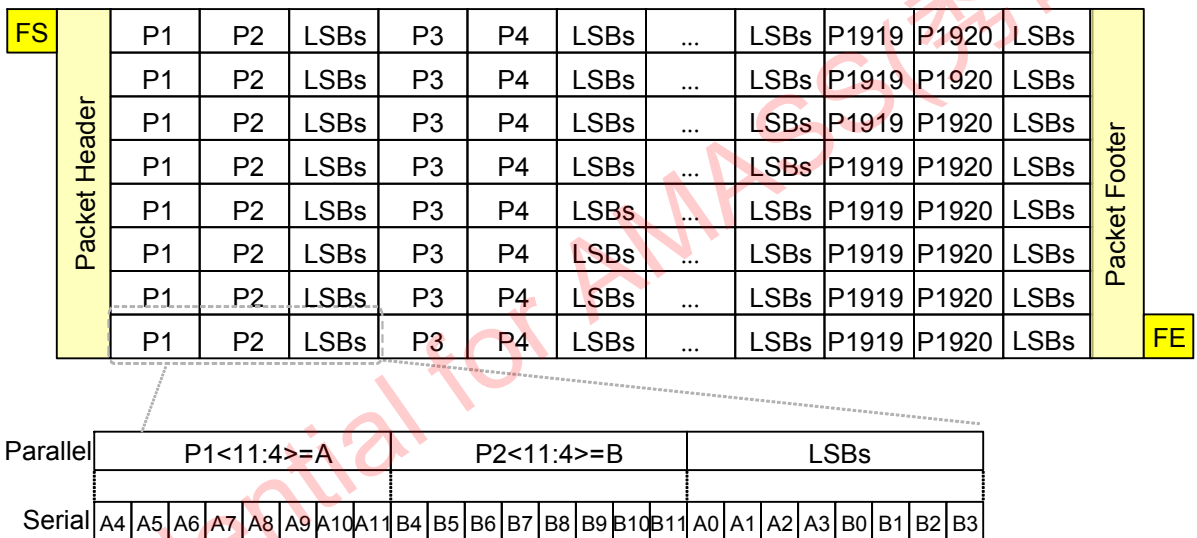


Figure 33 MIPI raw12 frame format

Table 28 shows registers relevant to MIPI and LVDS mode setting.

Table 28 Register Table - MIPI and LVDS mode setting

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mipi_en	F	04	[6]	1'b0	RW	aev	MIPI enable 1'b0 : disable 1'b1 : enable
clk_hs_mode	F	04	[4]	1'b1	RW	aev	MIPI clock lane hs mode 1'b0 : LP & HS mode 1'b1 : only HS mode
mipi_lane	F	08	[3:2]	2'b00	RW		MIPI lane selector 2'b00 : 1 lane mode 2'b01 : 2 lane mode 2'b10 : 4 lane mode

MIPI Global Operation

- Data Unit and Bit Transmission Order

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

MIPI transmitter serially sends data in byte unit starting from LSB. Figure 34 shows MIPI data transfer order.

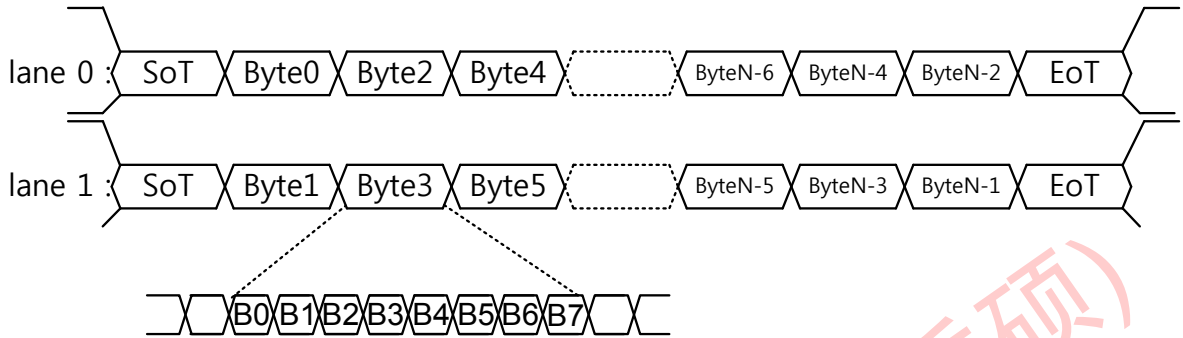


Figure 34 MIPI transmission order

- Lane States and Line Levels

Transmitter functions determine the Lane state by driving certain Line levels. During normal operation either a HS-TX or a LP-TX is driving a Lane. A HS-TX always drives the Lane differentially. The two LP-TX's drive the two Lines of a Lane independently and single-ended. This results in two possible High-Speed Lane states and four possible Low-Power Lane states. The High-Speed Lane states are Differential-0 and Differential-1. Low Power signaling is used for both Control mode and Escape mode. The interpretation of Low-Power Lane states depends on the mode of operation.

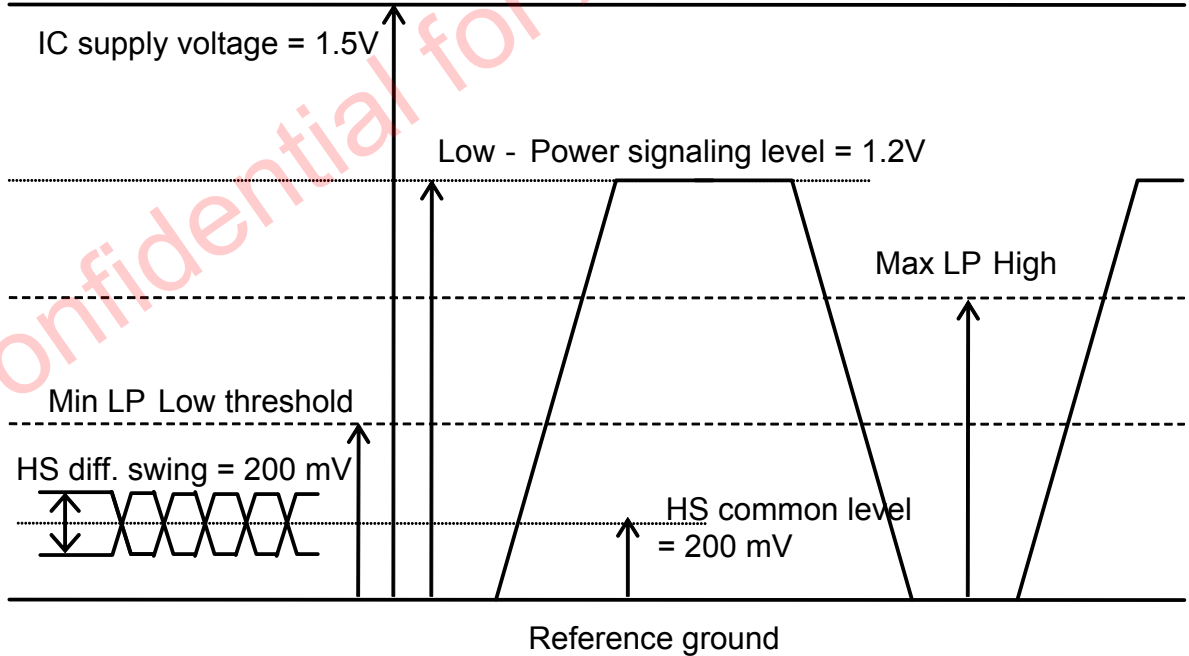


Figure 35 MIPI PAD levels

- Operating Modes : Control, High-Speed, and Escape
 During normal operation a Data Lane will be either in Control or High-Speed mode. High-Speed Data transmission happens in bursts and starts from and ends at a Stop state (LP-11), which is by definition in Control mode. The Lane is only in high-speed mode during Data bursts. The sequence to enter high speed mode is : LP-11, LP-01, LP-00 at which point the Data Lane remains in high speed mode until a LP-11 is received. The special Escape mode can only be entered via a request within Control mode. The Data Lane

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

shall always exit Escape mode and return to Control mode after detection of a Stop state. If not in High-Speed or Escape mode the Data Lane shall stay in Control mode. For Data Lanes and for Clock Lanes the Stop state serves as general standby state and may last for any period of time $> T_{LPX}$. Possible events starting from and ending in the Stop state are High-Speed Data Transmission burst (LP-11, LP-01, LP-00) and Escape mode request (LP-11, LP-10, LP-00, LP-01, LP-00). The Lane shall stay in the Stop state as long as no other state is presented on the Lane.

Table 29 Lane states description

State Code	Line Voltage Levels		High-Speed	Low-Power	
	DP-Line	DN-Line	Burst Mode	Control Mode	Escape Mode
HS-0	HS Low	HS High	Differential-0	N/A	N/A
HS-1	HS High	HS Low	Differential-1	N/A	N/A
LP-00	LP Low	LP Low	N/A	Bridge	Space
LP-01	LP Low	LP High	N/A	HS-Rqst	Mark-0
LP-10	LP High	LP Low	N/A	LP-Rqst	Mark-1
LP-11	LP High	LP High	N/A	Stop	N/A

Table 30 shows registers relevant to PAD level control based on MIPI state.

Table 30 Register Table - MIPI PAD control

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mipi_ck_control	F	05	[7:4]	4'b1010	RW		MIPI CKP/CKN pad state control 4'b0000 : Normal operation mode 4'b0001 : CKP/CKN = LP-00 state 4'b0010 : CKP/CKN = LP-01 state 4'b0011 : CKP/CKN = LP-10 state 4'b0100 : CKP/CKN = LP-11 state 4'b0101 : CKP/CKN = HS-0 state 4'b0110 : CKP/CKN = HS-1 state 4'b0111 : CKP/CKN = Hi-z state 4'b1000 : CKP/CKN = ULP state 4'b1010 : CKP/CKN = power down
mipi_d0_control	F	06	[7:4]	4'b1010	RW		MIPI DP0/DN0 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP0/DN0 = LP-00 state 4'b0010 : DP0/DN0 = LP-01 state 4'b0011 : DP0/DN0 = LP-10 state 4'b0100 : DP0/DN0 = LP-11 state 4'b0101 : DP0/DN0 = HS-0 state 4'b0110 : DP0/DN0 = HS-1 state 4'b0111 : DP0/DN0 = Hi-z state 4'b1000 : DP0/DN0 = ULP state 4'b1001 : DP0/DN0 = Serializer Test mode 4'b1010 : DP0/DN0 = power down
mipi_d1_control	F	06	[3:0]	4'b1010	RW		MIPI DP1/DN1 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP1/DN1 = LP-00 state 4'b0010 : DP1/DN1 = LP-01 state 4'b0011 : DP1/DN1 = LP-10 state

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array


Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							4'b0100 : DP1/DN1 = LP-11 state 4'b0101 : DP1/DN1 = HS-0 state 4'b0110 : DP1/DN1 = HS-1 state 4'b0111 : DP1/DN1 = Hi-z state 4'b1000 : DP1/DN1 = ULP state 4'b1001 : DP1/DN1 = Serializer Test mode 4'b1010 : DP1/DN1 = power down
mipi_d2_control	F	07	[7:4]	4'b1010	RW		MIPI DP2/DN2 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP2/DN2 = LP-00 state 4'b0010 : DP2/DN2 = LP-01 state 4'b0011 : DP2/DN2 = LP-10 state 4'b0100 : DP2/DN2 = LP-11 state 4'b0101 : DP2/DN2 = HS-0 state 4'b0110 : DP2/DN2 = HS-1 state 4'b0111 : DP2/DN2 = Hi-z state 4'b1000 : DP2/DN2 = ULP state 4'b1001 : DP2/DN2 = Serializer Test mode 4'b1010 : DP2/DN2 = power down
mipi_d3_control	F	07	[3:0]	4'b1010	RW		MIPI DP3/DN3 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP3/DN3 = LP-00 state 4'b0010 : DP3/DN3 = LP-01 state 4'b0011 : DP3/DN3 = LP-10 state 4'b0100 : DP3/DN3 = LP-11 state 4'b0101 : DP3/DN3 = HS-0 state 4'b0110 : DP3/DN3 = HS-1 state 4'b0111 : DP3/DN3 = Hi-z state 4'b1000 : DP3/DN3 = ULP state 4'b1001 : DP3/DN3 = Serializer Test mode 4'b1010 : DP3/DN3 = power down
d0_lane_swap	F	09	[7:6]	2'b00	RW		Data0 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
d1_lane_swap	F	09	[5:4]	2'b01	RW		Data1 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
d2_lane_swap	F	09	[3:2]	2'b10	RW		Data2 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
d3_lane_swap	F	09	[1:0]	2'b11	RW		Data3 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							2'b10 : d2 lane data 2'b11 : d3 lane data
mipi_ck_NP_swap	F	0B	[3]	1'b0	RW		Mipi clock N/P swap
d0_NP_swap	F	0B	[7]	1'b0	RW		Data0 N/P swap
d1_NP_swap	F	0B	[6]	1'b0	RW		Data1 N/P swap
d2_NP_swap	F	0B	[5]	1'b0	RW		Data2 N/P swap
d3_NP_swap	F	0B	[4]	1'b0	RW		Data3 N/P swap
mipi_test_d0	F	2D	[7:0]	0xAA	RW		MIPI test data 0 for HS state
mipi_test_d1	F	2E	[7:0]	0xFF	RW		MIPI test data 1 for HS state
mipi_test_d2	F	2F	[7:0]	0x00	RW		MIPI test data 2 for HS state
mipi_test_d3	F	30	[7:0]	0x55	RW		MIPI test data 3 for HS state

Low Level Protocol

The Low Level Protocol (LLP) is a byte oriented, packet based protocol that supports the transport of image data using Short and Long packet formats. For each packet structure, exit from the low power state followed by the Start of Transmission (SoT) sequence indicates the start of the packet. The End of Transmission (EoT) sequence followed by the low power state indicates the end of the packet.

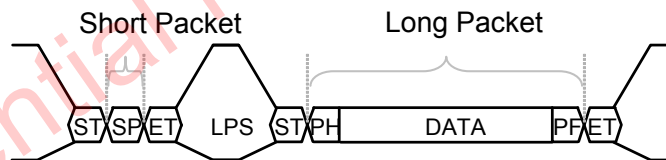

LPS = Low Power State
 ET = End of Transmission
 ST = Start of Transmission

Figure 36 MIPI low level protocol

- **Short Packet Format**
 The PK5210K supports two types of Short Packets for frame synchronization : Frame Start (FS) Packet and Frame End (FE) Packet. Data ID field is 00h for FS and 01h for FE. Each image frame shall begin with a FS packet containing the Frame Start Code. The FS Packet shall be followed by one or more long packets containing image data. Each image frame shall end with a FE packet containing the Frame End Code. For FS and FE synchronization packets the Short Packet Data Field shall contain a 16-bit frame number. This frame number is the same for the FS and FE synchronization packets corresponding to a given frame. The 16-bit frame number shall always be non-zero to distinguish it from the use-case where frame number is inoperative and remains set to zero. The Error Correction Code (ECC) byte allows single-bit errors to be corrected and 2-bit errors to be detected in the Short Packet.

*1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array*

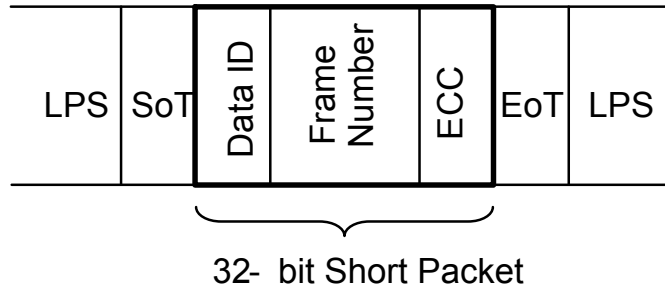


Figure 37 MIPI short packet structure

- Long Packet Format

A Long Packet shall consist of 3 elements : a 32-bit Packet Header (PH), an application Data Payload with a variable number of 8-bit words and a 16-bit Packet Footer (PF). The Packet Header is further composed of three elements : an 8-bit Data Identifier, a 16-bit Word Count field and an 8-bit ECC. The Packet Footer has one element : a 16-bit checksum. The Word Count defines the number of 8-bit data words in the Data Payload between the end of the Packet Header and the start of the Packet Footer. Neither the Packet Header nor the Packet Footer shall be included in the Word Count. After the end of the Packet Header the receiver reads the next WC*8-bits data words of the Data Payload. While reading the Data Payload the receiver shall not look for any embedded sync codes. Therefore, there are no limitations on the value of a data word. Once the receiver has read the Data Payload it reads the checksum in the Packet Footer. In the generic case, the length of the Data Payload shall be a multiple of 8-bit data words. In addition, each image data format may impose additional restrictions on the length of the payload data. Each byte shall be transmitted least significant bit first. Multi-byte elements such as Word Count, Checksum and the Short packet 16-bit Data Field shall be transmitted least significant byte first.

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

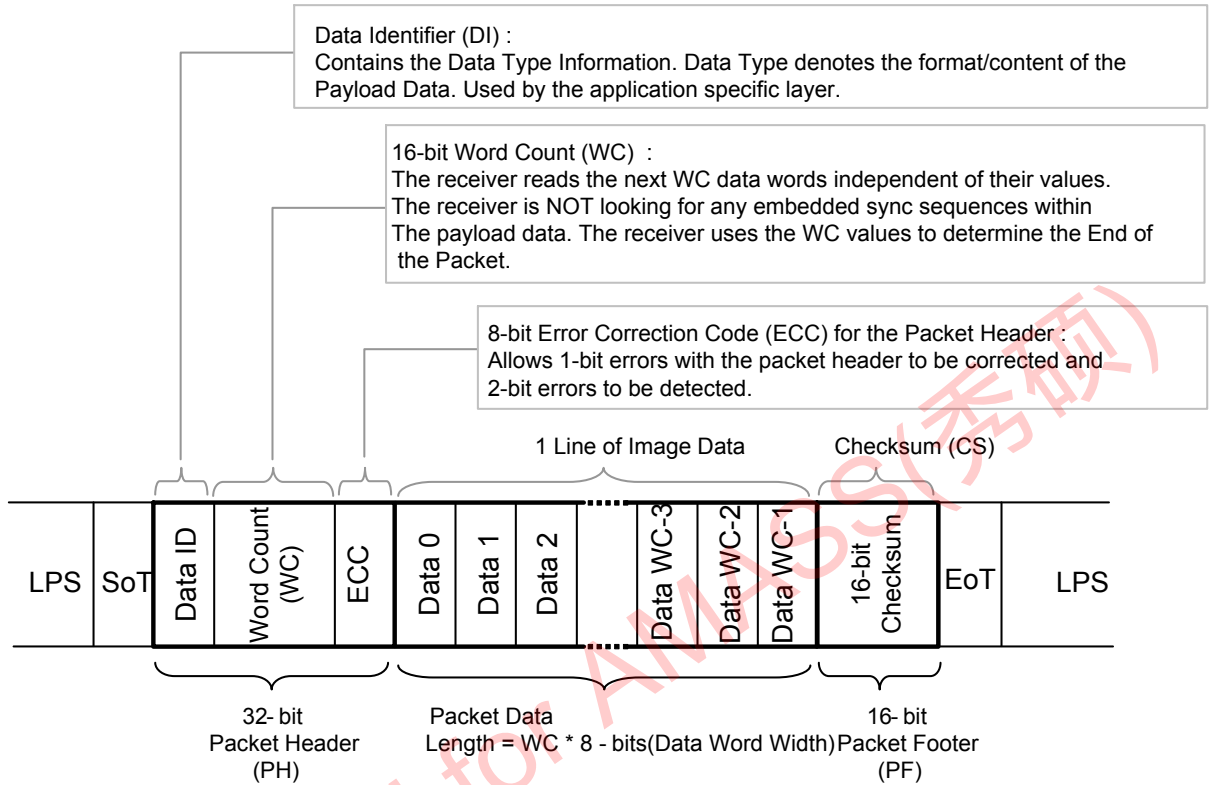


Figure 38 MIPI long packet structure

Table 31 MIPI Data Type and Data ID

Data ID	Data Type (Image Format)	Packet Type
00 hex	Frame start	Short
01 hex	Frame end	Short
2C hex	Raw bayer 12-bit	Long

Table 32 shows registers relevant to MIPI packet.

Table 32 Register Table - MIPI packet control

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mipi_pkt_size0_h	F	36	[7:0]	0x09	RW		MIPI word counter size 0 control for image data High Byte
mipi_pkt_size0_l	F	37	[7:0]	0x6F	RW		MIPI word counter size 0 control for image data Low Byte
mipi_pkt_size1_h	F	38	[7:0]	0x09	RW		MIPI word counter size 1 control for image data High Byte
mipi_pkt_size1_l	F	39	[7:0]	0x6F	RW		MIPI word counter size 1 control for image data Low Byte
mipi_pkt_size2_h	F	3A	[7:0]	0x09	RW		MIPI word counter size 2 control for image data High Byte

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mipi_pkt_size2_1	F	3B	[7:0]	0x6F	RW		MIPI word counter size 2 control for image data Low Byte
mipi_data_id0	F	42	[7:0]	0x2B	RW		MIPI data 0 identifier
mipi_data_id1	F	43	[7:0]	0x6B	RW		MIPI data 1 identifier
mipi_data_id2	F	44	[7:0]	0xAB	RW		MIPI data 2 identifier

- Packet Spacing and Frame Format**
 Between Low Level Protocol packets there must always be a transition into and out of the Low Power State (LPS). The packet spacing does not have to be a multiple of 8-bit data words as the receiver will synchronize to the correct byte boundary during the SoT sequence prior to the Packet Header of the next packet.

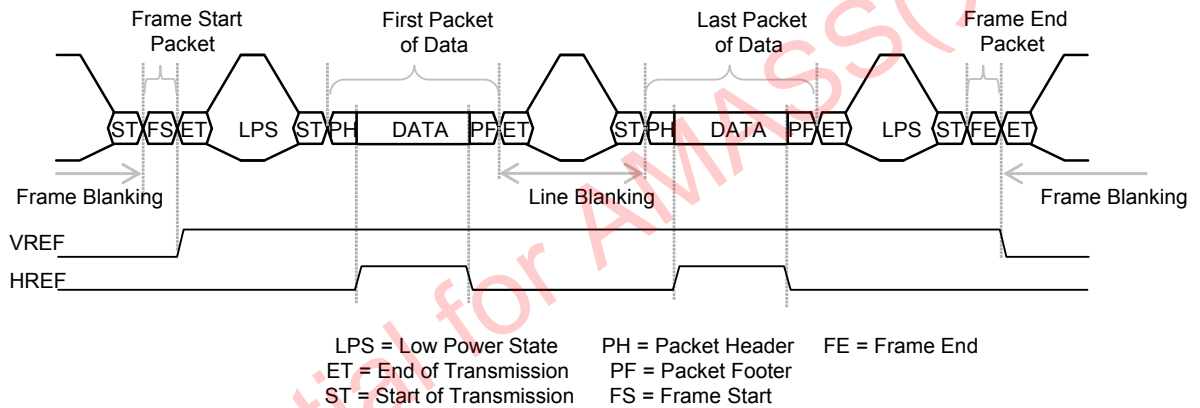


Figure 39 MIPI multiple packet

MIPI Electrical Characteristics

- Low-Power Transmitter**
 The Low-Power transmitter is a slew-rate controlled push-pull driver. It is used for driving the Lines in all Low-Power operating modes. It is therefore important that the static power consumption of a LP transmitter be as low as possible. The slew-rate of signal transitions is bounded in order to keep EMI low.

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

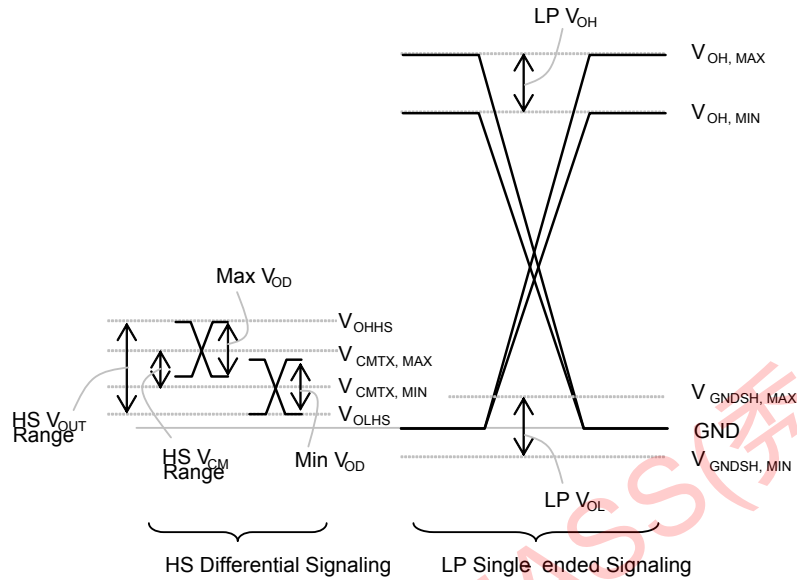


Figure 40 D-PHY signaling levels

Table 33 LP transmitter DC characteristics

Parameter	Description	Min	Nom	Max	Units	Notes
V_{OL}	Thevenin output low level	-50		50	mV	
V_{OH}	Thevenin output high level	1.1	1.2	1.3	V	
Z_{OLP}	Output Impedance of LP transmitter	110			Ohm	

Table 34 LP transmitter DC characteristics

Parameter	Description	Min	Nom	Max	Units	Notes
t_{RLP} / t_{FLP}	15%-85% rise time and fall time			25	ns	1, 5
t_{REOT}	30%-85% rise time in EOT state			35	ns	4, 5, 6
dV/dt_{SR}	Slew rate			120	mV/ns	1, 2, 3
C_{LOAD}	Load Capacitance	0		70	pF	

Notes 1. When the output is loaded with a capacitive load C_{LOAD}
 Notes 2. When the output voltage is between 15% and below 85% of the fully settled LP signal levels.
 Notes 3. Measured as average across 50mV segment of the output signal transition.
 Notes 4. The rise-time of t_{REOT} starts from the HS common level at the moment the differential amplitude drops below 70mV, due to stopping the differential drive.
 Notes 5. For capacitive loads from 0-70pF
 Notes 6. With an additional load capacitance CCM between 0-60pF on the termination center tap at RX side of the link.

- High-Speed Transmitter
 The reference characteristic impedance level is 100 Ohm differential, 50 Ohm single-ended per wire, and 25 Ohm common-mode for both wires together. A HS differential signal driven on the DP and DN pins is generated by a differential output driver. For reference, DP is considered as the positive side and DN as the negative side. The Lane state is called Differential-1 (HS-1) when the potential on DP is higher than the potential of DN. The Lane state is called Differential-0 (HS-0), when the potential on DP is lower than the potential of DN.

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

The differential output voltage V_{OD} is defined as the difference of the voltages V_{DP} and V_{DN} at the DP and DN pins, respectively.

$$V_{OD}=V_{DP}-V_{DN}$$

The output voltages V_{DP} and V_{DN} at the DP and DN pins shall not exceed the high-speed output high voltage V_{OHHS} . The common-mode voltage V_{CMTX} is defined as the arithmetic mean value of the voltages at the DP and DN pins :

$$V_{CMTX}=(V_{DP}+V_{DN})/2$$

Table 35 HS transmitter DC characteristics

Parameter	Description	Min	Nom	Max	Units	Notes
V_{OD}	HS transmit differential voltage	140	200	270	mV	1
V_{CMTX}	HS transmit static common mode voltage	150	200	250	mV	1
ΔV_{OD}	VOD mismatch when output is Differential-1 or Differential-0			10	mV	
ΔV_{CMTX}	VCMTX mismatch when output is Differential-1 or Differential-0			5	mV	
V_{OHHS}	HS output high voltage			360	mV	1
Z_{OS}	Single ended output impedance	40	50	62.5	W	
ΔZ_{OS}	Single ended output impedance mismatch			10	%	

Notes 1. Value when driving into load impedance

Table 36 HS transmitter AC characteristics

Parameter	Description	Min	Nom	Max	Units	Notes
$\Delta V_{CMTX(HF)}$	Common-level variation above 450MHz			15	mV _{RMS}	
$\Delta V_{CMTX(LF)}$	Common-level variation between 50-450MHz			25	mV _{PEAK}	1
t_R / t_F	20%-80% rise time and fall time	150		$0.3UI_{NOM}$	ps	2

Notes 1. V_{PP} is the voltage difference compared to the DC average common-mode potential.
Notes 2. UI_{NOM} is the long term average Unit Interval.

- High-Speed Data-Clock Timing
The Master side of the Link shall send a differential clock to the Slave side to be used for data sampling. This clock is at a fixed nominal frequency and stable for the entire duration of a data transfer. The DDR [Double Data Rate] Clock signal maintains a quadrature phase relationship to the data signal. Data will be sampled by both the rising and falling edges of the Clock signal. The Clock signal is a differential signal. Use of the term “rising-edge” means “rising edge of the signal (CLPp – CLKn)” and similarly for “falling edge”. Therefore, the frequency of the Clock signal will be half the desired data rate in bits per second. The timing relationship of the DDR Clock differential signal to the NRZ Data differential signal is shown in [Figure 41](#) . Data is launched in a quadrature relationship to the clock such that the Clock signal edge may be used directly by the receiver to sample the received data. The rising edge of the DDR Clock is sent during the first bit of each byte, such that the receiver can sample the bits of each byte starting with a rising edge.

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

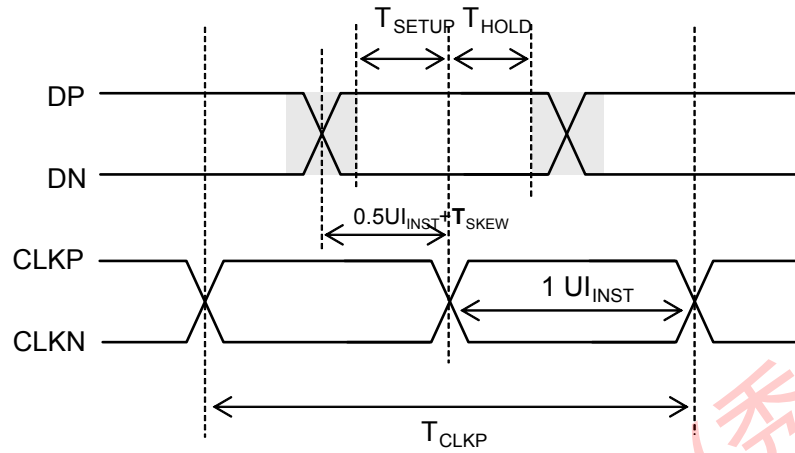


Figure 41 Data to clock timing

Table 37 MIPI clock signal spec

Clock Parameter	Symbol	Min	Nom	Max	Units	Notes
$U_{I_{instantaneous}}$	$U_{I_{INST}}$	0.8		1.2	$U_{I_{NOM}}$	
Data to Clock Skew	T_{SKEW}	-0.075		0.075	$U_{I_{NOM}}$	

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Electrical Characteristics

PK5210K does not have tolerant input pads. The input signal must have HVDD power level for stable operation. If the power of input signal is higher than the recommended level, leakage current may flow via short circuit path in the input pads.

DC Characteristics

Absolute maximum ratings ¹

AVDD supply voltage : -0.3 [V] to 4.0 [V]

HVDD supply voltage : -0.3 [V] to 4.0 [V]

DVDD supply voltage : -0.3 [V] to 1.8 [V]

DVDDM supply voltage : -0.3 [V] to 1.8 [V]

DC VTG at any input pin : -0.3 [V] to HVDD+0.3 [V]

DC VTG at any output pin : -0.3 [V] to HVDD+0.3 [V]

Storage temperature : -40 [°C] to + 125 [°C]

Table 38 DC characteristics

Symbol	Descriptions	Min	Typ	Max	Unit
AVDD	Analog VDD(AVDD) voltage relative to GND(AGND) level	2.97	3.3	3.63	[V]
HVDD	High VDD(HVDD) voltage relative to GND(HGND) level @ DVP	1.62	1.8	3.63	[V]
	High VDD(HVDD) voltage relative to GND(HGND) level @ MIPI		3.3		
DVDD	Digital VDD(DVDD) voltage relative to GND(DGND) level	TBD	1.2	TBD	[V]
DVDDM	Digital MIPI VDD(DVDDM) voltage relative to GND(DGND) level	1.152	1.2	1.32	[V]
I _{DDD}	HVDD=3.3 [V] @DVP	-	TBD	TBD	[mA]
	AVDD= 3.3 [V] @ DVP	-	TBD	TBD	
	DVDD= 1.2 [V] @ DVP	-	TBD	TBD	
	HVDD=3.3 [V] @MIPI	-	TBD	TBD	
	AVDD= 3.3 [V] @ MIPI	-	TBD	TBD	
I _{DDS}	DVDD= 1.2 [V] @ MIPI	-	TBD	TBD	[uA]
	Standby supply current	-	TBD	TBD	
V _{IL1}	Input voltage low level	-	-	HVDD*0.3	[V]
V _{IH1}	Input voltage high level	HVDD*0.7	-	-	[V]
V _{IL2}	Input voltage low level for rClk, rData.	-	-	HVDD*0.3	[V]
V _{IH2}	Input voltage high level for rClk, rData .	HVDD*0.7	-	-	[V]
C _{IN}	Input pin capacitance	-	-	10	[pF]
V _{OL1}	Output voltage low	-	-	HVDD*0.2	[V]
V _{OH1}	Output voltage high	HVDD*0.8	-	-	[V]

¹Excessive stresses may cause permanent damage to the device.

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Symbol	Descriptions	Min	Typ	Max	Unit
V _{OL2}	Output voltage low level for rClk, rData.	-	-	HVDD*0.2	[V]
V _{OH2}	Output voltage high level for rData.	HVDD*0.8	-	-	[V]
I _{IN}	Input leakage current	-10	-	10	[uA]
I _{OT}	Output leakage current	-10	-	10	[uA]

Confidential for AMASS(秀碩)

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

AC Characteristics

Table 39 2-wire serial interface characteristics

Symbol	Descriptions	Min	Typ	Max	Unit
f_{SCL}	2-wire serial interface Clock frequency	-	-	400	kHz
T_{ic}	2-wire serial interface Clock period	2.5	-	-	us
T_{icl}	2-wire serial interface Clock low level width	1.66	-	-	us
T_{ich}	2-wire serial interface Clock high level width	0.83	-	-	us
T_{iss}	Setup time for start condition	0.83	-	-	us
T_{ihs}	Hold time for start condition	0.83	-	-	us
T_{isd}	Setup time for input data	266	-	-	ns
T_{ihd}	Hold time for input data	0	-	-	ns
T_{isp}	Setup time for stop condition	0.83	-	-	us
T_{buf}	Bus free time between a stop and a new start condition	1.66	-	-	us
T_{oaa}	Delay from SCL falling edge to output data transition	-	-	354	ns
T_r	10% to 90% rising time for SCL/SDA (load : 10pF)	-	-	46	ns
T_f	90% to 10% falling time for SCL/SDA (load : 10pF)	-	-	37	ns
R_p	SCL, SDA pull-up resistor	-	2	-	k Ω

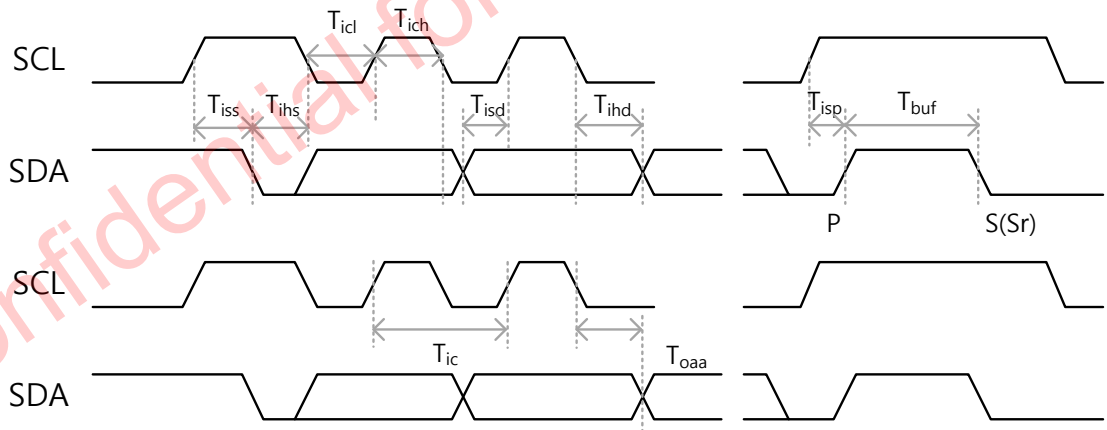


Figure 42 Timing diagram of SCL and SDA

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register Map

Table 40 Register Table - Group A

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
bank	A	03	[7:0]	0x00	RW		Register group selector
mirror	A	05	[1:0]	0x00	RW	aev	Image Inversion mirror[1] : vertical inversion mirror[0] : horizontal inversion
framewidth_h	A	06	[4:0]	0x08	RW	aev	Framewidth High Byte (must be larger than window width)
framewidth_l	A	07	[7:0]	0x97	RW	aev	Framewidth Low Byte (must be larger than window width)
fheight_a_h	A	08	[4:0]	0x04	RW	aev	Frameheight High Byte (must be larger than window height)
fheight_a_l	A	09	[7:0]	0x7C	RW	aev	Frameheight Low Byte (must be larger than window height)
i2c_control_1	A	1A	[7:0]	0x50	RW		I2c control register 1
softreset	A	20	[0]	0x00	RW		Soft reset 1'b0 : disable 1'b1 : enable (after succesful reset value reverts to 0)
pad_control1	A	23	[7:0]	0x60	RW		Pad control 1
pad_control2	A	24	[7:0]	0x00	RW		Pad control 2
pad_control3	A	25	[7:0]	0x00	RW		Pad control 3
pad_control4	A	26	[7:0]	0x00	RW		Pad control 4
pad_control5	A	27	[7:0]	0x00	RW		Pad control 5
pll_control2	A	4E	[7:0]	0x7A	RW		PLL control 2
pll_tg_n_cnt	A	51	[7:0]	0x2C	RW		TG PLL multiplication factor
pll_tg_r_cnt	A	52	[4:0]	0x04	RW		TG PLL division factor
pll_mp_n_cnt	A	53	[7:0]	0x2C	RW		MIPI PLL multiplication factor
pll_mp_r_cnt	A	54	[4:0]	0x04	RW		MIPI PLL division factor
clkdiv1	A	56	[7:0]	0x20	RW	aev	Clock divider 1
clkdiv2	A	57	[7:0]	0x50	RW	aev	Clock divider 2
clkdiv3	A	58	[7:0]	0xF3	RW	aev	Clock divider 3
sync_blankEAV_h	A	63	[3:0]	0x0B	RW		Blanking EAV control High Byte
sync_blankEAV_l	A	64	[7:0]	0x60	RW		Blanking EAV control Low Byte
sync_blankSAV_h	A	65	[3:0]	0x0A	RW		Blanking SAV control High Byte
sync_blankSAV_l	A	66	[7:0]	0xB0	RW		Blanking SAV control Low Byte
sync_activeEAV_h	A	67	[3:0]	0x09	RW		Active EAV control High Byte
sync_activeEAV_l	A	68	[7:0]	0xD0	RW		Active EAV control Low Byte
sync_activeSAV_h	A	69	[3:0]	0x08	RW		Active SAV control High Byte

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
sync_activeSAV_l	A	6A	[7:0]	0x00	RW		Active SAV control Low Byte
sync_CCIR_FF_h	A	6B	[3:0]	0x0F	RW		Format header control 0 (FF) High Byte
sync_CCIR_FF_l	A	6C	[7:0]	0xFF	RW		Format header control 0 (FF) Low Byte
sync_CCIR_00_h	A	6D	[3:0]	0x00	RW		Format header control 1 (00) High Byte
sync_CCIR_00_l	A	6E	[7:0]	0x00	RW		Format header control 1 (00) Low Byte
sync_CCIR_80_h	A	6F	[3:0]	0x08	RW		Blank data control 0 (80) High Byte
sync_CCIR_80_l	A	70	[7:0]	0x00	RW		Blank data control 0 (80) Low Byte
sync_CCIR_10_h	A	71	[3:0]	0x01	RW		Blank data control 1 (10) High Byte
sync_CCIR_10_l	A	72	[7:0]	0x00	RW		Blank data control 1 (10) Low Byte
vsyncstartrow0_h	A	74	[4:0]	0x00	RW	aev	Parallel interface - Vertical sync start control High Byte MIPI interface @ Virtual channel 0 - Frame start control High Byte
vsyncstartrow0_l	A	75	[7:0]	0x17	RW	aev	Parallel interface - Vertical sync start control Low Byte MIPI interface @ Virtual channel 0 - Frame start control Low Byte
vsyncstoprow0_h	A	76	[4:0]	0x04	RW	aev	Parallel interface - Vertical sync end control High Byte MIPI interface @ Virtual channel 0 - Frame end control High Byte
vsyncstoprow0_l	A	77	[7:0]	0x5F	RW	aev	Parallel interface - Vertical sync end control Low Byte MIPI interface @ Virtual channel 0 - Frame end control Low Byte
vsynccolumn0_h	A	78	[4:0]	0x00	RW	aev	Internal vsync 0 start point High Byte @ column counter
vsynccolumn0_l	A	79	[7:0]	0x02	RW	aev	Internal vsync 0 start point Low Byte @ column counter
sync_control_0	A	AD	[7:0]	0x80	RW	aev	Sync_control 0
sync_control_1	A	AE	[7:0]	0x00	RW	aev	Sync_control 1
data_min_h	A	B0	[3:0]	0x00	RW		Minimum active data High Byte
data_min_l	A	B1	[7:0]	0x00	RW		Minimum active data Low Byte
data_max_h	A	B2	[3:0]	0x0F	RW		Maximum active data High Byte
data_max_l	A	B3	[7:0]	0xFF	RW		Maximum active data Low Byte

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 41 Register Table - Group B

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
bayer_control_07	B	0A	[7:0]	0x00	RW		bayer control 07
bayer_control_14	B	11	[7:0]	0x00	RW		bayer control 14
rcount_genlock_h	B	50	[4:0]	0x00	RW		Genlock row count High Byte
rcount_genlock_l	B	51	[7:0]	0x01	RW		Genlock row count Low Byte
ccount_genlock_h	B	52	[4:0]	0x00	RW		Genlock column count High Byte
ccount_genlock_l	B	53	[7:0]	0x01	RW		Genlock column count Low Byte
genlock_width	B	54	[7:0]	0x10	RW		Genlock pulse width
inttime_h	B	6E	[7:0]	0x01	RW	wr_en	Integration time 0 (line) High Byte
inttime_m	B	6F	[7:0]	0x40	RW	wr_en	Integration time 0 (line) Low Byte
inttime_l	B	70	[7:0]	0x00	RW	wr_en	Integration time 0 (column)
inttime_vs_h	B	71	[7:0]	0x00	RW	wr_en	Integration time 1 (line) High Byte
inttime_vs_m	B	72	[7:0]	0x02	RW	wr_en	Integration time 1 (line) Low Byte
inttime_vs_l	B	73	[7:0]	0x00	RW	wr_en	Integration time 1 (column)
globalgain	B	74	[7:0]	0x00	RW	wr_en	Analog gain
digitalgain_l	B	75	[7:0]	0x10	RW	wr_en	Digital gain of long data
digitalgain_s	B	76	[7:0]	0x10	RW	wr_en	Digital gain of short data
digitalgain_vs	B	77	[7:0]	0x10	RW	wr_en	Digital gain of very short data
wr_en	B	8D	[0]	0x00	RW		Update exposure related register l'b0 : no update l'b1 : wr_en set
wr_en_off	B	8E	[0]	0x00	RW		Update exposure related register l'b0 : update @ wr_en = l'b1 l'b1 : Immediately update
tp_control_0	B	BC	[7:0]	0x00	RW		Test pattern selection
tp_control_1_h	B	BD	[7:0]	0x00	RW		R color for test pattern High Byte
tp_control_1_l	B	BE	[7:0]	0x00	RW		R color for test pattern Low Byte
tp_control_2_h	B	BF	[7:0]	0x00	RW		G1 color for test pattern High Byte
tp_control_2_l	B	C0	[7:0]	0x00	RW		G1 color for test pattern Low Byte
tp_control_3_h	B	C1	[7:0]	0x00	RW		G2 color for test pattern High Byte
tp_control_3_l	B	C2	[7:0]	0x00	RW		G2 color for test pattern Low Byte
tp_control_4_h	B	C3	[7:0]	0x00	RW		B color for test pattern High Byte
tp_control_4_l	B	C4	[7:0]	0x00	RW		B color for test pattern Low Byte
tp_width_h	B	C5	[2:0]	0x07	RW		Test pattern width for color bar pattern High Byte
tp_width_l	B	C6	[7:0]	0xA8	RW		Test pattern width for color bar pattern Low Byte

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 42 Register Table - Group F

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
mipi_control_0	F	04	[7:0]	0x30	RW	aev	MIPI control 0
mipi_control_1	F	05	[7:0]	0xAB	RW		MIPI control 1
mipi_control_2	F	06	[7:0]	0xAA	RW		MIPI control 2
mipi_control_3	F	07	[7:0]	0xAA	RW		MIPI control 3
mipi_control_4	F	08	[7:0]	0x01	RW		MIPI control 4
mipi_control_7	F	0B	[7:0]	0x00	RW		MIPI control 7
mipi_test_d0	F	2D	[7:0]	0xAA	RW		MIPI test data 0 for HS state
mipi_test_d1	F	2E	[7:0]	0xFF	RW		MIPI test data 1 for HS state
mipi_test_d2	F	2F	[7:0]	0x00	RW		MIPI test data 2 for HS state
mipi_test_d3	F	30	[7:0]	0x55	RW		MIPI test data 3 for HS state
mipi_pkt_size0_h	F	36	[7:0]	0x09	RW		MIPI word counter size 0 control for image data High Byte
mipi_pkt_size0_l	F	37	[7:0]	0x6F	RW		MIPI word counter size 0 control for image data Low Byte
mipi_pkt_size1_h	F	38	[7:0]	0x09	RW		MIPI word counter size 1 control for image data High Byte
mipi_pkt_size1_l	F	39	[7:0]	0x6F	RW		MIPI word counter size 1 control for image data Low Byte
mipi_pkt_size2_h	F	3A	[7:0]	0x09	RW		MIPI word counter size 2 control for image data High Byte
mipi_pkt_size2_l	F	3B	[7:0]	0x6F	RW		MIPI word counter size 2 control for image data Low Byte
mipi_data_id0	F	42	[7:0]	0x2B	RW		MIPI data 0 identifier
mipi_data_id1	F	43	[7:0]	0x6B	RW		MIPI data 1 identifier
mipi_data_id2	F	44	[7:0]	0xAB	RW		MIPI data 2 identifier

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 43 Register Table - Group G

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
isp_func_2	G	06	[7:0]	0x00	RW	aev	ISP_control 2
nr_ratio_l	G	37	[7:0]	0x08	RW	aev	NR strength control (long)
nr_ratio_s	G	3A	[7:0]	0x08	RW	aev	NR strength control (short)
nr_ratio_vs	G	3D	[7:0]	0x08	RW	aev	NR strength control (very-short)
cmp_x1_h	G	B5	[1:0]	0x00	RW	aev	Explanatory variable point 1 for compress
cmp_x1_m	G	B6	[7:0]	0x40	RW	aev	Explanatory variable point 1 for compress
cmp_x1_l	G	B7	[7:0]	0x00	RW	aev	Explanatory variable point 1 for compress
cmp_x2_h	G	B8	[1:0]	0x00	RW	aev	Explanatory variable point 2 for compress
cmp_x2_m	G	B9	[7:0]	0x80	RW	aev	Explanatory variable point 2 for compress
cmp_x2_l	G	BA	[7:0]	0x00	RW	aev	Explanatory variable point 2 for compress
cmp_x3_h	G	BB	[1:0]	0x01	RW	aev	Explanatory variable point 3 for compress
cmp_x3_m	G	BC	[7:0]	0x00	RW	aev	Explanatory variable point 3 for compress
cmp_x3_l	G	BD	[7:0]	0x00	RW	aev	Explanatory variable point 3 for compress
cmp_x4_h	G	BE	[1:0]	0x02	RW	aev	Explanatory variable point 4 for compress
cmp_x4_m	G	BF	[7:0]	0x00	RW	aev	Explanatory variable point 4 for compress
cmp_x4_l	G	C0	[7:0]	0x00	RW	aev	Explanatory variable point 4 for compress
cmp_y0_h	G	C1	[3:0]	0x00	RW	aev	Dependent variable point 0 for compress
cmp_y0_l	G	C2	[7:0]	0x00	RW	aev	Dependent variable point 0 for compress
cmp_y1_h	G	C3	[3:0]	0x04	RW	aev	Dependent variable point 1 for compress
cmp_y1_l	G	C4	[7:0]	0x00	RW	aev	Dependent variable point 1 for compress
cmp_y2_h	G	C5	[3:0]	0x06	RW	aev	Dependent variable point 2 for compress
cmp_y2_l	G	C6	[7:0]	0x00	RW	aev	Dependent variable point 2 for compress
cmp_y3_h	G	C7	[3:0]	0x08	RW	aev	Dependent variable point 3 for compress
cmp_y3_l	G	C8	[7:0]	0x80	RW	aev	Dependent variable point 3 for compress
cmp_y4_h	G	C9	[3:0]	0x0C	RW	aev	Dependent variable point 4 for compress
cmp_y4_l	G	CA	[7:0]	0x00	RW	aev	Dependent variable point 4 for compress
cmp_y5_h	G	CB	[3:0]	0x0F	RW	aev	Dependent variable point 5 for compress
cmp_y5_l	G	CC	[7:0]	0xFF	RW	aev	Dependent variable point 5 for compress

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 44 Register Table - Group H

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
wdr_ctrl_0	H	04	[7:0]	0x00	RW	aev	Control signals for WDR
lens_scale	H	80	[7:0]	0x80	RW	aev	LSC scale control
lens_x	H	81	[7:0]	0x00	RW	aev	LSC center control
lens_y	H	82	[7:0]	0x00	RW	aev	LSC center control

Confidential for AMASS(秀碩)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 45 Register Table - Group I

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
dgain_isp	I	88	[7:0]	0x00	RW	aev	ISP digitalgain (10h = x1, ... , FFh = x15.9735)
ADG_ratio	I	BD	[7:0]	0x08	RW	aev	ADG ratio (02h = x1)

Confidential for AMASS(秀碩)

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Table 46 Register Table - Control register map

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
pad_control1	A	23	[5:4]	2'b10	RW		stdby_level Output data pad stdby level selector 2'b00 : low 2'b01 : high 2'b1x : hiz
	A	23	[3]	1'b0	RW		clkoff Clock pad kill enable 1'b0 : disable (not kill) 1'b1 : enable (kill)
pad_control2	A	24	[7:6]	2'b00	RW		pad_drv Data pad drivability control
	A	24	[5:4]	2'b00	RW		pclk_drv PCLK pad drivability control
	A	24	[3:0]	4'b0000	RW		dly_digi_PCLK PCLK timing delay delay = dly_digi_PCLK*0.4 ns
pad_control3	A	25	[7]	1'b0	RW		vsync_pad_en Vsync pad enable 1'b0 : disable 1'b1 : enable
	A	25	[6:5]	2'b00	RW		hsync_drv Hsync Pad drivability control
	A	25	[4]	1'b0	RW		hsync_pad_en Hsync pad enable 1'b0 : disable 1'b1 : enable
	A	25	[3]	1'b0	RW		pclk_pad_en PCLK pad enable 1'b0 : disable 1'b1 : enable
	A	25	[2]	1'b0	RW		pclk_polarity Change PCLK phase
	A	25	[1]	1'b0	RW		dpad_swap Data pad swap option 1'b0 : [MSB:LSB] 1'b1 : [LSB:MSB]
	A	25	[0]	1'b0	RW		genlock_pad_en GENLOCK pad enable 1'b0 : disable 1'b1 : enable
pad_control4	A	26	[7]	1'b0	RW		d11_pad_en D11 pad control 1'b0 : disable 1'b1 : enable
	A	26	[6]	1'b0	RW		d10_pad_en D10 pad control 1'b0 : disable

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							1'b1 : enable
	A	26	[5]	1'b0	RW		d9_pad_en D9 pad control 1'b0 : disable 1'b1 : enable
	A	26	[4]	1'b0	RW		d8_pad_en D8 pad control 1'b0 : disable 1'b1 : enable
	A	26	[3]	1'b0	RW		d7_pad_en D7 pad control 1'b0 : disable 1'b1 : enable
	A	26	[2]	1'b0	RW		d6_pad_en D6 pad control 1'b0 : disable 1'b1 : enable
	A	26	[1]	1'b0	RW		d5_pad_en D5 pad control 1'b0 : disable 1'b1 : enable
	A	26	[0]	1'b0	RW		d4_pad_en D4 pad control 1'b0 : disable 1'b1 : enable
pad_control5	A	27	[7]	1'b0	RW		d3_pad_en D3 pad control 1'b0 : disable 1'b1 : enable
	A	27	[6]	1'b0	RW		d2_pad_en D2 pad control 1'b0 : disable 1'b1 : enable
	A	27	[5]	1'b0	RW		d1_pad_en D1 pad control 1'b0 : disable 1'b1 : enable
	A	27	[4]	1'b0	RW		d0_pad_en D0 pad control 1'b0 : disable 1'b1 : enable
i2c_control_1	A	1A	[7:4]	4'b0101	RW		updatecontrol Control I2C register with autov, aev update type LSB 2-bit updatecontrol[1:0] controls aev update and MSB 2-bit updatecontrol[3:2] controls autov update 2'b00 : no update

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							2'b01 : aev update 2'b1x : immediate aev update
clkdiv1	A	56	[7:6]	2'b00	RW	aev	adclk_div ADC clock divider $isp_clk = vco1 / (2^{adclk_div})$
	A	56	[5:4]	2'b10	RW	aev	ispclk_div ISP clock divider $isp_clk = vco1 / (2^{ispclk_div})$
clkdiv2	A	57	[7:6]	2'b01	RW	aev	mipicl_div MIPI clock divider $mipi_clk = vco2 / (2^{mipicl_div})$
	A	57	[4:3]	2'b10	RW	aev	ddclk_div MIPI byte clock divider $ddclk = vco2 / (2^{ddclk_div})$
clkdiv3	A	58	[7]	1'b1	RW	aev	isp_clk_en isp clock enable
	A	58	[6]	1'b1	RW	aev	tm_clk_en tone map clock enable
pll_control2	A	4E	[5]	1'b1	RW		plltg_pd PLL1 power down mode 1'b0 : pll1 power on 1'b1 : pll1 power down
	A	4E	[4]	1'b1	RW		pll_bypass PLL bypass 1'b0 : use pll mode 1'b1 : pll bypass mode
	A	4E	[3]	1'b1	RW		pllmp_pd PLL2 power down mode 1'b0 : pll2 power on 1'b1 : pll2 power down
bayer_control_07	B	0A	[5]	1'b0	RW		genlock_en GENLOCK enable 1'b0 : disable 1'b1 : enable
	B	0A	[4]	1'b0	RW		genlock_master GENLOCK master 1'b0 : slave 1'b1 : master
bayer_control_14	B	11	[4:3]	2'b00	RW		tp_seq Test pattern block input sequence selection
	B	11	[2:1]	2'b00	RW		tp_seq_vs Test pattern block input sequence selection for very short
sync_control_0	A	AD	[6:5]	2'b00	RW	aev	sync_drop Vsync, hsync drop control 2'b00 : No drop 2'b01 : vsync drop

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							2'b10 : hsync drop 2'b11 : hsync and vsync drop
sync_control_1	A	AE	[6]	1'b0	RW	aev	sync_vsyncPolarity Vsync polarity change 1'b0 : disable 1'b1 : enable
	A	AE	[5]	1'b0	RW	aev	sync_hsyncAllLines Hsync output all lines enable(black and active) 1'b0 : No hsync during vertical blank 1'b1 : hsync during vertical blank
	A	AE	[4]	1'b0	RW	aev	sync_hsyncPolarity Hsync polarity change 1'b0 : disable 1'b1 : enable
	A	AE	[1]	1'b0	RW	aev	data_clamp Effective data clamping enable 1'b0 : disable 1'b1 : enable
mipi_control_0	F	04	[6]	1'b0	RW	aev	mipi_en MIPI enable 1'b0 : disable 1'b1 : enable
	F	04	[4]	1'b1	RW	aev	clk_hs_mode MIPI clock lane hs mode 1'b0 : LP & HS mode 1'b1 : only HS mode
mipi_control_1	F	05	[7:4]	4'b1010	RW		mipi_ck_control MIPI CKP/CKN pad state control 4'b0000 : Normal operation mode 4'b0001 : CKP/CKN = LP-00 state 4'b0010 : CKP/CKN = LP-01 state 4'b0011 : CKP/CKN = LP-10 state 4'b0100 : CKP/CKN = LP-11 state 4'b0101 : CKP/CKN = HS-0 state 4'b0110 : CKP/CKN = HS-1 state 4'b0111 : CKP/CKN = Hi-z state 4'b1000 : CKP/CKN = ULP state 4'b1010 : CKP/CKN = power down
mipi_control_2	F	06	[7:4]	4'b1010	RW		mipi_d0_control MIPI DP0/DN0 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP0/DN0 = LP-00 state 4'b0010 : DP0/DN0 = LP-01 state 4'b0011 : DP0/DN0 = LP-11 state 4'b0100 : DP0/DN0 = LP-11 state 4'b0101 : DP0/DN0 = HS-0 state 4'b0110 : DP0/DN0 = HS-1 state 4'b0111 : DP0/DN0 = Hi-z state 4'b1000 : DP0/DN0 = ULP state 4'b1001 : DP0/DN0 = Serializer Test

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							mode 4'b1010 : DP0/DN0 = power down
	F	06	[3:0]	4'b1010	RW		mipi_d1_control MIPI DP1/DN1 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP1/DN1 = LP-00 state 4'b0010 : DP1/DN1 = LP-01 state 4'b0011 : DP1/DN1 = LP-10 state 4'b0100 : DP1/DN1 = LP-11 state 4'b0101 : DP1/DN1 = HS-0 state 4'b0110 : DP1/DN1 = HS-1 state 4'b0111 : DP1/DN1 = Hi-z state 4'b1000 : DP1/DN1 = ULP state 4'b1001 : DP1/DN1 = Serializer Test mode 4'b1010 : DP1/DN1 = power down
mipi_control_3	F	07	[7:4]	4'b1010	RW		mipi_d2_control MIPI DP2/DN2 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP2/DN2 = LP-00 state 4'b0010 : DP2/DN2 = LP-01 state 4'b0011 : DP2/DN2 = LP-10 state 4'b0100 : DP2/DN2 = LP-11 state 4'b0101 : DP2/DN2 = HS-0 state 4'b0110 : DP2/DN2 = HS-1 state 4'b0111 : DP2/DN2 = Hi-z state 4'b1000 : DP2/DN2 = ULP state 4'b1001 : DP2/DN2 = Serializer Test mode 4'b1010 : DP2/DN2 = power down
	F	07	[3:0]	4'b1010	RW		mipi_d3_control MIPI DP3/DN3 pad state control 4'b0000 : Normal operation mode 4'b0001 : DP3/DN3 = LP-00 state 4'b0010 : DP3/DN3 = LP-01 state 4'b0011 : DP3/DN3 = LP-10 state 4'b0100 : DP3/DN3 = LP-11 state 4'b0101 : DP3/DN3 = HS-0 state 4'b0110 : DP3/DN3 = HS-1 state 4'b0111 : DP3/DN3 = Hi-z state 4'b1000 : DP3/DN3 = ULP state 4'b1001 : DP3/DN3 = Serializer Test mode 4'b1010 : DP3/DN3 = power down
mipi_control_4	F	08	[3:2]	2'b00	RW		mipi_lane MIPI lane selector 2'b00 : 1 lane mode 2'b01 : 2 lane mode 2'b10 : 4 lane mode
mipi_control_5	F	09	[7:6]	2'b00	RW		d0_lane_swap Data0 lane data swap 2'b00 : d0 lane data

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
	F	09	[5:4]	2'b01	RW		d1_lane_swap Data1 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
	F	09	[3:2]	2'b10	RW		d2_lane_swap Data2 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
	F	09	[1:0]	2'b11	RW		d3_lane_swap Data3 lane data swap 2'b00 : d0 lane data 2'b01 : d1 lane data 2'b10 : d2 lane data 2'b11 : d3 lane data
mipi_control_7	F	0B	[7]	1'b0	RW		d0_NP_swap Data0 N/P swap
	F	0B	[6]	1'b0	RW		d1_NP_swap Data1 N/P swap
	F	0B	[5]	1'b0	RW		d2_NP_swap Data2 N/P swap
	F	0B	[4]	1'b0	RW		d3_NP_swap Data3 N/P swap
	F	0B	[3]	1'b0	RW		mipi_ck_NP_swap Mipi clock N/P swap
isp_func_2	G	06	[7]	1'b0	RW	aev	nr_en_l NR enable (long) 1'b0 : disable 1'b1 : enable
	G	06	[6]	1'b0	RW	aev	nr_en_s NR enable (short) 1'b0 : disable 1'b1 : enable
	G	06	[5]	1'b0	RW	aev	nr_en_vs NR enable (very-short) 1'b0 : disable 1'b1 : enable
	G	06	[0]	1'b0	RW	aev	isp_dgain_en ISP digitalgain enable 1'b0 : disable 1'b1 : enable
wdr_ctrl_0	H	04	[6]	1'b0	RW	aev	lens_en Lens shading compensation enable

1/2.7 inch FHD Bayer Chip
CMOS Image Sensor with 1960x1120 Pixel Array

Register name	Address		Bits	Init. Val.	Type	Up date	Description
	Bank	Hex					
							1'b0 : disable 1'b1 : enable

Confidential for AMASS(秀碩)

1/2.7 inch FHD Bayer Chip
 CMOS Image Sensor with 1960x1120 Pixel Array

Revision History

Version	Date [D/M/Y]	Notes	Writer
0.0	02/06/2020	(Preliminary)	Jaedong Park
0.1	03/06/2020	<ul style="list-style-type: none"> Modify optical format. - P.6 <ul style="list-style-type: none"> 2.7 inch 	Jaedong Park
0.2	16/07/2020	<ul style="list-style-type: none"> Update Register Update Timing - P.24 <ul style="list-style-type: none"> modified table Update Test Pattern Control - P.32 <ul style="list-style-type: none"> deleted tp_control_5 Update DC characteristics. - P.49~50 <ul style="list-style-type: none"> Table format Update AC characteristics. - P.51 <ul style="list-style-type: none"> Table format Update Register Map. <ul style="list-style-type: none"> deleted PAD delay (pad_control6~12) ddclk divider 	Jaedong Park
0.3	19/08/2020	<ul style="list-style-type: none"> Update General Description. - P.6 <ul style="list-style-type: none"> Sensitivity Dark Signal Dynamic range SNR 	Jaedong Park
0.4	03/09/2020	<ul style="list-style-type: none"> Update General Description. - P.6 <ul style="list-style-type: none"> Description 	Jaedong Park
0.5	15/10/2020	<ul style="list-style-type: none"> Update General Description. - P.6 <ul style="list-style-type: none"> HVDD Update DC characteristics. - P.49~50 <ul style="list-style-type: none"> AVDD / HVDD / DVDDM 	Jaedong Park