

PQ05RF12/PQ05RF13 Series

1A Output Low Power-Loss Voltage Regulators Considering Power Line Voltage Drop

■ Features

- Low power-loss (Dropout voltage : MAX.0.5V)
- Compact resin full-mold package
- Output voltage value (5.3V, 9.3V, 12.3V) with an allowance for power line voltage drop
- The high-precision output voltage models are also available. (output voltage precision : $\pm 2.5\%$)
- Built-in ON/OFF control function.

■ Applications

- Series power supply for various electronic equipment such as VCRs and electronic instruments

■ Model Line-ups

| Output voltage | 5.3V output | 9.3V output | 12.3V output |
|---------------------------------------|-------------|-------------|--------------|
| Output voltage precision: $\pm 5\%$ | PQ05RF12 | PQ09RF12 | PQ12RF12 |
| Output voltage precision: $\pm 2.5\%$ | PQ05RF13 | PQ09RF13 | PQ12RF13 |

■ Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)


| Parameter | Symbol | Rating | Unit |
|---|-----------|---------------|------------------|
| *1 Input voltage | V_{IN} | 35 | V |
| *1 ON/OFF control terminal voltage | V_C | 35 | V |
| Output current | I_O | 1 | A |
| Power dissipation (No heat sink) | P_{D1} | 1.5 | W |
| Power dissipation (with infinite heat sink) | P_{D2} | 15 | W |
| *2 Junction temperature | T_j | 150 | $^\circ\text{C}$ |
| Operating temperature | T_{opr} | -20 to +80 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -40 to +150 | $^\circ\text{C}$ |
| Soldering temperature | T_{sol} | 260 (For 10s) | $^\circ\text{C}$ |

*1 All are open except GND and applicable terminals.

*2 Overheat protection may operate at $125 < T_j < 150^\circ\text{C}$

■ Outline Dimensions

(Unit : mm)

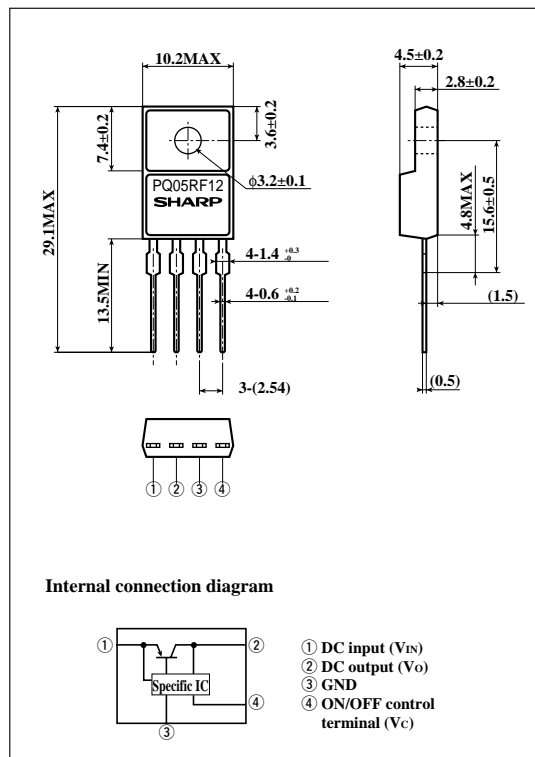

■ Electrical Characteristics

Unless otherwise specified, condition shall be $(V_{IN}=8V, I_o=0.5A(PQ05RF12/PQ05RF13))$
 $(V_{IN}=12V, I_o=0.5A(PQ09RF12/PQ09RF13))$
 $(V_{IN}=15V, I_o=0.5A(PQ12RF12/PQ12RF13))$

($T_a=25^{\circ}C$)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---|--------------|---------------------------|----------|------------|------|----------------|---|
| Output voltage | V_o | - | PQ05RF12 | 5.04 | 5.3 | 5.56 | V |
| | | | PQ09RF12 | 8.84 | 9.3 | 9.76 | |
| | | | PQ12RF12 | 11.69 | 12.3 | 12.91 | |
| | | | PQ05RF13 | 5.17 | 5.3 | 5.43 | |
| | | | PQ09RF13 | 9.07 | 9.3 | 9.53 | |
| | | | PQ12RF13 | 12.0 | 12.3 | 12.6 | |
| Load regulation | R_{eL} | $I_o=5mA$ to 1.0A | - | 0.1 | 2.0 | % | |
| Line regulation | R_{eL} | $V_{IN}=7$ to 17V | - | 0.5 | 2.5 | % | |
| | | $V_{IN}=11$ to 21V | - | | | | |
| | | $V_{IN}=14$ to 24V | - | | | | |
| Temperature coefficient of output voltage | TcV_o | $T_j=0$ to $125^{\circ}C$ | - | ± 0.02 | - | %/ $^{\circ}C$ | |
| Ripple rejection | RR | Refer to Fig. 2 | 45 | 55 | - | dB | |
| Dropout voltage | V_{i-o} | ^{*3} | - | - | 0.5 | V | |
| ON-state voltage for control | $V_{C(ON)}$ | ^{*4} | 2.0 | - | - | V | |
| ON-state current for control | $I_{C(ON)}$ | $V_C=2.7V$ | - | - | 20 | μA | |
| OFF-state voltage for control | $V_{C(OFF)}$ | - | - | - | 0.8 | V | |
| OFF-state current for control | $I_{C(OFF)}$ | $V_C=0.4V$ | - | - | -0.4 | mA | |
| Quiescent current | I_q | $V_C=0A$ | - | - | 10 | mA | |

^{*3} Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

^{*4} In case of opening control terminal ④, output voltage turns on.

Fig.1 Test Circuit



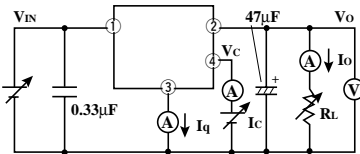


Fig.2 Test Circuit of Ripple Rejection

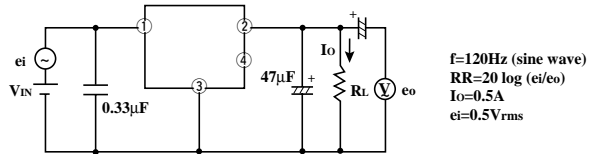

$f=120Hz$ (sine wave)
 $RR=20 \log(ei/eo)$
 $I_o=0.5A$
 $ei=0.5Vrms$

Fig.3 Power Dissipation vs. Ambient Temperature

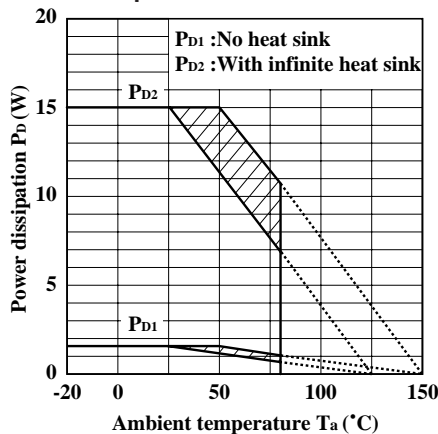

Note) Oblique line portion: Overheat protection may operate in this area.

Fig.4 Overcurrent Protection Characteristics (Typical Value)

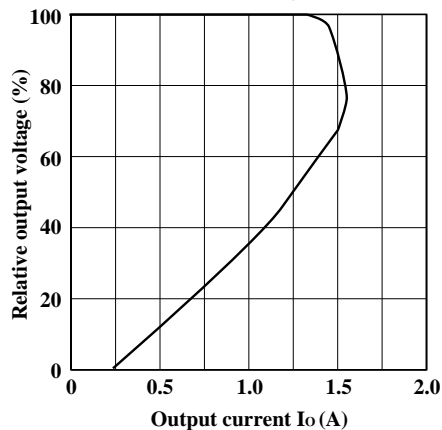


Fig.5 Output Voltage Deviation vs. Junction Temperature (PQ05RF12/PQ05RF13)

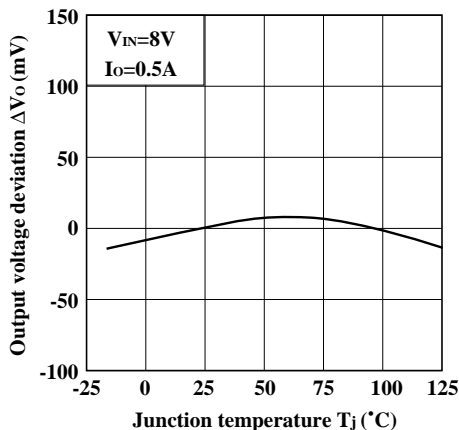


Fig.6 Output Voltage Deviation vs. Junction Temperature (PQ09RF12/PQ09RF13)

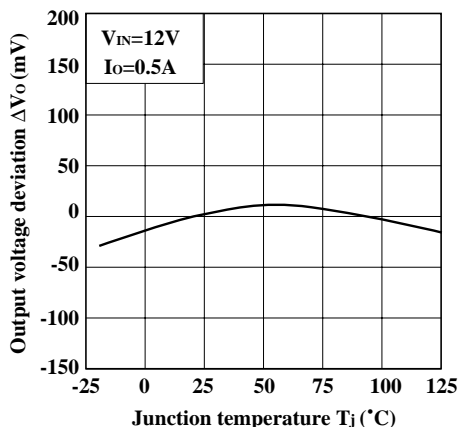


Fig.7 Output Voltage Deviation vs. Junction Temperature (PQ12RF12/PQ12RF13)

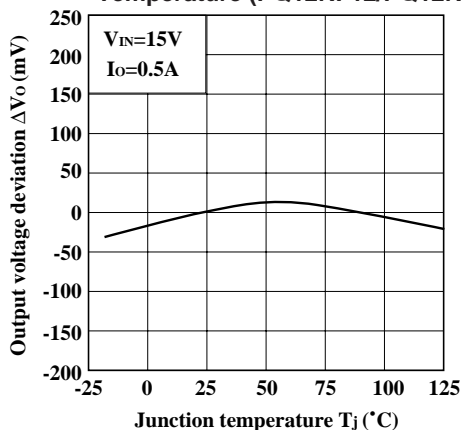


Fig.8 Output Voltage vs. Input Voltage (PQ05RF12/PQ05RF13)

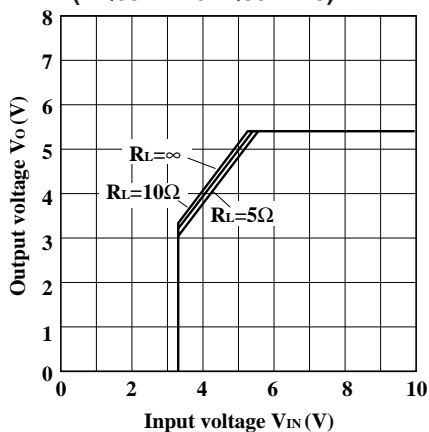


Fig.9 Output Voltage vs. Input Voltage (PQ09RF12/PQ09RF13)

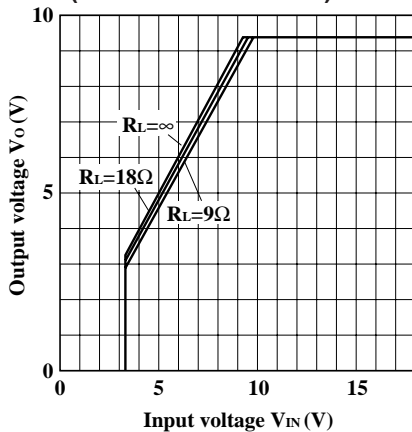


Fig.10 Output Voltage vs. Input Voltage (PQ12RF12/PQ12RF13)

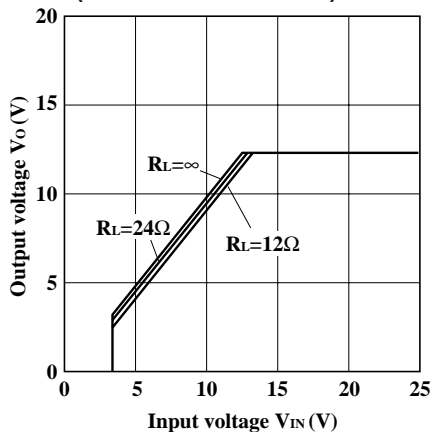


Fig.11 Circuit Operating Current vs. Input Voltage (PQ05RF12/PQ05RF13)

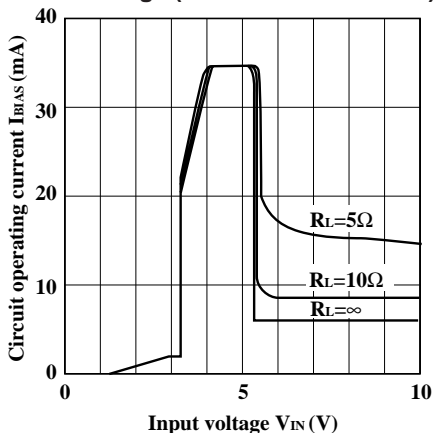


Fig.12 Circuit Operating Current vs. Input Voltage (PQ09RF12/PQ09RF13)

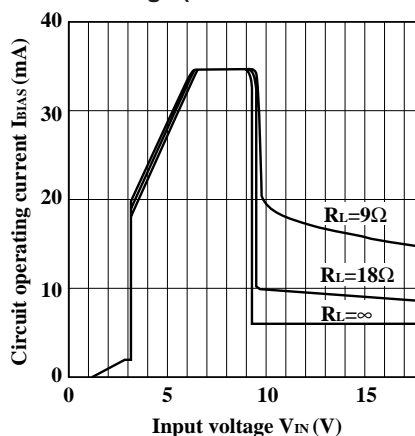


Fig.13 Circuit Operating Current vs. Input Voltage (PQ12RF12/PQ12RF13)

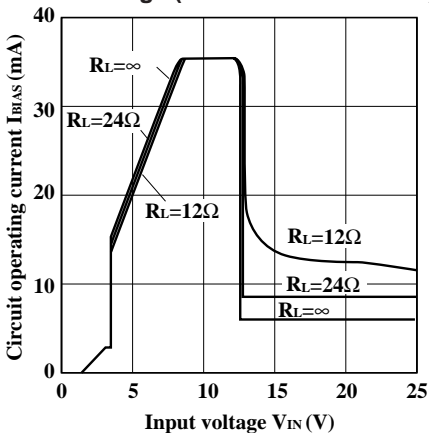


Fig.14 Dropout Voltage vs. Junction Temperature

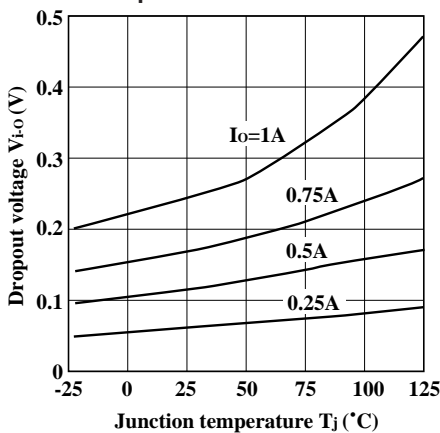


Fig.15 Quiescent Current vs. Junction Temperature

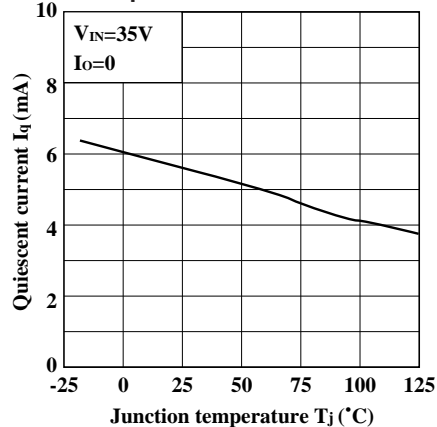


Fig.16 Ripple Rejection vs. Input Ripple Frequency

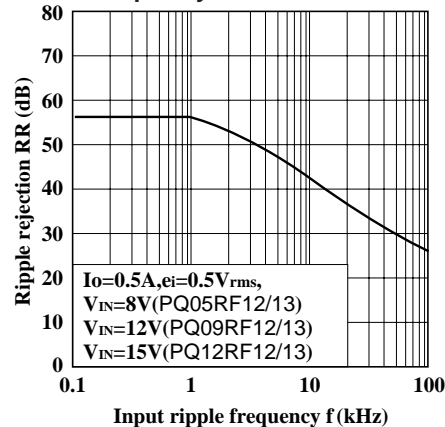


Fig.17 Ripple Rejection vs. Output Current

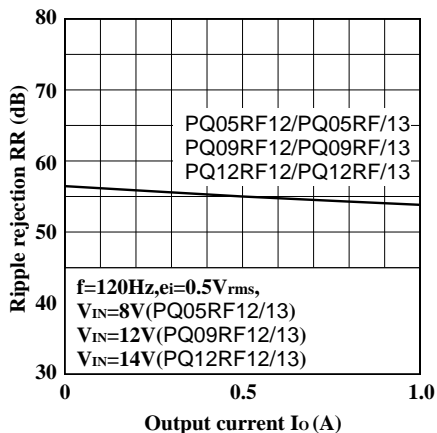


Fig.18 Output Peak Current vs. Dropout Voltage

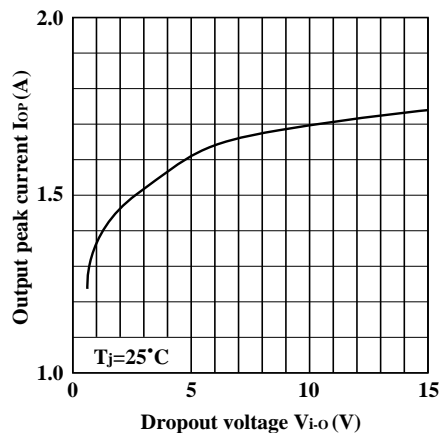


Fig.19 Output Peak Current vs. Junction Temperature

