

IC for System Reset Monolithic IC PST92XX Series

July 18, 2000

Outline

This IC is a reset IC with a delay circuit which realizes high-precision detection accuracy and is provided in an ultra-small package.

Features

- | | |
|--------------------------------------|---|
| 1. Internal delay circuit | Delay time can be set with an external capacitor. |
| 2. High-precision detection accuracy | $V_s \pm 1.5\%$. |
| 3. Low current consumption | $3\mu\text{A typ.}$ |


Package

SOT-25A


Applications

Microcomputer reset and battery level detection

Pin Assignment

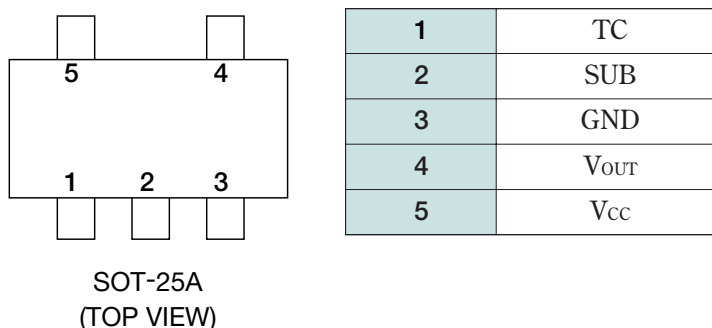

Equivalent Circuit Diagram

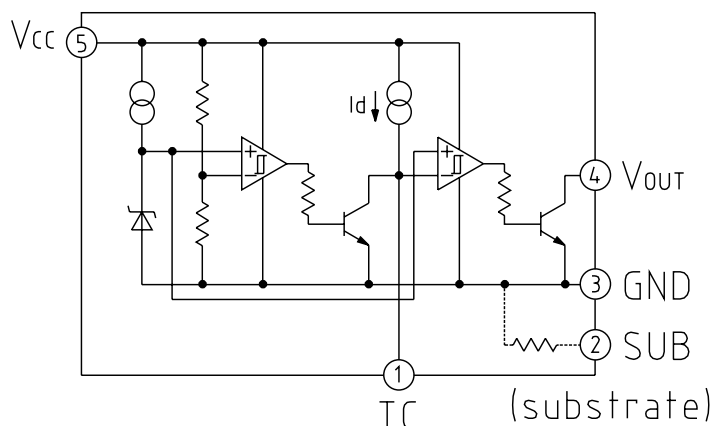

Pin Description

Pin No.	Pin name	Functions
1	TC	T _{PLH} control pin
2	SUB	Substrate pin* 1
3	GND	GND pin
4	V _{OUT}	Reset signal output pin
5	V _{CC}	V _{CC} pin/voltage detect pin

Note 1 : Connect to GND.

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit
Storage temperature	T _{STG}	-40~+125	°C
Operating temperature	T _{OPR}	-20~+175	°C
Supply voltage	V _{CC} max.	-0.3~+110	V
Allowable loss	P _d	150	mW

Recommended Operating Conditions

Item	Symbol	Ratings	Unit
Operating temperature	T _{OPR}	-20~+75	°C
Supply voltage	V _{CC}	-0.3~+10	V

Electrical Characteristics (Ta=25°C) (Except where noted otherwise, resistance unit is Ω)

Item	Symbol	Measurement circuit	Measurement conditions	Min.	Typ.	Max.	Unit		
Detecting voltage	V _S	1	V _{CC} =H→L R _L =4.7k V _{OL} ≤ 0.4V	PST9246	4.531	4.600	4.669	V	
				PST9245	4.432	4.500	4.568		
				PST9244	4.334	4.400	4.466		
				PST9243	4.235	4.300	4.365		
				PST9242	4.137	4.200	4.263		
				PST9241	4.038	4.100	4.162		
				PST9240	3.940	4.000	4.060		
				PST9239	3.841	3.900	3.959		
				PST9238	3.743	3.800	3.857		
				PST9237	3.644	3.700	3.756		
				PST9236	3.546	3.600	3.654		
				PST9235	3.447	3.500	3.553		
				PST9234	3.349	3.400	3.451		
				PST9233	3.250	3.300	3.350		
				PST9232	3.152	3.200	3.248		
				PST9231	3.053	3.100	3.147		
				PST9230	2.955	3.000	3.045		
				PST9229	2.856	2.900	2.944		
				PST9228	2.758	2.800	2.842		
				PST9227	2.659	2.700	2.741		
				PST9226	2.561	2.600	2.639		
				PST9225	2.462	2.500	2.538		
				PST9224	2.364	2.400	2.436		
				PST9223	2.265	2.300	2.335		
				PST9222	2.167	2.200	2.233		
				PST9221	2.068	2.100	2.132		
				PST9220	1.970	2.000	2.030		
				PST9219	1.871	1.900	1.929		

Item	Symbol	Measurement circuit	Measurement conditions	Min.	Typ.	Max.	Unit
Hysteresis voltage	ΔV_S	1	$V_{CC1}=L \rightarrow H \rightarrow L, R_L=4.7k$ $S1 : ON$	25	50	100	mV
Detecting voltage temperature coefficient	$V_S/\Delta T$	1	$R_L=4.7k, T_a=-20 \sim +75^\circ C$ $S1 : ON$		± 0.01		%/ $^\circ C$
Low level output voltage	V_{OL}	1	$V_{CC1}=V_S \text{ min. } -0.05V$ $R_L=4.7k \quad S1 : ON$		0.1	0.4	V
Output Leak current	I_{OH}	1	$V_{CC1}=V_{CC2}=10V \quad S2 : ON$			± 0.1	μA
Circuit current at ON time	I_{CCL}	1	$V_{CC1}=V_S \text{ min. } -0.05V \quad R_L=\infty$		5.0	9.0	μA
Circuit current at OFF time	I_{CCH}	1	$V_{CC1}=V_S \text{ typ. } /0.85 \quad R_L=\infty$		3.0	5.0	μA
"H" transmission delay time	T_{PLH}	2	$R_L=4.7k, C_L=100pF$ $C_d=0.01\mu F \quad *1$		($\star 3$)		ms
"L" transmission delay time	T_{PHL}	2	$R_L=4.7k, C_L=100pF$ $C_d=0.01\mu F \quad *2$		($\star 3$)		μs
Threshold operating voltage	V_{OPL}	1	$R_L=4.7k \quad V_{OL} \leq 0.4V \quad S1 : ON$		0.65	0.85	V
Output current at ON time 1	I_{OL1}	1	$V_{CC1}=V_S \text{ min. } -0.05V$ $V_{CC2}=0.4V \quad S2 : ON$	5			mA
Output current at ON time 2	I_{OL2}	1	$V_{CC1}=V_S \text{ min. } -0.05V$ $T_a=-20 \sim +75^\circ C \quad S2 : ON$	3			mA

NOTE 1: $T_{PLH} : V_{CC}=(V_S \text{ typ. } -0.4V) \rightarrow (V_S \text{ typ. } +0.4V)$


NOTE 2: $T_{PLH} : V_{CC}=(V_S \text{ typ. } +0.4V) \rightarrow (V_S \text{ typ. } -0.4V)$

NOTE 3 : Tables of PST92XX series transmission delay time (Please see below.)


	T_{PLH}	T_{PHL}
PST9246	195	140
PST9245	190	140
PST9244	185	140
PST9243	180	140
PST9242	175	140
PST9241	170	140
PST9240	165	140
PST9239	160	140
PST9238	155	120
PST9237	150	120
PST9236	145	120
PST9235	140	120
PST9234	135	120
PST9233	130	120
PST9232	125	120
PST9231	120	120
PST9230	115	120
PST9229	110	120
PST9228	105	100
PST9227	100	100
PST9226	95	100
PST9225	90	100
PST9224	85	100
PST9223	80	100
PST9222	75	100
PST9221	70	100
PST9220	65	100
PST9219	60	100

Measuring Circuit

(1)

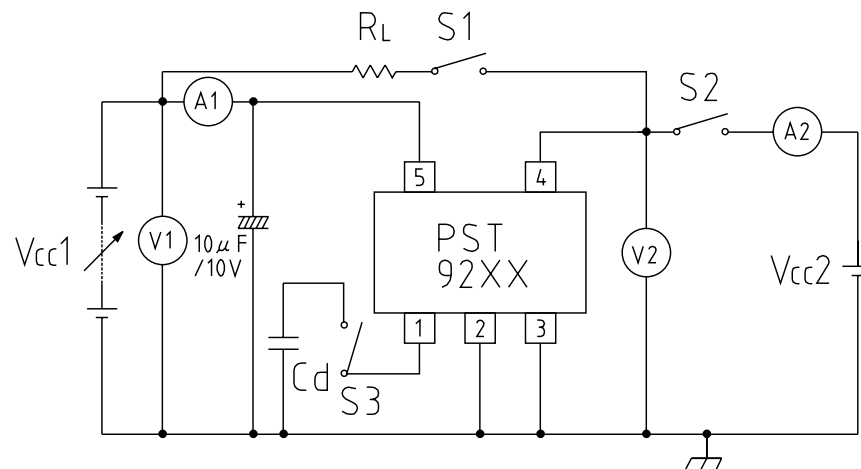

(2)

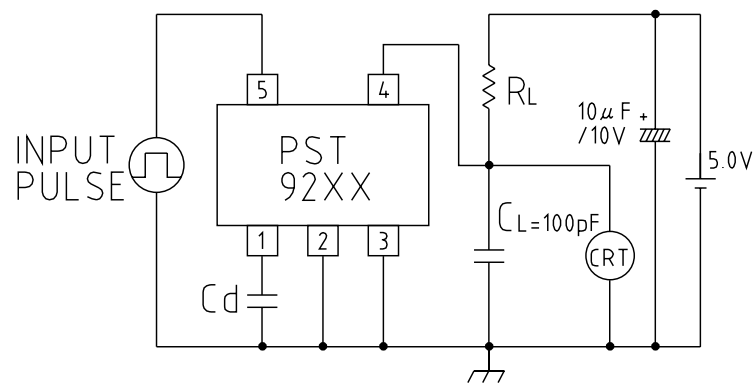


A : DC Amperemeter


V : DC Voltmeter

CRT : Oscilloscope


INPUT PULSE

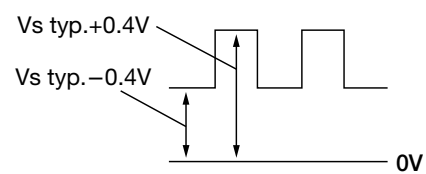

Timing Chart

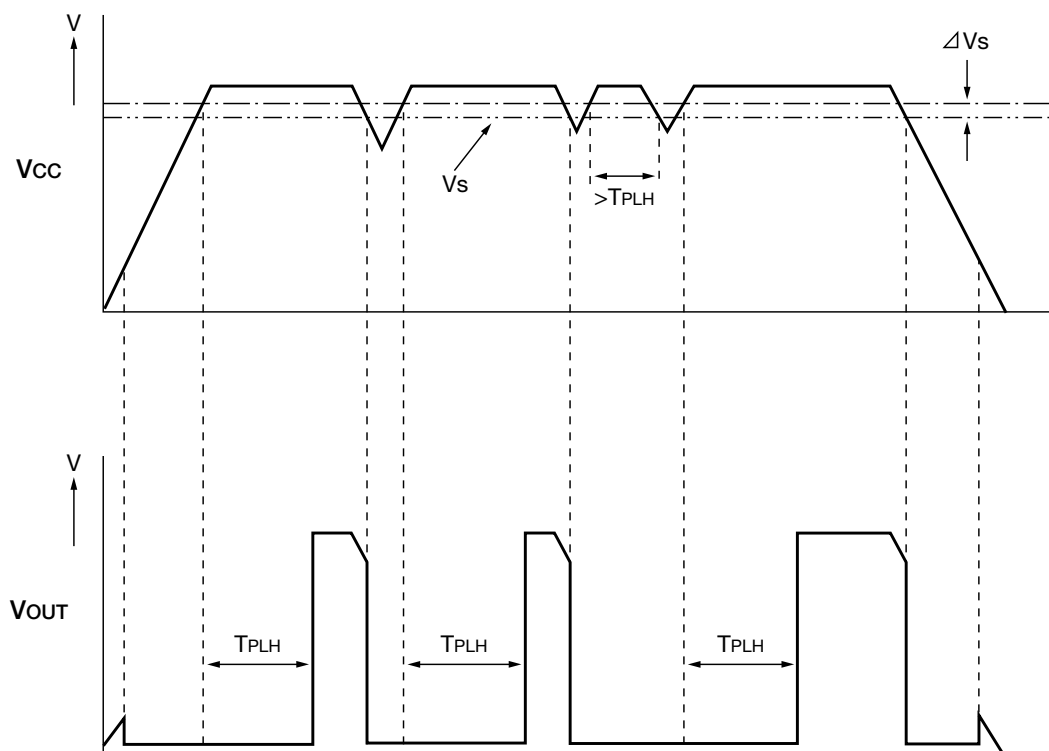

Application Circuit

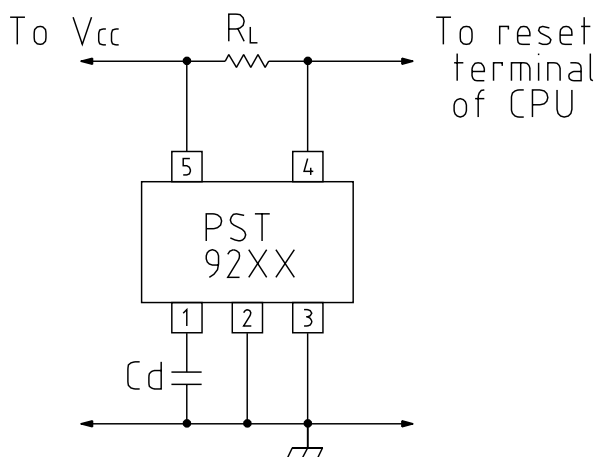


If the impedance of V_{CC} line is high enough, connect a capacitor between V_{CC} and GND terminal of the IC. ★

★ : When the rapid noise occurs to V_{CC} , V_{OUT} has sometimes switched over even if V_{CC} doesn't become below V_S .

Characteristics


(1) V_{CC} vs V_{OUT}

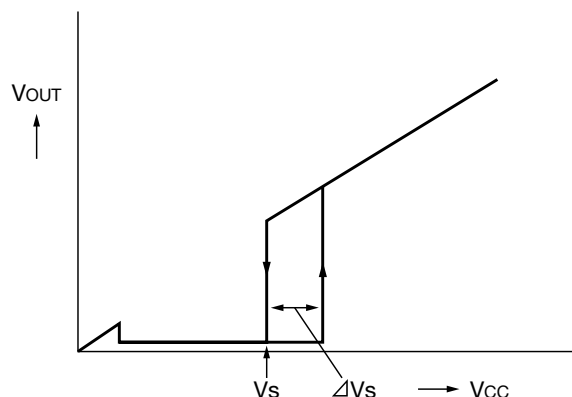


(2) C_d – T_{PLH}

Representative T_{PLH} Data : PST9220, PST9244

■ PST9220 C_d – T_{PLH} Characteristics

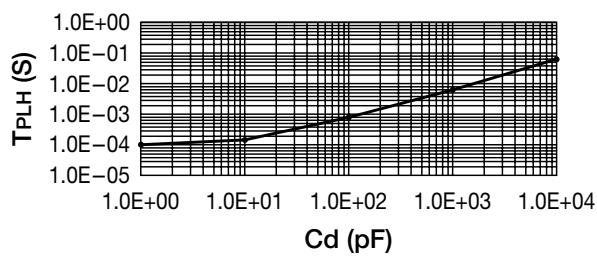

■ PST9244 C_d – T_{PLH} Characteristics

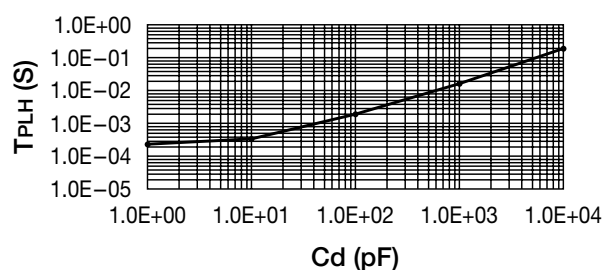

"H" transmission delay time can be calculated roughly using the following formula, but there is some fluctuation due to element deviation and the V_{CC} input signal (dV/dT).

$$T_{PLH} [\text{ms}] \approx C_d [\mu\text{F}] \times d$$

d: delay time coefficient

Model name	d	Model name	d	Model name	d
PST9246	1.95×10^4	PST9236	1.45×10^4	PST9226	0.95×10^4
PST9245	1.90×10^4	PST9235	1.40×10^4	PST9225	0.90×10^4
PST9244	1.85×10^4	PST9234	1.35×10^4	PST9224	0.85×10^4
PST9243	1.80×10^4	PST9233	1.30×10^4	PST9223	0.80×10^4
PST9242	1.75×10^4	PST9232	1.25×10^4	PST9222	0.75×10^4
PST9241	1.70×10^4	PST9231	1.20×10^4	PST9221	0.70×10^4
PST9240	1.65×10^4	PST9230	1.15×10^4	PST9220	0.65×10^4
PST9239	1.60×10^4	PST9229	1.10×10^4	PST9219	0.60×10^4
PST9238	1.55×10^4	PST9228	1.05×10^4		
PST9237	1.50×10^4	PST9227	1.00×10^4		