



ZIBO MICRO COMMERCIAL
COMPONENTS CORP.



ADD:ZhangLiu Road No.6
Zhangdian Zibo Shandong
P.C.:255000
Tel:+86-533-3032000/3032025
Fax:+86-533-3112884

**1N5913BP-TPX01
THRU
1N5946BP-TPX01**

Features

- Glass Passivated Junction
- Low Profile Package
- Low Inductance
- Built-in Strain Relief
- Lead Free Finish/RoHS Compliant (Note1)("P"Suffix designates Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking : 1N5913B~1N5946B type number and Cathode Band

**1.5 Watt
Zener Diode
3.3to 75 Volts**


Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Forward Voltage at $I_F=200\text{mA}$	V_F	1.5	V
Power Dissipation at $T_L = 75^\circ\text{C}$	P_{tot}	1.5 ⁽²⁾	W
Pwak forward Surge Current 8.3ms single half sine/square wave	I_{FSM}	10	Amps
Junction Temperature	T_j	-55 ~ +175	°C
Storage Temperature Range	T_{STG}	-55 ~ +175	°C

Note1: High Temperature Solder Exemption Applied, see EU Directive Annex 7.
2. 0.375" lead length from body.

DO-41

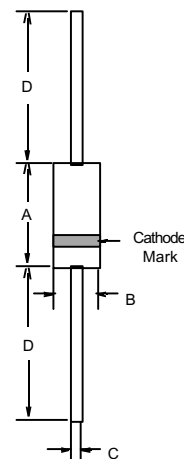

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.160	0.205	4.10	5.20	
B	0.080	0.107	2.00	2.70	Diameter
C	0.028	0.034	0.71	0.86	Diameter
D	1.000	-----	25.40	-----	

1N5913BP-TPX01 THRU 1N5946BP-TPX01

ZIBO MICRO COMMERCIAL
COMPONENTS CORP.

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Type	V_{Znom}	I_{ZT} for	r_{zT}	r_{zK} at	I_{ZK}	I_R at	V_R
	V	mA	Ω	Ω	mA	μA	V
1N5913BP-TPX01	3.3	113.6	<10	<500	1	<100	1
1N5914BP-TPX01	3.6	104.2	<9	<500	1	<75	1
1N5915BP-TPX01	3.9	96.1	<7.5	<500	1	<25	1
1N5916BP-TPX01	4.3	87.2	<6	<500	1	<5	1
1N5917BP-TPX01	4.7	79.8	<5	<500	1	<5	1.5
1N5918BP-TPX01	5.1	73.5	<4	<350	1	<5	2
1N5919BP-TPX01	5.6	66.9	<2	<250	1	<5	3
1N5920BP-TPX01	6.2	60.5	<2	<200	1	<5	4
1N5921BP-TPX01	6.8	55.1	<2.5	<200	1	<5	5.2
1N5922BP-TPX01	7.5	50	<3	<400	0.5	<5	6
1N5923BP-TPX01	8.2	45.7	<3.5	<400	0.5	<5	6.5
1N5924BP-TPX01	9.1	41.2	<4	<500	0.5	<5	7
1N5925BP-TPX01	10	37.5	<4.5	<500	0.25	<5	8
1N5926BP-TPX01	11	34.1	<5.5	<550	0.25	<1	8.4
1N5927BP-TPX01	12	31.2	<6.5	<550	0.25	<1	9.1
1N5928BP-TPX01	13	28.8	<7	<550	0.25	<1	9.9
1N5929BP-TPX01	15	25	<9	<600	0.25	<1	11.4
1N5930BP-TPX01	16	23.4	<10	<600	0.25	<1	12.2
1N5931BP-TPX01	18	20.8	<12	<650	0.25	<1	13.7
1N5932BP-TPX01	20	18.7	<14	<650	0.25	<1	15.2
1N5933BP-TPX01	22	17	<17.5	<650	0.25	<1	16.7
1N5934BP-TPX01	24	15.6	<19	<700	0.25	<1	18.2
1N5935BP-TPX01	27	13.9	<23	<700	0.25	<1	20.6
1N5936BP-TPX01	30	12.5	<26	<750	0.25	<1	22.8
1N5937BP-TPX01	33	11.4	<33	<800	0.25	<1	25.1
1N5938BP-TPX01	36	10.4	<38	<850	0.25	<1	27.4
1N5939BP-TPX01	39	9.6	<45	<900	0.25	<1	29.7
1N5940BP-TPX01	43	8.7	<53	<950	0.25	<1	32.7
1N5941BP-TPX01	47	8	<67	<1000	0.25	<1	35.8
1N5942BP-TPX01	51	7.3	<70	<1100	0.25	<1	38.8
1N5943BP-TPX01	56	6.7	<86	<1300	0.25	<1	42.6
1N5944BP-TPX01	62	6	<100	<1500	0.25	<1	47.1
1N5945BP-TPX01	68	5.5	<120	<1700	0.25	<1	51.7
1N5946BP-TPX01	75	5	<140	<2000	0.25	<1	56

* TOLERANCE AND VOLTAGE DESIGNATION Tolerance designation - The type numbers listed indicate a tolerance of +/-5%

Characteristics ($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter
V_Z	Reverse zener voltage @ I_{ZT}
I_{ZT}	Reverse current
Z_{ZT}	Maximum zener impedance @ I_{ZT}
I_{ZK}	Reverse current
Z_{ZK}	Maximum zener impedance @ I_{ZK}
I_R	Reverse leakage current @ V_R
V_R	Breakdown voltage
I_F	Forward current
V_F	Forward voltage @ I_F

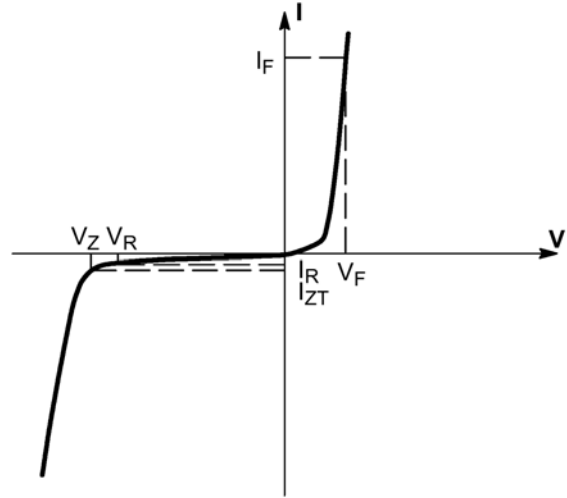


Figure 1. Zener voltage regulator

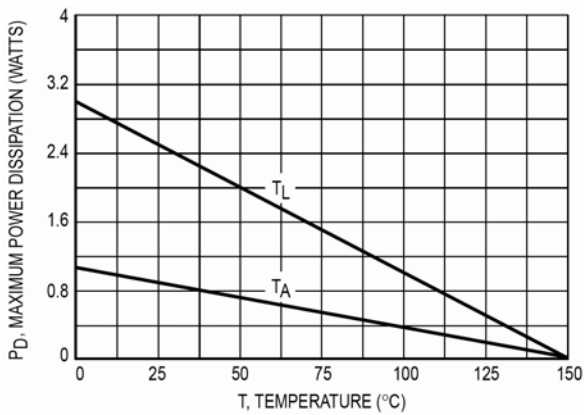


Figure 2. Steady state power derating

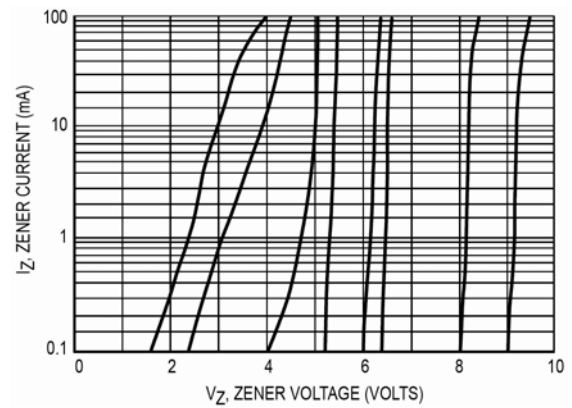


Figure 3. $V_Z - 3.3$ thru 10 volts

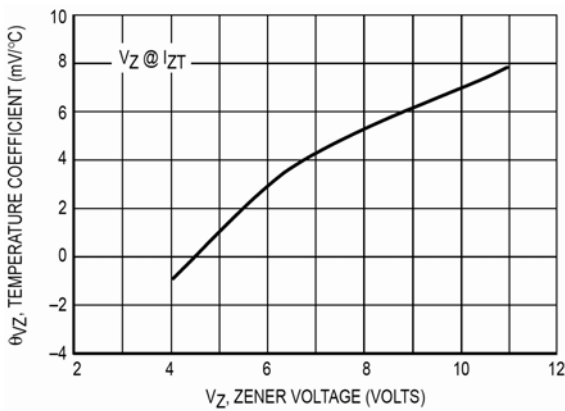


Figure 4. Zener voltage - 3.3 to 12 volts

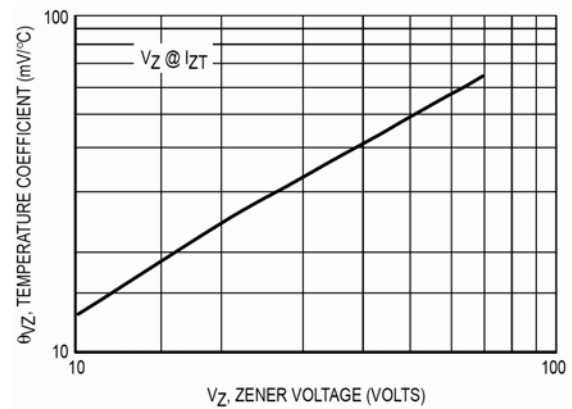
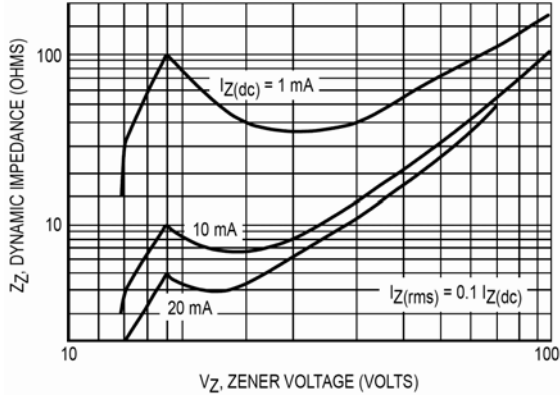
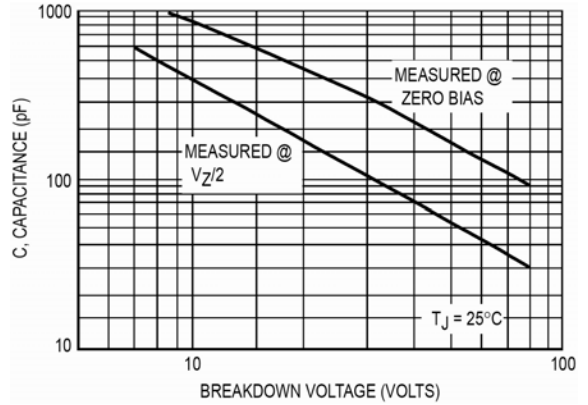
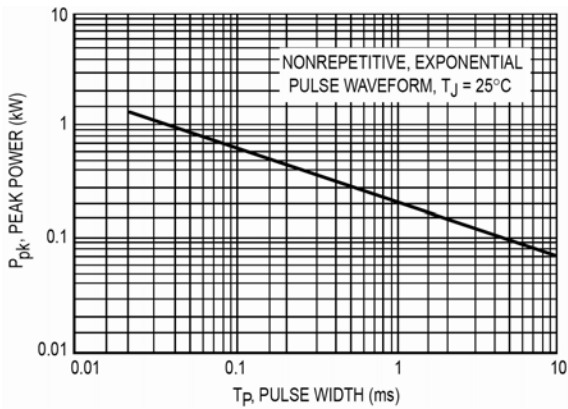
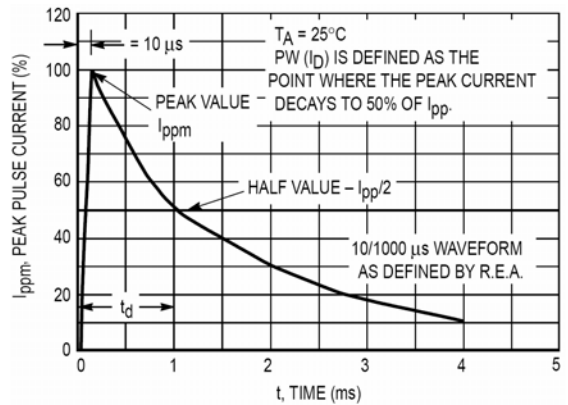
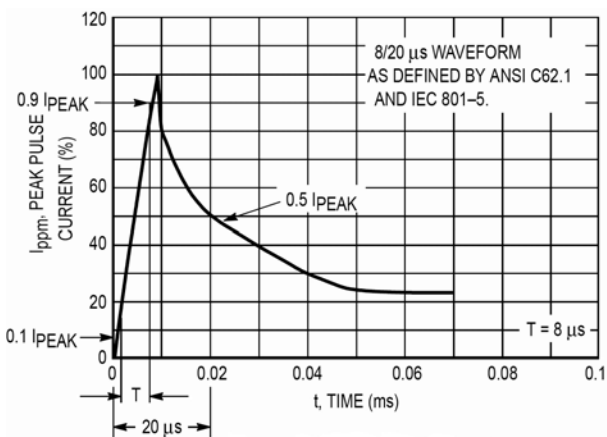


Figure 5. Zener voltage - 14 to 43 volts

1N5913BP-TPX01 THRU 1N5946BP-TPX01

 ZIBO MICRO COMMERCIAL
 COMPONENTS CORP.

Figure 6. Effect of zener voltage

Figure 7. Capacitance curve

Figure 8. Typical pulse rating curve

Figure 9. Pulse waveform

Figure 10. Pulse waveform



ZIBO MICRO COMMERCIAL
COMPONENTS CORP.

Ordering Information :

Device	Packing
1N5913BP-TPX01 ~ 1N5946BP-TPX01	Tape&Reel: 5Kpcs/Reel

*****LIFE SUPPORT*****

ZBMCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of ZiBo Micro Commercial Components Corp.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. ZiBo Micro Commercial Components Corp. is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. ZBMCC strongly encourages customers to purchase ZBMCC parts either directly from ZBMCC or from Authorized ZBMCC Distributors who are listed by country on our web page cited below. Products customers buy either from ZBMCC directly or from Authorized ZBMCC Distributors are genuine parts, have full traceability, meet ZBMCC's quality standards for handling and storage. ZBMCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. ZBMCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.