

DIGITRON SEMICONDUCTORS

1N6309 – 1N6355D 500 mW GLASS ZENER DIODES

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---|-----------------|-------------|------|
| Junction and storage temperature range | T_J, T_{stg} | -65 to +175 | °C |
| Thermal resistance, junction to lead ⁽¹⁾ 1N6309-1N6320 1N6321-1N6355 | $R_{\theta JL}$ | 150 95.5 | °C/W |
| Thermal resistance, junction to ambient ⁽²⁾ | $R_{\theta JA}$ | 240 | °C/W |
| Steady state power dissipation @ $T_L = 75^\circ\text{C}$ | PD | 0.5 | W |
| Forward voltage @ 1.0A | V_F | 1.4 | V |
| Solder temperature @ 10s | T_{SP} | 260 | °C |

Note 1: At 3/8" from body.

Note 2: $T_A = +55^\circ\text{C}$ before derating on printed circuit board, PCB = FR4 0.0625" 1 layer 1oz. Cu, horizontal, still air, pads = 0.092" diameter, strip = 0.030" x 1" long, axial lead length $L \leq 0.187$ ". $R_{\theta JA}$ with a defined thermal resistance condition included is measured at $I_Z =$ as defined in the characteristics and ratings table herein.

ELECTRICAL CHARACTERISTICS

| Part number ⁽¹⁾ | V_{Z2} Nom. +/- 5% @ I_{Z2} | V_{Z1} Min. @ $I_{Z1} = 250\mu\text{A}$ | Test Current I_{Z2} | Dynamic impedance $Z_z @ I_{Z2}$ | Dynamic impedance $Z_{ZK} @ 250\mu\text{A}$ | Max. current I_{ZM} | Voltage reg. V_Z (reg) $\Delta V_Z^{(2)}$ | Surge current I_{ZSM} 8.3ms square wave | Reverse voltage V_R | Max. reverse current $I_{R1} @ 25^\circ\text{C}$ | Max. reverse current $I_{R2} @ 150^\circ\text{C}$ | Max. noise density ND @ 250 μA 1-3kHz | Max. temperature coefficient |
|----------------------------|---------------------------------|---|-----------------------|----------------------------------|---|-----------------------|---|---|-----------------------|--|---|--|------------------------------|
| | Volts | Volts | mA | Ohms | Ohms | mA | Volts | Amps | Volts | μA | μA | $\mu\text{V}/\sqrt{\text{Hz}}$ | %/°C |
| 1N6309 | 2.4 | 1.1 | 20 | 30 | 1200 | 177 | 1.5 | 2.5 | 1.0 | 100 | 200 | 1 | -0.085 |
| 1N6310 | 2.7 | 1.2 | 20 | 30 | 1300 | 157 | 1.5 | 2.2 | 1.0 | 60 | 150 | 1 | -0.080 |
| 1N6311 | 3.0 | 1.3 | 20 | 29 | 1400 | 141 | 1.5 | 2.0 | 1.0 | 30 | 100 | 1 | -0.075 |
| 1N6312 | 3.3 | 1.5 | 20 | 27 | 1400 | 158 | 1.6 | 1.8 | 1.0 | 5 | 20 | 1 | -0.070 |
| 1N6313 | 3.6 | 1.8 | 20 | 25 | 1400 | 117 | 1.6 | 1.65 | 1.0 | 3 | 12 | 1 | -0.065 |
| 1N6314 | 3.9 | 2.0 | 20 | 23 | 1700 | 108 | 1.6 | 1.5 | 1.0 | 2 | 12 | 1 | -0.060 |
| 1N6315 | 4.3 | 2.4 | 20 | 20 | 1700 | 99 | 0.9 | 1.4 | 1.0 | 2 | 12 | 1 | -0.045 +0.020 |
| 1N6316 | 4.7 | 2.8 | 20 | 17 | 1500 | 90 | 0.5 | 1.27 | 1.5 | 5 | 12 | 1 | -0.028 +0.032 |
| 1N6317 | 5.1 | 3.3 | 20 | 14 | 1300 | 83 | 0.4 | 1.17 | 2.0 | 5 | 12 | 1 | -0.020 +0.035 |
| 1N6318 | 5.6 | 4.3 | 20 | 8 | 1200 | 76 | 0.4 | 1.10 | 2.5 | 5 | 10 | 2 | +0.050 |
| 1N6319 | 6.2 | 5.2 | 20 | 3 | 800 | 68 | 0.3 | 0.97 | 3.5 | 5 | 10 | 5 | +0.060 |
| 1N6320 | 6.8 | 6.0 | 20 | 3 | 400 | 63 | 0.35 | 1.23 | 4.0 | 2 | 50 | 5 | +0.062 |
| 1N6321 | 7.5 | 6.6 | 20 | 4 | 400 | 57 | 0.4 | 1.16 | 5.0 | 2 | 30 | 5 | +0.068 |
| 1N6322 | 8.2 | 7.5 | 20 | 5 | 400 | 52 | 0.4 | 1.07 | 6.0 | 1 | 10 | 20 | +0.075 |
| 1N6323 | 9.1 | 8.4 | 20 | 6 | 500 | 47 | 0.5 | 0.97 | 7.0 | 1 | 10 | 40 | +0.076 |
| 1N6324 | 10.0 | 9.1 | 20 | 6 | 500 | 43 | 0.5 | 0.89 | 8.0 | 1 | 10 | 80 | +0.079 |
| 1N6325 | 11.0 | 10.0 | 20 | 7 | 550 | 35 | 0.55 | 0.77 | 9.0 | 1 | 10 | 100 | +0.083 |
| 1N6326 | 12.0 | 11.0 | 20 | 7 | 550 | 35 | 0.55 | 0.77 | 9.0 | 10 | 10 | 100 | +0.083 |
| 1N6327 | 13.0 | 11.9 | 9.5 | 8 | 550 | 33 | 0.55 | 0.71 | 9.9 | 0.05 | 10 | 100 | +0.083 |
| 1N6328 | 15.0 | 13.8 | 8.5 | 10 | 600 | 28 | 0.70 | 0.62 | 11.0 | 0.05 | 10 | 100 | +0.084 |
| 1N6329 | 16.0 | 14.7 | 7.8 | 12 | 600 | 27 | 0.75 | 0.58 | 12.0 | 0.05 | 10 | 100 | +0.084 |
| 1N6330 | 18.0 | 16.6 | 7.0 | 14 | 600 | 24 | 0.85 | 0.52 | 14.0 | 0.05 | 10 | 00 | +0.085 |
| 1N6331 | 20.0 | 18.5 | 6.2 | 18 | 500 | 21 | 0.95 | 0.47 | 15.0 | 0.05 | 10 | 100 | +0.086 |
| 1N6332 | 22.0 | 20.4 | 5.6 | 20 | 500 | 19 | 1.05 | 0.43 | 17.0 | 0.05 | 10 | 100 | +0.087 |
| 1N6333 | 24.0 | 22.33 | 5.2 | 24 | 500 | 18 | 1.15 | 0.39 | 18.0 | 0.05 | 10 | 100 | +0.088 |
| 1N6334 | 27.0 | 25.2 | 4.6 | 27 | 500 | 16 | 1.30 | 0.35 | 21.0 | 0.05 | 10 | 100 | +0.009 |
| 1N6335 | 30.0 | 28.0 | 4.2 | 32 | 500 | 14 | 1.45 | 0.31 | 23.0 | 0.05 | 10 | 100 | +0.091 |
| 1N6336 | 33.0 | 30.9 | 3.8 | 40 | 600 | 13 | 1.60 | 0.28 | 25.0 | 0.05 | 10 | 100 | +0.092 |

DIGITRON SEMICONDUCTORS

1N6309 – 1N6355 500 mW GLASS ZENER DIODES


ELECTRICAL CHARACTERISTICS

| Part number ⁽¹⁾ | V _{Z2} Nom. +/- 5% @ I _{Z2} | V _{Z1} Min. @ I _{Z1} 250µA | Test Current I _{Z2} | Dynamic impedance Z _Z @ I _{Z2} | Dynamic impedance Z _{ZK} @ 250µA | Max. current I _{ZM} | Voltage reg. V _Z (reg) ΔV _Z ⁽²⁾ | Surge current I _{ZSM} 8.3ms square wave | Reverse voltage V _R | Max. reverse current I _{R1} @ 25°C | Max. reverse current I _{R2} @ 150°C | Max. noise density ND @ 250µA 1-3kHz | Max. temperature coefficient |
|----------------------------|---|--|------------------------------|--|---|------------------------------|--|--|--------------------------------|---|--|--------------------------------------|------------------------------|
| | Volts | Volts | mA | Ohms | Ohms | mA | Volts | Amps | Volts | µA | µA | µV/√Hz | %/°C |
| 1N6337 | 36.0 | 33.7 | 3.4 | 50 | 600 | 12 | 1.75 | 0.260 | 27.0 | 0.05 | 10 | 100 | +0.093 |
| 1N6338 | 39.0 | 36.6 | 3.2 | 55 | 700 | 11 | 1.90 | 0.240 | 30 | 0.05 | 10 | 100 | +0.094 |
| 1N6339 | 43.0 | 40.4 | 3.0 | 65 | 800 | 9.9 | 2.10 | 0.220 | 33 | 0.05 | 10 | 80 | +0.095 |
| 1N6340 | 47.0 | 44.2 | 2.7 | 75 | 900 | 9.0 | 2.25 | 0.200 | 36 | 0.05 | 10 | 80 | +0.095 |
| 1N6341 | 51.0 | 48.0 | 2.5 | 85 | 1000 | 8.3 | 2.5 | 0.180 | 39 | 0.05 | 10 | 80 | +0.096 |
| 1N6342 | 56.0 | 52.7 | 2.2 | 100 | 1200 | 7.6 | 2.7 | 0.170 | 43 | 0.05 | 10 | 80 | +0.097 |
| 1N6343 | 62.0 | 58.4 | 2.0 | 125 | 1300 | 6.8 | 2.9 | 0.150 | 47 | 0.05 | 10 | 80 | +0.099 |
| 1N6344 | 68.0 | 64.1 | 1.8 | 155 | 1500 | 6.3 | 3.2 | 0.13 | 52 | 0.05 | 10 | 80 | +0.101 |
| 1N6345 | 75.0 | 70.8 | 1.7 | 180 | 1600 | 5.7 | 3.4 | 0.125 | 56 | 0.05 | 10 | 80 | +0.103 |
| 1N6346 | 82.0 | 77.4 | 1.5 | 220 | 1800 | 5.2 | 3.8 | 0.115 | 62 | 0.05 | 10 | 80 | +0.105 |
| 1N6347 | 91.0 | 86.0 | 1.4 | 270 | 2100 | 4.7 | 4.2 | 0.100 | 69 | 0.05 | 10 | 80 | +0.108 |
| 1N6348 | 100.0 | 94.5 | 1.3 | 340 | 2400 | 4.3 | 4.4 | 0.095 | 76 | 0.05 | 10 | 80 | +0.110 |
| 1N6349 | 110.0 | 104.0 | 1.1 | 500 | 2800 | 3.9 | 4.80 | 0.085 | 84 | 0.05 | 10 | 80 | +0.110 |
| 1N6350 | 120.0 | 113.0 | 1.0 | 600 | 3200 | 3.5 | 5.2 | 0.080 | 91 | 0.05 | 10 | 80 | +0.110 |
| 1N6351 | 130.0 | 122.0 | 0.95 | 850 | 4100 | 3.3 | 5.60 | 0.070 | 99 | 0.05 | 10 | 800 | +0.110 |
| 1N6352 | 150.0 | 141 | 0.85 | 1000 | 4500 | 2.8 | 7.00 | 0.065 | 114 | 0.05 | 10 | 80 | +0.110 |
| 1N6353 | 160.0 | 151 | 0.80 | 1200 | 5000 | 2.7 | 7.5 | 0.060 | 122 | 0.05 | 10 | 80 | +0.110 |
| 1N6354 | 180.0 | 170 | 0.68 | 1500 | 5600 | 2.4 | 9.00 | 0.050 | 137 | 0.05 | 10 | 80 | +0.110 |
| 1N6355 | 200.0 | 189 | 0.65 | 1800 | 6500 | 2.1 | 12.00 | 0.045 | 152 | 0.05 | 10 | 80 | +0.110 |

Note 1: Standard tolerance is 5%. "C" suffix is 2% tolerance and "D" suffix is 1% tolerance.

Note 2: Voltage regulation V_{Z(reg)} is the measured voltage change at thermal equilibrium between the current of 10% and 50% of maximum zener current (I_{ZM}) when the lead temperature is maintained at 25°C = +8°C, -2°C.

| | |
|-----------------|-----------------------------|
| Case | DO-35 |
| Marking | Body painted, alpha-numeric |
| Polarity | Cathode band |

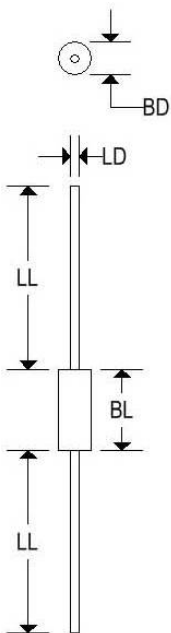

| | DO-35 | | | |
|----|--------|-------|-------------|--------|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BD | 0.055 | 0.090 | 1.400 | 2.290 |
| BL | 0.120 | 0.200 | 3.050 | 5.080 |
| LD | 0.018 | 0.022 | 0.460 | 0.560 |
| LL | 1.000 | 1.500 | 25.400 | 38.100 |

DIGITRON SEMICONDUCTORS

1N6309 – 1N6355

500 mW GLASS ZENER DIODES

Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).
 Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.

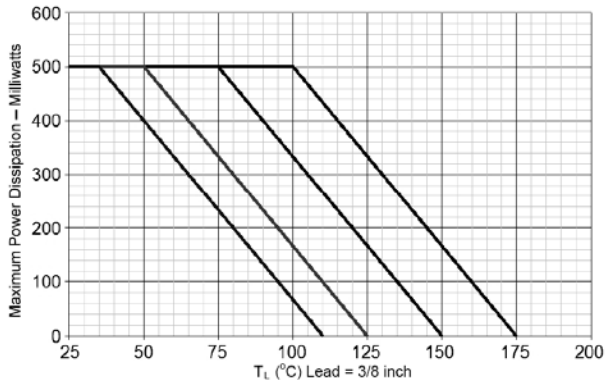


FIGURE 1 - (1N6309 – 1N6320)
 T_j Temperature-Power Derating Curve
 $R_{\theta JA}$ 3/8 inch = 150 °C/W (dc operation)

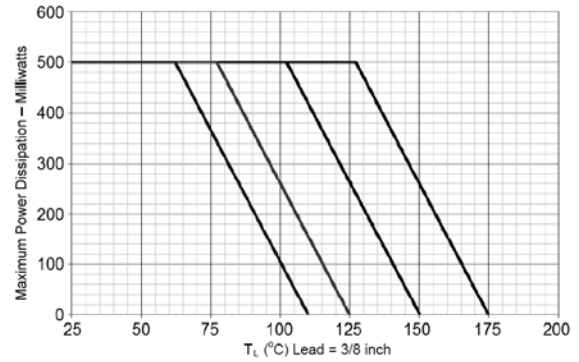


FIGURE 2 - (1N6321 – 1N6355)
 T_j Temperature-Power Derating Curve
 $R_{\theta JA}$ 3/8 inch = 95.5 °C/W (dc operation)

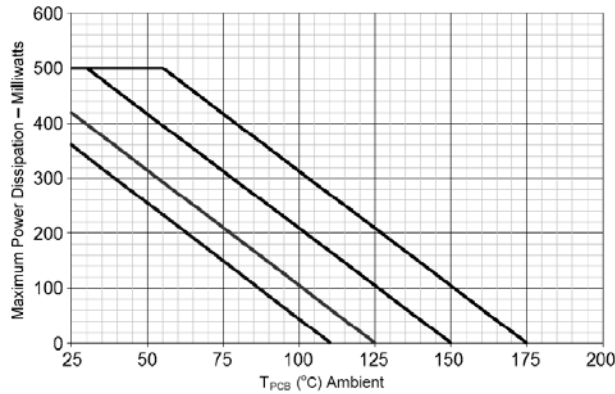


FIGURE 3
 Temperature-Power Derating Curve
 $R_{\theta JA}$ = 240 °C/W (dc operation)