




RF1284

- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Rugged TO39 Hermetic Package**
- **Complies with Directive 2002/95/EC (RoHS)** 

319.508 MHz SAW Filter

The RF1284 is a low-loss, compact and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 319.508 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included). Quartz construction provides excellent frequency stability over a wide temperature range.



TO39-3 Case

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C Absolute Frequency Tolerance from 319.500 MHz	f_c	1, 2	319.428		319.588	MHz
	Δf_c					
Insertion Loss	IL	1		2.0	3.0	dB
3 dB Bandwidth	BW_3	1, 2	500	600	800	kHz
Rejection at $f_c - 21.4$ MHz (Image) at $f_c - 10.7$ MHz (LO) Ultimate		1	40	50		dB
			15	40		
				80		
Temperature Operating Case Temperature Turnover Temperature Turnover Frequency Frequency Temperature Coefficient	T_c	3, 4	-40		+85	°C
	T_o		15	25	35	°C
	f_o			f_c		MHz
	FTC			0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	fAI	5		≤10	ppm/yr
Impedance @ f_c Input $Z_{IN}=R_{IN}/C_{IN}$ Output $Z_{OUT}=R_{OUT}/C_{OUT}$	Z_{IN}	1		1570Ω//6.84pf		nH
	Z_{OUT}	1		1490Ω//7.02pf		pF
Lid Symbolization (in addition to Lot and/or Date Codes)	RFM // RF1284 // YYVWS##					



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:



1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
2. The frequency f_c is defined as the midpoint between the 3dB frequencies.
3. Where noted, specifications apply over the entire specified operating temperature range.
4. The turnover temperature, T_o , is the temperature of maximum (or turnover) frequency, f_o . The nominal frequency at any case temperature, T_c , may be calculated from: $f = f_o [1 - FTC (T_o - T_c)^2]$.
5. Frequency aging is the change in f_c with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.

Absolute Maximum Ratings

Rating	Value	Units
Incident RF Power	+13	dBm
DC Voltage Between Any Two Pins (Observe ESD Precautions)	±30	VDC
Case Temperature ⁵	-40 to +85	°C


Typical Filter Response

Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout. Illustrated frequencies and minimum rejection for LO and IMAGE are shown only for superhet receivers with 10.7 MHz IF.

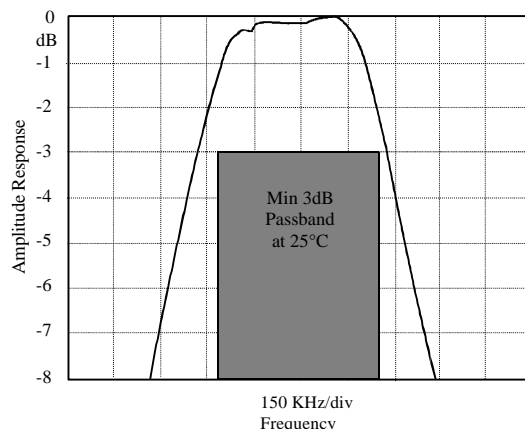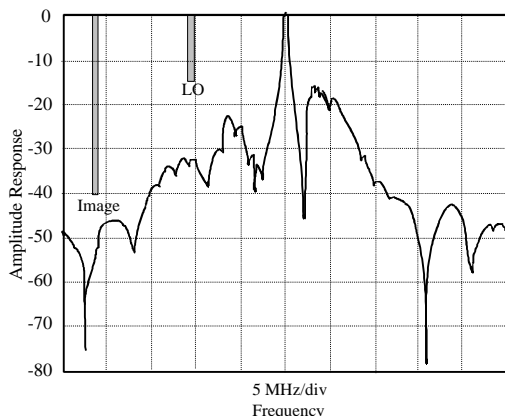


Electrical Connections


Pin	Connection
1	Input or Output
2	Output or Input
3	Case Ground



Case Design

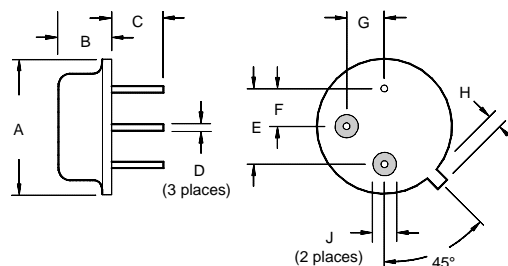



Typical Test Circuit

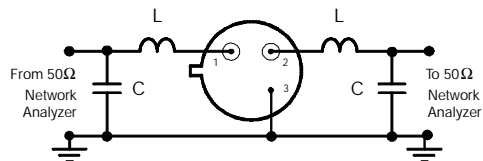

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A		9.30		0.366
B		3.18		0.125
C	2.50	3.50	0.098	0.138
D	0.46 Nominal		0.018 Nominal	
E	5.08 Nominal		0.200 Nominal	
F	2.54 Nominal		0.100 Nominal	
G	2.54 Nominal		0.100 Nominal	
H		1.02		0.040
J	1.40		0.055	



319.508 MHz

SAW Filter

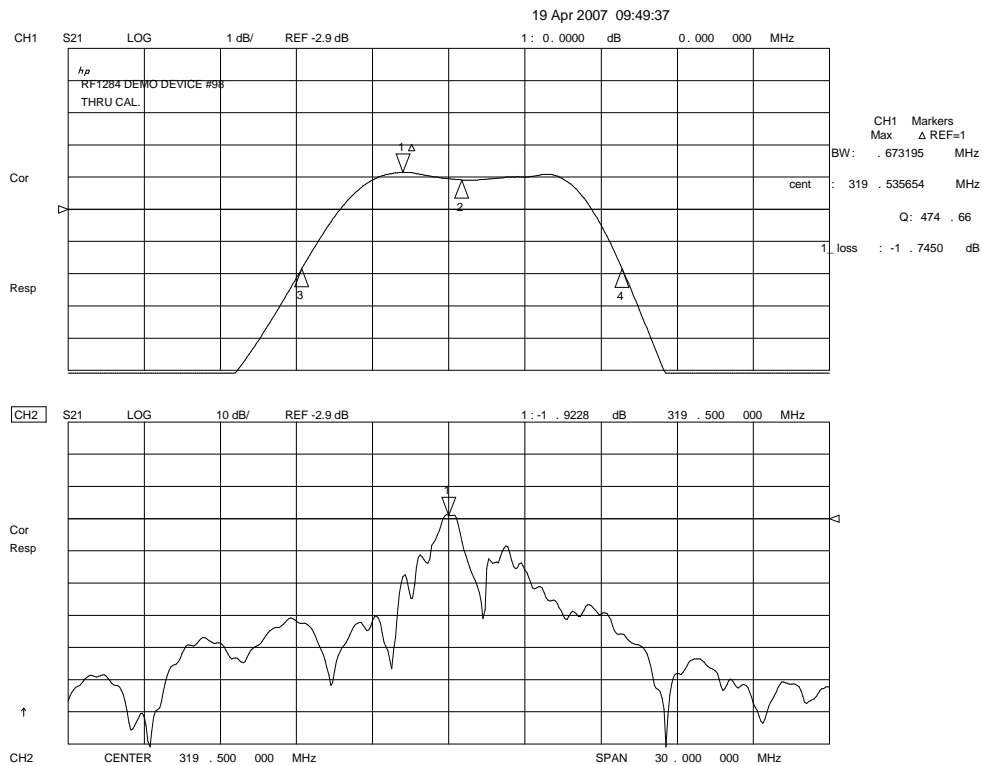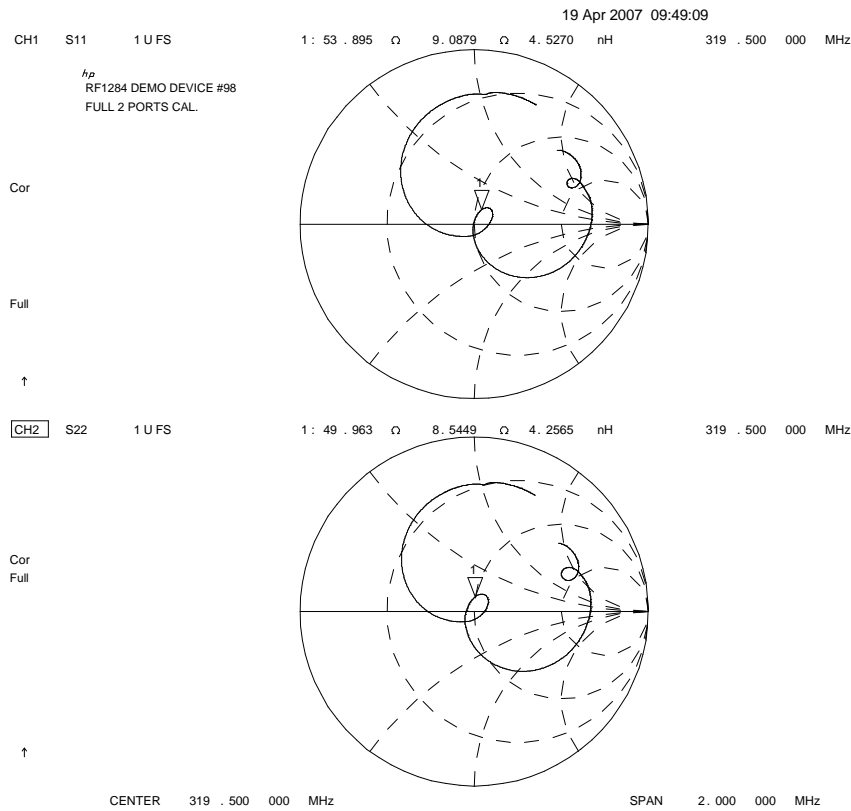



319.508 MHz


SAW Filter

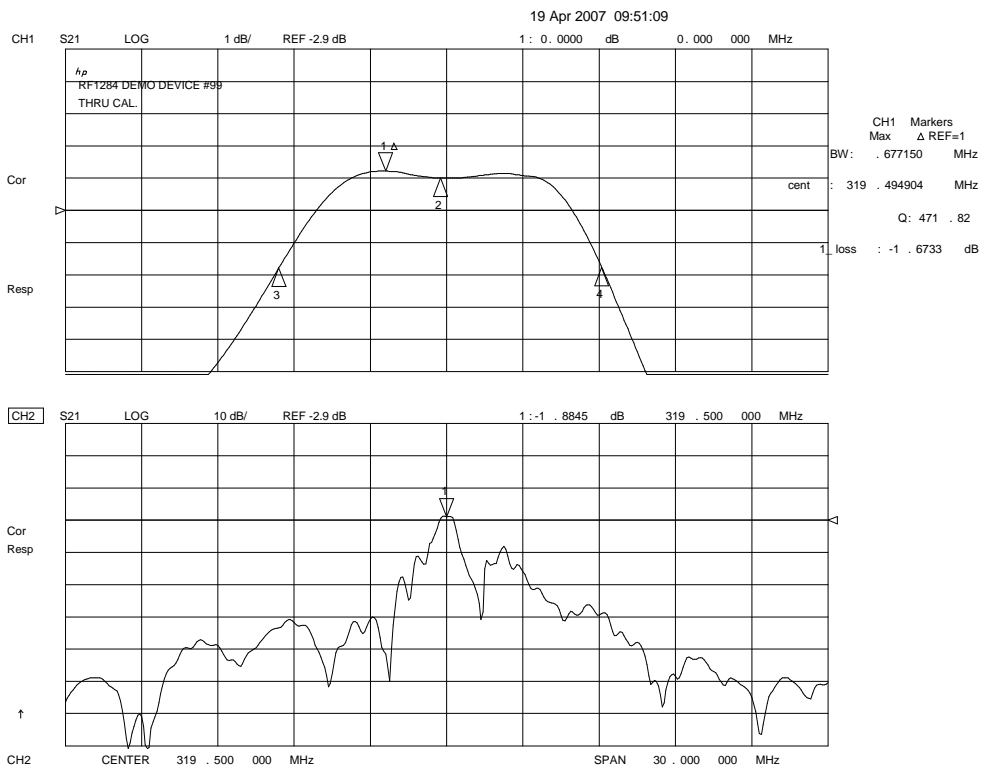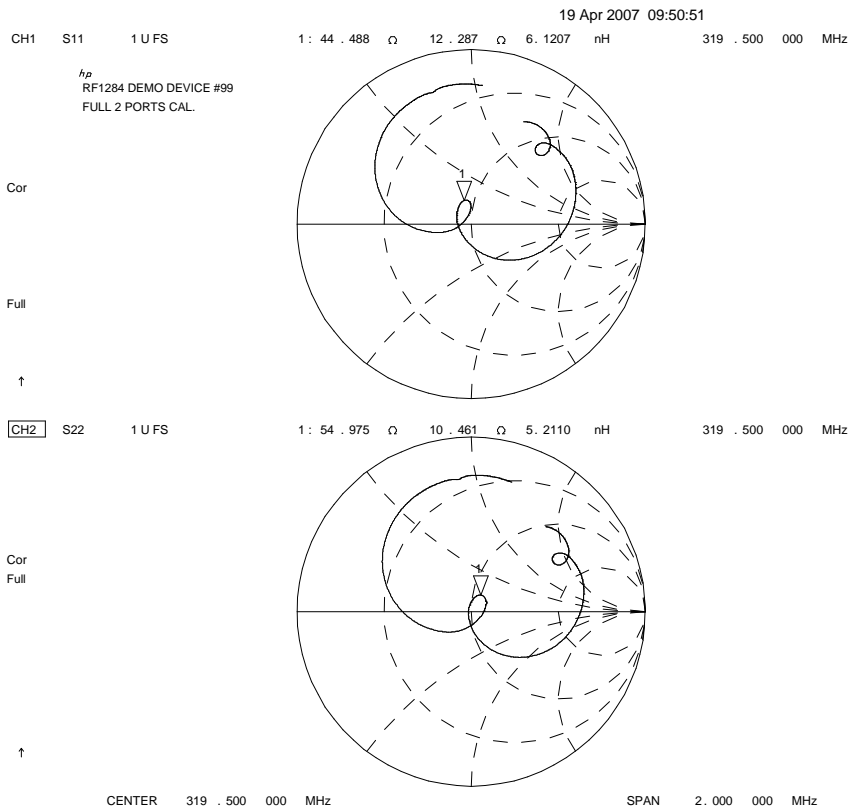

319.508 MHz

SAW Filter

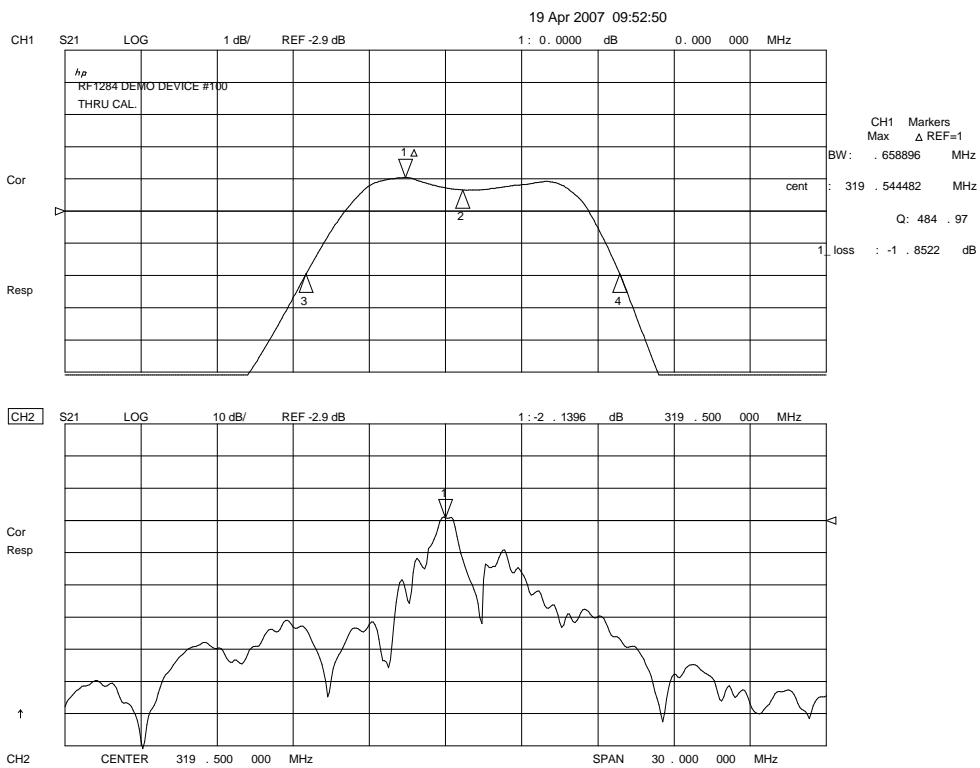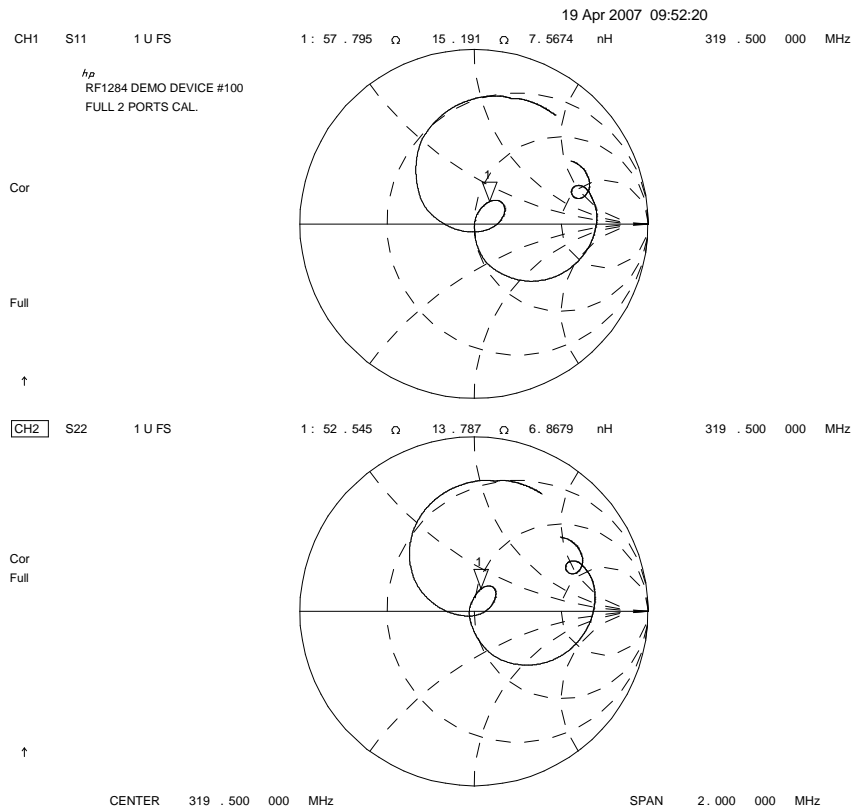

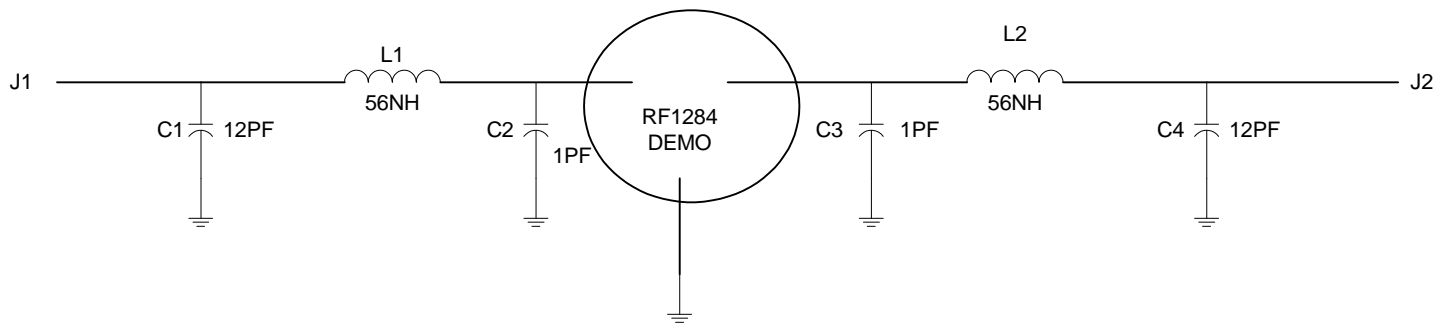

PCB, 400-0455-001
IND, 501-0966-560, 1008CS 56NH
CAP, 501-1275-010, 0805, 1PF
CAP, 501-1275-120, 0805, 12PF

L1, L2
C2, C3
C1, C1