


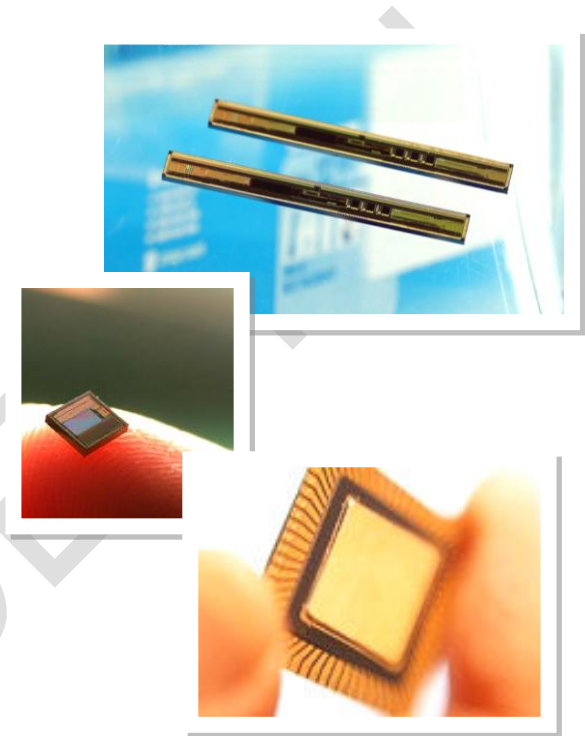

RM69330 Data Sheet

Single Chip Driver with 16.7M color
for 480RGBx480 OLED driver

Revision : 0.0

Date : Nov,01 2017

Revision History

Version No.	Date	Description	Page	Modified By	Checked By
0.0	2017/11/01	First Release		Howard Hsiung	CN.Lin

CONFIDENTIAL

Table of Contents

Table of Contents	3
1. General Description	6
2. Features	7
3. Block Diagram	10
4. Pin Description	11
4.1 Power Supply Pins	11
4.2 Interface Pins	12
4.3 MIPI Interface Pins	13
4.4 Interface Logic Pins	14
4.5 Driver Output Pins (Pins for Panel)	15
4.6 DC/DC Convert Pins	16
4.7 Test Pins	17
5. Function Description	18
5.1 Interface Type Selection	18
5.2 3-wire/4-wire SPI Interface	19
5.2.1 Write Cycle and Sequence	19
5.2.2 Read Cycle and Sequence	20
5.2.3 Break and Pause Sequence	22
5.3 Display Serial Interface (DSI)	23
5.4.1 DSI Protocol	24
5.4.2 Processor to Peripheral Transactions	26
5.4.3 Peripheral-to-Processor LP Transmission	31
5.4.4 Error Report Format	32
5.4.5 Peripheral-to-Processor Transaction – Detail Format Description	33
5.4.6 DSI Video Mode Interface Timing	34
5.4.7 Error Correction Code (ECC)	35
5.4.8 Notice	36
5.4 Tearing Effect Output	37
5.5.1 Tearing Effect Line Mode	37
5.5.2 Tearing Effect Line Timing	39
6. Command	40
6.1 Command List	40
6.2 Command Description	43
NOP (0000h)	43
SWRESET(0100h) : Software Reset	44
RDDID(0400h~0402h) : Read Display ID	45
RDNUMED(0500h) : Read Number of Errors on DSI	46
RDDPM (0A00h) : Read Display Power Mode	47
RDDMADCTR (0B00h): Read Display MADCTR	48
RDDCOLMOD (0C00h): Read Display Pixel Format	49
RDDIM (0D00h): Read Display Image Mode	51
RDDSM (0E00h): Read Display Signal Mode	52
RDDSDR (0F00h): Read Display Self-Diagnostic Result	53
SLPIN (1000h): Sleep In	54
SLPOUT (1100h): Sleep Out	56
PTLON (1200h): Partial Display Mode On	58
NORON (1300h): Normal Display Mode On	59
INVOFF (2000H): Display Inversion Off	60
INVON (2100H): Display Inversion On	61
ALLPOFF (2200H): All Pixel Off	62
ALLPON (2300H): All Pixel On	64
DISPOFF (2800h): Display Off	66
DISPON (2900h): Display On	67

CASET(2A00h~2A03h) : Set Column Start Address	68
RASET(2B00h~2B03h) : Set Row Start Address	70
RAMWR (2C00h): Memory Write	72
PTLAR (3000h): Partial Area	74
PTLAR (3100h): Vertical Partial Area	76
TEOFF (3400h): Tearing Effect Line OFF	79
TEON (3500h): Tearing Effect Line ON	80
MADCTR (3600h): Scan Direction Control	83
IDMOFF (3800h): Idle Mode Off	85
IDMON (3900h): Enter_idle_mode	86
COLMOD (3A00h): Interface Pixel Format	88
RAMWRC (3C00h): Memory Continuous Write	90
STESL(4400h) : Set_Tear_Scanline	92
GSL (4500h) : Get_Scanline	93
DSTBON (4F00h): Deep Standby Mode On	94
WRDISBV (5100h): Write Display Brightness	95
RDDISBV (5200h): Read Display Brightness	96
WRCTRLD (5300h): Write Display Control	97
RDCTRLD (5400h): Read Display Control	98
WRRADACL (5500h): RAD_ACL Control	99
IMGEHCCTR (5800h) : Set_color_enhance	100
IMGEHCCTR (5900h) : Read_color_enhance	101
WRDISBV (6300h): Write HBM Display Brightness	102
RDDISBV (6400h): Read HBM Display Brightness	103
HBM_Mode (6600h) : Set_HBM_Mode	104
Deep_Idle_Mode (6700h) : Set_Deep Idle Mode	105
COLSET (7000~7F00h): Interface Pixel Format Set	106
COLOPT (8000h): Interface Pixel Format Option	110
RDDDBS(A100h) : Read_DDB_Start	113
RDDDBC(A800h) : Read DDB Continous	115
RDFCS(AA00h) : Read First Checksum	117
RDCCS(AF00h) : Read Continue Checksum	118
SetDISPMode (C200h) : set_DISP Mode	119
SetDSPIMode (C400h) : set_DSPI Mode	120
RDID1 (DA00h): ID1 Code	123
RDID2 (DB00h): ID2 Code	124
RDID3 (DC00h): ID3 Code	125
(FE00h): CMD Mode Switch	126
(FF00h): Read CMD Status	128
7. Electrical Characteristics	130
7.1 Absolute Maximum Ratings	130
7.2 ESD Protection Level	130
7.3 Latch-Up Protection Level	130
7.4 DC Characteristics	131
7.4.1 Basic Characteristics	131
7.4.2 Operation current	132
7.5 MIPI Characteristics	133
7.5.1 High-Speed Receiver Specification	133
7.5.2 Forward high speed transmissions	134
7.5.3 Data to Clock Timing Definitions	135
7.5.4 Low power transceiver specifications	136
7.6 AC Characteristics	137
7.6.1 Serial Interface Characteristics	137
7.6.2 DSI Timing Characteristics	139
7.6.3 Reset Timing	142
8. Power Generation	143
8.1 2 Supply Power (VDDI / VDD)	143
8.2 DC/DC Converter Circuit	144

8.3	External Components	145
8.4	Power on/off sequence and timing	146
8.5	Power Level Modes.....	147
8.6	Maximum Series Resistance	148
9.	Pad Diagram and Coordination	149

CONFIDENTIAL

1. General Description

The RM69330 device is a single-chip solution for LTPS AMOLED that incorporates gate drivers and is capable of 480RGBx480, 400RGBx400, 360RGBx480, 320RGBx320, 320RGBx480, 272RGBx480, 240RGBx240, 240RGBx320, 180RGBx360, 180RGBx540, 128RGBx432 with internal GRAM. It includes a 2,764,800 bits internal memory, a timing controller with glass interface level-shifters and a glass power supply circuit.

The RM69330 supports MIPI Interface, 8-bit system interfaces, serial peripheral interfaces (SPI), dual serial peripheral interfaces (Dual-SPI). The specified window area can be updated selectively, so that moving pictures can be displayed simultaneously independent of the still picture area.

The RM69330 is also able to make gamma correction settings separately for RGB dots to allow benign adjustments to panel characteristics, resulting in higher display qualities. The IC possesses internal GRAM that stores 480 x 480 x 1/2 x 24 bits for 16.77M-color images. A deep standby mode is also supported for lower power consumption.

This LSI is suitable for wearable device applications, including I-watch and smart band.

CONFIDENTIAL

2. Features

- **Single chip AMOLED controller/driver with display RAM**
- **Display resolution option**
 - 480RGB x 480
 - 400RGB x 400
 - 360RGB x 480
 - 320RGB x 320
 - 320RGB x 480
 - 272RGB x 480
 - 240RGB x 240
 - 240RGB x 320
 - 180RGB x 360
 - 180RGB x 540
 - 128RGB x 432
- **Display data RAM (frame memory): 2,764,800 bits**
- **Display mode (Color mode)**
 - Full color mode: 16.7M-colors
 - Idle mode: 16.7M-colors, 4096-colors, 8-colors
- **Interface**
 - 8-bits 80-series MPU interface
 - Serial peripheral interface (SPI)
 - Dual serial peripheral interface (Dual-SPI)
 - MIPI Display Serial Interface (1 clock and 2 data lane pairs)
 - ◆ Support 1lane/2lane (1lane: 500Mbps)
 - ◆ Maximum total bit rate is 500Mbps of 2 data lanes 24-bit data format/ 360Mbps of 2 data lanes 18-bit data format/ 320Mbps of 2 data lanes 16-bit data format
- **Abundant color display and drawing functions**
 - Programmable γ -correction function for 16.7 million color display
 - Individual gamma correction setting for RGB dots
 - Partial display function
- **Sunlight readable**
- **Control power IC by one-wire interface**
- **On chip**
 - VREFP5/VREFN5 voltage generator for panel voltage
 - VGHR/VGLR voltage for gate control signal
 - Internal oscillator for display clock
 - Source output MUX 1-6 with 240ch source output pins
 - Supports gate control signals to gate driver in the panel
- **Built-in OTP function to adjust panel setting**
- **Logic / interface power supply voltage VDDI = 1.65V ~ 3.3V**
- **Analog power supply voltage VDD = 2.7V ~ 3.6V**

■ Output voltage levels

- Positive gate driver voltage range for VGHR: 3 ~ 10.5V (Max≤VGH-0.3v)
- Negative gate driver voltage range for VGLR: -2V ~ -9.5V (Min≥VGL+0.3v)
- VREFP5 panel voltage range : 0~5V (Max≤AVDD-0.3v)
- VREFN5 panel voltage range : -0.5~-4.5V (Min≥VCL+0.3v)
- Step-up 1,2 output voltage range for AVDD: 4.5 ~ 6.5V, VCL: -3.5 ~ -5.0V
- Gamma high/low voltage range for VGMP: 2.0V ~ 6.0V (Max≤AVDD-0.5v) , VGSP: 0V, 0.2125V ~ 4.5V

■ Package: COF/COG


■ Chip size evaluation : 8300um x 2060um(including scribe line)

CONFIDENTIAL

■ Power Supply Specifications

No.	Item	Description
1	Source Driver	240 pins (480 x RGB)
2	gate control timing Level shift	VGHR-VGLR
5	Input Voltage	VDDI
		1.65 ~ 3.3V
		VCC
		Connect to VDDI or VDD(VCI)
		VDD
		(VDDA/VDDDB/VDDR)
		2.70 ~ 3.60V
6	OLED drive voltages	AVDD
		4.5V ~ 6.5V
		VGHR
		3V ~ 10.5V (Max<=VGHR-0.3v)
		VGLR
		-2V ~ -9.5V (Min>=VGL+0.3v)
		VREFP5
		0V ~ 5V (Max<=AVDD-0.3v)
		VREFN5
		-0.5V ~ -4.5V (Min>=VCL+0.3v)
7	Internal step-up circuits	AVDD
		VCI x2.0(dual), x3.0(single)
		VCL
		VCI x -1.0(dual), x-2.0(single)
		VGHR
		VCI x2, x3, x4
		VGL
		VCI x-2, x-3, x-4

3. Block Diagram

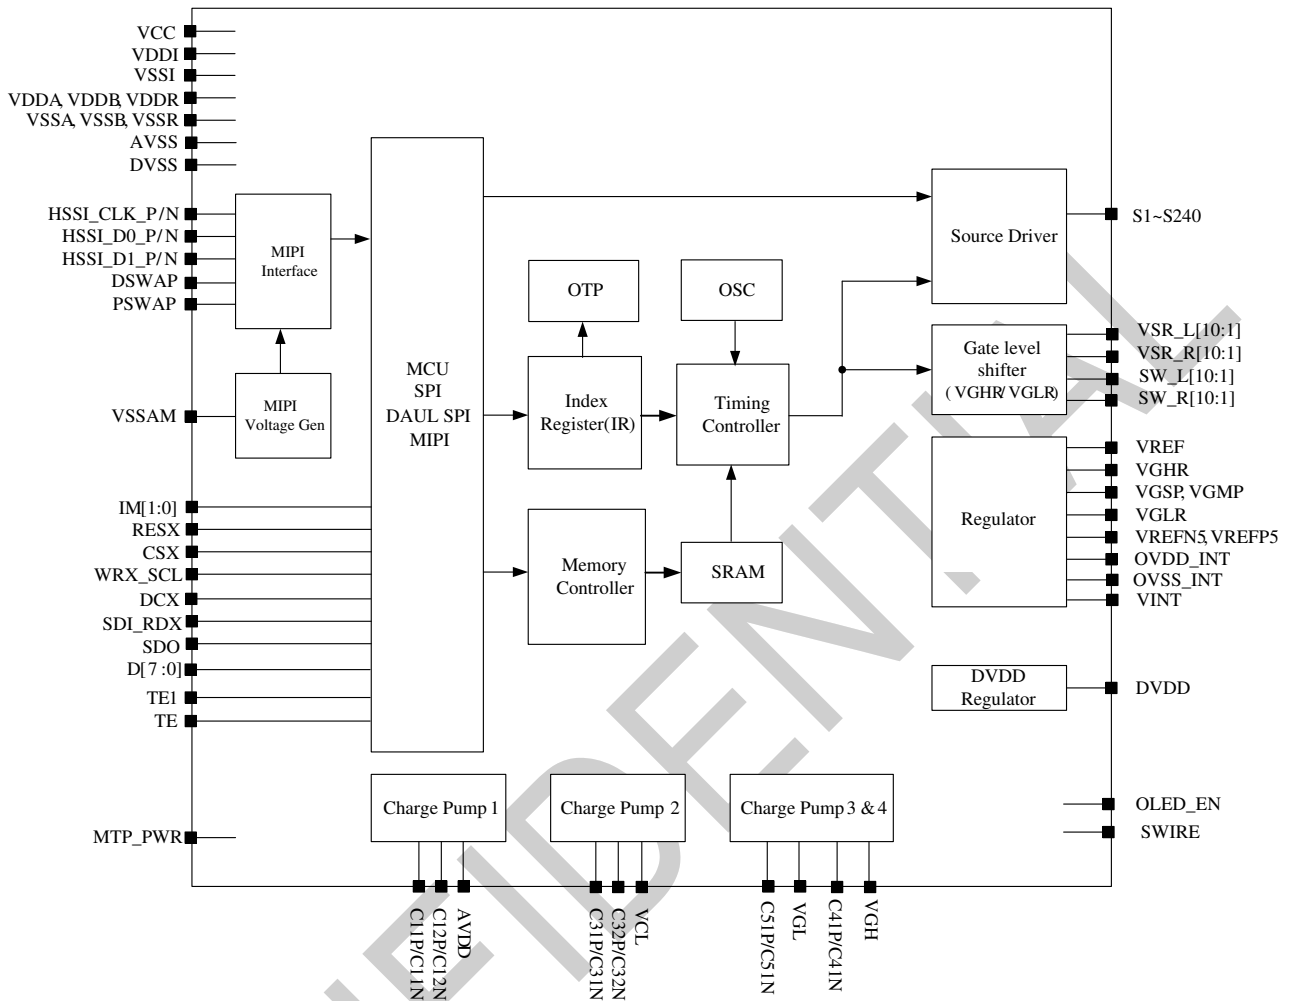

Interface

The RM69330 supports MIPI DSI interface. MIPI DSI can access both internal command and display data.

Grayscale Voltage Generating Circuit

Grayscale voltage generating circuit generates a drive voltage, which corresponds to grayscale level set in the y correction register. The RM69330 displays 16.7M colors at the maximum.

Power Supply Circuit

The power supply circuit generates supply voltages to OLED panel, VGH, VGL.

Timing Generating

The timing controller generates timing signals for internal circuits such as the display timing.

Oscillator

The RM69330 incorporates RC oscillator circuit. The frame frequency is changeable by command settings.

Panel Driver Circuit

The OLED display driver circuit consists of 240 source drivers (S1~S240). The gate signal consists of VSR_R/L[1:10], SW_R/L[1:10] and outputs either VGHR or VGLR level.

4. Pin Description

4.1 Power Supply Pins

Signal	I/O	Function
Vddb	P	Power supply for DC/DC converter Vddb, Vdda and Vddr should be the same input voltage level
Vdda	P	Power supply for analog system. Vddb, Vdda and Vddr should be the same input voltage level
Vddr	P	Power supply for regulator system Vddb, Vdda and Vddr should be the same input voltage level
Vddi	P	Power supply for interface system except MIPI interface.
Vcc	P	Power supply for DVDD regulator
Vssb	P	System ground for DC/DC converter
Vssa	P	System ground for analog system
Vssr	P	System ground for regulator system
Vssam	P	System ground for internal MIPI analog system
Vssi	P	System ground for interface system except MIPI interface
Dvss	P	System ground for internal digital system
Avss	P	System ground for source OP system.
MTP_PWR	P	MTP programming power supply pin (7.5V typical) Must be left open or connected to DVSS in normal condition.

4.2 Interface Pins

Signal	I/O	Function
CSX	I	Chip select input pin ("Low" enable) in 80-series MPU I/F and SPI I/F. If not used, please connect to VDDI.
WRX_SCL	I	WRX : Writes strobe signal to write data when WRX is "Low" in 80-series MPU I/F. SCL: A synchronous clock signal in SPI I/F. If not used, please connect to VSSI.
D/CX	I	Display data / command selection in 80-series MPU I/F and 4-wire SPI I/F. D/CX = "0" : Command D/CX = "1" : Display data or Parameter If not used, please connect to VSSI.
SDI_RDX	I/O	SDI: Serial input signal in SPI I/F. The data is input on the rising edge of the SCL signal. RDX : Reads strobe signal to write data when RDX is "Low" in 80-series MPU interface. If not used, please leave it Open.
SDO	O	Serial output signal in SPI I/F. The data is output on the rising/falling edge of the SCL signal. If the host places the SDI line into high-impedance state during the read interval, the SDI and SDO can be tied together. If not used, please open this pin.
D[7:0]	I/O	8-bit bi-directional data bus for 80-series MPU I/F and 8-bit input data bus for RGB I/F. These pins are not used for SPI, MIPI, please leave it Open.

4.3 MIPI Interface Pins

Signal	I/O	Function																																			
HSSI_CLK_P HSSI_CLK_N	I	-These pins are DSI-CLK+/- differential clock signals if MIPI interface is used. -If not used, please connect these pins to VSSAM.																																			
HSSI_D0_P HSSI_D0_N	I/O	-These pins are DSI-D0+/- differential data signals if MIPI interface is used. -If not used, please connect these pins to VSSAM.																																			
HSSI_D1_P HSSI_D1_N	I/O	-These pins are DSI-D1+/- differential data signals if MIPI interface is used. -If not used, please connect these pins to VSSAM.																																			
DSWAP PSWAP	I	Input pin to select HSSI_D0/D1 data lane sequence and polarity in high speed interface only.																																			
		<table><tr><th>Pin Name</th><th>HSSI_D0_P</th><th>HSSI_D0_N</th><th>HSSI_CLK_P</th><th>HSSI_CLK_N</th><th>HSSI_D1_P</th><th>HSSI_D1_N</th></tr><tr><td>DSWAP=0 PSWAP=0</td><td>DSI D0+</td><td>DSI D0-</td><td>DSI CLK+</td><td>DSI CLK-</td><td>DSI D1+</td><td>DSI D1-</td></tr><tr><td>DSWAP=0 PSWAP=1</td><td>DSI D0-</td><td>DSI D0+</td><td>DSI CLK-</td><td>DSI CLK+</td><td>DSI D1-</td><td>DSI D1+</td></tr><tr><td>DSWAP=1 PSWAP=0</td><td>DSI D1+</td><td>DSI D1-</td><td>DSI CLK+</td><td>DSI CLK-</td><td>DSI D0+</td><td>DSI D0-</td></tr><tr><td>DSWAP=1 PSWAP=1</td><td>DSI D1-</td><td>DSI D1+</td><td>DSI CLK-</td><td>DSI CLK+</td><td>DSI D0-</td><td>DSI D0+</td></tr></table>	Pin Name	HSSI_D0_P	HSSI_D0_N	HSSI_CLK_P	HSSI_CLK_N	HSSI_D1_P	HSSI_D1_N	DSWAP=0 PSWAP=0	DSI D0+	DSI D0-	DSI CLK+	DSI CLK-	DSI D1+	DSI D1-	DSWAP=0 PSWAP=1	DSI D0-	DSI D0+	DSI CLK-	DSI CLK+	DSI D1-	DSI D1+	DSWAP=1 PSWAP=0	DSI D1+	DSI D1-	DSI CLK+	DSI CLK-	DSI D0+	DSI D0-	DSWAP=1 PSWAP=1	DSI D1-	DSI D1+	DSI CLK-	DSI CLK+	DSI D0-	DSI D0+
		Pin Name	HSSI_D0_P	HSSI_D0_N	HSSI_CLK_P	HSSI_CLK_N	HSSI_D1_P	HSSI_D1_N																													
		DSWAP=0 PSWAP=0	DSI D0+	DSI D0-	DSI CLK+	DSI CLK-	DSI D1+	DSI D1-																													
		DSWAP=0 PSWAP=1	DSI D0-	DSI D0+	DSI CLK-	DSI CLK+	DSI D1-	DSI D1+																													
		DSWAP=1 PSWAP=0	DSI D1+	DSI D1-	DSI CLK+	DSI CLK-	DSI D0+	DSI D0-																													
DSWAP=1 PSWAP=1	DSI D1-	DSI D1+	DSI CLK-	DSI CLK+	DSI D0-	DSI D0+																															
If not used, please connect to VSSI.																																					

NOTE: "1" = VDDI level, "0" = VSSI level.

4.4 Interface Logic Pins

Signal	I/O	Function															
RESX	I	This signal will reset the device and must be applied to properly initialize the chip. Signal is active low.															
IM[1:0]	I	Interface type selection. The connections of IM[1:0] which not shown in table are invalid. <table><tr><th>IM[1:0]</th><th>Display Data</th><th>Command</th></tr><tr><td>00</td><td>MIPI / 3-wire SPI</td><td>MIPI / 3-wire SPI</td></tr><tr><td>01</td><td>MIPI / 4-wire SPI</td><td>MIPI / 4-wire SPI</td></tr><tr><td>10</td><td>MIPI / QAD-SPI</td><td>MIPI / QAD-SPI</td></tr><tr><td>11</td><td>MCU 8-bit</td><td>MCU 8-bit</td></tr></table>	IM[1:0]	Display Data	Command	00	MIPI / 3-wire SPI	MIPI / 3-wire SPI	01	MIPI / 4-wire SPI	MIPI / 4-wire SPI	10	MIPI / QAD-SPI	MIPI / QAD-SPI	11	MCU 8-bit	MCU 8-bit
IM[1:0]	Display Data	Command															
00	MIPI / 3-wire SPI	MIPI / 3-wire SPI															
01	MIPI / 4-wire SPI	MIPI / 4-wire SPI															
10	MIPI / QAD-SPI	MIPI / QAD-SPI															
11	MCU 8-bit	MCU 8-bit															
BSTM	I	Boost mode selection pin. <table><tr><th>BSTM</th><th>Mode</th></tr><tr><td>0</td><td>2 PWR(VDDI, VCI) AVDD --> internal CP VCL --> internal CP</td></tr><tr><td>1</td><td>Reserved</td></tr></table>	BSTM	Mode	0	2 PWR(VDDI, VCI) AVDD --> internal CP VCL --> internal CP	1	Reserved									
BSTM	Mode																
0	2 PWR(VDDI, VCI) AVDD --> internal CP VCL --> internal CP																
1	Reserved																
TE	O	Tearing effect output pin to synchronize MCU to frame writing, activated by S/W command. When this pin is not activated, this pin is output low. If not used, please open this pin.															
TE1	O																
SWIRE	O	Swire protocol setting pin of Power IC, If not used, please open this pin.															
OLED_EN	O	Power IC enable control pin, If not used, please open this pin.															

NOTE: "1" = VDDI level, "0" = VSSI level.

4.5 Driver Output Pins (Pins for Panel)

Signal	I/O	Function
S1 ~ S240	O	Pixel electrode driving output.
SDMY[1] ~ SDMY[21]	O	Dummy Source, leave it Open.
VSR_L[10:1] VSR_R[10:1]	O	VSR control signals, Level shift output, (VGHR-VGLR)
SW_L[10:1] SW_R[10:1]	O	VSR control signals, Level shift output, (VGHR-VGLR)

CONFIDENTIAL

4.6 DC/DC Convert Pins

Signal	I/O	Function
AVDD	O	Output voltage from step-up circuit 1, generated from VDDDB. Connect a capacitor for stabilization.
VCL	O	Output voltage from step-up circuit 3, generated from VDDDB. Connect a capacitor for stabilization.
VGH	O	Output voltage from step-up circuit 4. Connect a capacitor for stabilization.
VGL	O	Output voltage from step-up circuit 5. Connect a capacitor for stabilization.
C11P, C11N C12P, C12N	IO	Capacitor connection pins for the step-up circuit which generate AVDD. Connect capacitor as requirement. When not in used, please open these pins.
C31P, C31N C32P, C32N	IO	Capacitor connection pins for the step-up circuit which generate VCL. Connect capacitor as requirement.
C41P, C41N	IO	Capacitor connection pins for the step-up circuit which generate VGH. Connect capacitor as requirement.
C51P, C51N	IO	Capacitor connection pins for the step-up circuit which generate VGL. Connect capacitor as requirement.
VGHR	O	Output voltage generated from VGH. LDO output used for panel voltage. Connect a capacitor for stabilization. When not in use, please open this pin.
VGLR	O	Output voltage generated from VGL. LDO output used for panel voltage. Connect a capacitor for stabilization. When not in use, please open this pin.
VGMP	O	Output voltage generated from AVDD. LDO output for positive gamma high voltage generator.
VGSP	O	Output voltage generated from AVDD. LDO output for positive gamma low voltage generator.
VREF	O	Regulator output for internal reference voltage. Connect capacitor for stabilization.
DVDD	O	Regulator output for logic system power. Connect a capacitor for stabilization.
VREFP5	O	Regulator output for VREFP(0~5V)
VREFN5	O	Regulator output for VREFP(-0.5~-5V)
VINT	O	Connect a capacitor for stabilization.

4.7 Test Pins

Signal	I/O	Function
ANALOG_TEST 1~2	O	Test pin, not accessible to user. Must be left open.
TEST1~3	IO	Test pin, not accessible to user. Must be left open.
TESTEN	I	Test pin, not accessible to user. Must be left open., Internal pull low
EXTCLK	I	Test pin, not accessible to user. Must be left open.
DUMMY	I	Dummy PAD, leave it open

CONFIDENTIAL

5. Function Description

5.1 Interface Type Selection

Interface type selection. The connections of IM[1:0] which not shown in table are invalid.

IM[1:0]	Display Data	Command
00	MIPI / 3-wire SPI	MIPI / 3-wire SPI
01	MIPI / 4-wire SPI	MIPI / 4-wire SPI
10	MIPI / QAD-SPI	MIPI / QAD-SPI
11	MCU 8-bit	MCU 8-bit

5.2 3-wire/4-wire SPI Interface


5.2.1 Write Cycle and Sequence

During a write cycle the host processor sends a single bit of data to the display module via the interface. The 3-wire/4-wire SPI interface utilizes CSX, SCL and SDA signals. SCL is driven from high to low then pulled back to high during the write cycle. The host processor provides information during the write cycle while the display module reads the host processor information on the rising edge of SCL.


During the write sequence the host processor writes one or more bytes of information to the display module via the interface. The write sequence is initiated when CSX is driven from high to low and ends when CSX is pulled high. The 3-wire serial data contains DCX bit and a transmission byte. DCX bit is driven low while command information is on the interface and is pulled high when data is present.

The 3-wire/4-wire SPI interface write command sequences are described in the following figure.

3-wire SPI

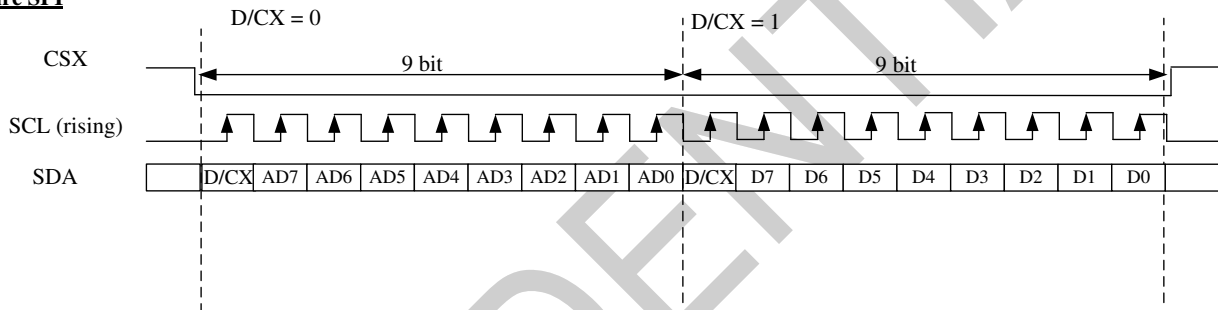

4-wire SPI

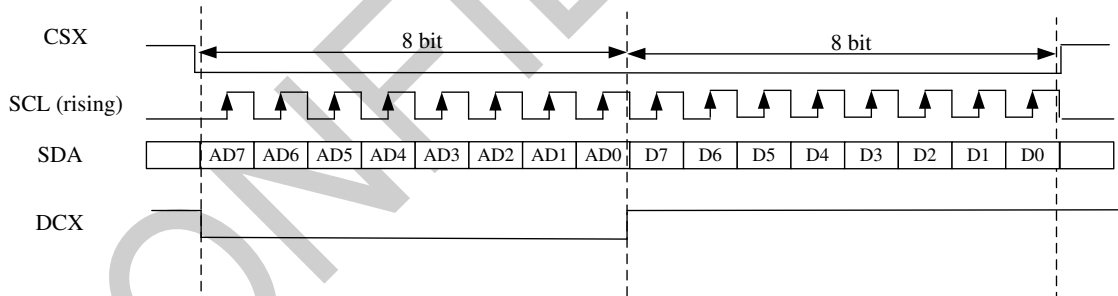


5.2.2 Read Cycle and Sequence

During a read cycle the host processor reads a single bit of data from the display module via the interface. The 3-wire/4-wire SPI interface utilizes CSX, SCL and SDA signals. SCL is driven from high to low then pulled back to high during the read cycle. The display module provides information during the read cycle while the host processor reads the display module information on the rising edge of SCL.


During the read sequence the host processor reads one or more bytes of information from the display module via the interface. The read sequence is initiated when CSX is driven from high to low and ends when CSX is pulled high. The 3-wire serial data contains DCX bit and a transmission byte. DCX is driven low while command information is on the interface and is pulled high when data is present.

The 3-wire/4-wire SPI interface read command sequences are described in the following figure.


3-wire SPI (0Ah/0B/0Ch/0Dh/0Eh/0Fh/DAh/DBh/DCh) for 8 bit read

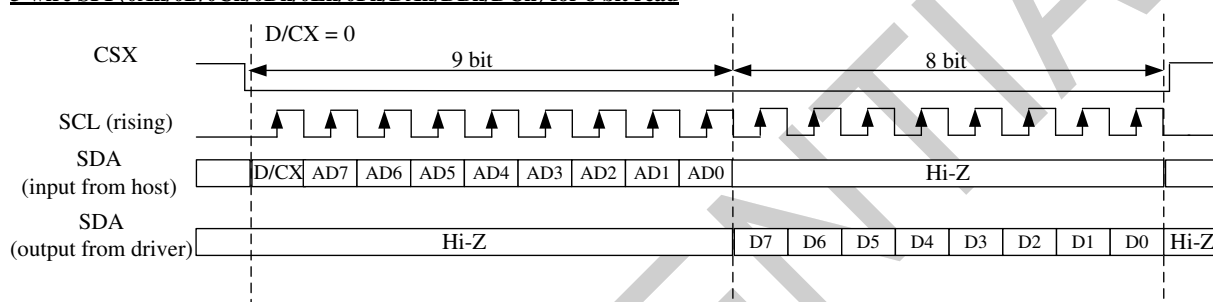


3-wire SPI (04h) for 24 bit read

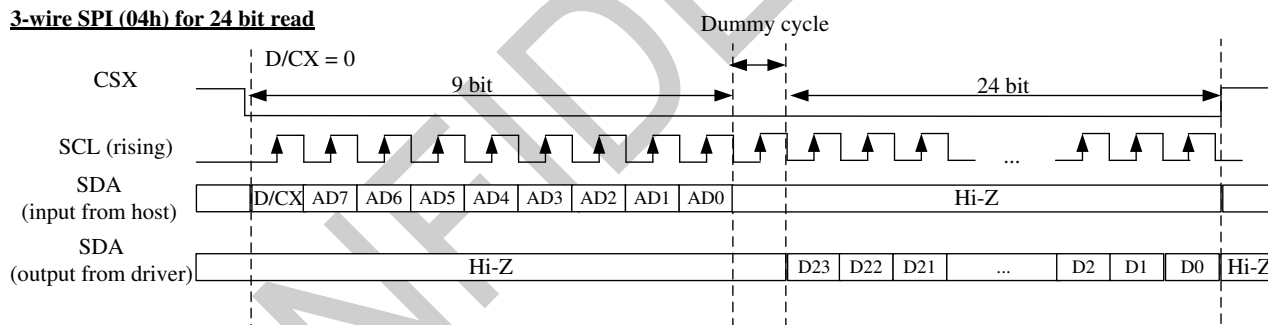

4-wire SPI (0Ah/0B/0Ch/0Dh/0Eh/0Fh/DAh/DBh/DCh) for 8 bit read

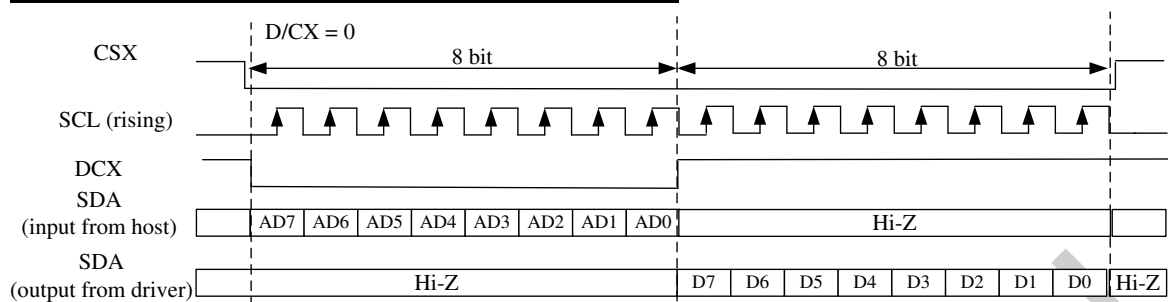

4-wire SPI (04h) for 24 bit read

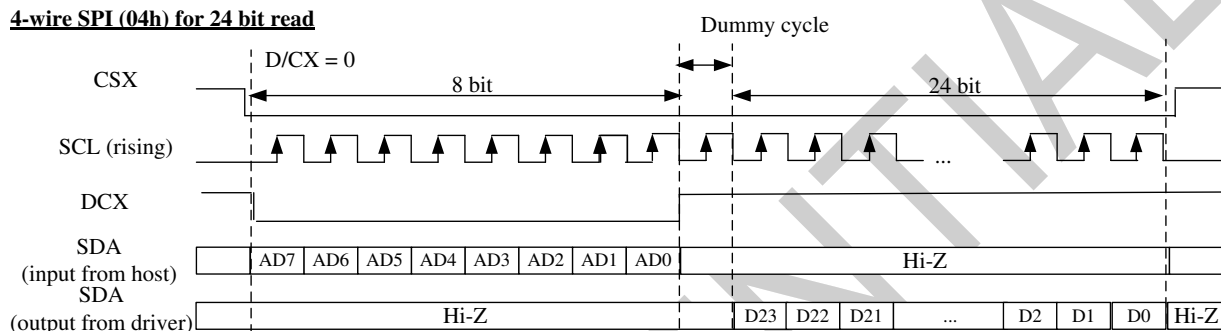


5.2.3 Break and Pause Sequence

The host processor can break a read or write sequence by pulling the CSX signal high during a command or data byte. The display module shall reset its interface so it will be ready to receive the same byte when CSX is again driven low.

The host processor can pause a read or write sequence by pulling the CSX signal high between command or data bytes. The display module shall wait for the host processor to drive CSX low before continuing the read or write sequence at the point where the sequence was paused.

1. Middle of frame

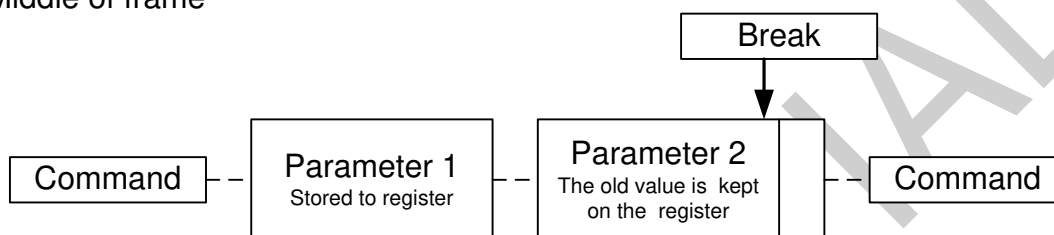


2. Between frames

Without break



With break

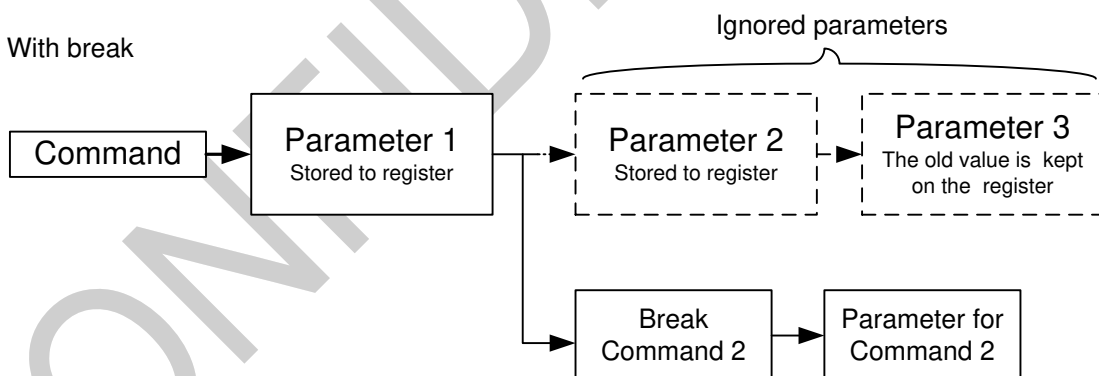

Break can be e.g. another command or noise pulse.

5.3 Display Serial Interface (DSI)

DSI-compliant peripherals support either of two basic modes of operation: Command Mode and Video Mode. The mode definitions reflect the primary intended use of DSI for display interconnect, but are not intended to restrict DSI from operating in other applications.

RM69330 is capable of both Command Mode operation and Video Mode operation. Command Mode refers to operation in which transactions primarily take the form of sending commands and data to a display module that incorporates a display controller. The display controller may include local registers and a frame buffer. Systems using Command Mode write to, and read from, the registers and frame buffer memory. The host processor indirectly controls activity at the peripheral by sending commands, parameters and data to the display controller.

The host processor can also read display module status information or the contents of the frame memory. Command Mode operation requires a bidirectional interface. Video Mode refers to operation in which transfers from the host processor to the peripheral take the form of a real-time pixel stream. In normal operation, the display module relies on the host processor to provide image data at sufficient bandwidth to avoid flicker or other visible artifacts in the displayed image. Video information should only be transmitted using High Speed Mode.


RM69330 Video Mode architectures also include a simple timing controller and partial frame buffer, used to maintain a partial-screen or lower-resolution image in standby or Low Power Mode. This permits the interface to reduce power consumption.

RM69330 Configuration:

Lane Pair	MCU(Master) RM69330(Slave)
Clock Lane	Unidirectional Lane Clock only
Data Lane 0	Bi-directional Lane Forward High-speed Bi-directional Escape Mode Bi-directional LPDT
Data Lane 1	Unidirectional Lane Forward High-Speed Escape Mode No LPDT

5.4.1 DSI Protocol

On the transmitter side of a DSI Link, parallel data, signal events, and commands are converted to packets. These packets are sent across the serial Link. The receiver side of a DSI Link performs the converse of the transmitter side, decomposing the packet into parallel data, signal events and commands.

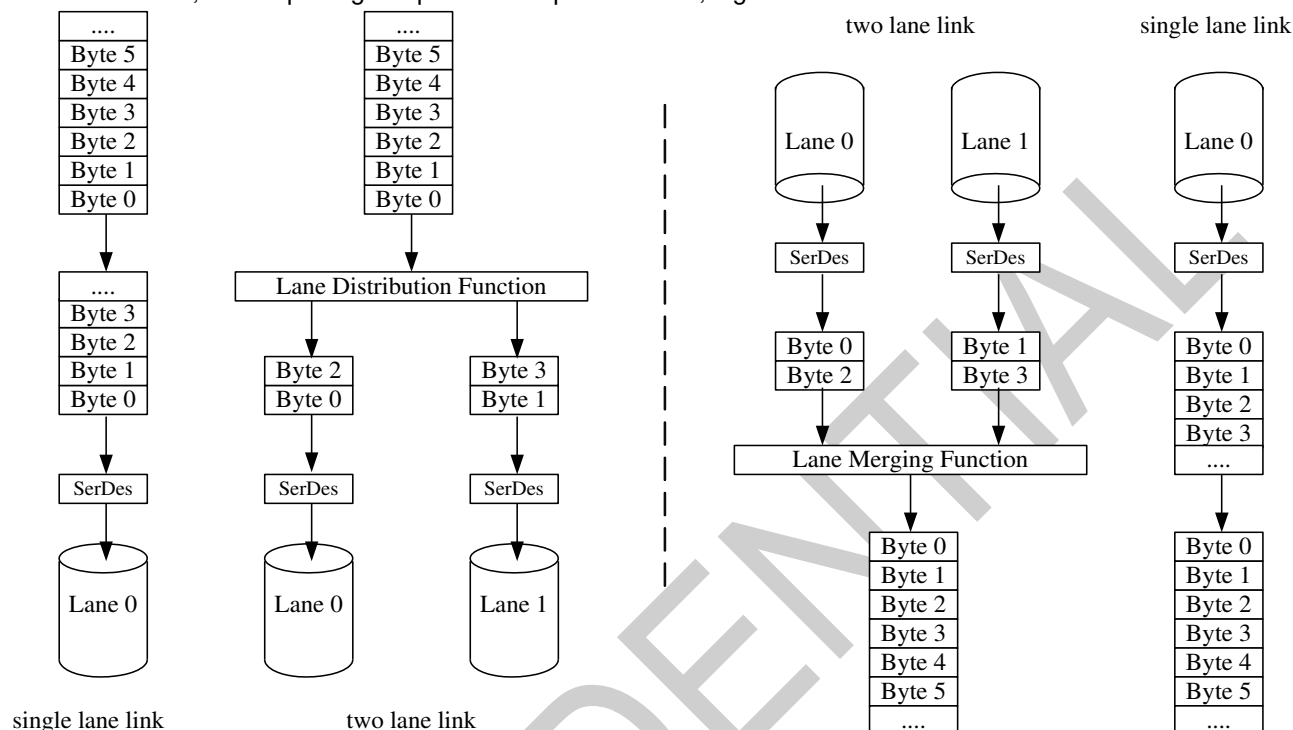

There are two kinds of packets, **short packet and long packet**.

Short packet structure:

LP-11: low power mode


SoT: start of transmission

DI: data identification

Data 0, Data1: packet data

ECC: error correction code

EoT: End of Transmission

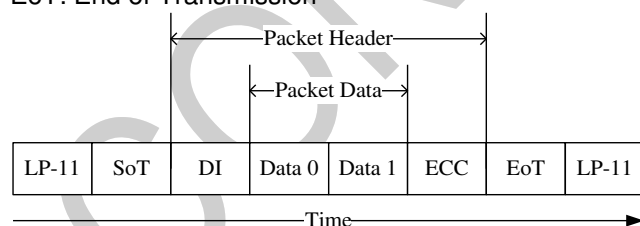

DI structure:

Virtual Channel: these two bits identify the data as directed to one of four virtual channels

Data Type: It specifies the packet structure and packet format

Virtual Channel (VC)		Data Type (DT)					
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0

Long packet structure:

LP-11: low power mode

SoT: start of transmission


DI: data identification

Word Count: the number of data bytes of packet data

ECC: error correction code

Checksum: The 16-bit CRC generator to check packet data. If the calculated checksum of receiver are equal to the packet data, the packet data is correct. If the calculated checksum of receiver are not equal, the packet data are not correct.

EoT: end of transmission

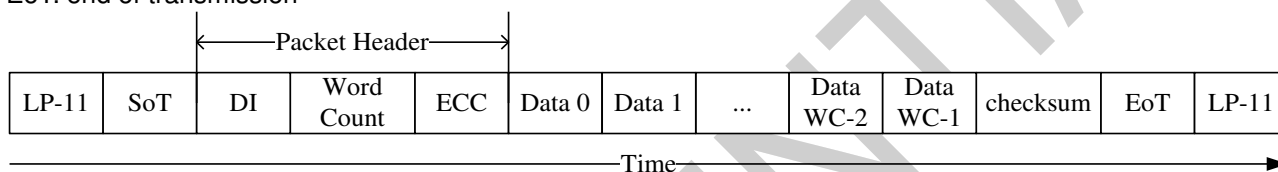

5.4.2 Processor to Peripheral Transactions

Processor to Peripheral Direction Packet Data Types

Data Type	Data Type binary	Description	Packet Size
01h	00 0001	Sync Event, V Sync Start	Short
11h	01 0001	Sync Event, V Sync End	Short
21h	10 0001	Sync Event, H Sync Start	Short
31h	11 0001	Sync Event, H Sync End	Short
08h	00 1000	End of Transmission packet (EoTp)	Short
02h	00 0010	Color Mode (CM) Off Command	Short
12h	01 0010	Color Mode (CM) On Command	Short
22h	10 0010	reserved	Short
32h	11 0010	reserved	Short
03h	00 0011	reserved	Short
13h	01 0011	Generic Short WRITE, 1 parameter	Short
23h	10 0011	Generic Short WRITE, 2 parameters	Short
04h	00 0100	reserved	Short
14h	01 0100	Generic READ, 1 parameter	Short
24h	10 0100	Generic READ, 2 parameters	Short
05h	00 0101	DCS Short WRITE, no parameters	Short
15h	01 0101	DCS Short WRITE, 1 parameter	Short
06h	00 0110	DCS READ, no parameters	Short
37h	11 0111	Set Maximum Return Packet Size	Short
09h	00 1001	Null Packet, no data	Long
19h	01 1001	Blanking Packet, no data	Long
29h	10 1001	Generic Long Write	Long
39h	11 1001	DCS Long Write/write_LUT Command Packet	Long
0Eh	00 1110	Packed Pixel Stream, 16-bit RGB, 5-6-5 Format	Long
1Eh	01 1110	Packed Pixel Stream, 18-bit RGB, 6-6-6 Format	Long
2Eh	10 1110	Loosely Packed Pixel Stream, 18-bit RGB, 6-6-6 Format	Long
3Eh	11 1110	Packed Pixel Stream, 24-bit RGB, 8-8-8 Format	Long

Sync Event, Data Type = xx 0001

Sync Events are all short packets and time-accurately. They can perform like the start and end of sync pulses. To represent timing information as accurately as possible, a V Sync Start event represents the start of the VSA and also implies an H Sync Start event for the first line of the VSA. Hence, a V Sync End event implies an H Sync Start event for the last line of the VSA. Sync events may be concatenated with blanking packets to convey inter-line timing accurately and avoid the overhead of switching between LPS and HS for every event. Note there is a power penalty for keeping the data line in HS mode.

EoT packet

This short packet is used to indicate the end of a high speed (HS) transmission. This packet will enhance overall system reliability. Although the main objective of the EoTp is to enhance robustness during HS transmission mode, RM69330 can detect and interpret arriving EoTps regardless of transmission mode (HS or LP modes)

Color Mode Off / On Command

They are short packet commands to switch video display module between normal display mode and low-color mode for power saving.

Generic short write / read packet

Generic Short WRITE command is a Short packet type for sending generic data to the peripheral. Generic READ request is a Short packet requesting data from the peripheral.

DCS commands

DCS short write command

DCS short write command is used to write a single data byte command to display module. If there is a valid parameter byte, data type bit 4 shall be set to 1. If there is no valid parameter byte, data type bit 4 shall be set to 0 and the parameter byte shall be 00h.

DCS read commands

The commands are used to request data from the display module.

DCS Long Write / write_LUT command

The commands are used to send larger blocks of data to a display module.

Maximum return packet size

This command specifies the maximum size of the payload in a long packet transmission from a display module to host processor.

Null Packet

This is a mechanism for keeping the data lane(s) in high speed mode while sending dummy data.

Blanking Packet


A Blanking packet is used to convey blanking timing information in a Long packet. The packet represents a period between active scan lines of a Video Mode display, where traditional display timing is provided from the host processor to the display module. The blanking period may have Sync Event packets interspersed between blanking segments. Blanking packets may contain arbitrary data as payload.

Generic Long Write

This is used to transmit arbitrary blocks of data from a host processor to a peripheral.

Packed Pixel Stream, 16-bit Format, Data Type: 00 1110


The pixel format is five bits red, six bits green and five bits blue. The green component is split across two bytes. Within a color component, the LSB is sent first, the MSB last.

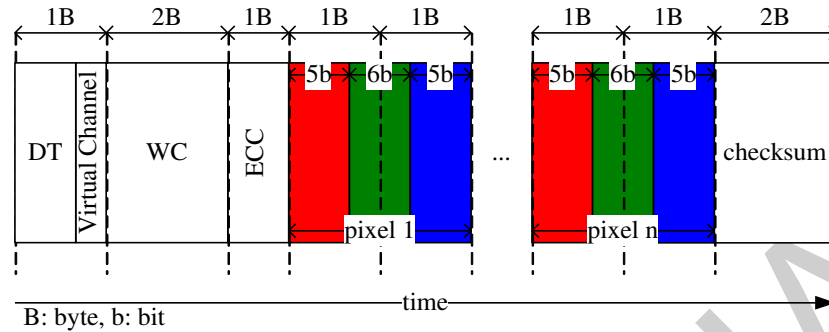

B: byte, b: bit


Packet pixel stream, 18-bit format, Data Type: 01 1110

The pixel format is six bits red, six bits green and six bits blue. Within a color component, the LSB is sent first, the MSB last.

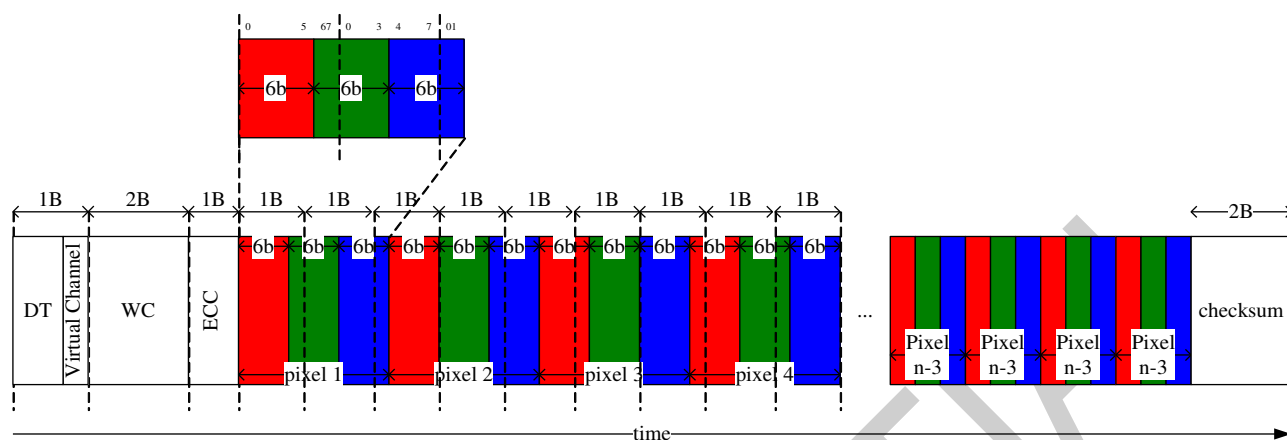


Packet pixel stream, 18-bit format in three bytes, Data Type: 10 1110

This is 18-bit pixel lossely packed format, each R, G or B color component is six bits but shifted to the upper bits of byte.

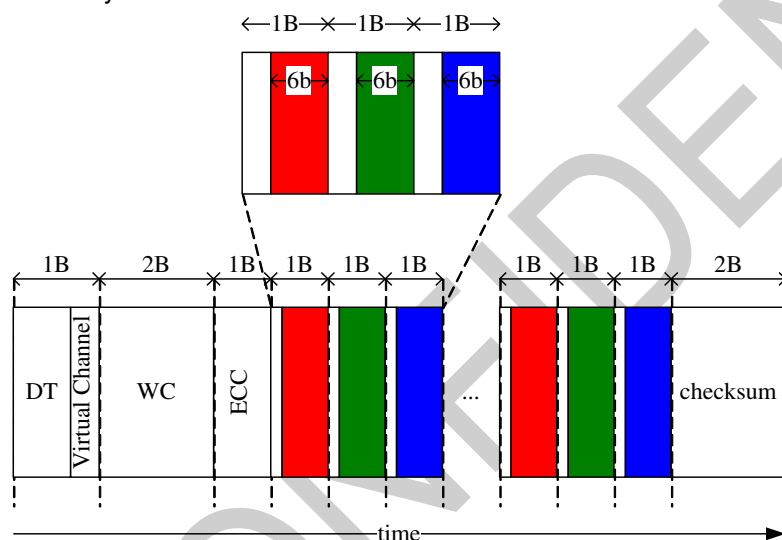

Packet pixel stream, 24-bit format, Data Type: 11 1110
The pixel format is eight bits red, eight bits green and eight bits blue.

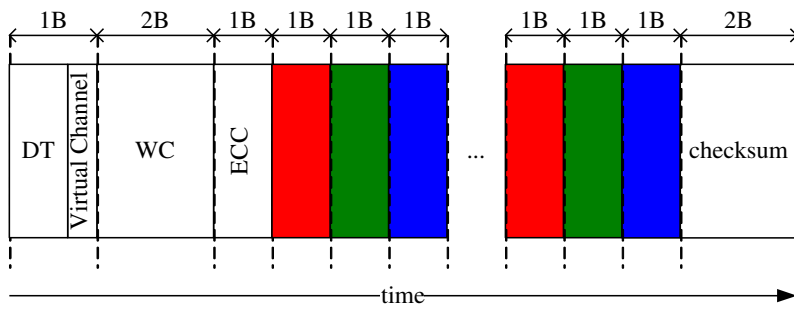

5.4.3 Peripheral-to-Processor LP Transmission

All Command Mode systems require bidirectional capability for returning READ data, acknowledge, or error information to the host processor. Multi-Lane systems shall use Lane 0 for all peripheral-to-processor transmissions. Reverse-direction signaling shall only use low power mode transmission.

Packet structure for peripheral-to-processor transaction is the same as for the processor-to-peripheral direction. For the processor-to-peripheral direction, two basic packet formats are the same as the peripheral-to-processor direction: Short and Long packet structure. BTA shall take place after every peripheral-to-processor transaction. This returns bus control to the host processor following the completion of the LP transmission from the peripheral.

There are four basic types of peripheral-to-processor transactions.

Tearing Effect: It is a Trigger message sent to convey display timing information to the host processor.

Acknowledge: It is a Trigger Message sent when the current transmission, as well as all preceding transmissions since the last peripheral to host communication.

Acknowledge and Error Report: It is a Short packet sent if any errors were detected in preceding transmissions from the host processor.

Response to Read Request: It may be a Short or Long packet that returns data requested by the preceding READ command from the processor.

Interpretation of processor-to-peripheral transactions with BTA asserted, and the expected responses, are as follows:

Following a non-Read command: If no errors were detected, the peripheral shall respond with Acknowledge.

Following a Read request: The peripheral shall send the requested READ data if no errors were detected and stored since the last peripheral to host communication.

Following a Read request: If only a single-bit ECC error was detected and corrected, the peripheral shall send the requested READ data in a Long or Short packet and a 4-byte Acknowledge and Error Report packet in the same LP transmission.

Following a non-Read command: If only a single-bit ECC error was detected and corrected, the peripheral shall respond to BTA by sending a 4-byte Acknowledge and Error Report packet.

Following a Read request: If multi-bit ECC errors were detected and not corrected, the peripheral shall send a 4-byte Acknowledge and Error Report packet without sending Read data.

Following a non-Read command: If multi-bit ECC errors were detected and not corrected, the peripheral shall not execute the command, and shall send a 4-byte Acknowledge and Error Report packet.

Following any command: If SoT Error, SoT Sync Error, the VC of DSI or the ID of DSI Invalid or DSI protocol violation was detected, or the DSI command was not recognized, the peripheral shall send a 4-byte Acknowledge and Error Report response.

Following any command: If EoT Sync Error or LP Transmit Sync Error is detected, or a checksum error is detected in the payload, the peripheral shall send a 4-byte Acknowledge and Error Report packet.

5.4.4 Error Report Format

The following table shows the bit assignment for all error report.

Bit	Description
0	SoT Error
1	SoT Sync Error
2	EoT Sync Error
3	Escape Mode Entry Command Error
4	Low-Power Transmit Sync Error
5	HS Receive Timeout Error
6	False Control Error
7	Reserved
8	ECC Error, single-bit (detected and corrected)
9	ECC Error, multi-bit (detected, not corrected)
10	Checksum Error (Long packet only)
11	DSI Data Type Not Recognized
12	DSI VC ID Invalid
13	reserved
14	reserved
15	reserved

5.4.5 Peripheral-to-Processor Transaction – Detail Format Description

The following list is the complete set of peripheral-to-processor data types.

Data type, hex	Data type binary	Description	Packet size
02h	00 0010	Acknowledge and error report	short
08h	00 1000	reserved	short
11h	01 0001	GEN short read reponse, 1byte returned	short
12h	01 0010	GEN short read reponse, 2bytes returned	short
1Ah	01 1010	Generic long read reponse	long
1Ch	01 1100	DCS long read reponse	long
21h	10 0001	DCS short read reponse, 1byte returned	short
22h	10 0010	DCS short read reponse, 2bytes returned	short

Acknowledge and error report: It is sent with BTA asserted when a reportable error is detected in the preceding, or earlier, transmission from the host processor.


Generic Short Read Response: This is the short-packet response to Generic READ Request. Packet composition is the Data Identifier (DI) byte, two bytes of payload data and an ECC byte. If the command itself is possibly corrupt, due to an uncorrectable ECC error, SoT or SoT Sync error, the requested READ data packet shall not be sent and only the Acknowledge and Error Report packet shall be sent.

Generic long read reponse: This is the long-packet response to Generic READ Request. Packet composition is DI followed by a two-byte Word Count, an ECC byte, N bytes of payload, and a two-byte Checksum. If the command itself is possibly corrupt, due to an uncorrectable ECC error, SoT or SoT Sync error, the requested READ data packet shall not be sent and only the Acknowledge and Error Report packet shall be sent.

DCS long read reponse: This is a Long packet response to DCS Read Request. Packet composition is DI followed by a two-byte Word Count, an ECC byte, N bytes of payload, and a two-byte Checksum. If the DCS command itself is possibly corrupt, due to uncorrectable ECC error, SoT or SoT Sync error, the requested READ data packet shall not be sent and only the Acknowledge and Error Report packet shall be sent.

DCS short read reponse: This is the short-packet response to DCS Read Request. Packet composition is DI, two bytes of payload data and an ECC byte. If the command itself is possibly corrupt, due to an uncorrectable ECC error, SoT or SoT Sync error, the requested READ data packet shall not be sent and only the Acknowledge and Error Report packet shall be sent.

5.4.6 DSI Video Mode Interface Timing

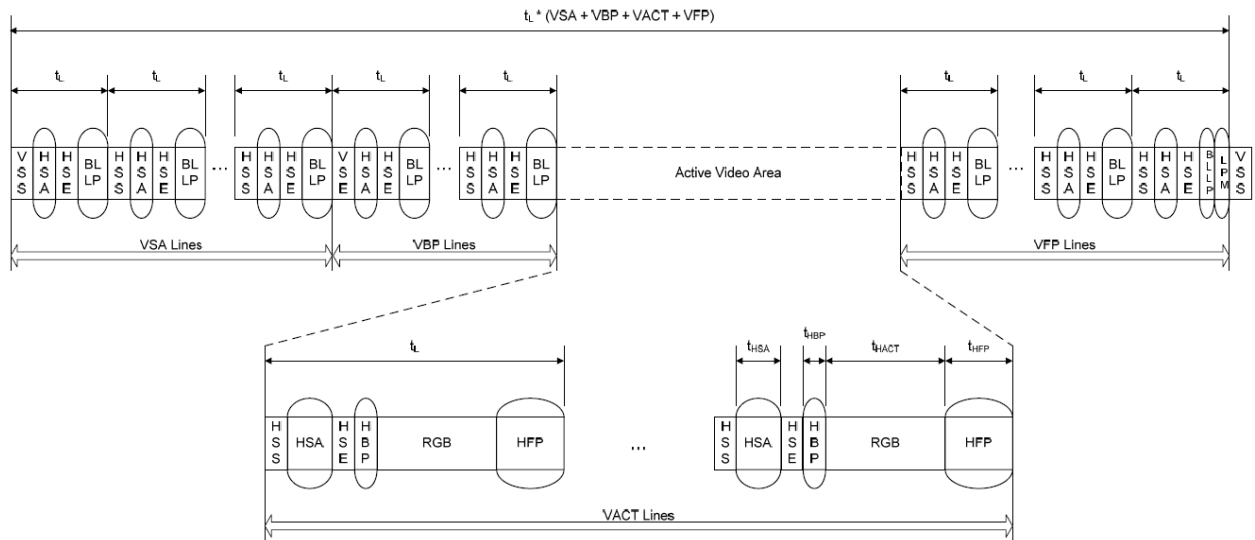

5.4.7 Error Correction Code (ECC)

ECC shall always be generated and appended in the Packet Header from the host processor. Peripherals with Bidirectional Links shall also generate and send ECC.

The number of parity or error check bits required is given by the Hamming rule, which uses parity to correct a single-bit error or detect a two-bit error, but are not capable of doing both simultaneously. DSI uses Hamming-modified codes where an extra parity bit is used to support both single error correction as well as two-bit error detection.

Since Packet Headers are fixed at four bytes (twenty-four data bits and eight ECC bits), P6 and P7 of the ECC byte are unused and shall be set to zero by the transmitter. The receiver shall ignore P6 and P7 and set both bits to zero before processing ECC.

The parity bits of ECC are defined as below:

$$P7 = 0$$

$$P6 = 0$$

$$P5 = D10 \oplus D11 \oplus D12 \oplus D13 \oplus D14 \oplus D15 \oplus D16 \oplus D17 \oplus D18 \oplus D19 \oplus D21 \oplus D22 \oplus D23$$

$$P4 = D4 \oplus D5 \oplus D6 \oplus D7 \oplus D8 \oplus D9 \oplus D16 \oplus D17 \oplus D18 \oplus D19 \oplus D20 \oplus D22 \oplus D23$$

$$P3 = D1 \oplus D2 \oplus D3 \oplus D7 \oplus D8 \oplus D9 \oplus D13 \oplus D14 \oplus D15 \oplus D19 \oplus D20 \oplus D21 \oplus D23$$

$$P2 = D0 \oplus D2 \oplus D3 \oplus D5 \oplus D6 \oplus D9 \oplus D11 \oplus D12 \oplus D15 \oplus D18 \oplus D20 \oplus D21 \oplus D22$$

$$P1 = D0 \oplus D1 \oplus D3 \oplus D4 \oplus D6 \oplus D8 \oplus D10 \oplus D12 \oplus D14 \oplus D17 \oplus D20 \oplus D21 \oplus D22 \oplus D23$$

$$P0 = D0 \oplus D1 \oplus D2 \oplus D4 \oplus D5 \oplus D7 \oplus D10 \oplus D11 \oplus D13 \oplus D16 \oplus D20 \oplus D21 \oplus D22 \oplus D23$$

The table below shows a compact way to specify the encoding of parity and decoding of syndromes.

ECC Parity Generation Rules:

Data Bit	P7	P6	P5	P4	P3	P2	P1	P0	Hex
0	0	0	0	0	0	1	1	1	0x07
1	0	0	0	0	1	0	1	1	0x0B
2	0	0	0	0	1	1	0	1	0x0D
3	0	0	0	0	1	1	1	0	0x0E
4	0	0	0	1	0	0	1	1	0x13
5	0	0	0	1	0	1	0	1	0x15
6	0	0	0	1	0	1	1	0	0x16
7	0	0	0	1	1	0	0	1	0x19
8	0	0	0	1	1	0	1	0	0x1A
9	0	0	0	1	1	1	0	0	0x1C
10	0	0	1	0	0	0	1	1	0x23
11	0	0	1	0	0	1	0	1	0x25
12	0	0	1	0	0	1	1	0	0x26
13	0	0	1	0	1	0	0	1	0x29
14	0	0	1	0	1	0	1	0	0x2A
15	0	0	1	0	1	1	0	0	0x2C
16	0	0	1	1	0	0	0	1	0x31
17	0	0	1	1	0	0	1	0	0x32
18	0	0	1	1	0	1	0	0	0x34
19	0	0	1	1	1	0	0	0	0x38
20	0	0	0	1	1	1	1	1	0x1F
21	0	0	1	0	1	1	1	1	0x2F
22	0	0	1	1	0	1	1	1	0x37
23	0	0	1	1	1	0	1	1	0x3B

5.4.8 Notice

1. We recommend users to stay in STOP state for 500ns when switching from LPDT to HSDT.
2. We recommend users to adopt EoTp to enhance overall robustness of the system during HSDT.


CONFIDENTIAL

5.4 Tearing Effect Output

The tearing effect output line supplies to the HOST a panel synchronization signal. This signal can be enabled or disabled by the set_tear_off (34h) and set_tear_on (35h) commands. The mode of the tearing effect signal is defined by the parameter of the set_tear_on (35h) and set_tear_scanline(44h) commands. The signal can be used by the HOST to synchronize internal VSYNC when displaying video images.

5.5.1 Tearing Effect Line Mode

Mode 1, the tearing effect output signal consist of V-sync information only:

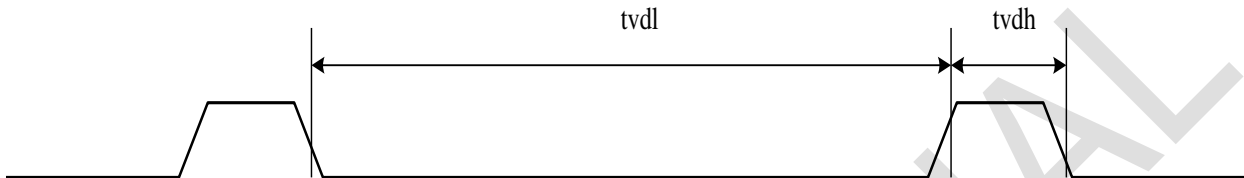

tvdh = The LCD display is not updated from the frame memory.

tvdl = The LCD display is updated from the frame memory.


Mode 2, the tearing effect output signal consist of V-sync and H-sync information:




thdh = The LCD display is not updated from the frame memory.

thdl = The LCD display is updated from the frame memory.

Mode 3, this mode turn on the tearing effect output signal when vertical scanning reaches line N.

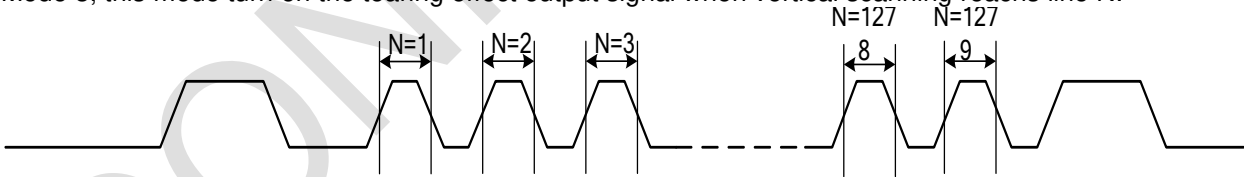


N = The N-th scanning line which set by register N[15:0] of command STESL(44h).

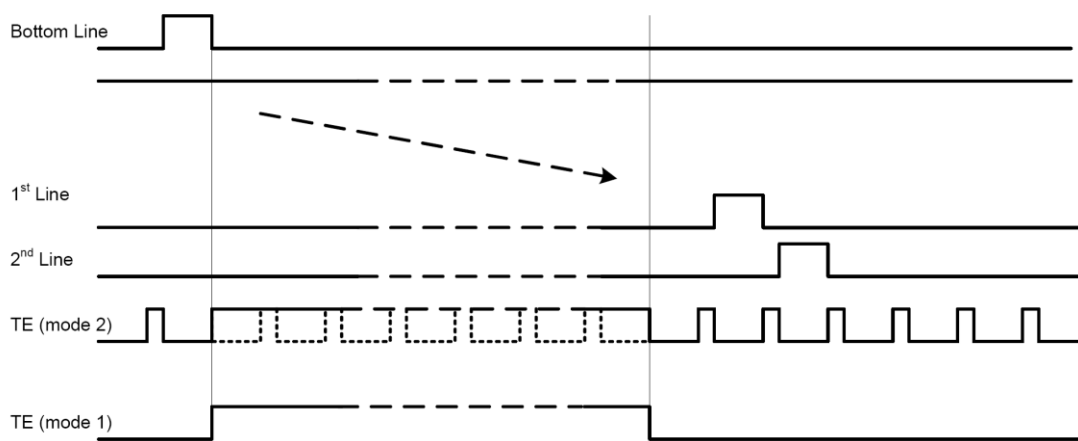

Note. During Sleep In mode, the tearing effect output signal is active low.

5.5.2 Tearing Effect Line Timing

The tearing effect signal is described as below:

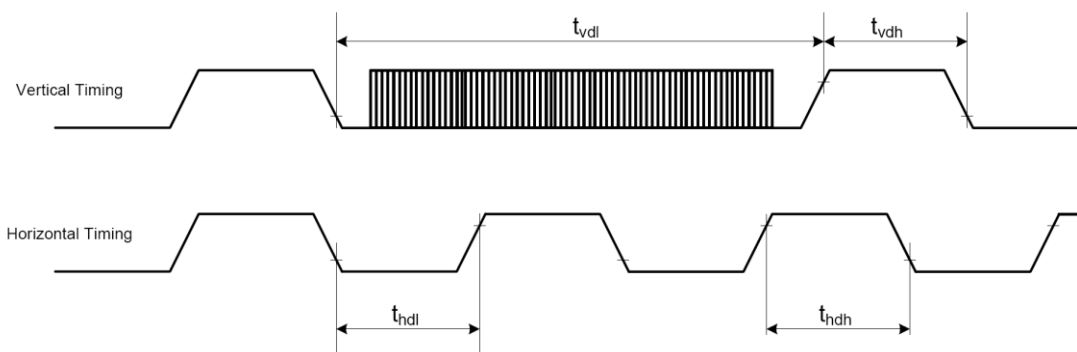


AC characteristics of Tearing Effect Signal (Frame Rate = 60.5Hz)

Symbol	Parameter	Typ.	Unit	Description
tvdl	Vertical timing low duration			1*frame time- tvdh
tvdh	Vertical timing high duration			tvdh =V Porch time if STS[15:0]=0. tvdh =31* line time if STS[15:0] not equal to 0.
thdl	Horizontal timing low duration			1* line time- 32*PCLK
thdh	Horizontal timing high duration	1.45	us	32*PCLK

Notes:

1. The timings apply when MADCTL B4=0 and B4=1
2. The signal's rise and fall times (t_f , t_r) are stipulated to be equal to or less than 15ns.

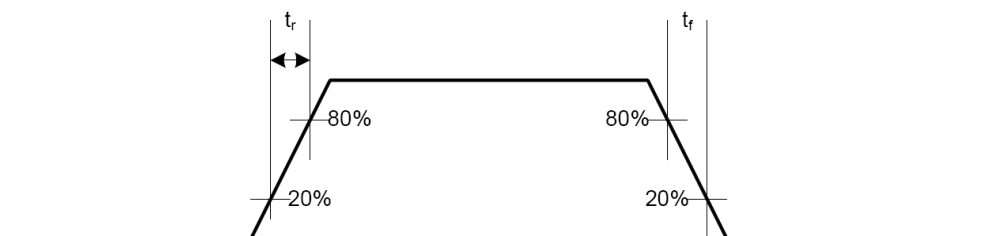

The Tearing Effect Output Line is fed back to the HOST and should be used as shown below to avoid tearing effect:

The Tearing Effect output line supplies to the HOST a panel synchronization signal. This signal can be enabled or disabled by the set_tear_off(34h), set_tear_on(35h) commands. The mode of the Tearing Effect Signal is defined by the Parameter of the Tearing Effect Line On command. The signal can be used by the HOST to synchronize internal VSYNC when displaying video images.

TEON (35h)	TELOM (35h, 1 st bit)	TE signal Output
0	*	GND
1	0	TE (Mode 1)
1	1	TE (Mode 2)

6. Command

6.1 Command List

Command			W/R	Function	D7	D6	D5	D4	D3	D2	D1	D0	Default (hex)	MTP
Page	Add.	Para.												
CMD1	00h	-	W	NOP	No Argument								-	-
CMD1	01h	-	W	Software reset	No Argument								-	-
CMD1	04h	1st	R	Read display identification information	ID1[7:0]								00h	-
CMD1	04h	2nd			ID2[7:0]								80h	-
CMD1	04h	3rd			ID3[7:0]								00h	-
CMD1	05h	-	R	Read number of the errors on DSI	P[7:0]								00h	-
CMD1	0Ah	1st	R	Read display power mode	BSTON	IDMON	PTLON	SLPOUT	NORON	DISPON	-	-	08h	-
CMD1	0Bh	1st	R	Read display MADCTR	MY	MX	-	-	RGB	-	-	-	00h	-
CMD1	0Ch	1st	R	Read display pixel format	SPI_IFPF_SEL	VIPF2	VIPF1	VIPF0	-	IFPF2	IFPF1	IFPF0	77h	-
CMD1	0Dh	1st	R	Read display image mode	0	0	INVON	ALLPON	ALLPOFF	0	0	0	00h	-
CMD1	0Eh	1st	R	Read display signal mode	TEON	M	0	0	0	0	0	ERR	00h	-
CMD1	0Fh	1st	R	Read display self-diagnostic result	0	0	0	0	0	0	0	checksum_comp	00h	-
CMD1	10h	-	W	Sleep-in	No Argument								-	-
CMD1	11h	-	W	Sleep-out	No Argument								-	-
CMD1	12h	-	W	Partial display mode on	No Argument								-	-
CMD1	13h	-	W	Normal display mode on	No Argument								-	-
CMD1	20h	-	W	Display inversion off	No Argument								-	-
CMD1	21h	-	W	Display inversion on	No Argument								-	-
CMD1	22h	-	W	All pixel off	No Argument								-	-
CMD1	23h	-	W	All pixel on	No Argument								-	-
CMD1	28h	-	W	Display off	No Argument								-	-
CMD1	29h	-	W	Display on	No Argument								-	-
CMD1	2Ah	1st	W	Set column start address	SC[9:8]								00h	-
CMD1		2nd	W		SC[7:0]								00h	-
CMD1		3rd	W		EC[9:8]								01h	-
CMD1		4th	W		EC[7:0]								8Fh	-
CMD1	2Bh	1st	W	Set row start address	SP[9:8]								00h	-
CMD1		2nd	W		SP[7:0]								00h	-
CMD1		3rd	W		EP[9:8]								01h	-
CMD1		4th	W		EP[7:0]								8Fh	-
CMD1	2Ch	-	W	Memory write	No Argument								-	-
CMD1	30h	1st	W	Partial area	SR[9:8]								00h	-
CMD1		2nd	W		SR[7:0]								00h	-
CMD1		3rd	W		ER[9:8]								01h	-
CMD1		4th	W		ER[7:0]								8Fh	-
CMD1	31h	1st	W	Vertical partial area	PSC[9:8]								00h	-
CMD1		2nd	W		PSC[7:0]								00h	-
CMD1		3rd	W		PEC[9:8]								01h	-
CMD1		4th	W		PEC[7:0]								8Fh	-
CMD1	34h	-	W	Tearing effect line off	No Argument								-	-
CMD1	35h	-	W	Tearing effect line on	0	0	0	0	0	0	TE_M	TELOM	00h	-
CMD1	36h	-	W	Scan direction control	MADCTR[7:0]								00h	-
CMD1	38h	-	W	Idle mode off	No Argument								-	-
CMD1	39h	-	W	Enter idle mode	No Argument								-	-
CMD1	3Ah	-	W	Interface Pixel Format	SPI_IFPF_SEL	VIPF2	VIPF1	VIPF0	0	IFPF[2]	IFPF[1]	IFPF[0]	77h	-
CMD1	3Ch	-	W	Memory Continuous Write	No Argument								-	-
CMD1	44h	1st	W	Set tear scan-line	STS[15:8]								00h	-
CMD1		2nd	W		STS[7:0]								00h	-
CMD1	45h	1st	R	Get scan line	GTS[15:8]								00h	-

CMD1		2nd	R		GTS[7:0]								00h	-
CMD1	4Fh	-	W	Deep standby	0	0	0	0	0	0	0	DSTB	00h	-
CMD1	51h	-	W	Write display brightness	DBV[7:0]								00h	-
CMD1	52h	-	R	Read display brightness	DBV[7:0]								00h	-
CMD1	53h	-	W	Write CTRL display	0	0	BCTRL	0	DD	0	0	0	28h	-
CMD1	54h	-	R	Read CTRL display	0	0	BCTRL	0	DD	0	0	0	28h	-
CMD1	55h	-	W	Write RAD_ACL function	0	0	0	0	0	0	RAD_ACL[1:0]		00h	
CMD1	56h	-	R	Read RAD_ACL function	0	0	0	0	0	0	RAD_ACL[1:0]		00h	
CMD1	58h	-	W	Set color enhancement	0	0	0	0	0	SLR_EN	SLR_LEVE L1	SLR_LEVE L0	00h	-
CMD1	59h	-	R	Read color enhancement	0	0	0	0	0	SLR_EN	SLR_LEVE L1	SLR_LEVE L0	00h	-
CMD1	63h	-	W	Write HBM display brightness	DBV_HBM[7:0]								00h	
CMD1	64h	-	R	Read HBM display brightness	DBV_HBM[7:0]								00h	
CMD1	66h		W	HBM enable	-	-	-	-	-	-	HBM_en	-	00h	
CMD1	67h		W	Deep idle enable	-	-	-	-	-	-	-	DEEP_IDL E_EN	00h	
CMD1	70h	1st	W	COLSET	R_0000[7:0]								00h	
2nd		W	COLSET	G_0000[7:0]								00h		
3rd		W	COLSET	B_0000[7:0]								00h		
CMD1	71h	1st	W	COLSET	R_0001[7:0]								00h	
2nd		W	COLSET	G_0001[7:0]								00h		
3rd		W	COLSET	B_0001[7:0]								FFh		
CMD1	72h	1st	W	COLSET	R_0010[7:0]								00h	
2nd		W	COLSET	G_0010[7:0]								FFh		
3rd		W	COLSET	B_0010[7:0]								00h		
CMD1	73h	1st	W	COLSET	R_0011[7:0]								00h	
2nd		W	COLSET	G_0011[7:0]								FFh		
3rd		W	COLSET	B_0011[7:0]								FFh		
CMD1	74h	1st	W	COLSET	R_0100[7:0]								FFh	
2nd		W	COLSET	G_0100[7:0]								00h		
3rd		W	COLSET	B_0100[7:0]								00h		
CMD1	75h	1st	W	COLSET	R_0101[7:0]								FFh	
2nd		W	COLSET	G_0101[7:0]								00h		
3rd		W	COLSET	B_0101[7:0]								FFh		
CMD1	76h	1st	W	COLSET	R_0110[7:0]								FFh	
2nd		W	COLSET	G_0110[7:0]								FFh		
3rd		W	COLSET	B_0110[7:0]								00h		
CMD1	77h	1st	W	COLSET	R_0111[7:0]								FFh	
2nd		W	COLSET	G_0111[7:0]								FFh		
3rd		W	COLSET	B_0111[7:0]								FFh		
CMD1	78h	1st	W	COLSET	R_1000[7:0]								00h	
2nd		W	COLSET	G_1000[7:0]								00h		
3rd		W	COLSET	B_1000[7:0]								00h		
CMD1	79h	1st	W	COLSET	R_1001[7:0]								00h	
2nd		W	COLSET	G_1001[7:0]								00h		
3rd		W	COLSET	B_1001[7:0]								FFh		
CMD1	7Ah	1st	W	COLSET	R_1010[7:0]								00h	
2nd		W	COLSET	G_1010[7:0]								FFh		
3rd		W	COLSET	B_1010[7:0]								00h		
CMD1	7Bh	1st	W	COLSET	R_1011[7:0]								00h	
2nd		W	COLSET	G_1011[7:0]								FFh		
3rd		W	COLSET	B_1011[7:0]								FFh		
CMD1	7Ch	1st	W	COLSET	R_1100[7:0]								FFh	
2nd		W	COLSET	G_1100[7:0]								00h		
3rd		W	COLSET	B_1100[7:0]								00h		
CMD1	7Dh	1st	W	COLSET	R_1101[7:0]								FFh	
2nd		W	COLSET	G_1101[7:0]								00h		
3rd		W	COLSET	B_1101[7:0]								FFh		

CMD1		1st	W	COLSET						R_1110[7:0]		FFh	
CMD1	7Eh	2nd	W	COLSET						G_1110[7:0]		FFh	
CMD1		3rd	W	COLSET						B_1110[7:0]		00h	
CMD1		1st	W	COLSET						R_1111[7:0]		FFh	
CMD1	7Fh	2nd	W	COLSET						G_1111[7:0]		FFh	
CMD1		3rd	W	COLSET						B_1111[7:0]		FFh	
CMD1	80h	1st	W	COLOPT	-	RGB111_o pt	-	-	RGB4bit_ en	gray256_col or[2]	gray256_c olor[1]	gray256_ color[0]	07h
CMD1		1st	R	Read DDB						SID[7:0]		D0h	-
CMD1		2nd	R							SID[15:8]		01h	-
CMD1	A1h	3rd	R							MID[7:0]		80h	-
CMD1		4th	R							MID[15:8]		90h	-
CMD1		5th	R		1	1	1	1	1	1	1	FFh	-
CMD1		1st	R	Read DDB Continuous						SID[7:0]		D0h	-
CMD1		2nd	R							SID[15:8]		01h	-
CMD1	A8h	3rd	R							MID[7:0]		80h	-
CMD1		4th	R							MID[15:8]		90h	-
CMD1		5th	R		1	1	1	1	1	1	1	FFh	-
CMD1	AAh	-	R	Read first checksum						FCS[7:0]		00h	-
CMD1	AFh	-	R	Read continuous checksum						CCS[7:0]		00h	-
CMD1	C2h			Set_DSIP Mode	0	0	0	0	0	0	DM1	DM0	00h
CMD1	C4h			Set_DSPI Mode	SPI_WRA M	0	DSPI_CFG 1	DSPI_CFG 0	0	0	0	DSPI_EN	00h
CMD1	DAh	-	R	Read display identification information (the same as 04h)						ID1[7:0]		00h	-
CMD1	DBh	-	R							ID2[7:0]		80h	-
CMD1	DCh	-	R							ID3[7:0]		00h	-
CMD1	FEh	-	W	Write CMD mode page	0	0	0	0		CMD_Page[3:0]		00h	-
CMD1	FFh	-	R	Read CMD page Status	0	0	0	0		CMD_Status[3:0]		00h	-

6.2 Command Description

NOP (0000h)

0000H	NOP (No Operation)																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
NOP	W	00h	0000h	No Argument																					
Description	This command is an empty command; it does not have any effect on the display module. X = Don't care.																								
Restriction	None																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
	Sleep In	Yes																							
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>N/A</td></tr><tr><td>SW Reset</td><td>N/A</td></tr><tr><td>HW Reset</td><td>N/A</td></tr></table>													Status	Default Value	Power On Sequence	N/A	SW Reset	N/A	HW Reset	N/A				
	Status	Default Value																							
	Power On Sequence	N/A																							
	SW Reset	N/A																							
	HW Reset	N/A																							
Flow Chart	None																								

SWRESET(0100h) : Software Reset

0100H	SWRESET(Software Reset)																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
SWRESET	W	01h	0100h	No Argument																					
Description	When the Software Reset command is written, it causes software reset. It resets the commands and parameters to their S/W Reset default values. (See default tables in each command description.)																								
Restriction	Software Reset Command cannot be sent during Sleep Out sequence. Any new command cannot be sent for 10-frame period until the RM69330 enters Sleep-In mode. Do not send any command.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>N/A</td></tr><tr><td>SW Reset</td><td>N/A</td></tr><tr><td>HW Reset</td><td>N/A</td></tr></table>													Status	Default Value	Power On Sequence	N/A	SW Reset	N/A	HW Reset	N/A				
Status	Default Value																								
Power On Sequence	N/A																								
SW Reset	N/A																								
HW Reset	N/A																								
Flow Chart	SWRESET (01h) Display whole blank screen Set Commands to S/W Default Value Sleep In Mode Legend Command Parameter Display Action Mode Sequential transfer																								

RDDID(0400h~0402h) : Read Display ID

0400H		RDDID																									
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX														
		MIPI	Other																								
RDDID	R	04h	0400h	x	ID17	ID16	ID15	ID14	ID13	ID12	ID11	ID10	00														
			0401h	x	ID27	ID26	ID25	ID24	ID23	ID22	ID21	ID20	80														
			0402h	x	ID37	ID36	ID35	ID34	ID33	ID32	ID31	ID30	00														
Description	The 1 st parameter (ID1): the Module's manufacture ID The 2 nd parameter (ID2): the Module/driver version ID The 3 rd parameter (ID3): the Module/driver ID Note: Commands RDID1/2/3 (DAh/DBh/DCh) read data correspond to the parameter 1, 2, 3 of command 04h, respectively.																										
Restriction	-																										
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes		
Status	Availability																										
Normal Mode On, Idle Mode Off, Sleep Out	Yes																										
Normal Mode On, Idle Mode On, Sleep Out	Yes																										
Partial Mode On, Idle Mode Off, Sleep Out	Yes																										
Partial Mode On, Idle Mode On, Sleep Out	Yes																										
Sleep In	Yes																										
Default	<table><tr><th rowspan="2">Status</th><th colspan="2">Default Value</th></tr><tr><th>After MTP</th><th>Before MTP</th></tr><tr><td>Power On Sequence</td><td>MTP value</td><td>ID1=00h / ID2=80h / ID3=00h</td></tr><tr><td>SW Reset</td><td>MTP value</td><td>ID1=00h / ID2=80h / ID3=00h</td></tr><tr><td>HW Reset</td><td>MTP value</td><td>ID1=00h / ID2=80h / ID3=00h</td></tr></table>													Status	Default Value		After MTP	Before MTP	Power On Sequence	MTP value	ID1=00h / ID2=80h / ID3=00h	SW Reset	MTP value	ID1=00h / ID2=80h / ID3=00h	HW Reset	MTP value	ID1=00h / ID2=80h / ID3=00h
Status	Default Value																										
	After MTP	Before MTP																									
Power On Sequence	MTP value	ID1=00h / ID2=80h / ID3=00h																									
SW Reset	MTP value	ID1=00h / ID2=80h / ID3=00h																									
HW Reset	MTP value	ID1=00h / ID2=80h / ID3=00h																									
Flow Chart	RDDID (04h) Send 1st parameter ID1[7:0] Send 2nd parameter ID2[7:0] Send 3rd parameter ID3[7:0] Legend Command Parameter Display Action Mode Sequential transfer																										

RDNUMED(0500h) : Read Number of Errors on DSI

0500H				RDNUMED																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDNUMED	R	05h	0500h	x	D7	D6	D5	D4	D3	D2	D1	D0	00												
Description	The first parameter is telling a number of the parity errors on DSI. The more detailed description of the bits is below. D[6..0] bits are telling a number of the parity errors. D[7] is set to “1” if there is overflow with D[6..0] bits. D[7..0] bits are set to “0”s (as well as RDDSM(0Eh)’s D0 are set “0” at the same time) after there is sent the first parameter information (= The read function is completed). This command is used for MIPI DSI only. It is no function for others interface operation.																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow Chart	RDDID (05h) ↓ Send 1st parameter ↓ P[7:0]=00h RDDSM(0Eh)’ s D0 = ‘0’ Legend Command Parameter Display Action Mode Sequential transfer																								

RDDPM (0A00h) : Read Display Power Mode


0A00H		RDDPM (Read Display Power Mode)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDDPM	R	0Ah	0A00h	x	D7	D6	D5	D4	D3	D2	D1	D0	08												
Description	This command indicates the current status of the display as described in the table below:																								
	Bit	Symbol	Description		Comment																				
	D7	BSTON	Booster Voltage Status		'1'=Booster on, '0'=Booster off																				
	D6	IDMON	Idle Mode On/Off		'1' = Idle Mode On, '0' = Idle Mode Off																				
	D5	PTLON	Partial Mode On/Off		'1' = Partial Mode On, '0' = Partial Mode Off																				
	D4	SLPON	Sleep In/Out		'1' = Sleep Out, '0' = Sleep In																				
	D3	NORON	Display Normal Mode On/Off		'1' = Normal Display, '0' = Partial Display																				
	D2	DISON	Display On/Off		'1' = Display On, '0' = Display Off																				
	D1	Reserved			0																				
D0	Reserved			0																					
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
	Sleep In	Yes																							
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>08h</td></tr><tr><td>SW Reset</td><td>08h</td></tr><tr><td>HW Reset</td><td>08h</td></tr></table>													Status	Default Value	Power On Sequence	08h	SW Reset	08h	HW Reset	08h				
	Status	Default Value																							
	Power On Sequence	08h																							
	SW Reset	08h																							
	HW Reset	08h																							
Flow Chart	Serial I/F Mode RDDPM (0Ah) ↓ Send D[7:0] Parallel I/F Mode RDDPM (0Ah) ↓ Dummy Read ↓ Send D[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

RDDMADCTR (0B00h): Read Display MADCTR

0B00H		RDDMADCTR (Read Display MADCTR)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDDMADCTR	R	0Bh	0B00h	x	D7	D6	D5	D4	D3	D2	D1	D0	00												
Description	This command indicates the current status of the display as described in the table below:																								
	Bit	Symbol	Description		Comment																				
	D7	MY	Row Address Increment		0: Increasing in vertical 1: Decreasing in vertical																				
	D6	MX	Column Address Increment		0: Increasing in horizontal 1: Decreasing in horizontal																				
	D3	RGB	RGB/BGR Order		'1' =BGR, "0"=RGB																				
others	Reserved	-		-																					
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
	Status	Default Value																							
	Power On Sequence	00h																							
	SW Reset	00h																							
HW Reset	00h																								
Flow Chart	Serial I/F Mode RDDMADCTR (0Bh) Send D[7:0] Parallel I/F Mode RDDMADCTR (0Bh) Dummy Read Send D[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

RDDCOLMOD (0C00h): Read Display Pixel Format

0C00H	RDDCOLMOD (Read Display Pixel Format)																																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																												
		MIPI	Other																																						
RDDCOLMOD	R	0Ch	0C00h	x	SPI_IFPF	VIPF[0]	VIPF[0]	VIPF[0]	0	IFPF[2]	IFPF[1]	IFPF[0]	77																												
Description	To return the status of 0x3A00.																																								
	This command sets the pixel format for the RGB image data used by the interface.																																								
	If SPI_IFPF_SEL(3Ah-B7) = 1: The VIPF[2:0] pixel format used by the SPI interface																																								
	If SPI_IFPF_SEL(3Ah-B7) = 0: The IFPF[2:0] pixel format used by the SPI / MCU interface																																								
	If not used DPI interface, then the corresponding bits in the parameter are ignored.																																								
	<table><tr><th>Control Interface Color Format</th><th>IFPF[2]</th><th>IFPF[1]</th><th>IFPF[0]</th></tr><tr><td>SPI 8 bit/pixel (256 colors); SPI 256 Gray (Support IF: SPI3/SPI4)</td><td>0</td><td>0</td><td>1</td></tr><tr><td>SPI 8 bit/pixel (256 colors); SPI 3-3-2 (Support IF: SPI3/SPI4)</td><td>0</td><td>1</td><td>0</td></tr><tr><td>SPI 3 bit/pixel (8 colors); SPI 1-1-1 (Support IF: SPI3/SPI4)</td><td>0</td><td>1</td><td>1</td></tr><tr><td>16bit/pixel (65,536 colors)</td><td>1</td><td>0</td><td>1</td></tr><tr><td>18bit/pixel (262,144 colors)</td><td>1</td><td>1</td><td>0</td></tr><tr><td>24bit/pixel (16.7M colors)</td><td>1</td><td>1</td><td>1</td></tr></table>													Control Interface Color Format	IFPF[2]	IFPF[1]	IFPF[0]	SPI 8 bit/pixel (256 colors); SPI 256 Gray (Support IF: SPI3/SPI4)	0	0	1	SPI 8 bit/pixel (256 colors); SPI 3-3-2 (Support IF: SPI3/SPI4)	0	1	0	SPI 3 bit/pixel (8 colors); SPI 1-1-1 (Support IF: SPI3/SPI4)	0	1	1	16bit/pixel (65,536 colors)	1	0	1	18bit/pixel (262,144 colors)	1	1	0	24bit/pixel (16.7M colors)	1	1	1
	Control Interface Color Format	IFPF[2]	IFPF[1]	IFPF[0]																																					
	SPI 8 bit/pixel (256 colors); SPI 256 Gray (Support IF: SPI3/SPI4)	0	0	1																																					
SPI 8 bit/pixel (256 colors); SPI 3-3-2 (Support IF: SPI3/SPI4)	0	1	0																																						
SPI 3 bit/pixel (8 colors); SPI 1-1-1 (Support IF: SPI3/SPI4)	0	1	1																																						
16bit/pixel (65,536 colors)	1	0	1																																						
18bit/pixel (262,144 colors)	1	1	0																																						
24bit/pixel (16.7M colors)	1	1	1																																						
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes																
	Status	Availability																																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																																							
Sleep In	Yes																																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>77h</td></tr><tr><td>SW Reset</td><td>77h</td></tr><tr><td>HW Reset</td><td>77h</td></tr></table>													Status	Default Value	Power On Sequence	77h	SW Reset	77h	HW Reset	77h																				
	Status	Default Value																																							
	Power On Sequence	77h																																							
	SW Reset	77h																																							
HW Reset	77h																																								

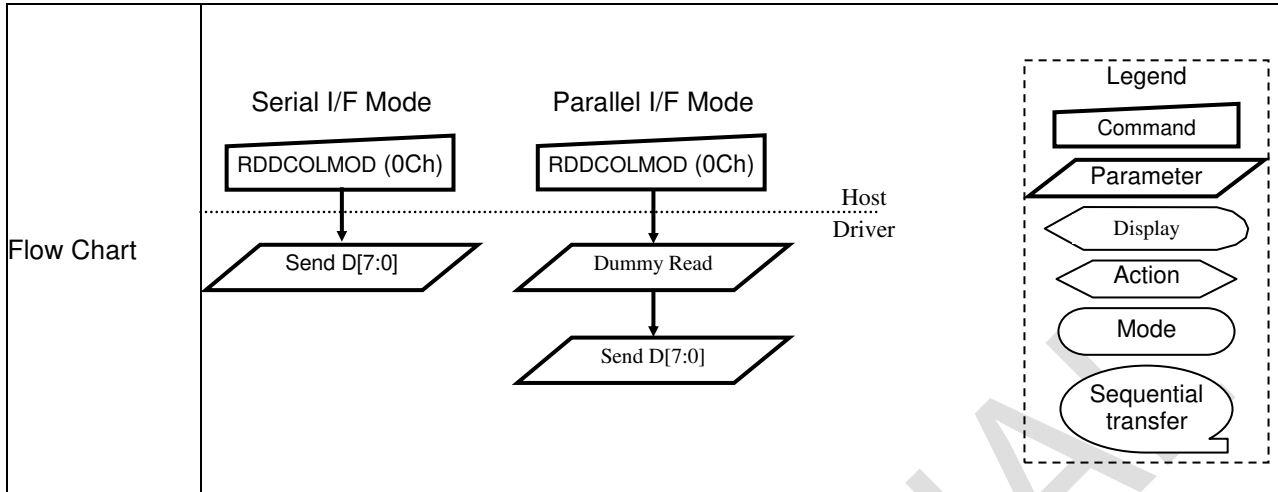

RDDIM (0D00h): Read Display Image Mode

0d00H		RDDIM (Read Display Image Mode)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDDIM	R	0Dh	0D00h	x	D7	D6	D5	D4	D3	D2	D1	D0	00												
Description	The display module returns the display image mode status.																								
	Bit	Symbol	Description	Comment																					
	D7	Reserved		'0'																					
	D6	Reserved		'0'																					
	D5	INVON	Inversion On/Off	"1" = Inversion is On, "0" = Inversion is Off																					
	D4	ALLON	All Pixel On	'0' = Normal display '1' = White display																					
	D3	ALLOFF	All Pixel Off	'0' = Normal display '1' = Black display																					
D2~D0	Reserved		'000'																						
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
	Status	Default Value																							
	Power On Sequence	00h																							
	SW Reset	00h																							
HW Reset	00h																								
Flow Chart	Serial I/F Mode RDDIM (0Dh) Send D[7:0] Parallel I/F Mode RDDIM (0Dh) Dummy Read Send D[7:0] Host Driver																								
	Legend Command Parameter Display Action Mode Sequential transfer																								

RDDSM (0E00h): Read Display Signal Mode


0E00H		RDDSM (Read Display Signal Mode)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDDSM	R	0Eh	0E00h	x	D7	D6	D5	D4	D3	D2	D1	D0	00												
Description	The display module returns the Display Signal Mode.																								
	Bit	Symbol	Description				Comment																		
	D7	TEON	Tearing Effect Line On/Off				"1" = On, "0" = Off																		
	D6	TELOM	Tearing effect line mode				"0" = mode1, "1" = mode2																		
	D5	Reserved					'0'																		
	D4	Reserved					'0'																		
	D3	Reserved					'0'																		
	D2	Reserved					'0'																		
	D1	Reserved					'0'																		
	D0	Error on DSI	Error on DSI				'0' = No Error '1' = Error																		
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
	Sleep In	Yes																							
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
	Status	Default Value																							
	Power On Sequence	00h																							
	SW Reset	00h																							
HW Reset	00h																								
Flow Chart	Serial I/F Mode RDDSM (0Eh) Send D[7:0] Parallel I/F Mode RDDSM (0Eh) Dummy Read Send D[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

RDDSDR (0F00h): Read Display Self-Diagnostic Result

0F00H				RDDSDR (Read Display Self-Diagnostic Result)																				
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
		MIPI	Other																					
RDDSDR	R	0Fh	0F00h	x	0	0	0	0	0	0	0	checksum_comp	00											
Description	The display module returns the self-diagnostic results following a Sleep Out command.																							
	<table><tr><th>Bit</th><th>Symbol</th><th>Description</th><th>Comment</th></tr><tr><td>D0</td><td>Reserved</td><td>checksum_comp</td><td>'0'</td></tr></table>													Bit	Symbol	Description	Comment	D0	Reserved	checksum_comp	'0'			
Bit	Symbol	Description	Comment																					
D0	Reserved	checksum_comp	'0'																					
Register Availability																								
	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In
Status	Availability																							
Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
Normal Mode On, Idle Mode On, Sleep Out	Yes																							
Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																							
Default																								
	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h			
Status	Default Value																							
Power On Sequence	00h																							
SW Reset	00h																							
HW Reset	00h																							
Flow Chart																								
	Serial I/F Mode RDDSDR (0Fh) Send D[7:0] Parallel I/F Mode RDDSTR (0Fh) Dummy Read Send D[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																							


SLPIN (1000h): Sleep In

1000H		SLPIN (Sleep In)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
SLPIN	W	10h	1000h	No Argument																					
Description	This command causes the display module to enter the minimum power consumption mode. In this mode the DC/DC converter is stopped, Internal display oscillator is stopped, and panel scanning is stopped. The control Interface such as registers is still working and keeps its values. After Sleep in command, user can send PCLK, HS and VS information on RGB I/F for blank display and this information is valid during 2 frames if there is used Normal Mode On in Sleep Out-mode. There is used an internal oscillator for blank display.																								
Restriction	This command has no effect when the display module is already in Sleep mode. Sleep In Mode can only be exit by the Sleep Out Command (11h). It must wait 5msec before sending next command for the supply voltages and clock circuits to stabilize. It must wait 120msec after sending Sleep Out command (when in Sleep In Mode) before Sleep In command can be sent.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Sleep In Mode</td></tr><tr><td>SW Reset</td><td>Sleep In Mode</td></tr><tr><td>HW Reset</td><td>Sleep In Mode</td></tr></table>													Status	Default Value	Power On Sequence	Sleep In Mode	SW Reset	Sleep In Mode	HW Reset	Sleep In Mode				
Status	Default Value																								
Power On Sequence	Sleep In Mode																								
SW Reset	Sleep In Mode																								
HW Reset	Sleep In Mode																								

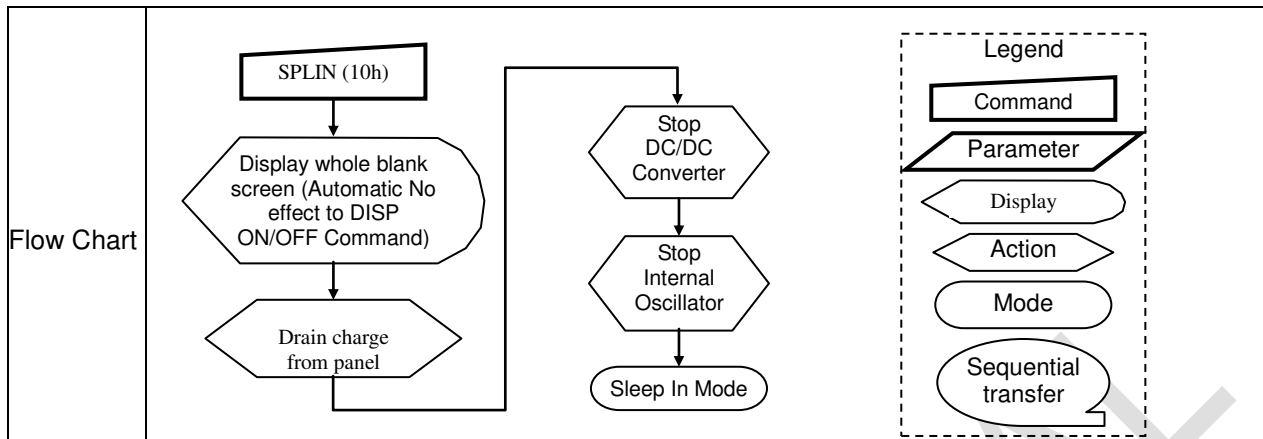

SLPOUT (1100h): Sleep Out

1100H				SLPOUT (Sleep Out)																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
SLPOUT	W	11h	1100h	No Argument																					
Description	This command causes the display module to exit Sleep mode. All blocks inside the display module are enabled. The host processor sends PCLK, HS and VS information to display modules two frames before this command is sent when the display module is in Normal Mode.																								
Restriction	This command shall not cause any visible effect on the display device when the display module is not in Sleep mode. The host processor must wait five milliseconds after sending this command before sending another command. This delay allows the supply voltages and clock circuits to stabilize. The host processor must wait 120 milliseconds after sending a Sleep Out command before sending a Sleep-In command. The display module loads the display module's default values to the registers when exiting the Sleep mode. There shall not be any abnormal visual effect on the display device when loading the registers if the factory default and register values are the same or when the display module is not in Sleep mode. The display module runs the self-diagnostic functions after this command is received.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Sleep In Mode</td></tr><tr><td>SW Reset</td><td>Sleep In Mode</td></tr><tr><td>HW Reset</td><td>Sleep In Mode</td></tr></table>													Status	Default Value	Power On Sequence	Sleep In Mode	SW Reset	Sleep In Mode	HW Reset	Sleep In Mode				
Status	Default Value																								
Power On Sequence	Sleep In Mode																								
SW Reset	Sleep In Mode																								
HW Reset	Sleep In Mode																								

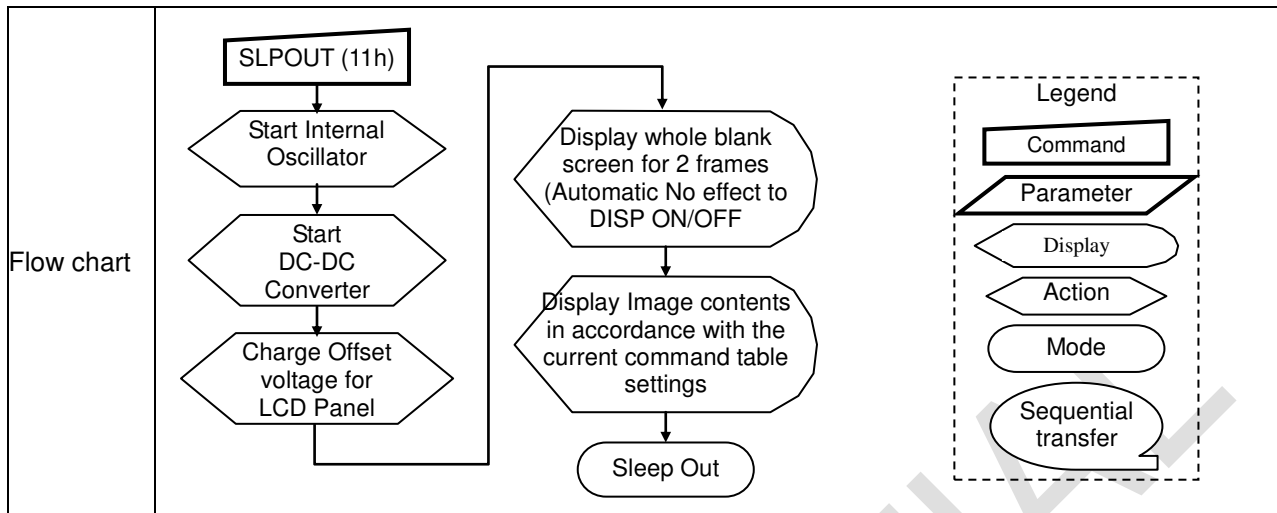



PTLON (1200h): Partial Display Mode On

1200H		PTLON (Partial Display Mode On)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
PTLON	W	12h	1200h	No Argument																					
Description	This command causes the display module to enter the Partial Display Mode. The Partial Display Mode window is described by the Partial Area (30h) command. To leave Partial Display Mode, the Normal Display Mode On (13h) command should be written. The host processor continues to send PCLK, HS and VS information to display modules for two frames after this command is sent when the display module is in Normal Display Mode.																								
Restriction	This command has no effect when Partial Display Mode is already active.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Normal display mode On</td></tr><tr><td>SW Reset</td><td>Normal display mode On</td></tr><tr><td>HW Reset</td><td>Normal display mode On</td></tr></table>													Status	Default Value	Power On Sequence	Normal display mode On	SW Reset	Normal display mode On	HW Reset	Normal display mode On				
Status	Default Value																								
Power On Sequence	Normal display mode On																								
SW Reset	Normal display mode On																								
HW Reset	Normal display mode On																								
Flow Chart	Refer to Partial Area (30h)																								





NORON (1300h): Normal Display Mode On

1300H		NORON (Normal Display Mode On)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
NORON	W	13h	1300h	No Argument																					
Description	This command causes the display module to enter the Normal mode. Normal Mode is defined as Partial Display mode. The host processor sends PCLK, HS and VS information to Type 2 display modules two frames before this command is sent when the display module is in Partial Display Mode.																								
Restriction	This command has no effect when Normal Display mode is already active.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Normal Display Mode On</td></tr><tr><td>SW Reset</td><td>Normal Display Mode On</td></tr><tr><td>HW Reset</td><td>Normal Display Mode On</td></tr></table>													Status	Default Value	Power On Sequence	Normal Display Mode On	SW Reset	Normal Display Mode On	HW Reset	Normal Display Mode On				
Status	Default Value																								
Power On Sequence	Normal Display Mode On																								
SW Reset	Normal Display Mode On																								
HW Reset	Normal Display Mode On																								
Flow Chart	Refer to the description of Partial Area (3000h)																								



INVOFF (2000H): Display Inversion Off

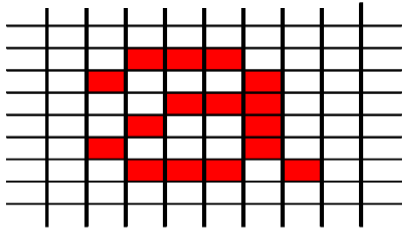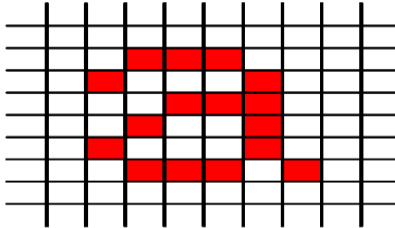
2000H		INVOFF (Display Inversion Off)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
INVOFF	W	20h	2000h	No Argument																					
Description	This command causes the display module to stop inverting the image data on the display device. No status bits are changed.																								
	Input Image  → Display Panel 																								
Restriction	This command has no effect when the display module is not inverting the display image.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Inversion off</td></tr><tr><td>SW Reset</td><td>Display Inversion off</td></tr><tr><td>HW Reset</td><td>Display Inversion off</td></tr></table>													Status	Default Value	Power On Sequence	Display Inversion off	SW Reset	Display Inversion off	HW Reset	Display Inversion off				
Status	Default Value																								
Power On Sequence	Display Inversion off																								
SW Reset	Display Inversion off																								
HW Reset	Display Inversion off																								
Flow Chart	Display Inversion On Mode ↓ INVOFF (20h) ↓ Display Inversion OFF Mode Legend Command Parameter Display Action Mode Sequential transfer																								

INVON (2100H): Display Inversion On

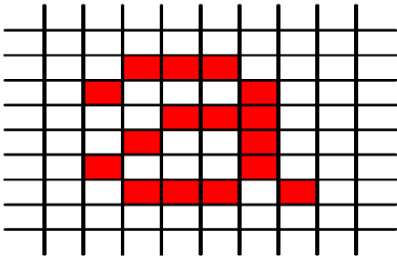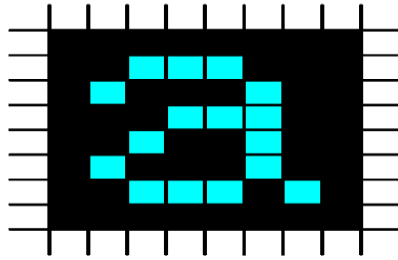2100H		INVON (Display Inversion On)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
INVON	W	21h	2100h	No Argument																					
Description	This command causes the display module to invert the image data only on the display device. No status bits are changed. Input Image   Display Panel 																								
Restriction	This command has no effect when module is already in inversion on mode.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Inversion off</td></tr><tr><td>SW Reset</td><td>Display Inversion off</td></tr><tr><td>HW Reset</td><td>Display Inversion off</td></tr></table>													Status	Default Value	Power On Sequence	Display Inversion off	SW Reset	Display Inversion off	HW Reset	Display Inversion off				
Status	Default Value																								
Power On Sequence	Display Inversion off																								
SW Reset	Display Inversion off																								
HW Reset	Display Inversion off																								
Flow Chart	<pre>graph TD; A([Display Inversion OFF Mode]) --> B[INVON (21h)]; B --> C([Display Inversion ON Mode]);</pre> Legend - Command - Parameter - Display - Action - Mode - Sequential transfer																								



ALLPOFF (2200H): All Pixel Off


2200H		ALLPOFF																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
ALLPOFF	W	22h	2200h	No Argument																					
Description	This command turns the display panel black in Sleep Out mode and a status of the Display On/Off register can be on or off. This command does not change any other status. Input Image  ➔ Display Panel  “All Pixels On”, “Normal Display Mode On” or “Partial Mode On” commands are used to leave this mode. The display panel is showing the content of the Input Image after “Normal Display On” and “Partial Mode On” commands.																								
	Restriction	-																							
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Inversion off</td></tr><tr><td>SW Reset</td><td>Display Inversion off</td></tr><tr><td>HW Reset</td><td>Display Inversion off</td></tr></table>													Status	Default Value	Power On Sequence	Display Inversion off	SW Reset	Display Inversion off	HW Reset	Display Inversion off				
Status	Default Value																								
Power On Sequence	Display Inversion off																								
SW Reset	Display Inversion off																								
HW Reset	Display Inversion off																								

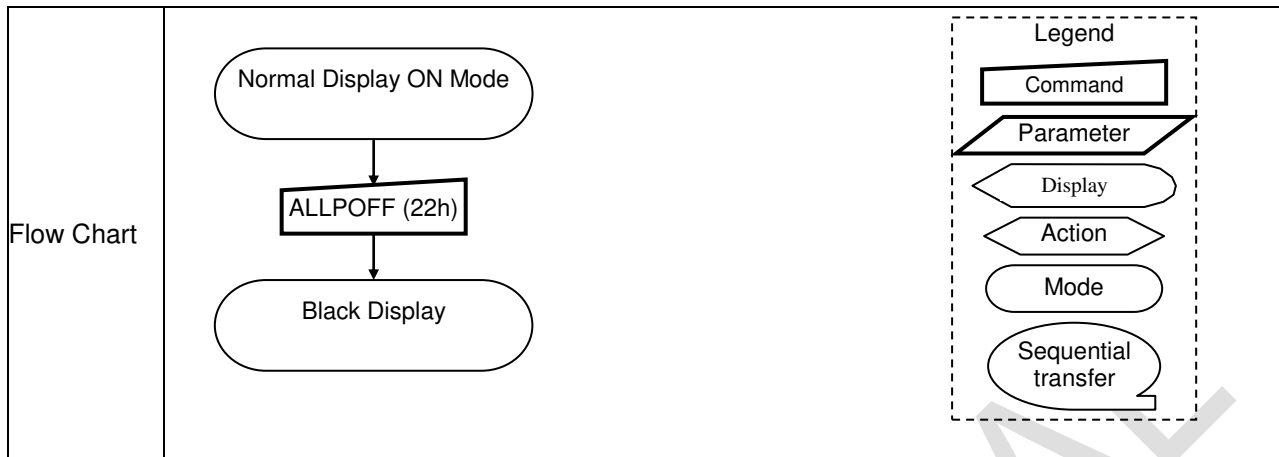











CONFIDENTIAL

ALLPON (2300H): All Pixel On



2300H		ALLPON																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
ALLPON	W	23h	2300h	No Argument																					
Description	This command turns the display panel white in Sleep Out mode and a status of the Display On/Off register can be on or off. This command does not change any other status. Input Image  ➔ Display Panel  “All Pixels Off”, “Normal Display Mode On” or “Partial Mode On” commands are used to leave this mode. The display panel is showing the content of the Input Image after “Normal Display On” and “Partial Mode On” commands.																								
	-																								
Restriction																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Inversion off</td></tr><tr><td>SW Reset</td><td>Display Inversion off</td></tr><tr><td>HW Reset</td><td>Display Inversion off</td></tr></table>													Status	Default Value	Power On Sequence	Display Inversion off	SW Reset	Display Inversion off	HW Reset	Display Inversion off				
Status	Default Value																								
Power On Sequence	Display Inversion off																								
SW Reset	Display Inversion off																								
HW Reset	Display Inversion off																								

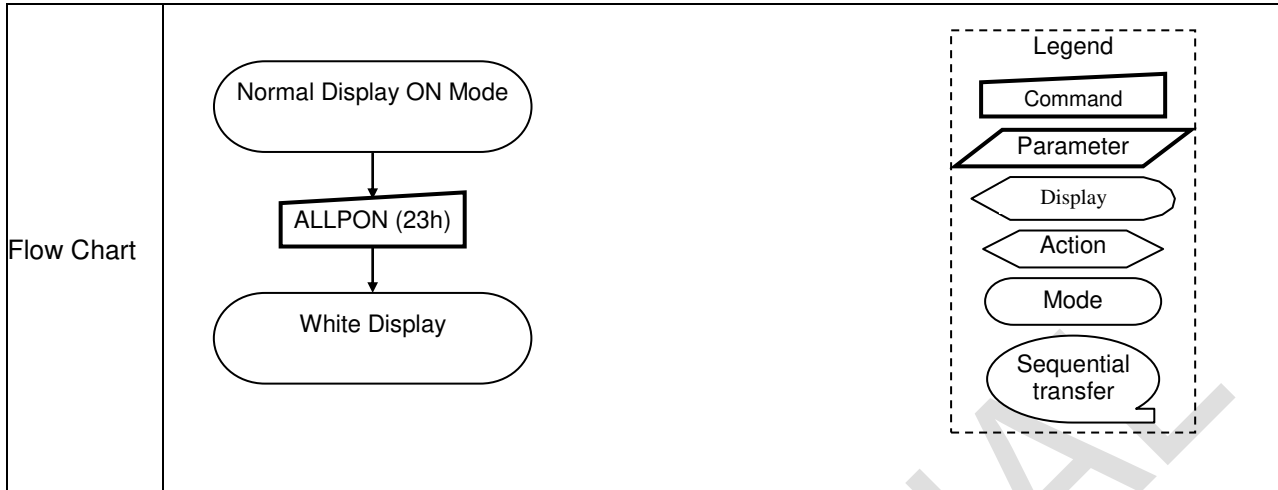

DISPOFF (2800h): Display Off

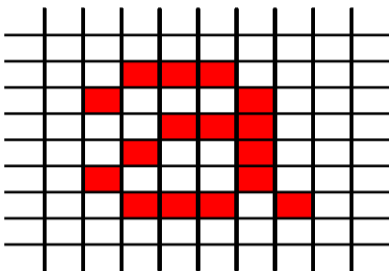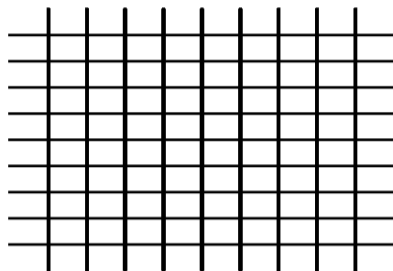
2800H				DISPOFF (Display Off)																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
DISPOFF	W	28h	2800h	No Argument																					
Description	This command causes the display module to stop displaying the image data on the display device. No status bits are changed. Input Image   Display Panel 																								
Restriction	This command has no effect when module is already in display off mode.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Off</td></tr><tr><td>SW Reset</td><td>Display Off</td></tr><tr><td>HW Reset</td><td>Display Off</td></tr></table>													Status	Default Value	Power On Sequence	Display Off	SW Reset	Display Off	HW Reset	Display Off				
Status	Default Value																								
Power On Sequence	Display Off																								
SW Reset	Display Off																								
HW Reset	Display Off																								
Flow Chart	<pre>graph TD A([Display On Mode]) --> B[DISPOFF (28h)] B --> C([Display OFF Mode])</pre> Legend  Command  Parameter  Display  Action  Mode  Sequential transfer																								

DISPON (2900h): Display On

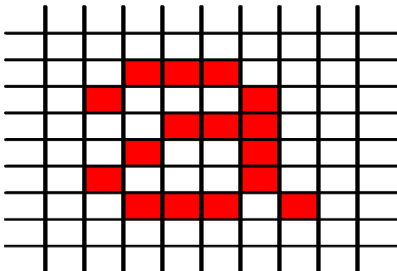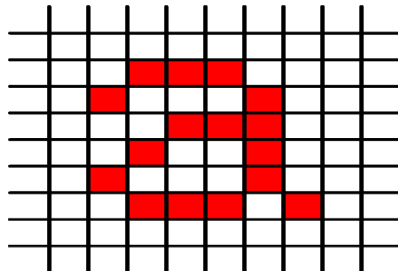
2900H				DISPON (Display On)																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
DISPON	W	29h	2900h	No Argument																					
Description	This command causes the display module to start displaying the image data on the display device. No status bits are changed. Input Image  Display Panel 																								
Restriction	This command has no effect when module is already in display on mode.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Display Off</td></tr><tr><td>SW Reset</td><td>Display Off</td></tr><tr><td>HW Reset</td><td>Display Off</td></tr></table>													Status	Default Value	Power On Sequence	Display Off	SW Reset	Display Off	HW Reset	Display Off				
Status	Default Value																								
Power On Sequence	Display Off																								
SW Reset	Display Off																								
HW Reset	Display Off																								
Flow Chart	Display OFF Mode ↓ DISPON (29h) ↓ Display ON Mode Legend - Command - Parameter - Display - Action - Mode - Sequential transfer																								

CASET(2A00h~2A03h) : Set Column Start Address

2A00H				CASET																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
CASET	W	2Ah	2A00h	x	-	-	-	-	-	-	SC9	SC8	00												
			2A01h	x	SC7	SC6	SC5	SC4	SC3	SC2	SC1	SC0	00												
			2A02h	x	-	-	-	-	-	-	EC9	EC8	01												
			2A03h	x	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0	8F												
Description	This command defines the column extent of the frame memory accessed by the host processor with the <code>read_memory_continue</code> and <code>write_memory_continue</code> commands. This command makes no change on the other driver status. The values of SC[9:0] and EC[9:0] are referred when RAMWR command comes. Each value represents one column line in the Frame Memory. SC[9:0] EC[9:0] SP[9:0] EP[9:0]																								
Restriction	(1) SC[9:0] always must be equal to or less than EC[9:0]. (2) The SC[9:0] and EC[9:0]-SC[9:0]+1 must can be divisible by 2.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								

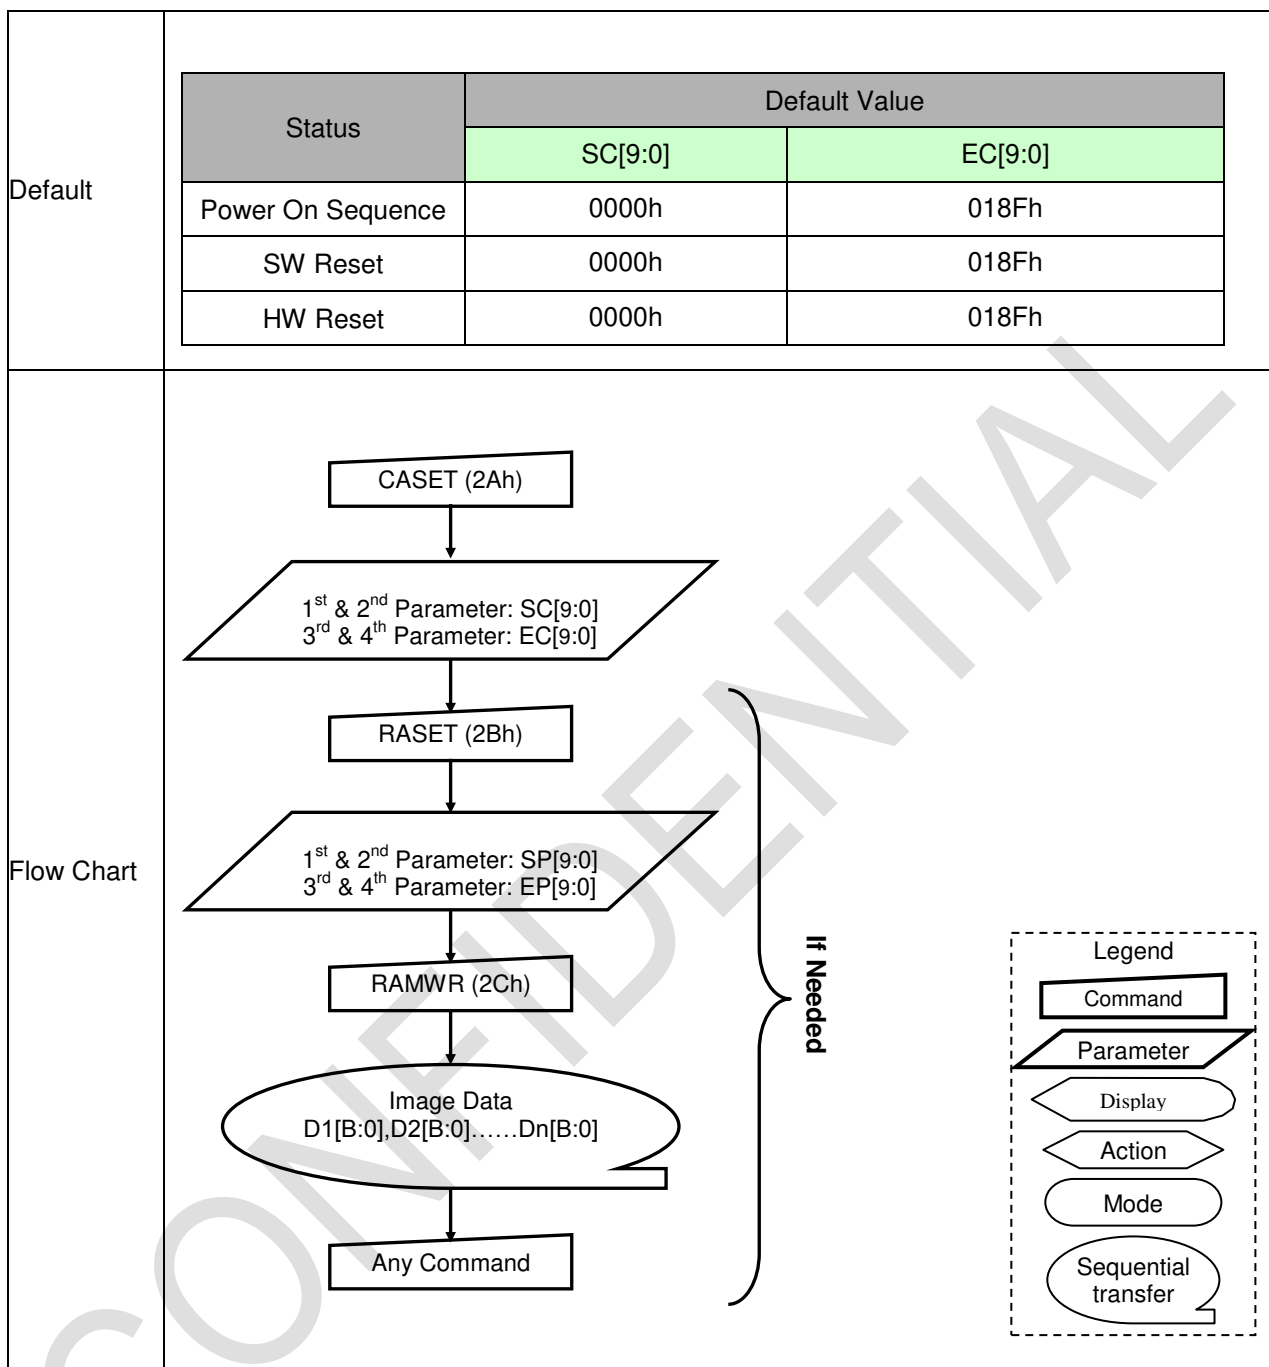


2B00H				RASET																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RASET	W	2Bh	2B00h	x	-	-	-	-	-	-	SP9	SP8	00												
			2B01h	x	SP7	SP6	SP5	SP4	SP3	SP2	SP1	SP0	00												
			2B02h	x	-	-	-	-	-	-	EP9	EP8	01												
			2B03h	x	EP7	EP6	EP5	EP4	EP3	EP2	EP1	EP0	8F												
Description	This command defines the page extent of the frame memory accessed by the host processor with the write_memory_continue and read_memory_continue command. This command makes no change on the other driver status. The values of SP[9:0] and EP[9:0] are referred when RAMWR command comes. Each value represents one Page line in the Frame Memory.																								
Restriction	(1) SP[9:0] always must be equal to or less than EP[9:0] (2) The SP[9:0] and EP[9:0]-SP[9:0]+1 must be divisible by 2.																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								


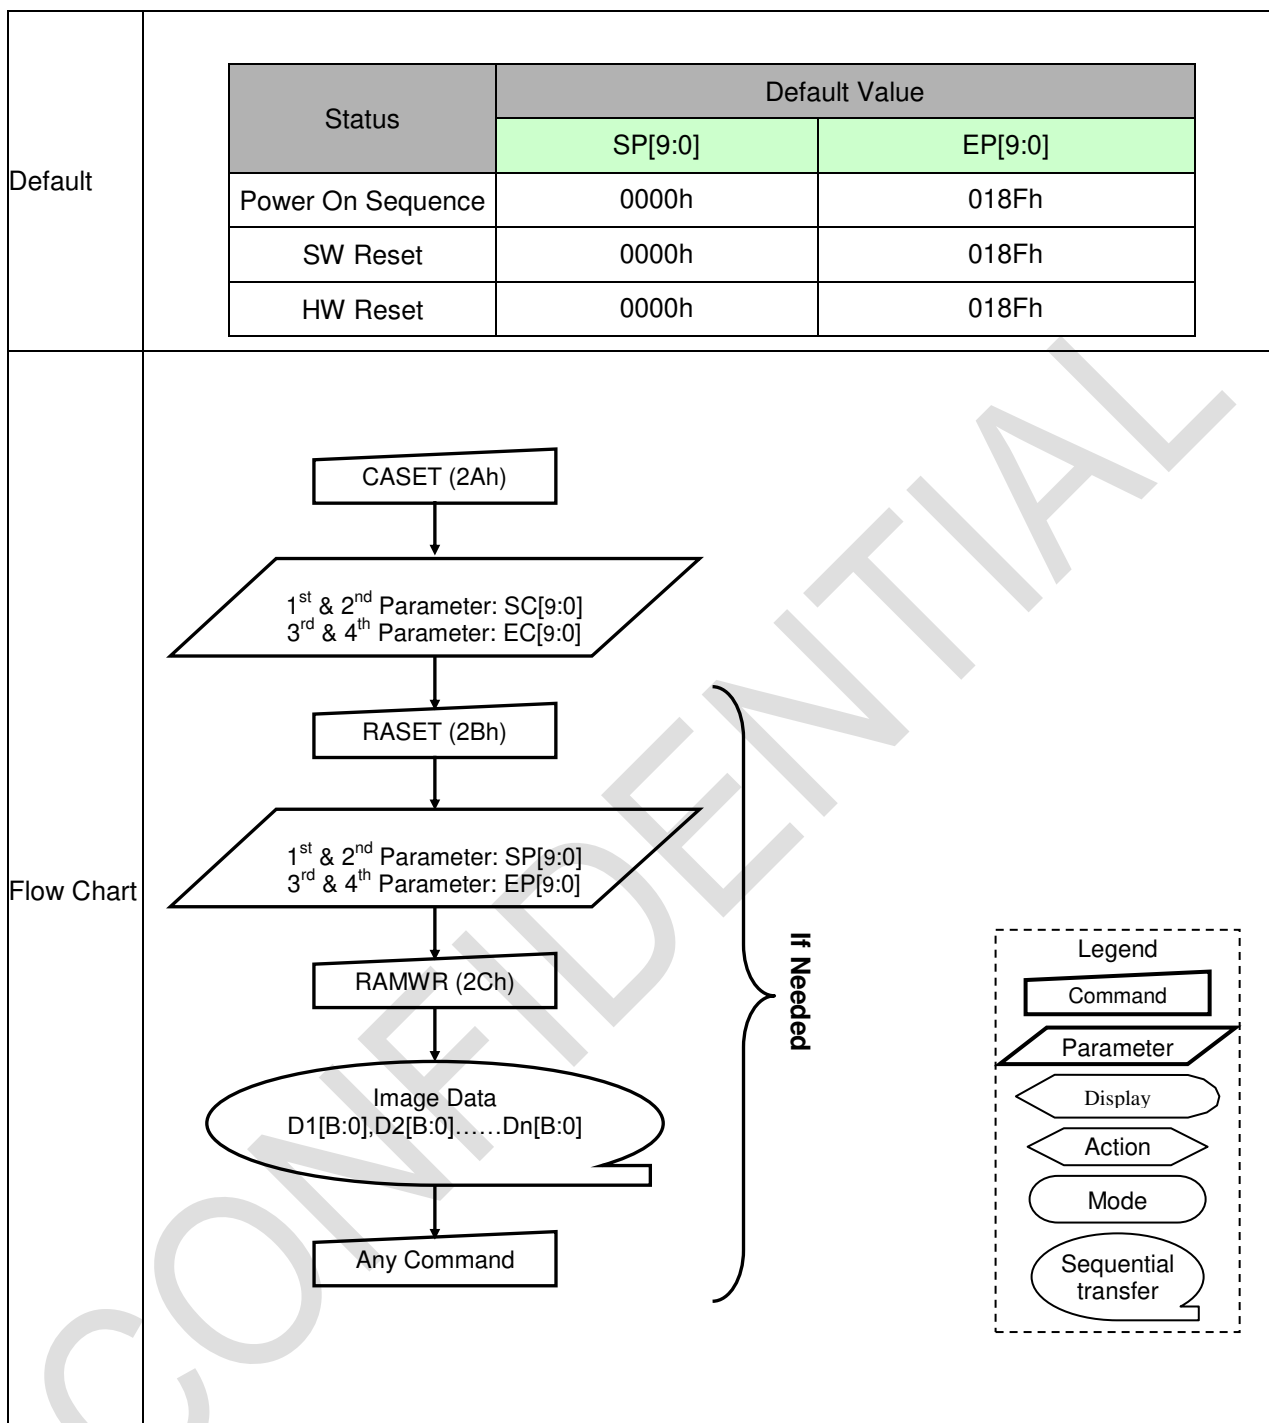


RAMWR (2C00h): Memory Write

2C00H				RAMWR																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RAMWR	W	2Ch	2C00h	X	0	0	1	0	1	1	0	0	2C												
			1 st Pixel	X	D ₁₇	D ₁₆	D ₁₅	D ₁₄	D ₁₃	D ₁₂	D ₁₁	D ₁₀													
			:	X	:	:	:	:	:	:	:	:													
			N th Pixel	X	D _{N7}	D _{N6}	D _{N5}	D _{N4}	D _{N3}	D _{N2}	D _{N1}	D _{N0}													
Description	This command transfers image data from the host processor to the display module's frame memory starting at the pixel location specified by preceding CASET (2Ah) and RASET (2Bh) commands.																								
Restriction	A Memory Write should follow a CASET(2Ah), RASET(2Bh) or MADCTR(36h) to define the write location. Otherwise, data written with RAMWR(2Ch) and any following RAMWRC(3Ch) commands is written to undefined locations.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Contents of memory is set randomly</td></tr><tr><td>SW Reset</td><td>Contents of memory is not cleared</td></tr><tr><td>HW Reset</td><td>Contents of memory is not cleared</td></tr></table>													Status	Default Value	Power On Sequence	Contents of memory is set randomly	SW Reset	Contents of memory is not cleared	HW Reset	Contents of memory is not cleared				
Status	Default Value																								
Power On Sequence	Contents of memory is set randomly																								
SW Reset	Contents of memory is not cleared																								
HW Reset	Contents of memory is not cleared																								

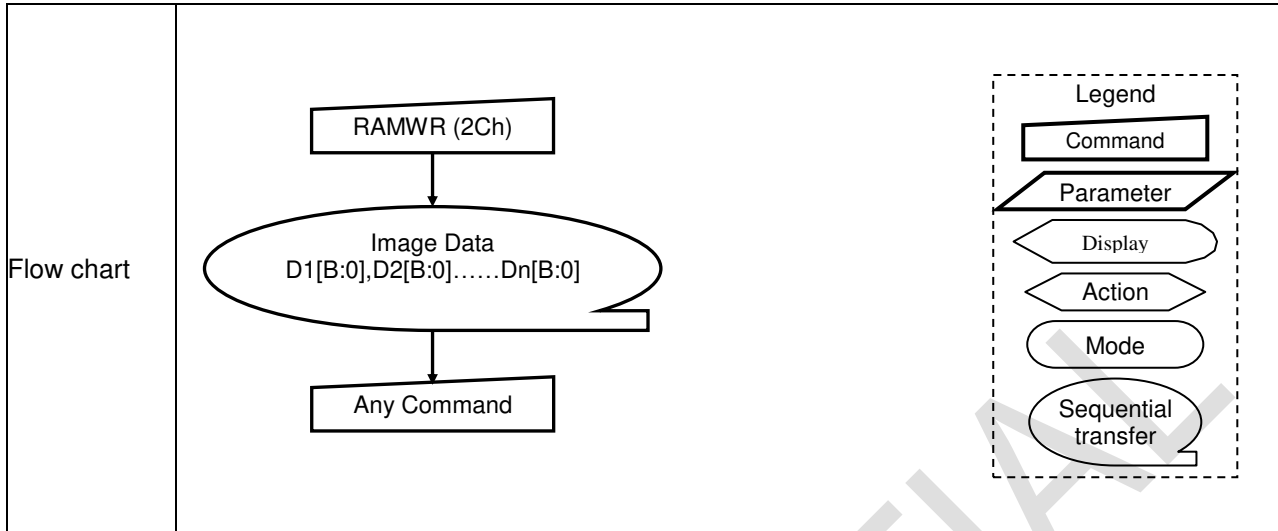

PTLAR (3000h): Partial Area

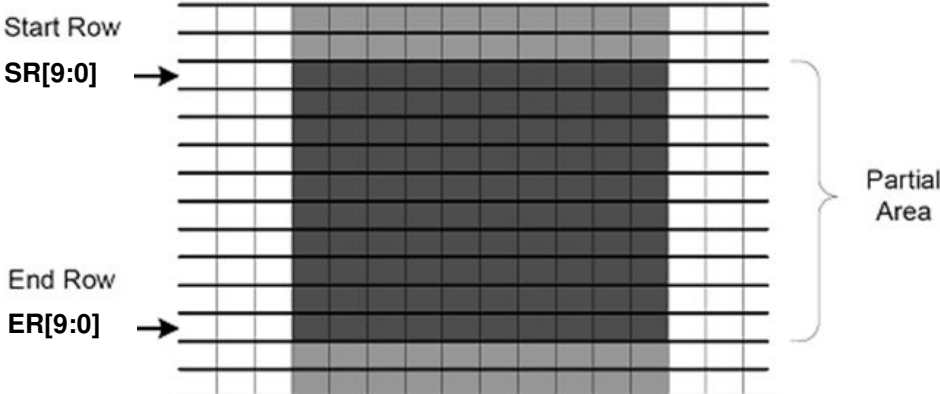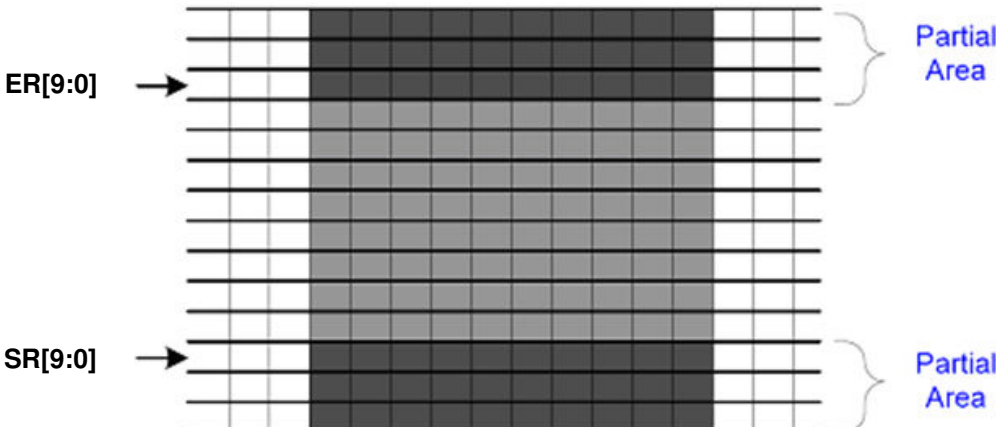3000H				PTLAR (Partial Area)									
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
PTLAR	W	30h	3000h	x	-	-	-	-	-	-	SR9	SR8	00
			3001h	x	SR7	SR6	SR5	SR4	SR3	SR2	SR1	SR0	00
			3002h	x	-	-	-	-	-	-	ER9	ER8	01
			3003h	x	ER7	ER6	ER5	ER4	ER3	ER2	ER1	ER0	8F
Description	This command defines the Partial Display mode's display area. There are two parameters associated with this command, the first defines the Start Row (SR) and the second the End Row (ER), as illustrated in the following figure. If End Row > Start Row  If End Row < Start Row  If End Row = Start Row then the Partial Area will be one row deep.												
	Restriction	SR[9:0] and ER[9:0] settings should be within max available Display Area.											

Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes		
Status	Availability														
Normal Mode On, Idle Mode Off, Sleep Out	Yes														
Normal Mode On, Idle Mode On, Sleep Out	Yes														
Partial Mode On, Idle Mode Off, Sleep Out	Yes														
Partial Mode On, Idle Mode On, Sleep Out	Yes														
Sleep In	Yes														
Default	<table><tr><th rowspan="2">Status</th><th colspan="2">Default Value</th></tr><tr><th>SR[9:0]</th><th>ER[9:0]</th></tr><tr><td>Power On Sequence</td><td>0000h</td><td>018Fh</td></tr><tr><td>SW Reset</td><td>0000h</td><td>018Fh</td></tr><tr><td>HW Reset</td><td>0000h</td><td>018Fh</td></tr></table>	Status	Default Value		SR[9:0]	ER[9:0]	Power On Sequence	0000h	018Fh	SW Reset	0000h	018Fh	HW Reset	0000h	018Fh
Status	Default Value														
	SR[9:0]	ER[9:0]													
Power On Sequence	0000h	018Fh													
SW Reset	0000h	018Fh													
HW Reset	0000h	018Fh													
Flow chart	1. To Enter Partial Mode <pre>graph TD; PTLAR[PTLAR 30h] --> P1[/1st & 2nd Parameter: SR[9:0]/]; P1 --> P2[/3rd & 4th Parameter: ER[9:0]/]; P2 --> PTLON[PTLON 12h]; PTLON --> PM([Partial Mode]);</pre> 2. To Exit Partial Mode <pre>graph TD; PM([Partial Mode]) --> DISPOFF[DISPOFF 28h]; DISPOFF --> NORON[NORON 13h]; NORON --> PMOFF([Partial Mode OFF]); PMOFF --> ID([Image Data D1[B:0], D2[B:0]... Dn[B:0]]); ID --> DISON[DISON 29h]; DISPOFF -.-> Note[Optional to prevent tearing effect image display];</pre> Legend - Command - Parameter - Display - Action - Mode - Sequential transfer Note : B=23														

PTLAR (3100h): Vertical Partial Area

3000H				PTLAR (Partial Area)									
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
PTLAR	W	30h	3100h	x	-	-	-	-	-	-	-	SC8	00
			3101h	x	SC7	SC6	SC5	SC4	SC3	SC2	SC1	SC0	00
			3102h	x	-	-	-	-	-	-	-	EC8	01
			3103h	x	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0	8F
Description	This command defines the Vertical Partial Display mode's display area. There are two parameters associated with this command, the first defines the Start Column (SC) and the second the End Column (EC), as illustrated in the following figure. If End Column > Start Column Start Column SC[9:0] End Column EC[9:0] Partial Area If End Column < Start Column												

	End Column EC[9:0] Start Column SC[9:0] Partial Area Partial Area If End Column = Start Column then the Partial Area will be one column deep.												
Restriction	SC[9:0] and EC[9:0] settings should be within max available Display Area.												
Register Availability	<table border="1"> <thead> <tr> <th>Status</th><th>Availability</th></tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </tbody> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												

Default	<table><tr><th rowspan="2">Status</th><th colspan="2">Default Value</th></tr><tr><th>SC[9:0]</th><th>EC[9:0]</th></tr><tr><td>Power On Sequence</td><td>0000h</td><td>018Fh</td></tr><tr><td>SW Reset</td><td>0000h</td><td>018Fh</td></tr><tr><td>HW Reset</td><td>0000h</td><td>018Fh</td></tr></table>		Status	Default Value		SC[9:0]	EC[9:0]	Power On Sequence	0000h	018Fh	SW Reset	0000h	018Fh	HW Reset	0000h	018Fh
	Status	Default Value														
		SC[9:0]	EC[9:0]													
	Power On Sequence	0000h	018Fh													
	SW Reset	0000h	018Fh													
HW Reset	0000h	018Fh														
Flow chart	1. To Enter Partial Mode <pre>graph TD; PTLAR[PTLAR 30h] --> SR[/1st & 2nd Parameter: SR[9:0]/]; SR --> ER[/3rd & 4th Parameter: ER[9:0]/]; ER --> PTLON[PTLON 12h]; PTLON --> PM([Partial Mode]);</pre> 2. To Exit Partial Mode <pre>graph TD; PM([Partial Mode]) --> DISPOFF[DISPOFF 28h]; DISPOFF --> NORON[NORON 13h]; NORON --> PMOFF([Partial Mode OFF]); PMOFF --> ID[/Image Data D1[B:0], D2[B:0]... Dn[B:0]/]; ID --> DISON[DISON 29h];</pre> Optional to prevent tearing effect image display Legend - Command - Parameter - Display - Action - Mode - Sequential transfer															
	Note : B=23															

TEOFF (3400h): Tearing Effect Line OFF

3400H		TEOFF (Tearing Effect Line OFF)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
TEOFF	W	34h	3400h	No Argument																					
Description	This command turns off the display module's Tearing Effect output signal on the TE signal line.																								
Restriction	This command has no effect when the Tearing Effect output is already off.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>OFF</td></tr><tr><td>SW Reset</td><td>OFF</td></tr><tr><td>HW Reset</td><td>OFF</td></tr></table>													Status	Default Value	Power On Sequence	OFF	SW Reset	OFF	HW Reset	OFF				
Status	Default Value																								
Power On Sequence	OFF																								
SW Reset	OFF																								
HW Reset	OFF																								
Flow Chart	TE Line Output ON TEOFF (34h) TE Line Output OFF Legend Command Parameter Display Action Mode Sequential transfer																								

TEON (3500h): Tearing Effect Line ON

3500H	TEON (Tearing Effect Line ON)												
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
TEON	W	35h	3500h	x	0	0	0	0	0	0	TE_M	TELOM	00

Bit	Symbol	Description	Comment
D1	TE_M	Output mode of TE signal set	1: Refresh frame active <Note> TE output active at refresh frame to avoid tearing effect, command can be set: 1. 0x3500=00.or 2. 0x3500=02.
D0	TELOM	Output mode of TE signal	0:only V-blanking 1:V-blanking +H-blanking

This command turns on the tearing Effect output signal on the TE signal line. The TE signal is not affected by changing MADCTR (36h) B4 (Line Address Order).

The Tearing Effect Line On has one parameter that describes the Tearing Effect Output Line mode.

If TELOM = 0:

The Tearing Effect Output line consists of V-Blanking information only.

Description



If TELOM = 1:



The Tearing Effect Output Line consists of both V-Blanking and H-Blanking information.



The Tearing Effect Output line shall be active low when the display module is in Sleep mode.

Restriction	This command has no effect when Tearing Effect output is already ON.												
Register Availability	<table> <tr> <th>Status</th><th>Availability</th></tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												
Default	<table> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>OFF</td></tr> <tr> <td>SW Reset</td><td>OFF</td></tr> <tr> <td>HW Reset</td><td>OFF</td></tr> </table>	Status	Default Value	Power On Sequence	OFF	SW Reset	OFF	HW Reset	OFF				
Status	Default Value												
Power On Sequence	OFF												
SW Reset	OFF												
HW Reset	OFF												

Flow Chart

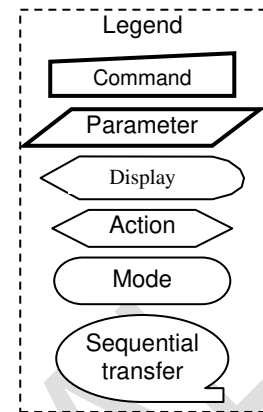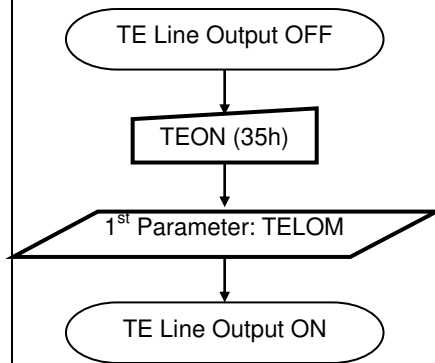

MADCTR (3600h): Scan Direction Control



3600H				MADCTR (Scan Direction Control)																																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																												
		MIPI	Other																																						
MADCTR	W	36h	3600h	x	D7	D6	D5	D4	D3	D2	D1	D0	00																												
Description	This command defines the scan direction of Source and Gate Driver. This command makes no change on the other driver status.																																								
	<table><tr><th>Bit</th><th>Symbol</th><th>Description</th><th>Comment</th></tr><tr><td>D7</td><td>Reserved</td><td></td><td></td></tr><tr><td>D6</td><td>MX</td><td>Column Address Increment</td><td>0: Increasing in horizontal 1: Decreasing in horizontal</td></tr><tr><td>D3</td><td>RGB</td><td>RGB/BGR Order</td><td>'1' =BGR, "0"=RGB</td></tr><tr><td>D2</td><td>Reserved</td><td></td><td></td></tr><tr><td>D1</td><td>Reserved</td><td></td><td></td></tr><tr><td>D0</td><td>Reserved</td><td></td><td></td></tr></table>													Bit	Symbol	Description	Comment	D7	Reserved			D6	MX	Column Address Increment	0: Increasing in horizontal 1: Decreasing in horizontal	D3	RGB	RGB/BGR Order	'1' =BGR, "0"=RGB	D2	Reserved			D1	Reserved			D0	Reserved		
	Bit	Symbol	Description	Comment																																					
	D7	Reserved																																							
	D6	MX	Column Address Increment	0: Increasing in horizontal 1: Decreasing in horizontal																																					
	D3	RGB	RGB/BGR Order	'1' =BGR, "0"=RGB																																					
	D2	Reserved																																							
	D1	Reserved																																							
	D0	Reserved																																							
	Input Image → Display Panel <table><tr><th>MX</th><th>Image In Frame Memory</th></tr><tr><td>0</td><td></td></tr><tr><td>1</td><td></td></tr></table>													MX	Image In Frame Memory	0		1																							
MX	Image In Frame Memory																																								
0																																									
1																																									
Input Image → Sent RGB Display Panel Input Image → Sent BGR Display Panel																																									
Restriction																																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes																
	Status	Availability																																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																																							
Sleep In	Yes																																								


Default	<table> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>00h</td></tr> <tr> <td>SW Reset</td><td>00h</td></tr> <tr> <td>HW Reset</td><td>00h</td></tr> </table>	Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h
Status	Default Value								
Power On Sequence	00h								
SW Reset	00h								
HW Reset	00h								
Flow chart	<pre> graph TD A[MADCTR (36h)] --> B[/1st Parameter/] </pre> Legend - Command - Parameter - Display - Action - Mode - Sequential transfer								

IDMOFF (3800h): Idle Mode Off

3800H		IDMOFF (Idle Mode Off)																			
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX								
		MIPI	Other																		
IDMOFF	W	38h	3800h	No Argument																	
Description	This command causes the display module to exit Idle mode.																				
Restriction	This command has no effect when the display module is not in Idle mode.																				
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Sleep Out, Sleep In</td><td>No</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode On	Yes	Partial Mode On, Idle Mode On	Yes	Sleep Out, Sleep In	No
Status	Availability																				
Normal Mode On, Idle Mode On	Yes																				
Partial Mode On, Idle Mode On	Yes																				
Sleep Out, Sleep In	No																				
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Idle Mode Off</td></tr><tr><td>SW Reset</td><td>Idle Mode Off</td></tr><tr><td>HW Reset</td><td>Idle Mode Off</td></tr></table>													Status	Default Value	Power On Sequence	Idle Mode Off	SW Reset	Idle Mode Off	HW Reset	Idle Mode Off
Status	Default Value																				
Power On Sequence	Idle Mode Off																				
SW Reset	Idle Mode Off																				
HW Reset	Idle Mode Off																				
Flow Chart	Idle mode ON IDMOFF (38h) Idle mode OFF Legend Command Parameter Display Action Mode Sequential transfer																				

IDMON (3900h): Enter_idle_mode

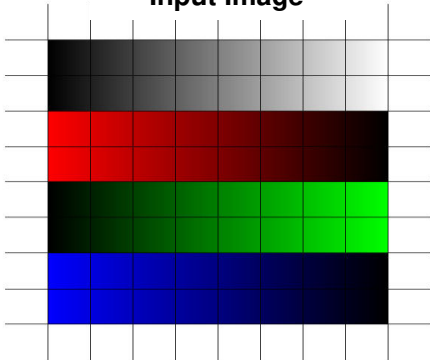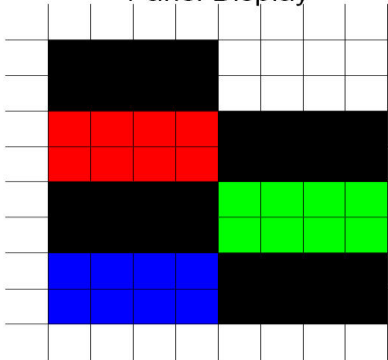3900H				Enter_idle_mode																																													
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																				
		MIPI	Other																																														
IDMON	W	39h	3900h	No Argument																																													
Description	This command causes the display module to enter Idle Mode. In Idle Mode, color expression is reduced. Colors are shown on the display device using the MSB of each of the R, G and B color components in the Input Image. Input Image  Panel Display  <table><tr><td>Color</td><td>R7 R6 R5 R4 R3 R2 R1 R0</td><td>G7 G6 G5 G4 G3 G2 G1 G0</td><td>B7 B6 B5 B4 B3 B2 B1 B0</td></tr><tr><td>Black</td><td>0XXXXXXX</td><td>0XXXXXXX</td><td>0XXXXXXX</td></tr><tr><td>Blue</td><td>0XXXXXXX</td><td>0XXXXXXX</td><td>1XXXXXXX</td></tr><tr><td>Red</td><td>1XXXXXXX</td><td>0XXXXXXX</td><td>0XXXXXXX</td></tr><tr><td>Magenta</td><td>1XXXXXXX</td><td>0XXXXXXX</td><td>1XXXXXXX</td></tr><tr><td>Green</td><td>0XXXXXXX</td><td>1XXXXXXX</td><td>0XXXXXXX</td></tr><tr><td>Cyan</td><td>0XXXXXXX</td><td>1XXXXXXX</td><td>1XXXXXXX</td></tr><tr><td>Yellow</td><td>1XXXXXXX</td><td>1XXXXXXX</td><td>0XXXXXXX</td></tr><tr><td>White</td><td>1XXXXXXX</td><td>1XXXXXXX</td><td>1XXXXXXX</td></tr></table>													Color	R7 R6 R5 R4 R3 R2 R1 R0	G7 G6 G5 G4 G3 G2 G1 G0	B7 B6 B5 B4 B3 B2 B1 B0	Black	0XXXXXXX	0XXXXXXX	0XXXXXXX	Blue	0XXXXXXX	0XXXXXXX	1XXXXXXX	Red	1XXXXXXX	0XXXXXXX	0XXXXXXX	Magenta	1XXXXXXX	0XXXXXXX	1XXXXXXX	Green	0XXXXXXX	1XXXXXXX	0XXXXXXX	Cyan	0XXXXXXX	1XXXXXXX	1XXXXXXX	Yellow	1XXXXXXX	1XXXXXXX	0XXXXXXX	White	1XXXXXXX	1XXXXXXX	1XXXXXXX
	Color	R7 R6 R5 R4 R3 R2 R1 R0	G7 G6 G5 G4 G3 G2 G1 G0	B7 B6 B5 B4 B3 B2 B1 B0																																													
	Black	0XXXXXXX	0XXXXXXX	0XXXXXXX																																													
Blue	0XXXXXXX	0XXXXXXX	1XXXXXXX																																														
Red	1XXXXXXX	0XXXXXXX	0XXXXXXX																																														
Magenta	1XXXXXXX	0XXXXXXX	1XXXXXXX																																														
Green	0XXXXXXX	1XXXXXXX	0XXXXXXX																																														
Cyan	0XXXXXXX	1XXXXXXX	1XXXXXXX																																														
Yellow	1XXXXXXX	1XXXXXXX	0XXXXXXX																																														
White	1XXXXXXX	1XXXXXXX	1XXXXXXX																																														
Restriction	This command has no effect when module is already in idle on mode.																																																
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off</td><td>Yes</td></tr><tr><td>Sleep out, Sleep In</td><td>No</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off	Yes	Partial Mode On, Idle Mode Off	Yes	Sleep out, Sleep In	No																												
Status	Availability																																																
Normal Mode On, Idle Mode Off	Yes																																																
Partial Mode On, Idle Mode Off	Yes																																																
Sleep out, Sleep In	No																																																
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Idle Mode Off</td></tr><tr><td>SW Reset</td><td>Idle Mode Off</td></tr><tr><td>HW Reset</td><td>Idle Mode Off</td></tr></table>													Status	Default Value	Power On Sequence	Idle Mode Off	SW Reset	Idle Mode Off	HW Reset	Idle Mode Off																												
Status	Default Value																																																
Power On Sequence	Idle Mode Off																																																
SW Reset	Idle Mode Off																																																
HW Reset	Idle Mode Off																																																

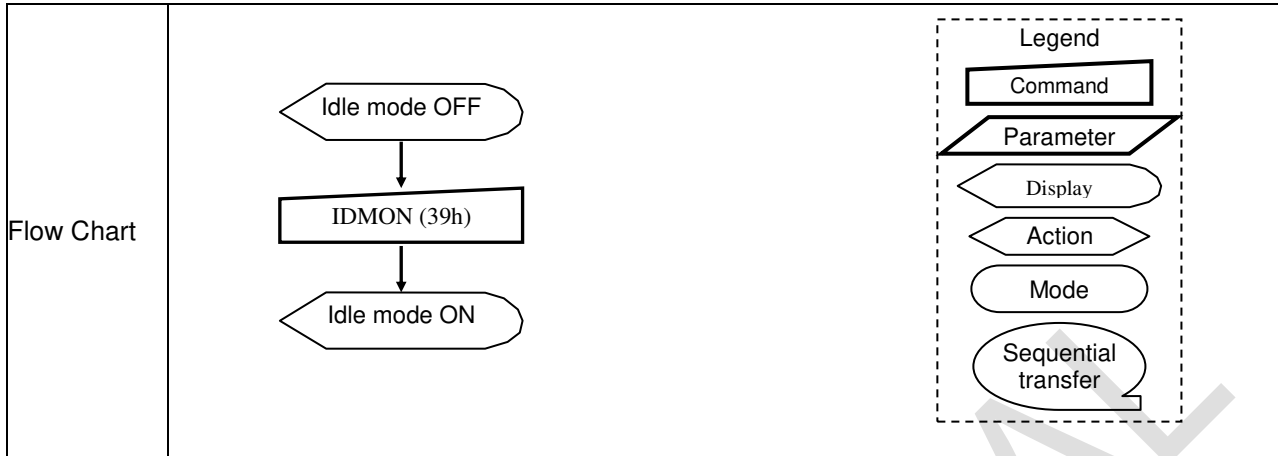

CONFIDENTIAL

COLMOD (3A00h): Interface Pixel Format

COLMOD (Interface Pixel Format)

3A00H

COLMOD (Interface Pixel Format)

Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
COLMOD	W	3Ah	3A00h	x	SPI_IFPF_SEL	VIPF[2]	VIPF[1]	VIPF[0]	0	IFPF[2]	IFPF[1]	IFPF[0]	77

This command sets the pixel format for the RGB image data used by the interface.

If SPI_IFPF_SEL(3Ah-B7) = 1: The VIPF[2:0] pixel format used by the SPI interface

If SPI_IFPF_SEL(3Ah-B7) = 0: The IFPF[2:0] pixel format used by the SPI / MCU interface

If not used DPI interface, then the corresponding bits in the parameter are ignored.

Control Interface Color Format	IFPF[2]	IFPF[1]	IFPF[0]
SPI 8 bit/pixel (256 colors); SPI 256 Gray (Support IF: SPI3/SPI4)	0	0	1
SPI 8 bit/pixel (256 colors); SPI 3-3-2 (Support IF: SPI3/SPI4)	0	1	0
SPI 3 bit/pixel (8 colors); SPI 1-1-1 (Support IF: SPI3/SPI4)	0	1	1
16bit/pixel (65,536 colors)	1	0	1
18bit/pixel (262,144 colors)	1	1	0
24bit/pixel (16.7M colors)	1	1	1

SPI 1-1-1

RGB 1-1-1 Bit	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note
CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write
1st RAM Data Write	1	X	X	R1[0]	G1[0]	B1[0]	R2[0]	G2[0]	B2[0]	1,2 pixel Data Write
2nd RAM Data Write	1	X	X	R3[0]	G3[0]	B3[0]	R4[0]	G4[0]	B4[0]	3,4 pixel Data Write
3rd RAM Data Write	1	X	X	R5[0]	G5[0]	B5[0]	R6[0]	G6[0]	B6[0]	5,6 pixel Data Write
So on...										

SPI 3-3-2

RGB 3-3-2 Bit	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note
CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write
1st RAM Data Write	1	R1[2]	R1[1]	R1[0]	G1[2]	G1[1]	G1[0]	B1[2]	B1[1]	1st pixel Data Write
2nd RAM Data Write	1	R2[2]	R2[1]	R2[0]	G2[2]	G2[1]	G2[0]	B2[2]	B2[1]	2nd pixel Data Write
3rd RAM Data Write	1	R3[2]	R3[1]	R3[0]	G3[2]	G3[1]	G3[0]	B3[2]	B3[1]	3rd pixel Data Write
So on...										

SPI 256 Gray


RGB 256 Gray	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note
CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write
1st RAM Data Write	1	P1[7]	P1[6]	P1[5]	P1[4]	P1[3]	P1[2]	P1[1]	P1[0]	1st pixel Data Write
2nd RAM Data Write	1	P2[7]	P2[6]	P2[5]	P2[4]	P2[3]	P2[2]	P2[1]	P2[0]	2nd pixel Data Write
3rd RAM Data Write	1	P3[7]	P3[6]	P3[5]	P3[4]	P3[3]	P3[2]	P3[1]	P3[0]	3rd pixel Data Write
So on...										

Description


Restriction													
Register Availability	<table> <tr> <th>Status</th><th>Availability</th></tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												
Default	<table> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>77h</td></tr> <tr> <td>SW Reset</td><td>77h</td></tr> <tr> <td>HW Reset</td><td>77h</td></tr> </table>	Status	Default Value	Power On Sequence	77h	SW Reset	77h	HW Reset	77h				
Status	Default Value												
Power On Sequence	77h												
SW Reset	77h												
HW Reset	77h												
Flow chart	Example : <pre> graph TD A([16-bits/Pixel Mode]) --> B[COLMOD (3Ah)] B --> C[/1st Parameter (06h)/] C --> D([18-bits/Pixel Mode]) </pre> Legend - Command - Parameter - Display - Action - Mode - Sequential transfer												

RAMWRC (3C00h): Memory Continuous Write

3C00H				RAMWRC																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RAMWR	W	3Ch	3C00h	X	0	0	1	1	1	1	0	0	3C												
			1 st Pixel	X	D ₁₇	D ₁₆	D ₁₅	D ₁₄	D ₁₃	D ₁₂	D ₁₁	D ₁₀													
			:	X	:	:	:	:	:	:	:	:													
			N th Pixel	X	D _{N7}	D _{N6}	D _{N5}	D _{N4}	D _{N3}	D _{N2}	D _{N1}	D _{N0}													
Description	This command transfers image data from the host processor to the display module's frame memory continuing from the pixel location following the previous write_memory_continue or write_memory_start command.																								
Restriction	A Memory Write should follow a CASET(2Ah), RASET(2Bh) or MADCTR(36h) to define the write location. Otherwise, data written with RAMWR(2Ch) and any following RAMWRC(3Ch) commands is written to undefined locations.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>Contents of memory is set randomly</td></tr><tr><td>SW Reset</td><td>Contents of memory is not cleared</td></tr><tr><td>HW Reset</td><td>Contents of memory is not cleared</td></tr></table>													Status	Default Value	Power On Sequence	Contents of memory is set randomly	SW Reset	Contents of memory is not cleared	HW Reset	Contents of memory is not cleared				
Status	Default Value																								
Power On Sequence	Contents of memory is set randomly																								
SW Reset	Contents of memory is not cleared																								
HW Reset	Contents of memory is not cleared																								

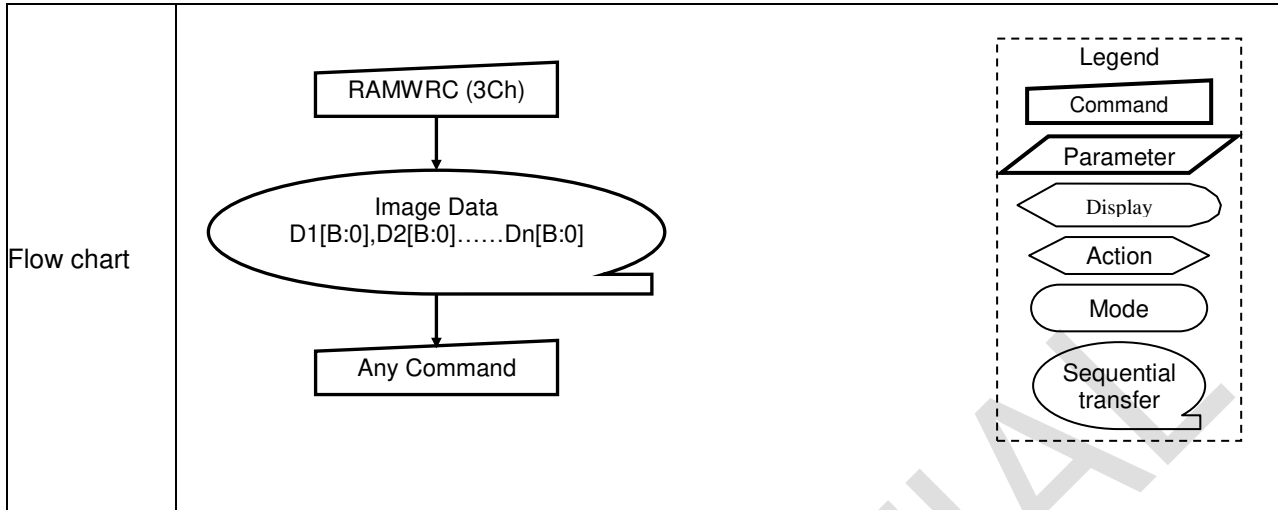

STESL(4400h) : Set_Tear_Scanline

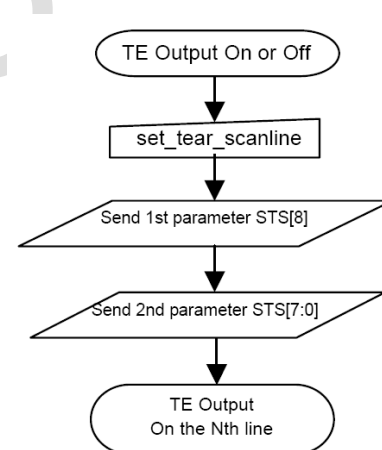4400H		STESL(Set_Tear_Scanline)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
STESL	W	44h	4400h	x	STS[15]	STS[14]	STS[13]	STS[12]	STS[11]	STS[10]	STS[9]	STS[8]	00												
			4401h	x	STS[7]	STS[6]	STS[5]	STS[4]	STS[3]	STS[2]	STS[1]	STS[0]	00												
Description	This command turns on the display Tearing Effect output signal on the TE signal line when the display reaches line N. The TE signal is not affected by changing set_address_mode bit B4. The Tearing Effect Line On has one parameter that describes the Tearing Effect Output Line mode.  The Tearing Effect Output line shall be active low when the display module is in Sleep mode																								
Restriction																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>STS[15:0]=16'h0000</td></tr><tr><td>SW Reset</td><td>STS[15:0]=16'h0000</td></tr><tr><td>HW Reset</td><td>STS[15:0]=16'h0000</td></tr></table>													Status	Default Value	Power On Sequence	STS[15:0]=16'h0000	SW Reset	STS[15:0]=16'h0000	HW Reset	STS[15:0]=16'h0000				
Status	Default Value																								
Power On Sequence	STS[15:0]=16'h0000																								
SW Reset	STS[15:0]=16'h0000																								
HW Reset	STS[15:0]=16'h0000																								
Flow Chart	 Legend - Command - Parameter - Display - Action - Mode - Sequential transfer																								

GSL (4500h) : Get_Scanline

4500H				GSL(Get_Scanline)																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
GSL	R	45h	4500h	x	GTS[15]	GTS[14]	GTS[13]	GTS[12]	GTS[11]	GTS[10]	GTS[9]	GTS[8]	0x												
			4501h	x	GTS[7]	GTS[6]	GTS[5]	GTS[4]	GTS[3]	GTS[2]	GTS[1]	GTS[0]	xx												
Description	The display returns the current scan line, N, used to update the display device. The total number of scan lines on a display device is defined as VSYNC + VBP + VACT + VFP. The first scan line is defined as the first line of V-Sync and is denoted as Line 0. When in Sleep Mode, the value returned by get scanline is undefined.																								
Restriction	-																								
Register Availability	<table><thead><tr><th>Status</th><th>Availability</th></tr></thead><tbody><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></tbody></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Flow Chart	get_scanline Wait 3us Dummy Read Send 1st parameter GTS[9:8] Send 2nd parameter GTS[7:0] Legend Command Parameter Display Action Mode Sequential transfer																								

DSTBON (4F00h): Deep Standby Mode On

4F00H		DSTBON(Deep Standby Mode On)																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
DSTBON	W	4Fh	4F00h	x	0	0	0	0	0	0	0	DSTB	00												
Description	This command is used to enter deep standby mode. DSTB="1", enter deep standby mode. Notes: - To exit Deep Standby Mode, input low pulse more than 3 msec to pin RESX. - For MIPI IF, if deep standby mode is used, please pull HSSI_CLK_P/N & HSSI_D0~D1_P/N to GND after executing deep standby command.																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow chart	DSTBON (4Fh) Parameter DSTB=1 Deep Standby Mode Legend Command Parameter Display Action Mode Sequential transfer																								

WRDISBV (5100h): Write Display Brightness

5100H				WRDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
WRDISBV	W	51h	5100h	x	DBV7	DBV6	DBV5	DBV4	DBV3	DBV2	DBV1	DBV0	00												
Description	This command is used to adjust brightness value. In principle relationship is that 00h value means the lowest brightness and FFh value means the highest brightness.																								
Restriction	The display supplier cannot use this command for tuning																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow chart	WRDISBV (51h) Parameter DBV[7:0] New Brightness Loaded Legend Command Parameter Display Action Mode Sequential transfer																								

RDDISBV (5200h): Read Display Brightness

5200H				RDDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDDISBV	R	52h	5200h	x	DBV7	DBV6	DBV5	DBV4	DBV3	DBV2	DBV1	DBV0	00												
Description	This command returns brightness value. In principle relationship is that 00h value means the lowest brightness and FFh value means the highest brightness.																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow Chart	RDDISBV (52hH) ↓ Send parameter DBV[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

WRCTRLD (5300h): Write Display Control

5300H				WRDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
WRCTRLD	W	53h	5300h	x	0	0	BCTRL	0	DD	0	0	0	28												
Description	BCTRL: Brightness control ,1=enable DD: Display dimming control ,1=enable																								
Restriction	The display supplier cannot use this command for tuning																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>28h</td></tr><tr><td>SW Reset</td><td>28h</td></tr><tr><td>HW Reset</td><td>28h</td></tr></table>													Status	Default Value	Power On Sequence	28h	SW Reset	28h	HW Reset	28h				
Status	Default Value																								
Power On Sequence	28h																								
SW Reset	28h																								
HW Reset	28h																								
Flow chart	WRCTRLD (53h) ↓ Parameter BCTRL Legend Command Parameter Display Action Mode Sequential transfer																								

RDCTRLD (5400h): Read Display Control

5400H				RDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDCTRLD	R	54h	5400h	x	0	0	BCTRL	0	DD	0	0	0	28												
Description	BCTRL: Brightness control ,1=enable DD: Display dimming control ,1=enable																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>28h</td></tr><tr><td>SW Reset</td><td>28h</td></tr><tr><td>HW Reset</td><td>28h</td></tr></table>													Status	Default Value	Power On Sequence	28h	SW Reset	28h	HW Reset	28h				
Status	Default Value																								
Power On Sequence	28h																								
SW Reset	28h																								
HW Reset	28h																								
Flow Chart	RDCTRLD (54hH) Send parameter BCTRL Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

WRRADACL (5500h): RAD_ACL Control

5500H				RDDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
WRRADACL	W	55h	5500h	x	0	0	0	0	0	0	RAD_ACL[1:0]		00												
Description	This command is used to control Raydium specific function for ACL (Auto Current Limit) RAD_ACL[1:0]=11, Enable Raydium ACL function. RAD_ACL[1:0]=00, Disable Raydium ACL function.																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow Chart	WRRADACL (55hH) Send parameter RAD_ACL[1:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

IMGEHCCTR (5800h) : Set_color_enhance

5800H	WRCE (set_color_enhance)																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
WRCE	W	58h	5800h	x	0	0	0	0	0	SLR_EN	SLR_LEVEL1	SLR_LEVEL0	00												
Description	<table><tr><th>Bit</th><th>Description</th><th>Value</th></tr><tr><td>SLR_EN</td><td>Sunlight Readable Enhancement Enable</td><td>'0': disable; '1': enable</td></tr><tr><td>SLR_LEVEL[1:0]</td><td>Sunlight Readable Enhancement Level</td><td>0~2, low to high</td></tr></table>													Bit	Description	Value	SLR_EN	Sunlight Readable Enhancement Enable	'0': disable; '1': enable	SLR_LEVEL[1:0]	Sunlight Readable Enhancement Level	0~2, low to high			
	Bit	Description	Value																						
	SLR_EN	Sunlight Readable Enhancement Enable	'0': disable; '1': enable																						
	SLR_LEVEL[1:0]	Sunlight Readable Enhancement Level	0~2, low to high																						
Restriction																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																								
Flow Chart	Legend Command Parameter Display Action Mode Sequential transfer																								

IMGEHCCTR (5900h) : Read_color_enhance

5900H	RDCE (set_color_enhance)																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDCE	R	59h	5900h	x	0	0	0	0	0	SLR_EN	SLR_LEVEL1	SLR_LEVEL0	00												
Description	<table><tr><th>Bit</th><th>Description</th><th>Value</th></tr><tr><td>SLR_EN</td><td>Sunlight Readable Enhancement Enable</td><td>'0': disable; '1': enable</td></tr><tr><td>SLR_LEVEL[1:0]</td><td>Sunlight Readable Enhancement Level</td><td>0~2, low to high</td></tr></table>													Bit	Description	Value	SLR_EN	Sunlight Readable Enhancement Enable	'0': disable; '1': enable	SLR_LEVEL[1:0]	Sunlight Readable Enhancement Level	0~2, low to high			
	Bit	Description	Value																						
	SLR_EN	Sunlight Readable Enhancement Enable	'0': disable; '1': enable																						
	SLR_LEVEL[1:0]	Sunlight Readable Enhancement Level	0~2, low to high																						
Restriction																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																								
Flow Chart	Legend Command Parameter Display Action Mode Sequential transfer																								

WRDISBV (6300h): Write HBM Display Brightness

6300H				WRDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
WRHBMDISBV	W	63h	6300h	x	DBV_HBM[7:0]							00													
Description	This command is used to adjust brightness value in HBM mode.																								
Restriction	The display supplier cannot use this command for tuning																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow chart	WRDISBV (63h) Parameter DBV_HBM[7:0] New Brightness Loaded Legend Command Parameter Display Action Mode Sequential transfer																								

RDDISBV (6400h): Read HBM Display Brightness

5200H				RDDISBV																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDHBMDISBV	R	64h	6400h	x	DBV_HBM[7:0]							00													
Description	This command returns brightness value in HBM mdoe.																								
Restriction	-																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>SW Reset</td><td>00h</td></tr><tr><td>HW Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	SW Reset	00h	HW Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
SW Reset	00h																								
HW Reset	00h																								
Flow Chart	RDDISBV (64hH) ↓ Send parameter DBV_HBM[7:0] Host Driver Legend Command Parameter Display Action Mode Sequential transfer																								

HBM_Mode (6600h) : Set_HBM_Mode

	SetHbmMode																				
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX								
		MIPI	Other																		
SetHbmMode	W	66h	6600h	x	0	0	0	0	0	0	HBM_en	0	00								
Description	HBM_en = 1, This command causes the display module to enter HBM mode (exit normal, idle and deep idle) HBM_en = 0, This command causes the display module to exit HBM mode (to normal mode)																				
Restriction	under display area																				
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Sleep In, Sleep Out</td><td>No</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode On	Yes	Partial Mode On, Idle Mode On	Yes	Sleep In, Sleep Out	No
Status	Availability																				
Normal Mode On, Idle Mode On	Yes																				
Partial Mode On, Idle Mode On	Yes																				
Sleep In, Sleep Out	No																				


Deep_Idle_Mode (6700h) : Set_Deep Idle Mode

SetDeepIdleMode																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX								
		MIPI	Other																		
SetDeepIdleMode	W	67h	6700h	x	0	0	0	0	0	0	0	DEEP_IDLE_EN	00								
Description	Deep_Idle_en = 1, This command causes the display module to enter deep idle mode (exit normal, idle and HBM) Deep_Idle_en = 0, This command causes the display module to exit deep idle mode (to idle mode)																				
Restriction	under display area																				
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On</td><td>Yes</td></tr><tr><td>Sleep In, Sleep Out</td><td>No</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode On	Yes	Partial Mode On, Idle Mode On	Yes	Sleep In, Sleep Out	No
Status	Availability																				
Normal Mode On, Idle Mode On	Yes																				
Partial Mode On, Idle Mode On	Yes																				
Sleep In, Sleep Out	No																				

COLSET (7000~7F00h): Interface Pixel Format Set

7000H ~ 7F00H	COLSET (Interface Pixel Format Set)												
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
7000h	W	70h	7000h	x	R_0000[7:0]								00
			7001h	x	G_0000[7:0]								00
			7002h	x	B_0000[7:0]								00
7100h	W	71h	7100h	x	R_0001[7:0]								00
			7101h	x	G_0001[7:0]								00
			7102h	x	B_0001[7:0]								FF
7200h	W	72h	7200h	x	R_0010[7:0]								00
			7201h	x	G_0010[7:0]								FF
			7202h	x	B_0010[7:0]								00
7300h	W	73h	7300h	x	R_0011[7:0]								00
			7301h	x	G_0011[7:0]								FF
			7302h	x	B_0011[7:0]								FF
7400h	W	74h	7400h	x	R_0100[7:0]								FF
			7401h	x	G_0100[7:0]								00
			7402h	x	B_0100[7:0]								00
7500h	W	75h	7500h	x	R_0101[7:0]								FF
			7501h	x	G_0101[7:0]								00
			7502h	x	B_0101[7:0]								FF
7600h	W	76h	7600h	x	R_0110[7:0]								FF
			7601h	x	G_0110[7:0]								FF
			7602h	x	B_0110[7:0]								00
7700h	W	77h	7700h	x	R_0111[7:0]								FF
			7701h	x	G_0111[7:0]								FF
			7702h	x	B_0111[7:0]								FF
7800h	W	78h	7800h	x	R_1000[7:0]								00
			7801h	x	G_1000[7:0]								00
			7802h	x	B_1000[7:0]								00
7900h	W	79h	7900h	x	R_1001[7:0]								00
			7901h	x	G_1001[7:0]								00
			7902h	x	B_1001[7:0]								FF
7A00h	W	7Ah	7A00h	x	R_1010[7:0]								00

			7A01h	x	G_1010[7:0]	FF
			7A02h	x	B_1010[7:0]	00
7B00h	W	7Bh	7B00h	x	R_1011[7:0]	00
			7B01h	x	G_1011[7:0]	FF
			7B02h	x	B_1011[7:0]	FF
7C00h	W	7Ch	7C00h	x	R_1100[7:0]	FF
			7C01h	x	G_1100[7:0]	00
			7C02h	x	B_1100[7:0]	00
7D00h	W	7Dh	7D00h	x	R_1101[7:0]	FF
			7D01h	x	G_1101[7:0]	00
			7D02h	x	B_1101[7:0]	FF
7E00h	W	7Eh	7E00h	x	R_1110[7:0]	FF
			7E01h	x	G_1110[7:0]	FF
			7E02h	x	B_1110[7:0]	00
7F00h	W	7Fh	7F00h	x	R_1111[7:0]	FF
			7F01h	x	G_1111[7:0]	FF
			7F02h	x	B_1111[7:0]	FF

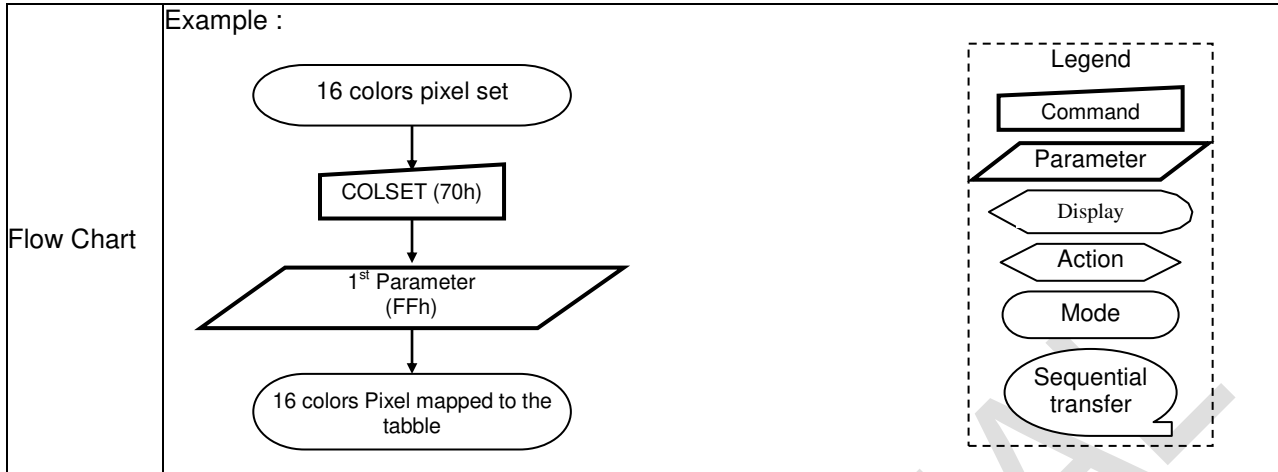


COLOPT (8000h): Interface Pixel Format Option

8000H				COLOPT (Interface Pixel Format Option)									
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
		MIPI	Other										
COLSET	W	80h	8000h	x	x	RGB111_opt	x	x	RGB4bit_en	gray256_color[2]	gray256_color[1]	gray256_color[0]	07
Description	This command sets the 1-1-1/256 gray color format option used by SPI interface.												
	RGB111_opt = 0 (80h-B6): Supporting in IFPF[2:0]=011 case setting by 3A00h (interface pixel format is SPI 1-1-1).												
	RGB 1-1-1 Bit	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note		
	CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write		
	1st RAM Data Write	1	x	x	R1[0]	G1[0]	B1[0]	R2[0]	G2[0]	B2[0]	1,2 pixel Data Write		
	2nd RAM Data Write	1	x	x	R3[0]	G3[0]	B3[0]	R4[0]	G4[0]	B4[0]	3,4 pixel Data Write		
	3rd RAM Data Write	1	x	x	R5[0]	G5[0]	B5[0]	R6[0]	G6[0]	B6[0]	5,6 pixel Data Write		
	So on...												
	RGB111_opt = 1 (80h-B6): Supporting in IFPF[2:0]=011 case setting by 3A00h (interface pixel format is SPI 1-1-1).												
	RGB 1-1-1 Bit	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note		
CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write			
1st RAM Data Write	1	x		R1[0]	G1[0]	B1[0]	x	R2[0]	G2[0]	B2[0]	1,2 Pixel Data Write		
2nd RAM Data Write	1	x		R3[0]	G3[0]	B3[0]	x	R4[0]	G4[0]	B4[0]	3,4 Pixel Data Write		
3rd RAM Data Write	1	x		R5[0]	G5[0]	B5[0]	x	R6[0]	G6[0]	B6[0]	5,6 Pixel Data Write		
So on...													
RGB4bit_en = 0 (80h-B3): Supporting in IFPF[2:0]=011 case setting by 3A00h (interface pixel format is SPI 1-1-1). Three bits per pixel formats map directly to 24bits by CMD 7000h-7700h													
RGB 1-1-1 Bit	DCX	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	Note			
CMDWR	0	0	0	0	0	0	0	0	0	0x2C for GRAM Write			
1st RAM Data Write	1	x	x	P1[2]	P1[1]	P1[0]	P2[2]	P2[1]	P2[0]	1,2 Pixel Data Write			
2nd RAM Data Write	1	x	x	P3[2]	P3[1]	P3[0]	P4[2]	P4[1]	P4[0]	3,4 Pixel Data Write			
3rd RAM Data Write	1	x	x	P5[2]	P5[1]	P5[0]	P6[2]	P6[1]	P6[0]	5,6 Pixel Data Write			
So on...													
Example: P1[2:0] = 3'b101 = { R_0101[7:0], G_0101[7:0], B_0101[7:0] } CMD 7500h-7502h													

Register Availability	<table> <tr> <th>Status</th><th>Availability</th></tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												
Default	<table> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>07h</td></tr> <tr> <td>SW Reset</td><td>07h</td></tr> <tr> <td>HW Reset</td><td>07h</td></tr> </table>	Status	Default Value	Power On Sequence	07h	SW Reset	07h	HW Reset	07h				
Status	Default Value												
Power On Sequence	07h												
SW Reset	07h												
HW Reset	07h												
Flow chart	Example : <pre> graph TD A([8 colors Pixel Mode]) --> B[COLOPT (80h)] B --> C[/1st Parameter (0Fh)/] C --> D([16 colors Pixel Mode]) </pre> Legend - Command - Parameter - Display - Action - Mode - Sequential transfer												


RDDDBS(A100h) : Read_DDB_Start

A100H		RDDDBS(Read_DDB_Start)																									
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX														
		MIPI	Other																								
RDDDBS	R	A1h	A100h	x	SID[7]	SID [6]	SID [5]	SID [4]	SID [3]	SID [2]	SID [1]	SID [0]	D0														
			A101h	x	SID[15]	SID[14]	SID[13]	SID[12]	SID[11]	SID[10]	SID[9]	SID[8]	01														
			A102h	x	MID[7]	MID[6]	MID[5]	MID[4]	MID[3]	MID[2]	MID[1]	MID[0]	80														
			A103h	x	MID[15]	MID[14]	MID[13]	MID[12]	MID[11]	MID[10]	MID[9]	MID[8]	90														
			A104h	x	1	1	1	1	1	1	1	1	FF														
Description	1 st 2 nd 3 rd 4 th 5 th	parameter: Supplier ID code parameter: Supplier ID code parameter: Module ID parameter: Module ID Exit code (FFh).																									
Restriction																											
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes		
Status	Availability																										
Normal Mode On, Idle Mode Off, Sleep Out	Yes																										
Normal Mode On, Idle Mode On, Sleep Out	Yes																										
Partial Mode On, Idle Mode Off, Sleep Out	Yes																										
Partial Mode On, Idle Mode On, Sleep Out	Yes																										
Sleep In	Yes																										
Default	<table><tr><th rowspan="2">Status</th><th colspan="2">Default Value</th></tr><tr><th>After MTP</th><th>Before MTP</th></tr><tr><td>Power On Sequence</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr><tr><td>SW Reset</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr><tr><td>HW Reset</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr></table>													Status	Default Value		After MTP	Before MTP	Power On Sequence	MTP Value	01h, D0h, 90h, 60h, FFh	SW Reset	MTP Value	01h, D0h, 90h, 60h, FFh	HW Reset	MTP Value	01h, D0h, 90h, 60h, FFh
Status	Default Value																										
	After MTP	Before MTP																									
Power On Sequence	MTP Value	01h, D0h, 90h, 60h, FFh																									
SW Reset	MTP Value	01h, D0h, 90h, 60h, FFh																									
HW Reset	MTP Value	01h, D0h, 90h, 60h, FFh																									

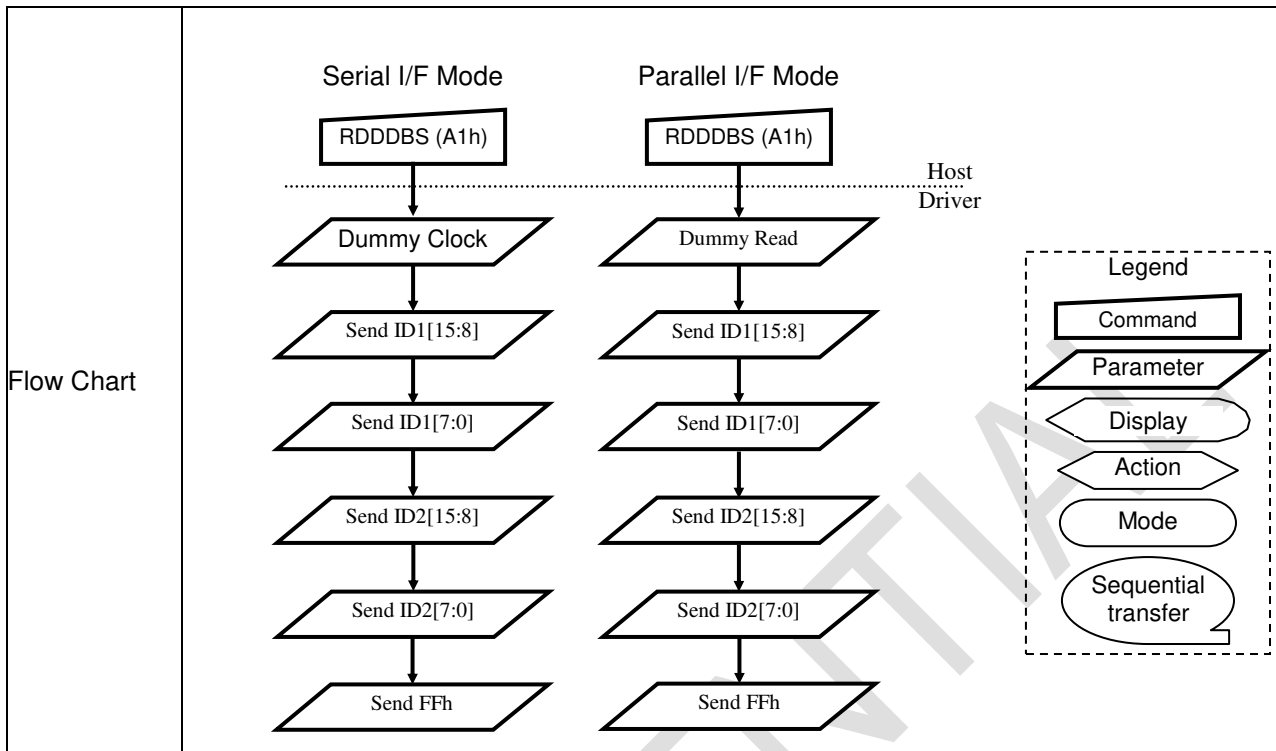

RDDDBC(A800h) : Read DDB Continous

A800H				RDDDBC																							
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX														
		MIPI	Other																								
RDDDBC	R	A8h	A800h	x	SID[7]	SID [6]	SID [5]	SID [4]	SID [3]	SID [2]	SID [1]	SID [0]	D0														
			A801h	x	SID[15]	SID[14]	SID[13]	SID[12]	SID[11]	SID[10]	SID[9]	SID[8]	01														
			A802h	x	MID[7]	MID[6]	MID[5]	MID[4]	MID[3]	MID[2]	MID[1]	MID[0]	80														
			A803h	x	MID[15]	MID[14]	MID[13]	MID[12]	MID[11]	MID[10]	MID[9]	MID[8]	90														
			A804h	x	1	1	1	1	1	1	1	1	FF														
Description	This command returns the supplier identification and display module mode/revision information from the point where RDDDBS command was interrupted by an other command. <i>Note: Parameter 0xFF is an "Exit Code", this means that there is no more data in the DDB block.</i> <i>Note: For use example,</i> 1. Set maximum return packet size=3 2. Read 0xA1, return 3 bytes SID[7:0], SID[15:8], MID[7:0] 3. Read 0xA8, return 2 bytes MID[15:8],RID[7:0], RID[15:8] and 0xFF																										
Restriction	A Read DDB Start command (RDDDBS) should be executed at least once before a Read DDB Continue command (RDDDBC) to define the read location. Otherwise, data read with a Read DDB Continue c ommnd is undefined.																										
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes		
Status	Availability																										
Normal Mode On, Idle Mode Off, Sleep Out	Yes																										
Normal Mode On, Idle Mode On, Sleep Out	Yes																										
Partial Mode On, Idle Mode Off, Sleep Out	Yes																										
Partial Mode On, Idle Mode On, Sleep Out	Yes																										
Sleep In	Yes																										
Default	<table><tr><th rowspan="2">Status</th><th colspan="2">Default Value</th></tr><tr><th>After MTP</th><th>Before MTP</th></tr><tr><td>Power On Sequence</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr><tr><td>SW Reset</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr><tr><td>HW Reset</td><td>MTP Value</td><td>01h, D0h, 90h, 60h, FFh</td></tr></table>													Status	Default Value		After MTP	Before MTP	Power On Sequence	MTP Value	01h, D0h, 90h, 60h, FFh	SW Reset	MTP Value	01h, D0h, 90h, 60h, FFh	HW Reset	MTP Value	01h, D0h, 90h, 60h, FFh
Status	Default Value																										
	After MTP	Before MTP																									
Power On Sequence	MTP Value	01h, D0h, 90h, 60h, FFh																									
SW Reset	MTP Value	01h, D0h, 90h, 60h, FFh																									
HW Reset	MTP Value	01h, D0h, 90h, 60h, FFh																									

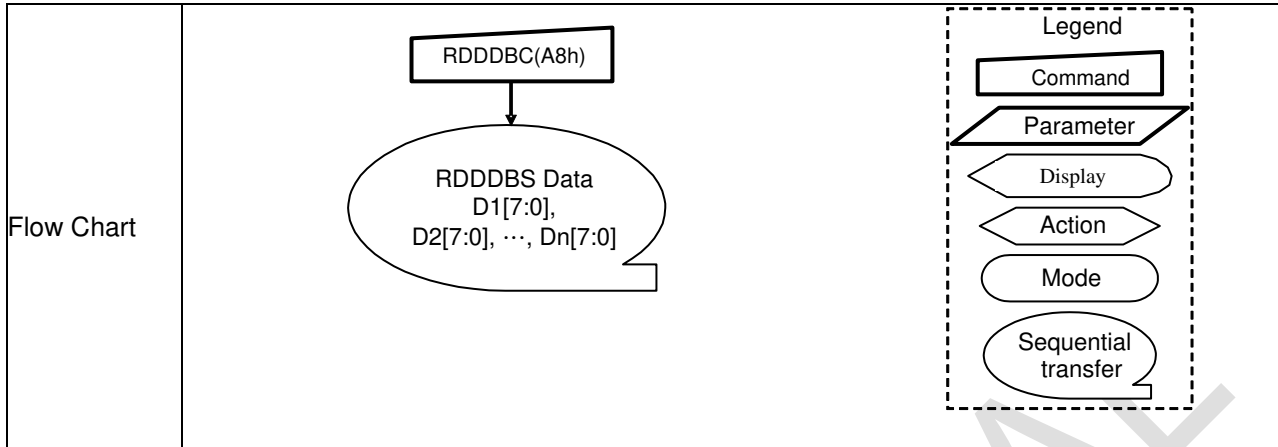

RDFCS(AA00h) : Read First Checksum

AA00H				RDFCS																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDFCS	R	AAh	AA00h	x	FCS7	FCS6	FCS5	FCS4	FCS3	FCS2	FCS1	FCS0	00												
Description	This command returns the first checksum what has been calculated from “User Command Set” area registers (not include “Manufacture Command Set) and the frame memory after the write access to those registers and/or frame memory has been done.																								
Restriction	It will be necessary to wait 150ms after there is the last write access on “User Command Set” area registers before there can read this checksum value.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>S/W Reset</td><td>00h</td></tr><tr><td>H/W Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	S/W Reset	00h	H/W Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
S/W Reset	00h																								
H/W Reset	00h																								
Flow Chart	RDFCS(AAh) Send Parameter FCS[7:0] Legend Command Parameter Display Action Mode Sequential transfer																								

RDCCS(AF00h) : Read Continue Checksum

AF00H				RDCCS																					
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
RDCCS	R	AFh	AF00h	x	CCS7	CCS6	CCS5	CCS4	CCS3	CCS2	CCS1	CCS0	00												
Description	This command returns the continue checksum what has been calculated continuously after the first checksum has calculated from “User Command Set” area registers and the frame memory after the write access to those registers and/or frame memory has been done.																								
Restriction	It will be necessary to wait 300ms after there is the last write access on “User Command Set” area registers before there can read this checksum value in the first time.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table><tr><th>Status</th><th>Default Value</th></tr><tr><td>Power On Sequence</td><td>00h</td></tr><tr><td>S/W Reset</td><td>00h</td></tr><tr><td>H/W Reset</td><td>00h</td></tr></table>													Status	Default Value	Power On Sequence	00h	S/W Reset	00h	H/W Reset	00h				
Status	Default Value																								
Power On Sequence	00h																								
S/W Reset	00h																								
H/W Reset	00h																								
Flow Chart	RDCCS(AFh) Send Parameter CCS[7:0] Legend Command Parameter Display Action Mode Sequential transfer																								


SetDISPMode (C200h) : set_DISP Mode

C200H	SetDISPMode																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
SetDISPMode	W	C2h	C200h	x	0	0	0	0	0	0	DM1	DM0	00												
Description	<table><tr><th>Bit</th><th>Description</th><th>Value</th></tr><tr><td>DM[1:0]</td><td>Display timing mode selection</td><td>2'b00: internal timing 2'b01: reserved 2'b10: reserved 2'b11: external timing (VSYNC + HSYNC align mode)</td></tr></table>													Bit	Description	Value	DM[1:0]	Display timing mode selection	2'b00: internal timing 2'b01: reserved 2'b10: reserved 2'b11: external timing (VSYNC + HSYNC align mode)						
	Bit	Description	Value																						
DM[1:0]	Display timing mode selection	2'b00: internal timing 2'b01: reserved 2'b10: reserved 2'b11: external timing (VSYNC + HSYNC align mode)																							
Restriction	Note: (1) If video mode, need to set DM[1:0] = 2'b11.																								
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Flow Chart	Legend Command Parameter Display Action Mode Sequential transfer																								


SetDSPIMode (C400h) : set_DSPI Mode

C400H	Set DSPI mode																								
Inst/Para	R/W	Address		D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
		MIPI	Other																						
SetDSPIMode	W	C4h	C400h	x	SPI_WRAM	0	DSPI_CFG1	DSPI_CFG0	0	0	0	DSPI_EN	00												
Description	<table><tr><th>Bit</th><th>Description</th><th>Value</th></tr><tr><td>DSPI_EN</td><td>DAUL SPI MODE Enable</td><td>0: disable 1: enable</td></tr><tr><td>DSPI_CFG[1:0]</td><td>DAUL SPI MODE Selection</td><td>00: 1P1T for 1 wire 10: 1P1T for 2 wire 11: 2P3T for 2 wire 01: reserved</td></tr><tr><td>SPI_WRAM</td><td>This command is used in SPI/SPINK interfaces. Making sure to set SPI_WRAM=1 before host writes SRAM via SPI/SPINK interfaces.</td><td>0: disable 1: SPI interface write RAM enable</td></tr></table>													Bit	Description	Value	DSPI_EN	DAUL SPI MODE Enable	0: disable 1: enable	DSPI_CFG[1:0]	DAUL SPI MODE Selection	00: 1P1T for 1 wire 10: 1P1T for 2 wire 11: 2P3T for 2 wire 01: reserved	SPI_WRAM	This command is used in SPI/SPINK interfaces. Making sure to set SPI_WRAM=1 before host writes SRAM via SPI/SPINK interfaces.	0: disable 1: SPI interface write RAM enable
	Bit	Description	Value																						
	DSPI_EN	DAUL SPI MODE Enable	0: disable 1: enable																						
	DSPI_CFG[1:0]	DAUL SPI MODE Selection	00: 1P1T for 1 wire 10: 1P1T for 2 wire 11: 2P3T for 2 wire 01: reserved																						
SPI_WRAM	This command is used in SPI/SPINK interfaces. Making sure to set SPI_WRAM=1 before host writes SRAM via SPI/SPINK interfaces.	0: disable 1: SPI interface write RAM enable																							
Note: detailed DAUL SPI formats are described at next page.																									
Restriction																									
Register Availability	<table><tr><th>Status</th><th>Availability</th></tr><tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr><tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr><tr><td>Sleep In</td><td>Yes</td></tr></table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
	Status	Availability																							
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
	Normal Mode On, Idle Mode On, Sleep Out	Yes																							
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
	Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																								
Flow Chart	Legend Command Parameter Display Action Mode Sequential transfer																								

DUAL SPI via SPI3 interface :

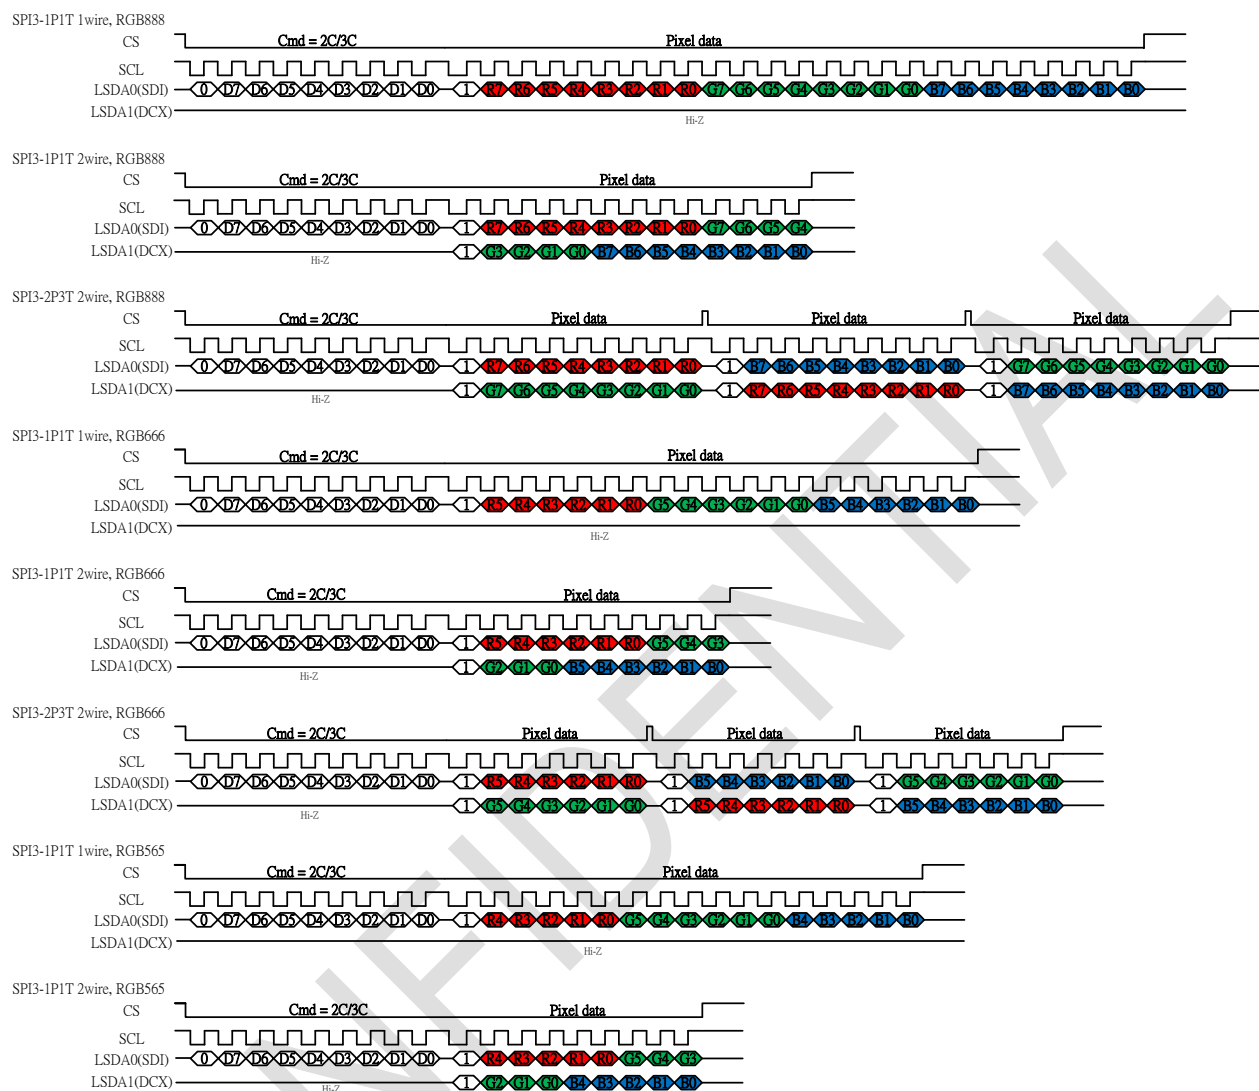

DUAL SPI via SPI4 interface :

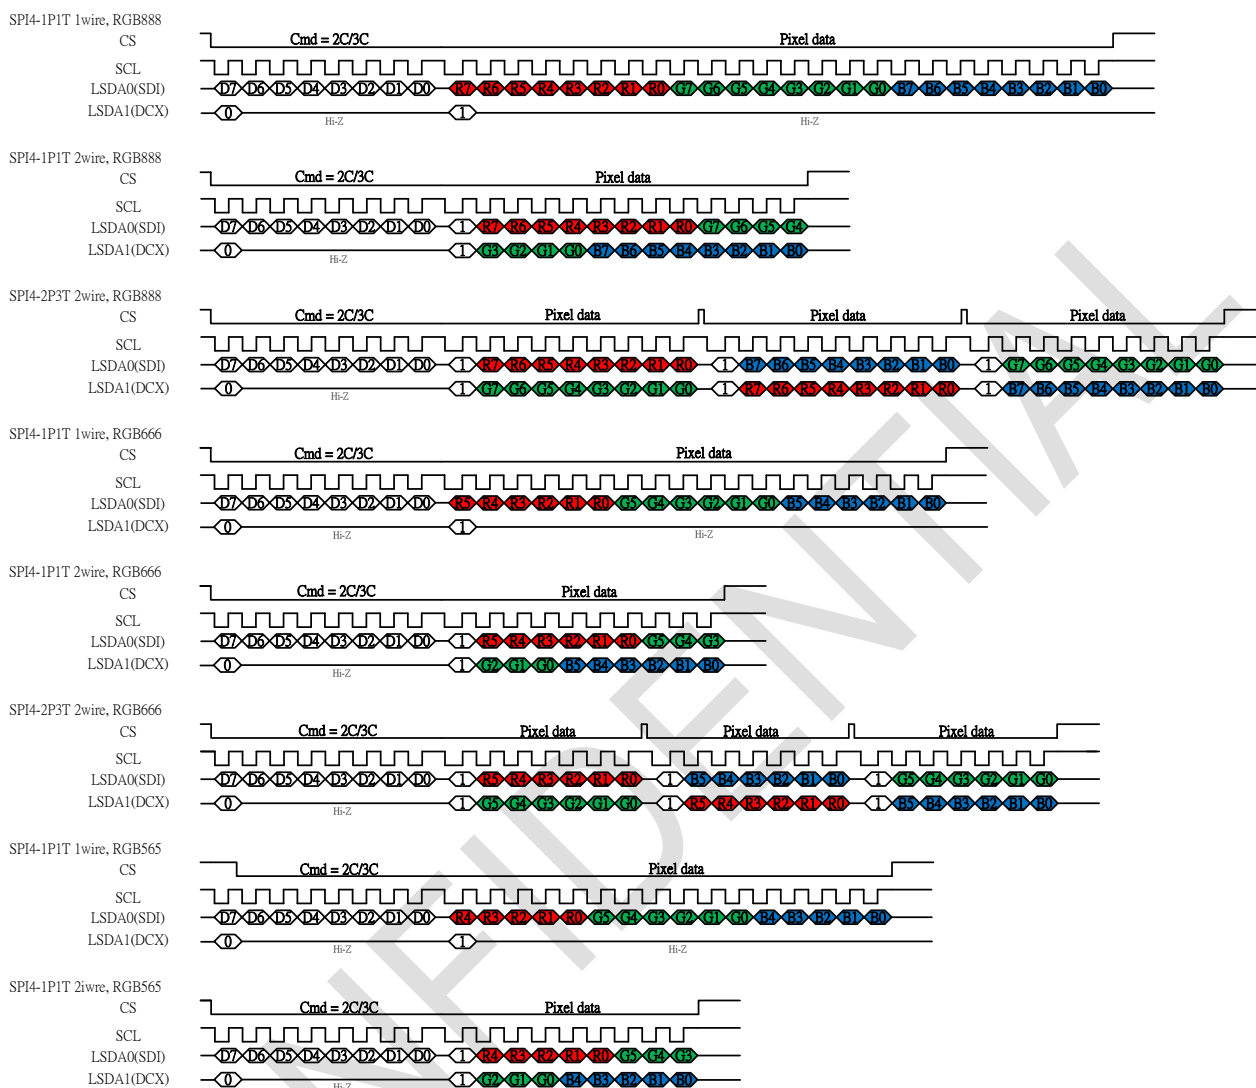

RDID1 (DA00h): ID1 Code

0XDA00h		WRDID											
Instruction	R/W	Address		Parameter									
		MIPI	Others	D15-D8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
WRDID	R	0xDAh	0XDA00h	00h	ID1[7:0]								0x00h
Description	This command is for Module Manufacture Number												
	Bit		Description						Data				
	ID1[7:0]		Module Manufactor Number										
Restriction													
Register Availability													
	Status						Availability						
	Normal Mode On, Idle Mode Off, Sleep Out						Yes						
	Normal Mode On, Idle Mode On, Sleep Out						Yes						
	Partial Mode On, Idle Mode Off, Sleep Out						Yes						
	Partial Mode On, Idle Mode On, Sleep Out						Yes						
	Sleep In						Yes						
Default													
	Status			Default Value									
				0xDAh / 0XDA00h									
	Power On Sequence			0x00h									
	S/W Reset			0x00h									
	H/W Reset			0x00h									

RDID2 (DB00h): ID2 Code

0XDB00h		WRDID																																																																																									
Instruction	R/W	Address		Parameter																																																																																							
		MIPI	Others	D15-D8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																														
WRDID	R	0xDBh	0XDB00h	00h	ID2[7:0]								0x80h																																																																														
Description	This command is for Module/Driver Version Number																																																																																										
	Bit		Description						Data																																																																																		
	ID2[7:0]		Module/Driver Version Number																																																																																								
Restriction																																																																																											
Register Availability	<table><tr><th colspan="6">Status</th><th colspan="7">Availability</th></tr><tr><td colspan="6">Normal Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Normal Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Sleep In</td><td colspan="7">Yes</td></tr></table>													Status						Availability							Normal Mode On, Idle Mode Off, Sleep Out						Yes							Normal Mode On, Idle Mode On, Sleep Out						Yes							Partial Mode On, Idle Mode Off, Sleep Out						Yes							Partial Mode On, Idle Mode On, Sleep Out						Yes							Sleep In						Yes						
	Status						Availability																																																																																				
	Normal Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Normal Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
Sleep In						Yes																																																																																					
Default	<table><tr><th rowspan="2">Status</th><th colspan="12">Default Value</th></tr><tr><td colspan="12">0xDBh / 0XDB00h</td></tr><tr><td>Power On Sequence</td><td colspan="12">0x80h</td></tr><tr><td>S/W Reset</td><td colspan="12">0x80h</td></tr><tr><td>H/W Reset</td><td colspan="12">0x80h</td></tr></table>													Status	Default Value												0xDBh / 0XDB00h												Power On Sequence	0x80h												S/W Reset	0x80h												H/W Reset	0x80h																									
	Status	Default Value																																																																																									
		0xDBh / 0XDB00h																																																																																									
	Power On Sequence	0x80h																																																																																									
	S/W Reset	0x80h																																																																																									
H/W Reset	0x80h																																																																																										

RDID3 (DC00h): ID3 Code

0XDC00h		WRDID																																																																																									
Instruction	R/W	Address		Parameter																																																																																							
		MIPI	Others	D15-D8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																														
WRDID	R	0xDCh	0xDC00h	00h	ID3[7:0]								0x00h																																																																														
Description	This command is for Module / Driver ID																																																																																										
	Bit		Description						Data																																																																																		
	ID3[7:0]		Module /Driver ID																																																																																								
Restriction																																																																																											
Register Availability	<table><tr><th colspan="6">Status</th><th colspan="7">Availability</th></tr><tr><td colspan="6">Normal Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Normal Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Sleep In</td><td colspan="7">Yes</td></tr></table>													Status						Availability							Normal Mode On, Idle Mode Off, Sleep Out						Yes							Normal Mode On, Idle Mode On, Sleep Out						Yes							Partial Mode On, Idle Mode Off, Sleep Out						Yes							Partial Mode On, Idle Mode On, Sleep Out						Yes							Sleep In						Yes						
	Status						Availability																																																																																				
	Normal Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Normal Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
Sleep In						Yes																																																																																					
Default	<table><tr><th colspan="4" rowspan="2">Status</th><th colspan="9">Default Value</th></tr><tr><th colspan="9">0xDCh / 0xDC00h</th></tr><tr><td colspan="4">Power On Sequence</td><td colspan="9">0x00h</td></tr><tr><td colspan="4">S/W Reset</td><td colspan="9">0x00h</td></tr><tr><td colspan="4">H/W Reset</td><td colspan="9">0x00h</td></tr></table>													Status				Default Value									0xDCh / 0xDC00h									Power On Sequence				0x00h									S/W Reset				0x00h									H/W Reset				0x00h																									
	Status				Default Value																																																																																						
					0xDCh / 0xDC00h																																																																																						
	Power On Sequence				0x00h																																																																																						
	S/W Reset				0x00h																																																																																						
H/W Reset				0x00h																																																																																							

(FE00h): CMD Mode Switch


FE00H		MAUCCTR (Manufacture Command Set Control)																																																																																									
Instruction	R/W	Address		Parameter																																																																																							
		MIPI	Others	D15-D8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																														
CMD Mode Switch	W	FEh	FE00h	00h	-	-	-	-	CMD_Page[3:0]				00																																																																														
Description	This command is used to switch the Manufacture Command Pages and User Commands sets.																																																																																										
	CMD_Page[3:0]			Hex Value		Description																																																																																					
	0000			00h (default)		User Command Set (UCS = CMD1)																																																																																					
	0001			01h		Manufacture Command Set Page0																																																																																					
	1100			0Ch		Manufacture Command Set Page0 extension																																																																																					
	1011			0Bh		Manufacture Command Set Page Panel ID																																																																																					
	0010			02h		Manufacture Command Set Page Gamma1																																																																																					
	0011			03h		Manufacture Command Set Page Gamma2																																																																																					
	1101			0Dh		Manufacture Command Set Page Gamma3																																																																																					
	0100			04h		Manufacture Command Set Page VSR																																																																																					
	0110			06h		Manufacture Command Set Page DBC																																																																																					
Restriction	-																																																																																										
Register Availability	<table><tr><th colspan="6">Status</th><th colspan="7">Availability</th></tr><tr><td colspan="6">Normal Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Normal Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Sleep In</td><td colspan="7">Yes</td></tr></table>													Status						Availability							Normal Mode On, Idle Mode Off, Sleep Out						Yes							Normal Mode On, Idle Mode On, Sleep Out						Yes							Partial Mode On, Idle Mode Off, Sleep Out						Yes							Partial Mode On, Idle Mode On, Sleep Out						Yes							Sleep In						Yes						
	Status						Availability																																																																																				
	Normal Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Normal Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
Sleep In						Yes																																																																																					

Default	Status	Default Value
		FEh / FE00h
	Power On Sequence	00h
	S/W Reset	00h
	H/W Reset	00h
Flow Chart	Legend Command Parameter Display Action Mode Sequential transfer	

(FF00h): Read CMD Status

FF00H		MAUCCTR (Manufacture Command Set Control)																																																																																									
Instruction	R/W	Address		Parameter																																																																																							
		MIPI	Others	D15-D8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																														
RD CMD Status	R	FFh	FF00h	00h	-	-	-	-	CMD_Status[3:0]				00																																																																														
Description	This command is used to switch the Manufacture Command Pages and User Commands sets.																																																																																										
	CMD_Status[3:0]			Hex Value		Description																																																																																					
	0000			00h (default)		User Command Set (UCS = CMD1)																																																																																					
	0001			01h		Manufacture Command Set Page0																																																																																					
	1100			0Ch		Manufacture Command Set Page0 extension																																																																																					
	1011			0Bh		Manufacture Command Set Page Panel ID																																																																																					
	0010			02h		Manufacture Command Set Page Gamma1																																																																																					
	0011			03h		Manufacture Command Set Page Gamma2																																																																																					
	1101			0Dh		Manufacture Command Set Page Gamma3																																																																																					
	0100			04h		Manufacture Command Set Page VSR																																																																																					
	0110			06h		Manufacture Command Set Page DBC																																																																																					
Restriction	-																																																																																										
Register Availability	<table><tr><th colspan="6">Status</th><th colspan="7">Availability</th></tr><tr><td colspan="6">Normal Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Normal Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode Off, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Partial Mode On, Idle Mode On, Sleep Out</td><td colspan="7">Yes</td></tr><tr><td colspan="6">Sleep In</td><td colspan="7">Yes</td></tr></table>													Status						Availability							Normal Mode On, Idle Mode Off, Sleep Out						Yes							Normal Mode On, Idle Mode On, Sleep Out						Yes							Partial Mode On, Idle Mode Off, Sleep Out						Yes							Partial Mode On, Idle Mode On, Sleep Out						Yes							Sleep In						Yes						
	Status						Availability																																																																																				
	Normal Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Normal Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode Off, Sleep Out						Yes																																																																																				
	Partial Mode On, Idle Mode On, Sleep Out						Yes																																																																																				
Sleep In						Yes																																																																																					

Default	Status	Default Value
		FFh / FF00h
	Power On Sequence	00h
	S/W Reset	00h
	H/W Reset	00h

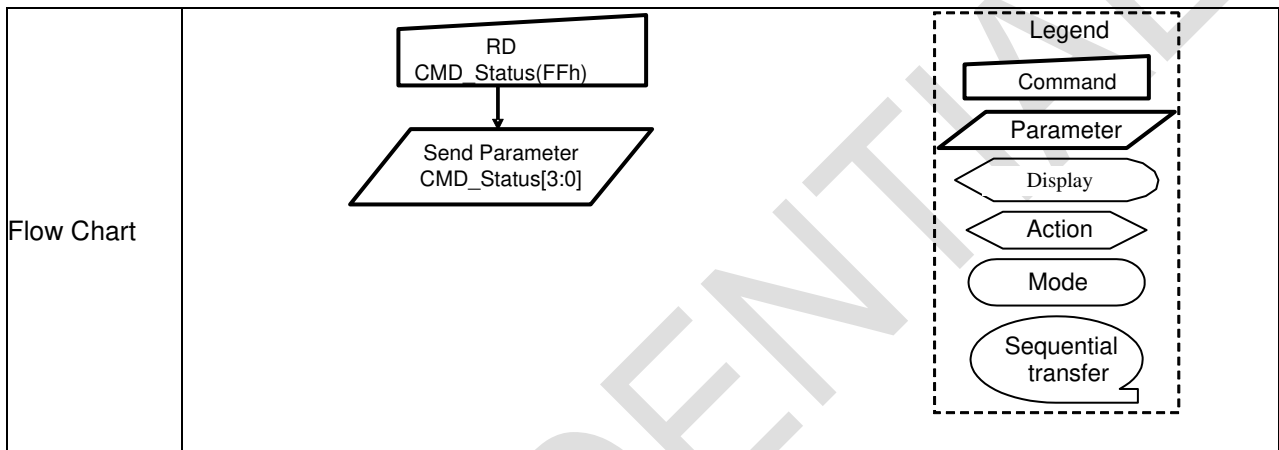

7. Electrical Characteristics

7.1 Absolute Maximum Ratings

The absolute maximum rating is listed on following table. When RM69330 is used out of the absolute maximum ratings, the RM69330 may be permanently damaged. To use the RM69330 within the following electrical characteristics limit is strongly recommended for normal operation. If these electrical characteristic conditions are exceeded during normal operation, the RM69330 will malfunction and cause poor reliability.

item	Symbol	Value	Unit
Power supply voltage	VDDI	-0.3 ~ + 5.5	V
Power supply voltage	VDD (VDDA, VDDb, VDDR)	-0.3 ~ + 5.5	V
Supply voltage (MV)	AVDD- AVSS	-0.3 ~ + 6.6	V
	AVSS- VCL	-0.3 ~ + 5.0	V
Supply voltage (HV)	VGH- VGLX	-0.3 ~ + 33	V
Input voltage	VIN	-0.3 ~ VDDI+ 0.3	V
Output voltage	VO	-0.3 ~ VDDI+ 0.3	V
Operating temperature	Topr	-40 ~ + 85	°C
Storage temperature	Tstg	-55 ~ + 125	°C
Notes: If one of the above items is exceeded its maximum limitation momentarily, the quality of the product may be degraded. Absolute maximum limitation. Therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the recommend range.			

7.2 ESD Protection Level

Model	Test Condition	Level
Human Body Mode	R = 1.5 kohm / C = 100 pF	Pass 3KV
Machine Mode	R = 0 ohm / C = 200 pF	Pass 300V

7.3 Latch-Up Protection Level

The device will not latch up at trigger current levels less than ± 200 mA.

7.4 DC Characteristics

7.4.1 Basic Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Related Pins
Analog Power Supply Voltage	VDD	Operation Voltage	2.7	2.8	3.6	V	Note 1
I/O pin Power Supply Voltage	VDDI	I/O supply voltage	1.65	1.8	3.3	V	Note 1,2
Logic High level input voltage	VIH	VDDI = 1.65V ~ 3.3V	0.8* VDDI	-	VDDI	V	Note 3
Logic Low level input voltage	VIL	VDDI = 1.65V ~ 3.3V	0.0	-	0.2* VDDI	V	Note 3
Logic High level Output voltage	VOH	I _{out} = -1 mA	0.8* VDDI	-	VDDI	V	Note 3
Logic Low level Output voltage	VOL	I _{out} = +1 mA	0.0	-	0.2* VDDI	V	Note 3
Logic High level input current (Except MIPI)	IIHD	V _{in} =0~VDDI			1	uA	Note 3
Logic Low level input current (Except MIPI)	IILD	V _{in} =0~VDDI	-1			uA	Note 3
Logic High level input current (MIPI)	IIHD	V _{in} =0~VDDI			1	uA	Note 3
Logic Low level input current (MIPI)	IILD	V _{in} =0~VDDI	-1			uA	Note 3
AVDD booster voltage	AVDD		4.5		6.5	V	Note 3
VCL booster voltage	VCL		-3.5		-5	V	Note 3
VGH booster voltage	VGH		AVDD		2AVDD	V	Note 3
VGL booster voltage	VGL		VCL		VCL - AVDD	V	Note 3
Voltage difference between VGH and VGL	VGHL	VGH-VGL			30	V	Note 3
Gamma reference voltage	VGMP		2.0		6.0	V	Note 3,4
Gamma reference voltage	VGSP		0.0		4.5	V	Note 3
OSC	Fosc		20.24	22	23.76	MHz	
Channel deviation voltage	V _{DEV}	S _{out} ≥ AVDD-1.0V, and 0V < S _{out} ≤ 1.0V				mV	TBD
Channel deviation voltage	V _{DEV}	1.0V < S _{out} < AVDD-1.0V				mV	TBD

Notes:

1. VDD means VDDA, VDDR, VDDB. And VSS means VSSA, VSSR, VSSB, AVSS, VSSAM. VDDB, VDDA and VDDR should be the same input voltage level and larger than VDDI voltage.
2. Recommend VDDI=1.8V for power saving.
3. Ta(ambient temperature) ranges from -30℃ to 85℃.
4. VGMP ≤ AVDD - 0.5V

7.4.2 Operation current


VCI=2.8V and VDDI=1.8V

Parameter	Symbol	Condition	Max.	Unit
Sleep In Mode	I_SLP_VCI	VDDI=VCC=1.8V VCI=VDDA=VDDDB=VDDR=2.8V	50	uA
	I_SLP_VDDI	HSSI_D0P/N=HSSI_D1P/N=HSSI_CKP/N=LP-11 Ta = 25deg	180	uA
Deep Standby Mode	I_DSTB_VCI	VDDI=VCC=1.8V VCI=VDDA=VDDDB=VDDR=2.8V	4	uA
	I_DSTB_VDDI	HSSI_D0P/N=HSSI_D1P/N=HSSI_CKP/N=0 Ta = 25deg	1	uA

7.5 MIPI Characteristics

7.5.1 High-Speed Receiver Specification

DC Specifications

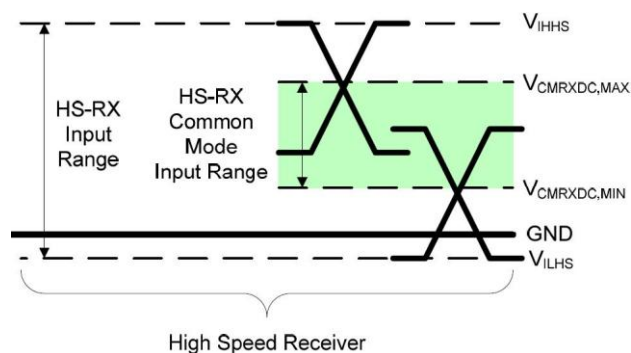


Parameter	Description	Min	Nom	Max	Units	Note
VCMRX(DC)	Common-mode voltage HS receive mode	70		330	mV	1,2
WIDTH	Differential input high threshold			70	mV	
VIDTL	Differential input low threshold	-70			mV	
VIHHS	Single-ended input high voltage			460	mV	1
VILHS	Single-ended input low voltage	-40			mV	1
ZID	Differential input impedance	80	100	125	Ω	

Notes:

1. Excluding possible additional RF interference of 100mV peak sine wave beyond 450MHz.
2. This table value includes a ground difference of 50mV between the transmitter and the receiver, the static common-mode level tolerance and variations below 450MHz

7.5.2 Forward high speed transmissions

DDR Clock Definition

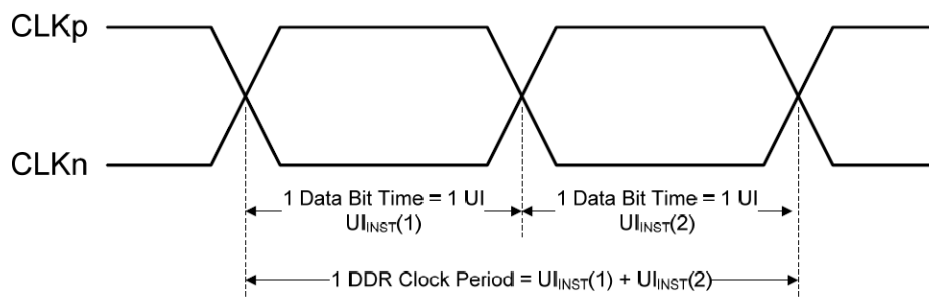

Clock Parameter	Symbol	Min	Typ	Max	Units	Notes
UI instantaneous	UI _{INST}	2		12.5	ns	1,2

Notes:

1. This value corresponds to a minimum 80 Mbps data rate.
2. The minimum UI shall not be violated for any single bit period, i.e., any DDR half cycle within a data burst.


Data-Clock Timing Specifications

Parameter	Symbol	Min	Typ	Max	Units	Notes
Data to Clock Skew [measured at transmitter]	T _{SKEW[TX]}	-0.15		0.15	UI _{INST}	1
Data to Clock Setup Time [receiver]	T _{SETUP[RX]}	0.15			UI _{INST}	2
Clock to Data Hold Time [receiver]	T _{HOLD[RX]}	0.15			UI _{INST}	2

Notes:

1. Total silicon and package delay budget of 0.3*UI_{INST}
2. Total setup and hold window for receiver of 0.3*UI_{INST}

7.5.3 Data to Clock Timing Definitions

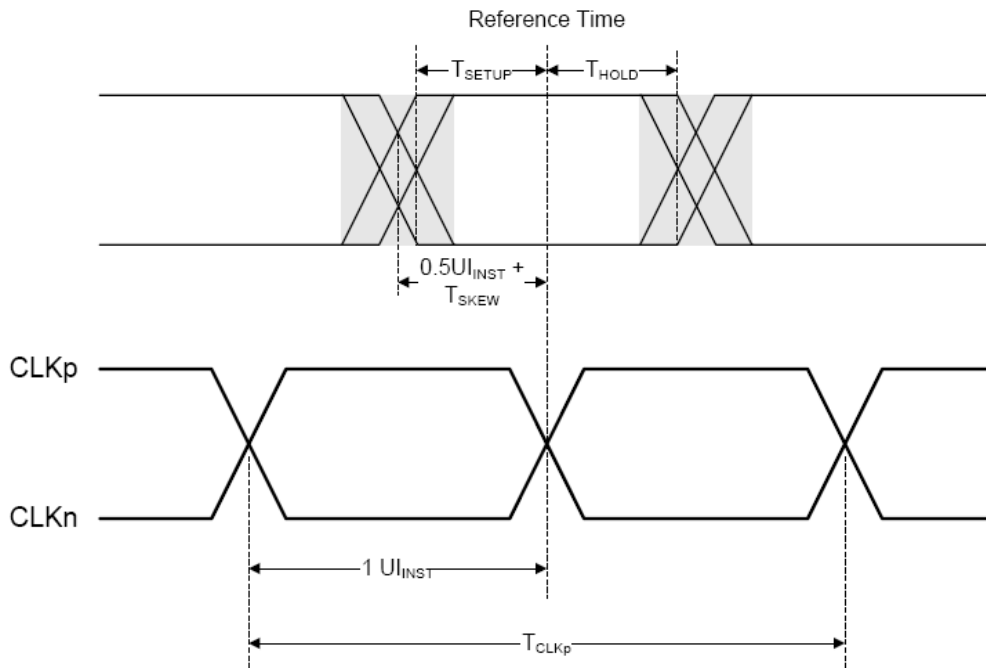

7.5.4 Low power transceiver specifications


Parameters	Symbol	Condition	Min	Typ	Max	Unit
Logic high level input voltage	VIHCD	Contention Detection (Lane_D0)	450		1350	mV
Logic low level input voltage	VILCD	Contention Detection (Lane_D0)	0		200	mV
Logic high level input voltage	VIH-LPRX	LP-Rx (Lane_CK, Lane_D0, Lane_D1)	880	-	1350	mV
Logic low level input voltage	VIL-LPRX	LP-Rx (Lane_CK, Lane_D0, Lane_D1)	0		550	mV
Logic low level input voltage	VIL-ULPS	LP-Rx ULPS (Lane_CK, Lane_D0, Lane_D1)	0		300	mV
Logic high level input voltage	VOH-LPTX	Contention Detection (Lane_D0)	1.1	1.2	1.3	V
Logic low level input voltage	VOL-LPTX	Contention Detection (Lane_D0)	-50	0	50	mV
eSPIKE ^(1,2,3)	Fig. 2	Input pulse rejection			300	V.ps

Notes:

Time-voltage integration of a spike above VIL when being in LP-0 state or below VIH when being in LP-1 State. An impulse less than this will not change the receiver state.

In addition to the required glitch rejection, implementers shall ensure rejection of known RF-interferers.


Input Glitch Rejection of Low Power Receivers as follow.

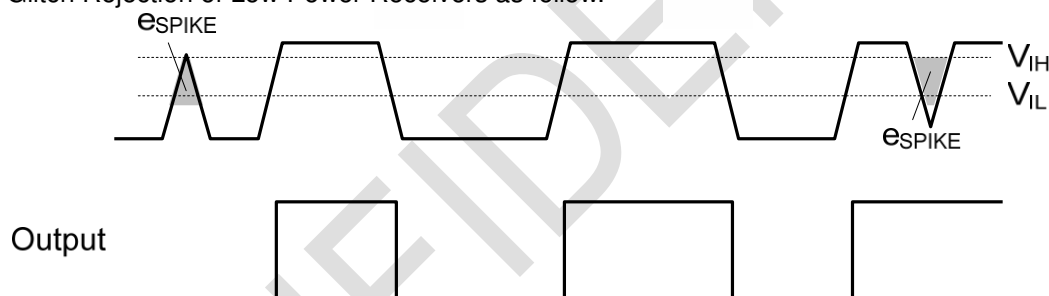


7.6 AC Characteristics

7.6.1 Serial Interface Characteristics

3-Wire SPI Serial Interface Characteristics

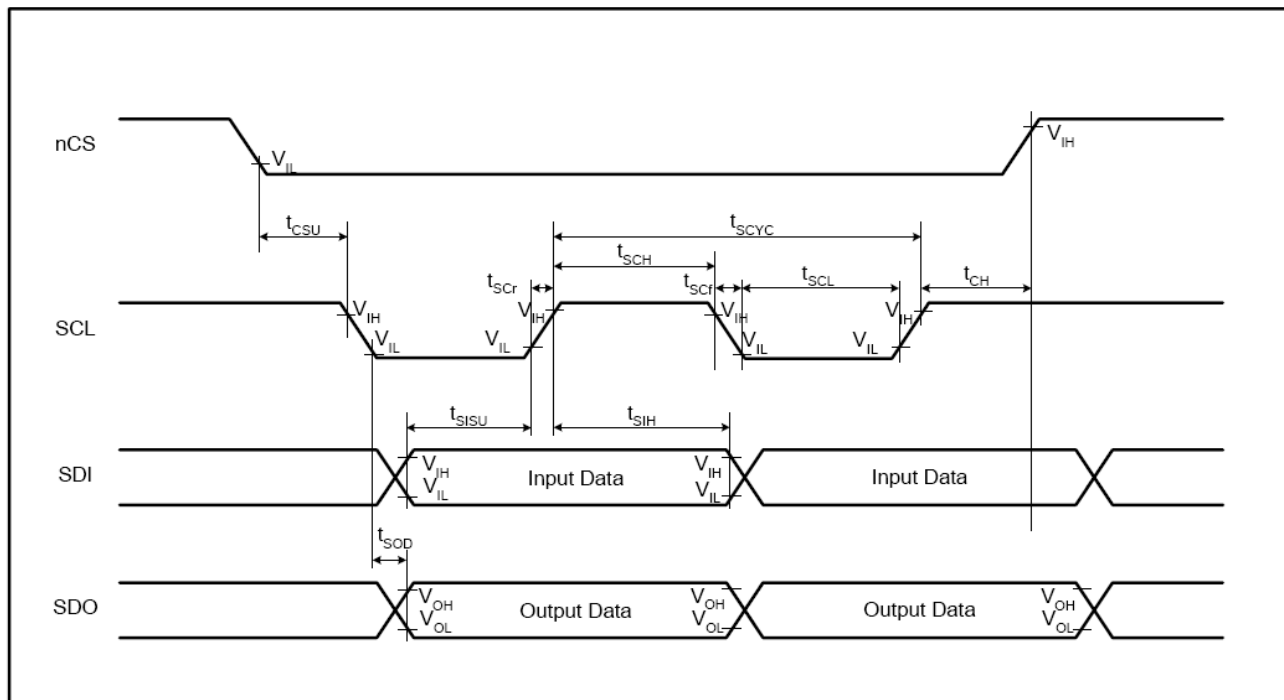

4-Wire SPI Serial Interface Characteristics

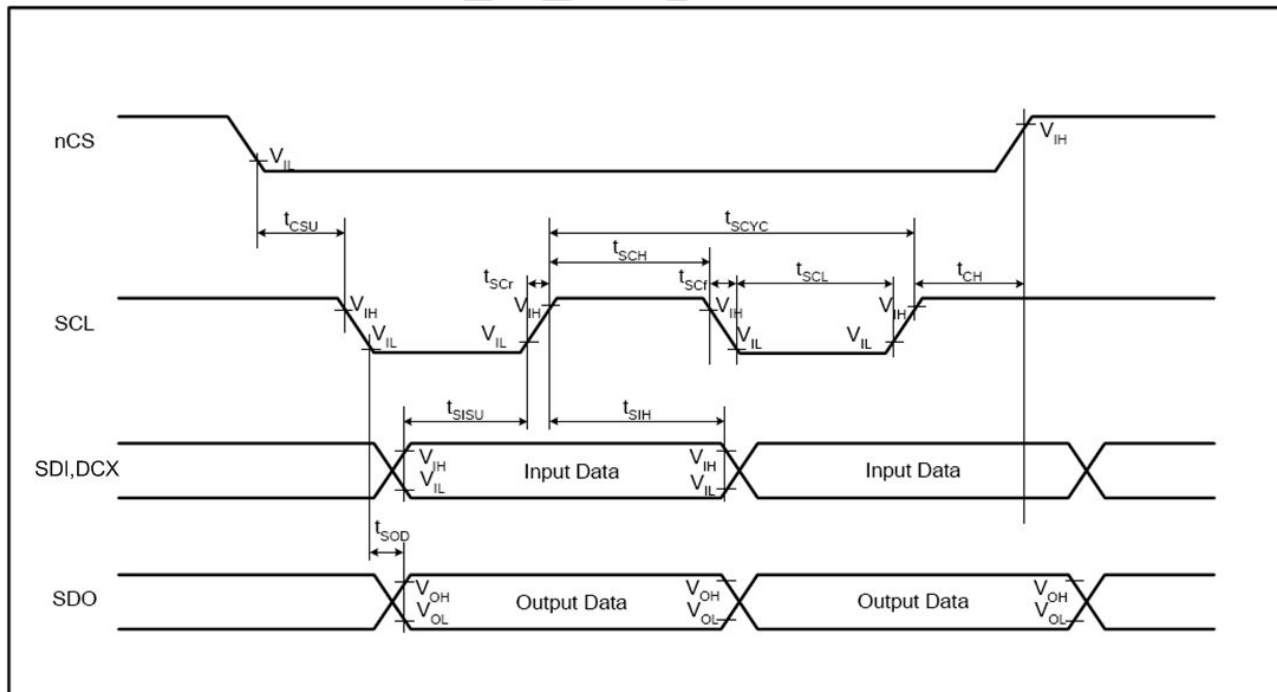


Signal	Symbol	Parameter	MIN	MAX	Unit	Description
SCL	T _{SCYC}	Clock cycle (Write)	20		ns	-
	T _{SCYC}	Clock cycle (Read)	300		ns	
	T _{SCH}	Clock "H" pulse width (Write)	9		ns	
	T _{SCH}	Clock "H" pulse width (Read)	140		ns	
	T _{SCL}	Clock "L" pulse width (Write)	9		ns	
	T _{SCL}	Clock "L" pulse width (Read)	140		ns	
	T _{SCr}	Clock rise time		2	ns	
	T _{SCf}	Clock fall time		2	ns	
nCS	T _{CSU}	Chip select setup time	10		ns	-
	T _{CH}	Chip select hold time	10		ns	
SDI (SDA)	T _{SISU}	Data input setup time	5		ns	-
	T _{SIH}	Data input hold time	5		ns	
SDO (SDA)	T _{SOD}	Data output setup time		120	ns	-
	T _{SOH}	Data output hold time	5		ns	

Note: Logic high and low levels are specified as 20% and 80% of VDDI for Input signals.


Note: Ta = -30 to 70 °C, VDDI=1.65V to 3.3V, VDD=2.7V to 3.6V, GND=0V

7.6.2 DSI Timing Characteristics

HS Data Transmission Burst

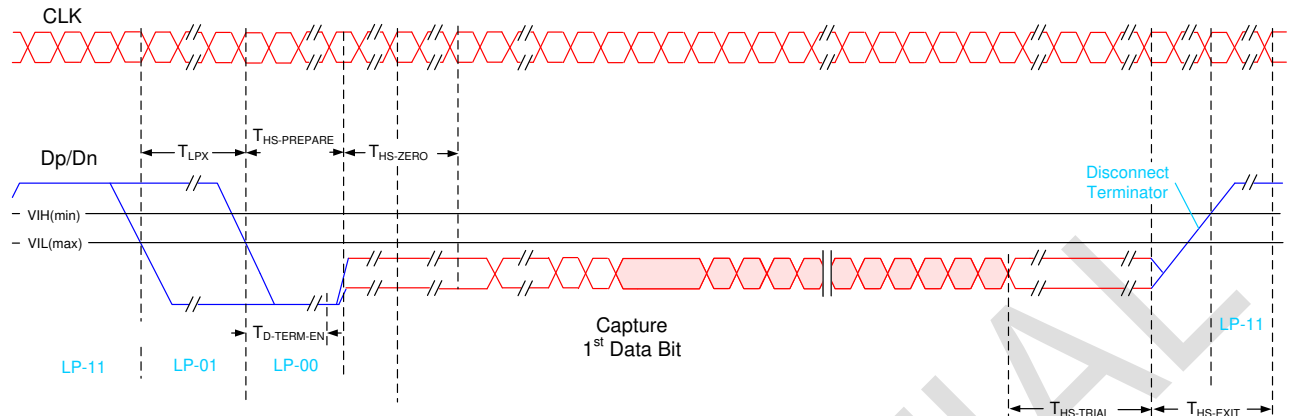


HS clock transmission

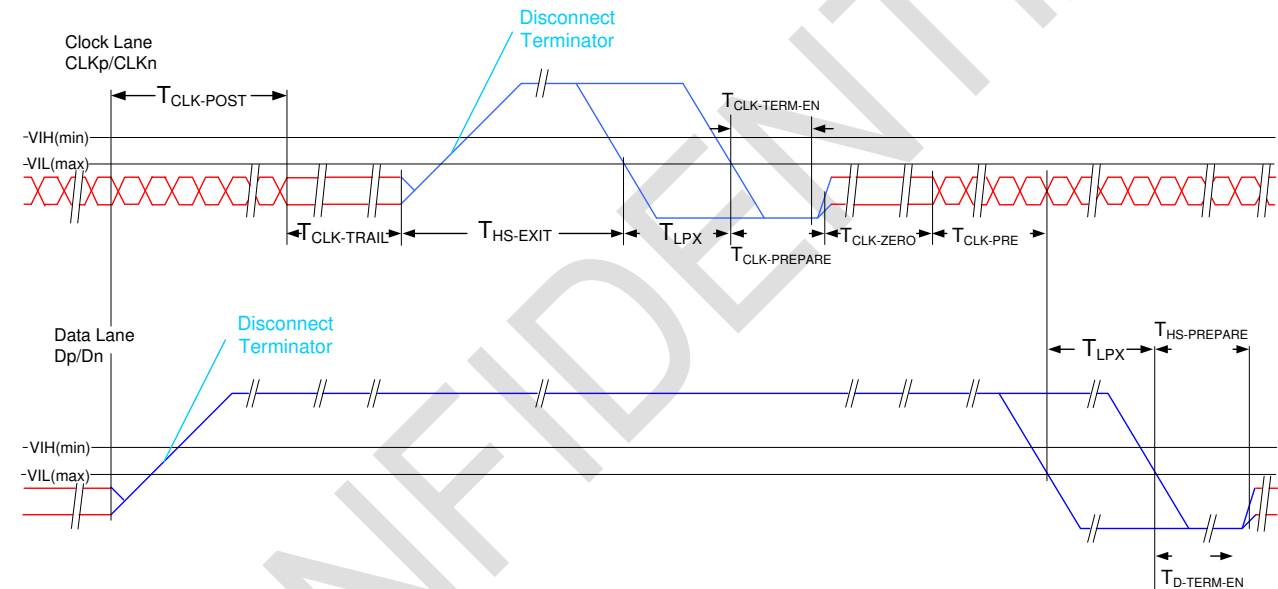


Timing Parameters:

Parameter	Description	Min	Typ	Max	Unit
$T_{CLK-POST}$	Time that the transmitter continues to send HS clock after the last associated Data Lane has transitioned to LP Mode. Interval is defined as the period from the end of $T_{HS-TRAIL}$ to the beginning of $T_{CLK-TRAIL}$.	$60ns + 52*UI$			ns
$T_{CLK-TRAIL}$	Time that the transmitter drives the HS-0 state after the last payload clock bit of a HS transmission burst.	60			ns
$T_{HS-EXIT}$	Time that the transmitter drives LP-11 following a HS burst.	300			ns
$T_{CLK-TERM-EN}$	Time for the Clock Lane receiver to enable the HS line termination, starting from the time point when Dn crosses $V_{IL,MAX}$.	Time for Dn to reach $V_{TERM-EN}$		38	ns
$T_{CLK-PREPARE}$	Time that the transmitter drives the Clock Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission.	38		95	ns
$T_{CLK-PRE}$	Time that the HS clock shall be driven by the transmitter prior to any associated Data Lane beginning the transition from LP to HS mode.	8			UI
$T_{CLK-PREPARE} + T_{CLK-ZERO}$	$T_{CLK-PREPARE}$ + time that the transmitter drives the HS-0 state prior to starting the Clock.	300			ns
$T_{D-TERM-EN}$	Time for the Data Lane receiver to enable the HS line termination, starting from the time point when Dn crosses $V_{IL,MAX}$.	Time for Dn to reach $V_{TERM-EN}$		$35 ns + 4*UI$	
$T_{HS-PREPARE}$	Time that the transmitter drives the Data Lane LP-00 Line state immediately before the HS-0 Line state starting the HS transmission	$40ns + 4*UI$		$85 ns + 6*UI$	ns
$T_{HS-PREPARE} + T_{HS-ZERO}$	$T_{HS-PREPARE}$ + time that the transmitter drives the HS-0 state prior to transmitting the Sync sequence.	$145ns + 10*UI$			ns
$T_{HS-TRAIL}$	Time that the transmitter drives the flipped differential state after last payload data bit of a HS transmission burst	$60ns + 4*UI$			ns

Turnaround Procedure

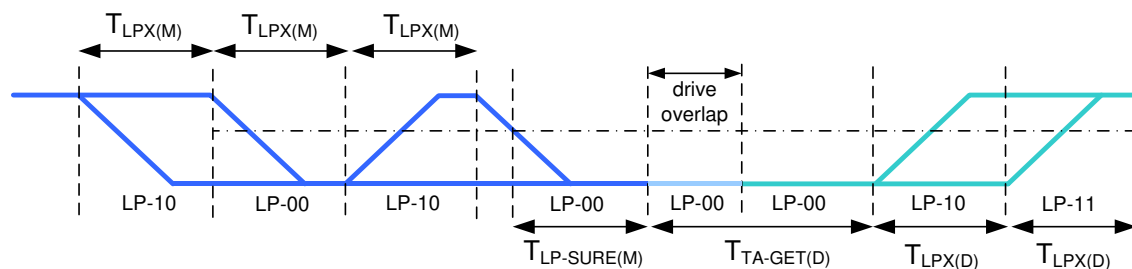

Bus turnaround (BAT) from MPU to display module timing

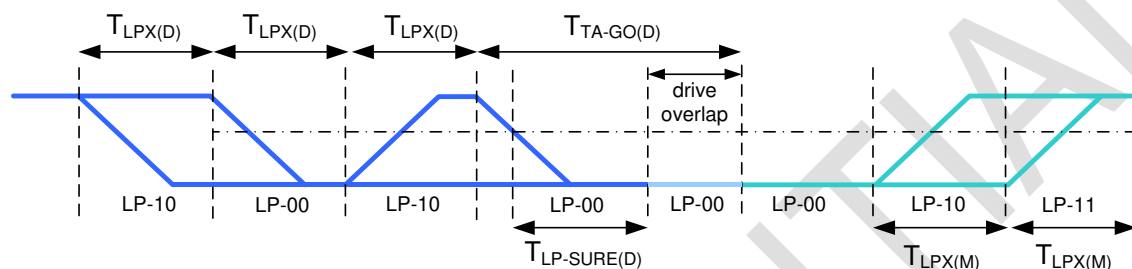

Bus turnaround (BAT) from display module to MPU timing


Low Power Mode :

Parameter	Description	Min	Typ	Max	Unit	Notes
$T_{LPX(M)}$	Transmitted length of any Low-Power state period of MCU to display module	50		150	ns	1,2
$T_{TA-SURE(M)}$	Time that the display module waits after the LP-10 state before transmitting the Bridge state (LP-00) during a Link Turnaround.	$T_{LPX(M)}$		$2 * T_{LPX(M)}$	ns	2
$T_{LPX(D)}$	Transmitted length of any Low-Power state period of display module to MCU	50		150	ns	1,2
$T_{TA-GET(D)}$	Time that the display module drives the Bridge state (LP-00) after accepting control during a Link Turnaround.		$5 * T_{LPX(D)}$		ns	2
$T_{TA-GO(D)}$	Time that the display module drives the Bridge state (LP-00) before releasing control during a Link Turnaround.		$4 * T_{LPX(D)}$		ns	2
$T_{TA-SURE(D)}$	Time that the MPU waits after the LP-10 state before transmitting the Bridge state (LP-00) during a Link Turnaround.	$T_{LPX(D)}$		$2 * T_{LPX(D)}$	ns	2

NOTE:

- T_{LPX} is an internal state machine timing reference. Externally measured values may differ slightly from the specified values due to asymmetrical rise and fall times.
- Transmitter-specific parameter

7.6.3 Reset Timing

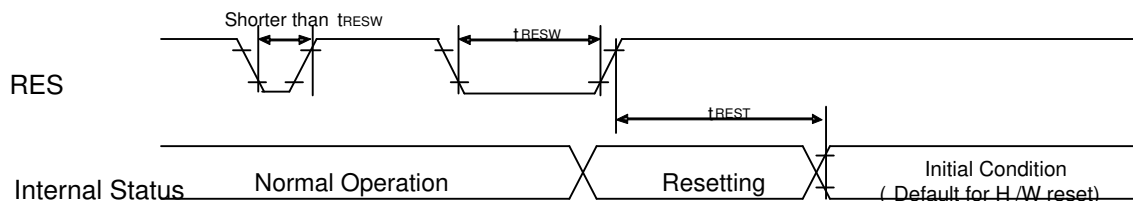

Reset input timing:

VDDI=1.65 to 3.3V, VDD=2.7 to 3.6V, AGND=DGND=0V, Ta=-40 to 85°C

Symbol	Parameter	Related Pins	MIN	TYP	MAX	Note	Unit
t _{RESW}	*1) Reset low pulse width	RESX	10	-	-	-	μs
t _{REST}	*2) Reset complete time	-	-	-	5	When reset applied during Sleep in mode	ms
		-	-	-	120	When reset applied during Sleep out mode	ms


Note 1) Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below.

RESX Pulse	Action
Shorter than 5μs	Reset Rejected
Longer than 10μs	Reset
Between 5μs and 10μs	Reset starts (It depends on voltage and temperature condition.)

Note 2. During the resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode) and then return to Default condition for H/W reset.

Note 3. During Reset Complete Time, data in OTP will be latched to internal register during this period. This loading is done every time when there is H/W reset complete time (t_{REST}) within 5ms after a rising edge of RESX.


Note 4. Spike Rejection also applies during a valid reset pulse as shown below:

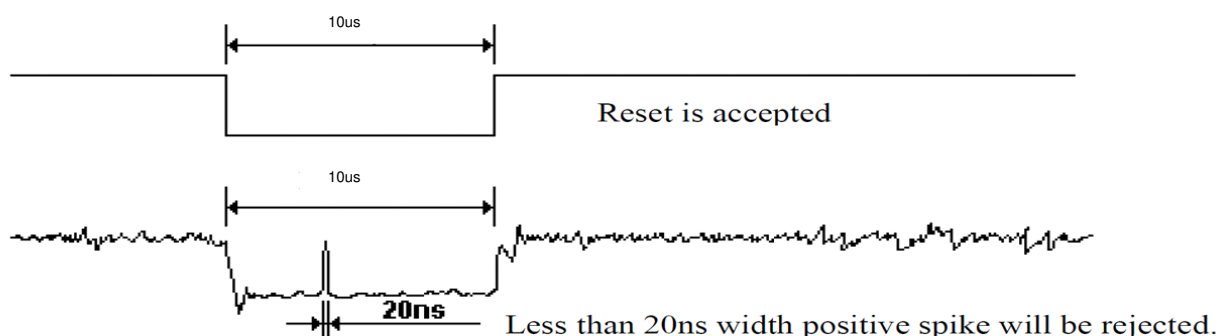

Note 5. It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.


8. Power Generation

8.1 2 Supply Power (VDDI / VDD)

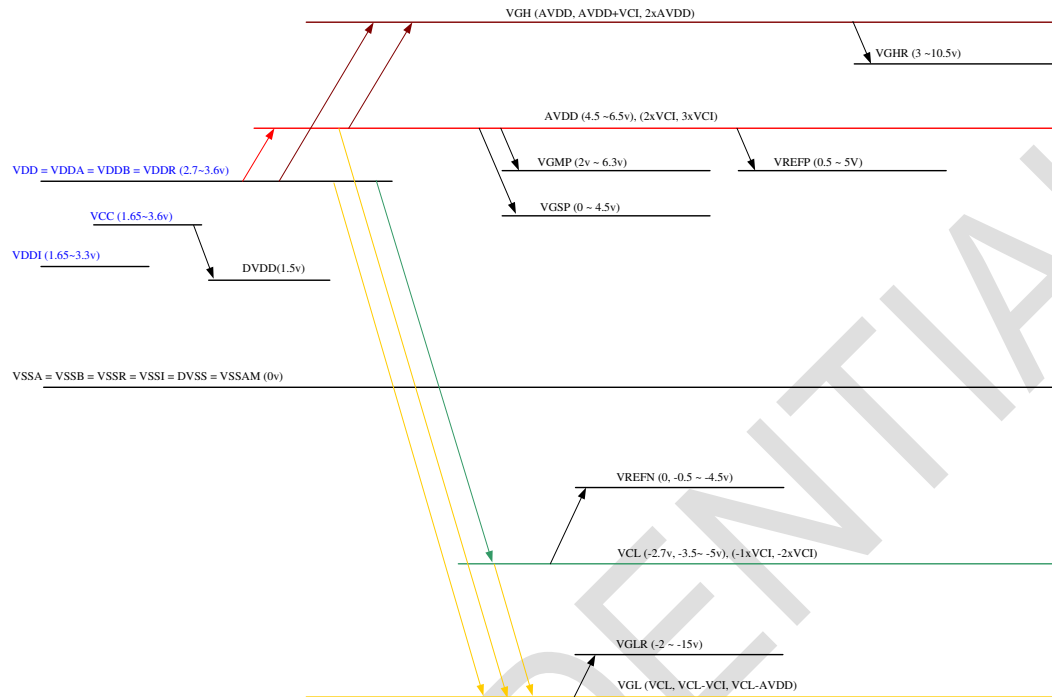

8.2 DC/DC Converter Circuit

2PWR(VDDI, VDD)
VDD=VDDA=VDDR=VDDB
AVDD/VCL → internal CP

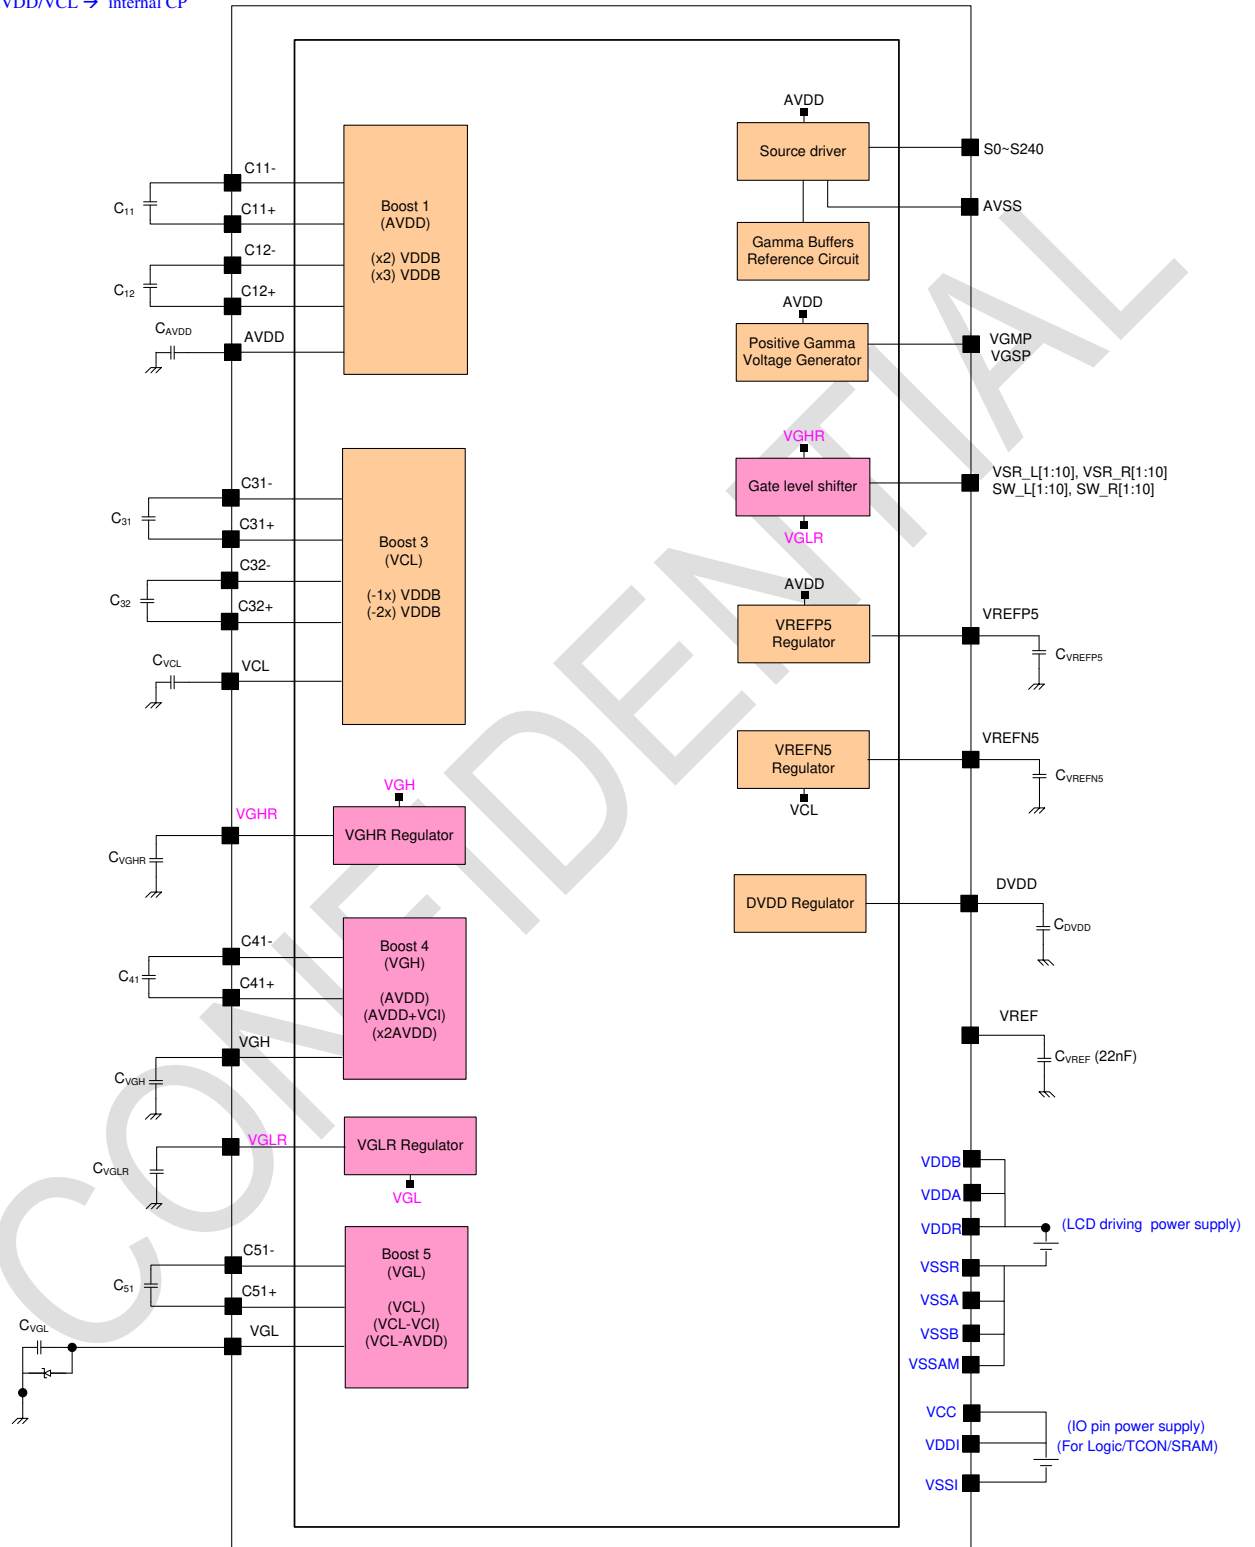


8.3 External Components


No.	Signal name	Values	Max ability
1	VDDA, VDDR, VDDDB	Cap , 2.2uF	6.3V
2	VDDI, VCC	Cap , 2.2uF	6.3V
3	VREF	Cap , 22nF	6.3V
4	DVDD	Cap , 1.0uF	6.3V
5	VREFN/VREFP	Cap , 1.0uF	6.3V
6	VGHR	Cap , 1.0uF	16V
7	VGLR	Cap , 1.0uF	16V
8	BVP3D	Cap , 2.2uF	10V
9	BVN3D	Cap , 2.2uF	10V
10	C11P/C11N	Cap , 1.0uF	6.3V
11	C12P/C12N	Cap , 1.0uF	6.3V
12	AVDD	Cap , 2.2uF	10V
13	C31P/C31N	Cap , 1.0uF	6.3V
14	C32P/C32N	Cap , 1.0uF	6.3V
15	VCL	Cap , 2.2uF	6.3V
16	C41P/C41N	Cap , 1.0uF	16V
17	VGH	Cap , 2.2uF	25V
18	C51P/C51N	Cap , 1.0uF	16V
19	VGL	Cap , 2.2uF	25V
20	VGL (VGL-GND)	Schottky Diode	

8.4 Power on/off sequence and timing

Power On sequence

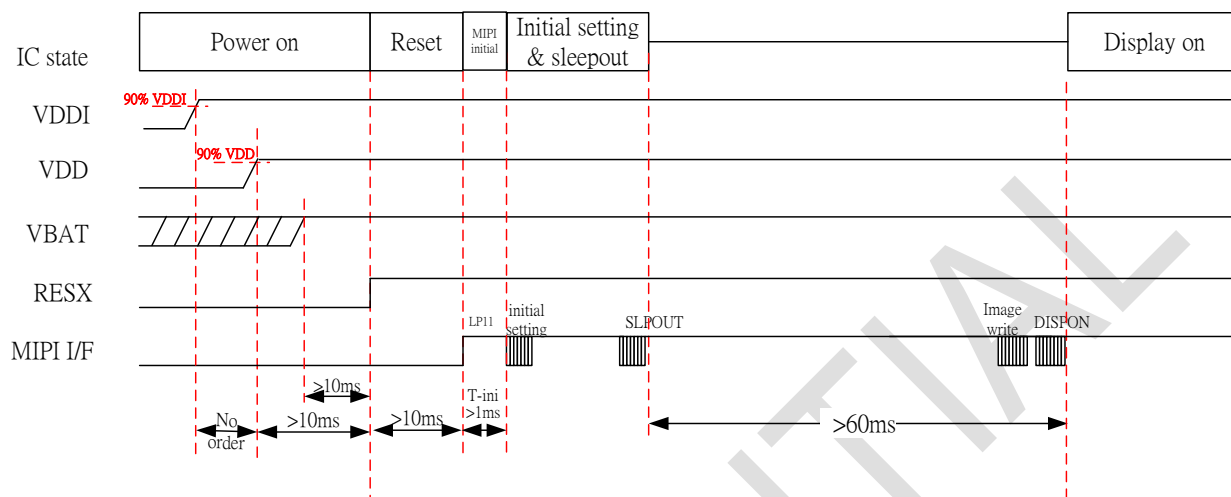

Power Off sequence

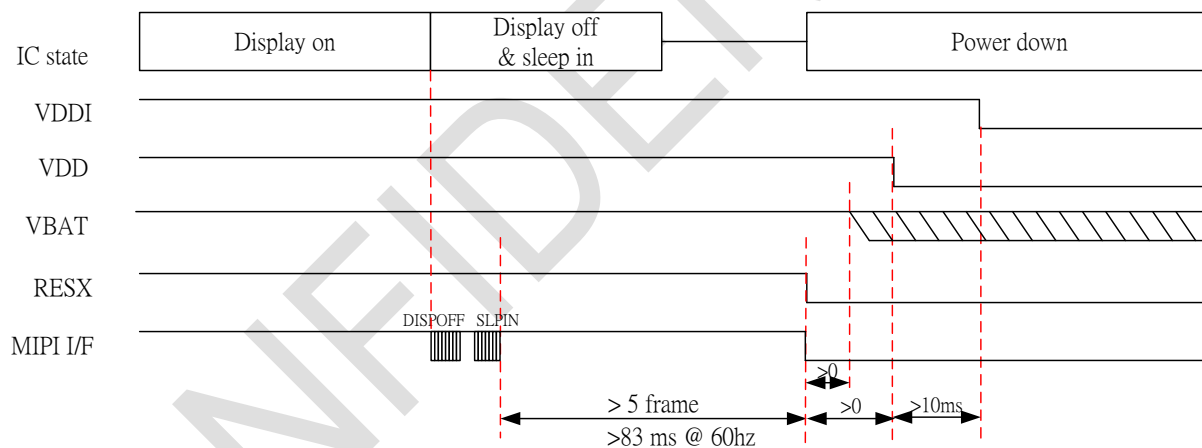

8.5 Power Level Modes

Normal display mode on = NORON

Partial mode on = PTLON

Idle mode off = IDMOFF

Idle mode on = IDMON

Sleep out = SLPOUT

Sleep in = SLPIN

Deep standby mode = DSTBON

Definition example:

1. Normal Mode On (full display), Idle Mode Off, Sleep Out.

In this mode, the display is able to show maximum 16.7M colors.

2. Partial Mode On, Idle Mode Off, Sleep Out

In this mode, part of the display is used with maximum 16.7M colors.

3. Normal Mode On (full display), Idle Mode On, Sleep Out.

In this mode, the full display is used but with 8 colors.

4. Partial Mode On, Idle Mode On, Sleep Out

In this mode, part of the display is used but with 8 colors.

5. Sleep In Mode.

In this mode, the DC/DC converter, internal oscillator and panel driver circuit are stopped. Only the MPU interface and registers are working with VDDI power supply. Contents of the frame memory can be safe or random.

6. Deep Standby Mode.

In this mode, the DC/DC converter, internal oscillator and panel driver circuit are stopped. The MPU interface and registers are not working. Contents of the frame memory are random.



7. Power Off Mode

In this mode, VDDI and VDDA/VDDR/Vddb are removed.

NOTE: Transition between mode 1~5 is controllable by MPU commands. Mode 6 is entered for power saving with both power supplies for I/O and analog circuits and can be exited by hardware reset only (RESX=L). Mode 7 is entered only when both power supplies for I/O and analog circuits are removed.

8.6 Maximum Series Resistance

Pin Name	Type	Max Resistance	Unit
VDDA, VDDDB, VDDR, VDDI, VCC,	Power Supply	5	Ω
AVSS, VSSAM, DVSS, VSSI, VSSA, VSSR, VSSB	Power Supply	5	Ω
AVDD	Power Input/Output	5	Ω
DVDD	Power Output	5	Ω
VCL	Power Output	5	Ω
VGH, VGL	Power Output	10	Ω
C11P/N~C12P/N	Capacitor Connection	5	Ω
C31P/N~C32P/N	Capacitor Connection	5	Ω
C41P/N	Capacitor Connection	5	Ω
C51P/N	Capacitor Connection	5	Ω
HSSI_CLK_P/N, HSSI_DATA0_P/N, HSSI_DATA1_P/N,	MIPI Interface I/O	5	Ω
TE, SWIRE, OLED_EN	Digital Output I/O	20	Ω
RESX, CSX, D/CX, SCL, SDI, SDO	Digital Interface I/O	20	Ω
IM[1 :0], DSWAP, PSWAP	Input I/O	100	Ω
MTP_PWR	Power Supply	5	Ω
S[1]~S[240]	Source output	20	Ω
VSR_L[1]~ VSR_L[10], VSR_R[1]~ VSR_R[10] SW_L[1]~ SW_L[10], SW_R[1]~ SW_R[10]	GOA,SWoutput	20	Ω

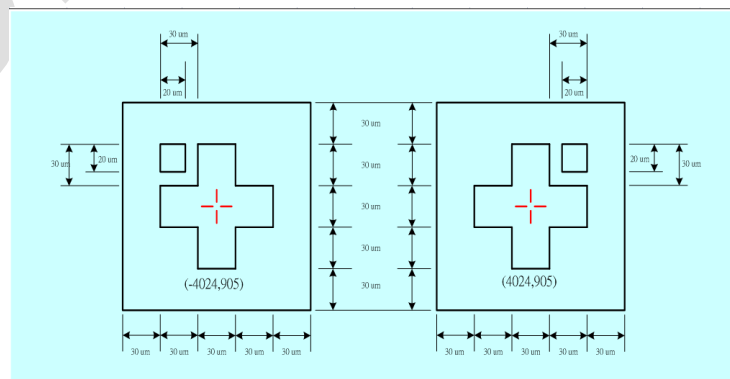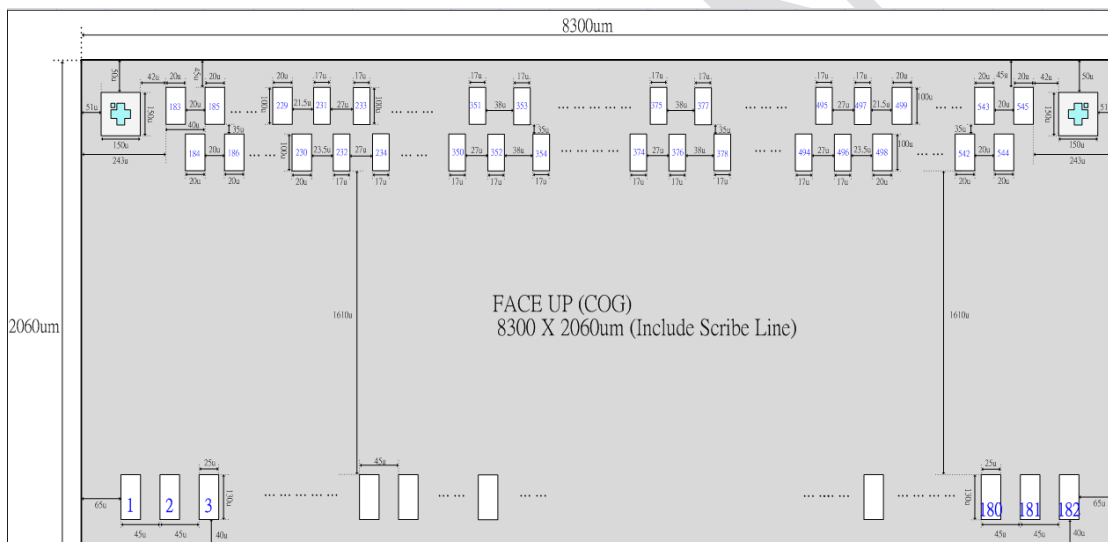

- Chip size: 8300 um x 2060um (Include sealing and scribe line)
- Chip thickness: 200/300 um
- PAD coordinates: PAD center
- PAD coordinates origin: Chip center
- Au bump size
 1. 16um x 35um(COF)/17um x 100um(COG): Source:S1~S240
 2. 20um x 35um(COF)/20um x 100um(COG): gate control signal
 3. 25um x 38um(COF)/25um x 130um(COG): Input Pads
- Au bump pitch: See PAD coordinates table
- Au bump height: 12 ± 2 um (typ.)
- No. in the figure corresponds to No. in the PAD coordinates table
- Alignment mark

Alignment mark shape	X	Y
left	4024	905
right	-4024	905

■

■ Pad Coordinate (Unit: um)

NO	PAD NAME						
1	ANALOG_TEST[1]	51	D[0]	101	VSSR	151	C32N
2	VGLR	52	VSSI	102	VSSR	152	C32N
3	VGLR	53	D[1]	103	VSSA	153	C41P
4	VGHR	54	D[2]	104	VSSA	154	C41P
5	VGHR	55	D[3]	105	VSSA	155	C41N
6	VREFP5	56	D[4]	106	AVSS	156	C41N
7	VREFP5	57	D[5]	107	AVSS	157	C51N
8	VREFP5	58	VSSI	108	AVSS	158	C51N
9	VREFN5	59	D[6]	109	VSSB	159	C51P
10	VREFN5	60	D[7]	110	VSSB	160	C51P
11	VREFN5	61	TEST[1]	111	VSSB	161	VGHR
12	BVP3D	62	EXTCLK	112	VSSB	162	VGHR
13	BVP3D	63	TEST[2]	113	VSSB	163	VGHR
14	BVP3D	64	VSSI	114	C11P	164	VGHR
15	BVN3D	65	TEST[3]	115	C11P	165	VGHR
16	BVN3D	66	IM[1]	116	C11P	166	VGHR
17	BVN3D	67	IM[0]	117	C11N	167	VGLR
18	VCL	68	DSWAP	118	C11N	168	VGLR
19	VCL	69	TESTEN	119	C11N	169	VGLR
20	VCL	70	PSWAP	120	C12P	170	VGL
21	AVDD	71	BSTM	121	C12P	171	VGL
22	AVDD	72	VDDI	122	C12P	172	VGL
23	AVDD	73	VDDI	123	C12N	173	AVSS
24	VREF	74	VDDI	124	C12N	174	AVSS
25	VGSP	75	VCC	125	C12N	175	AVSS
26	VGMP	76	VCC	126	VDDDB	176	MTP_PWR
27	ANALOG_TEST[2]	77	VCC	127	VDDDB	177	MTP_PWR
28	VDDR	78	DVDD	128	VDDDB	178	MTP_PWR
29	VDDR	79	DVDD	129	VDDDB	179	MTP_PWR
30	VDDR	80	DVDD	130	VDDDB	180	MTP_PWR
31	VDDA	81	DVDD	131	VDDR	181	MTP_PWR
32	VDDA	82	DVSS	132	VDDR	182	DUMMY
33	VDDA	83	DVSS	133	VDDR	183	VGLR
34	AVSS	84	DVSS	134	VDDR	184	VGLR
35	AVSS	85	DVSS	135	AVDD	185	VGHR
36	AVSS	86	HSSI_D1_P	136	AVDD	186	VGHR
37	VSSR	87	HSSI_D1_P	137	AVDD	187	VREFP5
38	VSSR	88	HSSI_D1_N	138	C31P	188	VREFP5
39	VSSR	89	HSSI_D1_N	139	C31P	189	VREFN5
40	TE1	90	VSSAM	140	C31P	190	VREFN5
41	SWIRE	91	HSSI_CLK_P	141	C31N	191	VSR_L[10]
42	OLED_EN	92	HSSI_CLK_P	142	C31N	192	VSR_L[10]
43	TE	93	HSSI_CLK_N	143	C31N	193	VSR_L[9]
44	RESX	94	HSSI_CLK_N	144	VCL	194	VSR_L[9]
45	SDO	95	VSSAM	145	VCL	195	VSR_L[8]
46	VSSI	96	HSSI_D0_P	146	VCL	196	VSR_L[8]
47	SDI_RDY	97	HSSI_D0_P	147	C32P	197	VSR_L[7]
48	DCX	98	HSSI_D0_N	148	C32P	198	VSR_L[7]
49	WRX_SCL	99	HSSI_D0_N	149	C32P	199	VSR_L[6]
50	CSX	100	VSSR	150	C32N	200	VSR_L[6]

201	VSR_L[5]	251	S[221]	301	S[171]	351	S[121]
202	VSR_L[5]	252	S[220]	302	S[170]	352	VGHR
203	VSR_L[4]	253	S[219]	303	S[169]	353	VGLR
204	VSR_L[4]	254	S[218]	304	S[168]	354	VREFN5
205	VSR_L[3]	255	S[217]	305	S[167]	355	SDMY[1]
206	VSR_L[3]	256	S[216]	306	S[166]	356	SDMY[2]
207	VSR_L[2]	257	S[215]	307	S[165]	357	SDMY[3]
208	VSR_L[2]	258	S[214]	308	S[164]	358	SDMY[4]
209	VSR_L[1]	259	S[213]	309	S[163]	359	SDMY[5]
210	VSR_L[1]	260	S[212]	310	S[162]	360	SDMY[6]
211	SW_L[1]	261	S[211]	311	S[161]	361	SDMY[7]
212	SW_L[1]	262	S[210]	312	S[160]	362	SDMY[8]
213	SW_L[2]	263	S[209]	313	S[159]	363	SDMY[9]
214	SW_L[2]	264	S[208]	314	S[158]	364	SDMY[10]
215	SW_L[3]	265	S[207]	315	S[157]	365	SDMY[11]
216	SW_L[3]	266	S[206]	316	S[156]	366	SDMY[12]
217	SW_L[4]	267	S[205]	317	S[155]	367	SDMY[13]
218	SW_L[4]	268	S[204]	318	S[154]	368	SDMY[14]
219	SW_L[5]	269	S[203]	319	S[153]	369	SDMY[15]
220	SW_L[5]	270	S[202]	320	S[152]	370	SDMY[16]
221	SW_L[6]	271	S[201]	321	S[151]	371	SDMY[17]
222	SW_L[6]	272	S[200]	322	S[150]	372	SDMY[18]
223	SW_L[7]	273	S[199]	323	S[149]	373	SDMY[19]
224	SW_L[7]	274	S[198]	324	S[148]	374	SDMY[20]
225	SW_L[8]	275	S[197]	325	S[147]	375	VREFP5
226	SW_L[8]	276	S[196]	326	S[146]	376	VGLR
227	SW_L[9]	277	S[195]	327	S[145]	377	VGHR
228	SW_L[9]	278	S[194]	328	S[144]	378	S[120]
229	SW_L[10]	279	S[193]	329	S[143]	379	S[119]
230	SW_L[10]	280	S[192]	330	S[142]	380	S[118]
231	SDMY[21]	281	S[191]	331	S[141]	381	S[117]
232	S[240]	282	S[190]	332	S[140]	382	S[116]
233	S[239]	283	S[189]	333	S[139]	383	S[115]
234	S[238]	284	S[188]	334	S[138]	384	S[114]
235	S[237]	285	S[187]	335	S[137]	385	S[113]
236	S[236]	286	S[186]	336	S[136]	386	S[112]
237	S[235]	287	S[185]	337	S[135]	387	S[111]
238	S[234]	288	S[184]	338	S[134]	388	S[110]
239	S[233]	289	S[183]	339	S[133]	389	S[109]
240	S[232]	290	S[182]	340	S[132]	390	S[108]
241	S[231]	291	S[181]	341	S[131]	391	S[107]
242	S[230]	292	S[180]	342	S[130]	392	S[106]
243	S[229]	293	S[179]	343	S[129]	393	S[105]
244	S[228]	294	S[178]	344	S[128]	394	S[104]
245	S[227]	295	S[177]	345	S[127]	395	S[103]
246	S[226]	296	S[176]	346	S[126]	396	S[102]
247	S[225]	297	S[175]	347	S[125]	397	S[101]
248	S[224]	298	S[174]	348	S[124]	398	S[100]
249	S[223]	299	S[173]	349	S[123]	399	S[99]
250	S[222]	300	S[172]	350	S[122]	400	S[98]

401	S[97]
402	S[96]
403	S[95]
404	S[94]
405	S[93]
406	S[92]
407	S[91]
408	S[90]
409	S[89]
410	S[88]
411	S[87]
412	S[86]
413	S[85]
414	S[84]
415	S[83]
416	S[82]
417	S[81]
418	S[80]
419	S[79]
420	S[78]
421	S[77]
422	S[76]
423	S[75]
424	S[74]
425	S[73]
426	S[72]
427	S[71]
428	S[70]
429	S[69]
430	S[68]
431	S[67]
432	S[66]
433	S[65]
434	S[64]
435	S[63]
436	S[62]
437	S[61]
438	S[60]
439	S[59]
440	S[58]
441	S[57]
442	S[56]
443	S[55]
444	S[54]
445	S[53]
446	S[52]
447	S[51]
448	S[50]
449	S[49]
450	S[48]

451	S[47]
452	S[46]
453	S[45]
454	S[44]
455	S[43]
456	S[42]
457	S[41]
458	S[40]
459	S[39]
460	S[38]
461	S[37]
462	S[36]
463	S[35]
464	S[34]
465	S[33]
466	S[32]
467	S[31]
468	S[30]
469	S[29]
470	S[28]
471	S[27]
472	S[26]
473	S[25]
474	S[24]
475	S[23]
476	S[22]
477	S[21]
478	S[20]
479	S[19]
480	S[18]
481	S[17]
482	S[16]
483	S[15]
484	S[14]
485	S[13]
486	S[12]
487	S[11]
488	S[10]
489	S[9]
490	S[8]
491	S[7]
492	S[6]
493	S[5]
494	S[4]
495	S[3]
496	S[2]
497	S[1]
498	SW_R[10]
499	SW_R[10]
500	SW_R[9]

501	SW_R[9]
502	SW_R[8]
503	SW_R[8]
504	SW_R[7]
505	SW_R[7]
506	SW_R[6]
507	SW_R[6]
508	SW_R[5]
509	SW_R[5]
510	SW_R[4]
511	SW_R[4]
512	SW_R[3]
513	SW_R[3]
514	SW_R[2]
515	SW_R[2]
516	SW_R[1]
517	SW_R[1]
518	VSR_R[1]
519	VSR_R[1]
520	VSR_R[2]
521	VSR_R[2]
522	VSR_R[3]
523	VSR_R[3]
524	VSR_R[4]
525	VSR_R[4]
526	VSR_R[5]
527	VSR_R[5]
528	VSR_R[6]
529	VSR_R[6]
530	VSR_R[7]
531	VSR_R[7]
532	VSR_R[8]
533	VSR_R[8]
534	VSR_R[9]
535	VSR_R[9]
536	VSR_R[10]
537	VSR_R[10]
538	VREFN5
539	VREFN5
540	VREFP5
541	VREFP5
542	VGHR
543	VGHR
544	VGLR
545	VGLR