


Spice Model



1N6521



Part Number	Working Reverse Voltage	Average Rectified Current		Reverse Current @ Vrwm		Forward Voltage		1 Cycle Surge Current tp=8.3ms (Ifsm)	Repetitive Surge Current (Ifrm)	Reverse Recovery Time (3) (Trr)	Thermal Impedance			Junction Cap. @50VDC @ 1kHz (Cj)
	(Vrwm)	(Io)		(Ir)		(Vf)					J-L			
	Volts	55°C(1) Amps	100°C(2) Amps	25°C µA	100°C µA	25°C Volts	25°C Amps	25°C Amps	25°C Amps	25°C ns	L=.000 °C/W	L=.125 °C/W	L=.250 °C/W	25°C pF
1N6521	2000	0.500	0.250	0.5	20	3.0	0.50	25	5	70	5	12	21.5	8

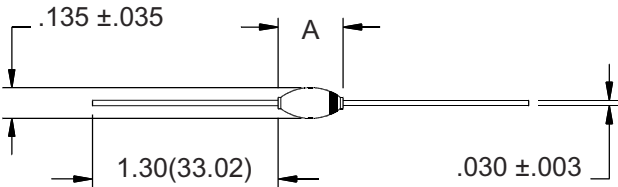

Part	A
1N6521	.220(5.59) MAX. .160(4.06) MIN.
1N6523	.240(6.10) MAX. .180(4.57) MIN.
1N6525	.260(6.60) MAX. .200(5.08) MIN.
1N6527	.320(8.13) MAX. .260(6.60) MIN.

IS	Reverse leakage current	2.50E-07	Amps
N	Emission coefficient	6.8	
T	Temperature	25	C
RS	Diode series resistance	0.29	Ohm
TT	Transit time	70	nS
CJ0	Zero-bias junction capacitance	11.94	pF
VJ	Bulk junction potential	1.57	Volts
M	Grading coefficient	0.5	
EG	Energy-band gap	1.11	Volts
XTI	Temperature coefficient	3	
KF	Flicker-noise coefficient	0	
AF	Flicker-noise exponent	1	
FC	Coefficient for capacitance	0.5	
BV	Diode breakdown voltage	2200	Volts
IBV	Diode breakdown current	100	uAmps



Voltage Multipliers, Inc.
8711 W. Roosevelt Ave.
Visalia, CA 93291

Tel (559) 651-1402
Fax (559) 651-0740
www.voltagemultipliers.com