

# 2,000 V - 5,000 V Rectifiers

## 0.75 A - 2.00 A Forward Current

## 30 ns - 50 ns Recovery Time

**1N6836LL 1N6837LL**  
**1N6838LL 1N6839LL**



FORMED LEAD  
 HERMETICALLY SEALED



### ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V <sub>rw</sub> )	Average Rectified Current (I <sub>o</sub> )		Reverse Current @ V <sub>rw</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current t <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (3) (T <sub>rr</sub> )	Thermal Impd. θ <sub>J-C</sub>	Junction Cap. @50VDC @1kHz (C <sub>j</sub> )
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	25°C	25°C
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C / W	pF
1N6836LL 1N6837LL	2000 5000	1.50 0.75	1.00 0.50	1.0 1.0	25 25	6.00 12.0	1.00 0.50	40 20	5 4	30 30	5.0 5.0	20 16
1N6838LL 1N6839LL	2000 5000	2.00 1.00	1.50 0.60	1.0 1.0	25 25	4.50 10.0	1.50 0.60	60 30	10 6	50 50	5.0 5.0	20 16

(1)TC=55°C (2)TC=100°C (3)I<sub>f</sub>=0.5A, I<sub>r</sub>=1.0A, I<sub>rr</sub>=0.25A • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

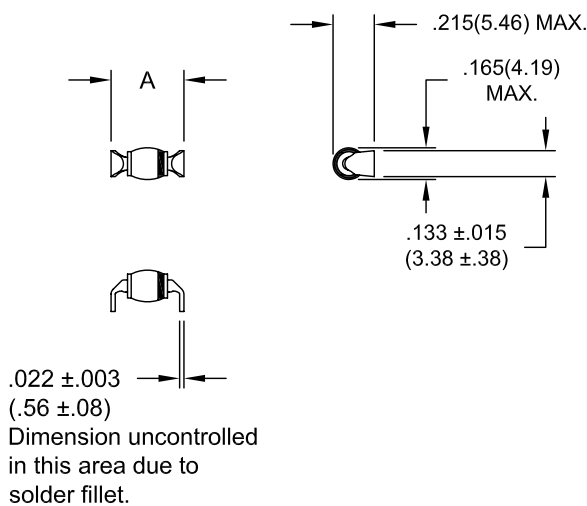

Part	A	B
1N6836LL	.350(8.89) MAX.	.220 (5.59)
1N6837LL	.390(9.91) MAX.	.260 (6.60)
1N6838LL	.350(8.89) MAX.	.220 (5.59)
1N6839LL	.390(9.91) MAX.	.260 (6.60)



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



**VOLTAGE MULTIPLIERS INC.**  
 8711 W. Roosevelt Ave.  
 Visalia, CA 93291

TEL 559-651-1402  
 FAX 559-651-0740  
[www.voltagemultipliers.com](http://www.voltagemultipliers.com)

# 1N6836LL 1N6837LL 1N6838LL 1N6839LL

