



Ordering Information

Part Numbers	Description	Device Vendor
SH5127UD351838SE	512Mx72 (4GB), DDR3, 240-Pin Unbuffered DIMM, ECC, 512Mx8 Based, PC3-14900, DDR3-1866-13-13-13, 30.00mm, 1.5V, Halogen-Free & RoHS Compliant.	Samsung, Rev. E K4B4G0846E-BYMA

(All specifications of this module are subject to change without notice.)

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963

Part Number Decode

S	H	512	7	UD3	518	3	8	S	E
1	2	3	4	5	6	7	8	9	10

1	SMART Modular Technologies
2	Module Process Technology H: Halogen-Free & RoHS Compliant
3	Module Address Depth 512: 512M
4	Module Data Bus Width 7: x72
5	Module Configuration UD3: 1.5V DDR3 240-Pin Unbuffered DIMM
6	Device Configuration 518: 512Mx8 Based
7	CAS Latency 3: CL 13
8	Device Speed 8: DDR3-1866
9	Device Vendor S: Samsung
10	Device Revision E: Revision E



Revision History

Date	Description
May 22, 2015	Datasheet released.

4GB (512Mx72) DDR3 SDRAM Module - 512Mx8 Based 240-Pin Unbuffered DIMM, ECC

Features

- Standard = JEDEC
- Configuration = ECC
- Number of Module Ranks = 1
- Number of Devices = 9
- $V_{DD} = V_{DDQ} = 1.5V$
- $V_{DDSPD} = 3.0V$ to $3.6V$
- Cycle Time = 1.071ns
- CAS Latency = 5, 6, 7, 8, 9, 10, 11, 13
- Additive Latency = 0, CL-1, and CL-2
- CAS Write Latency (CWL) = 5, 6, 7, 8, 9
- Burst Length = BC4, BL8, BC4 or BL8 (on the fly)
- Burst Type = Nibble Sequential & Interleave Mode
- Internal Banks per SDRAM = 8
- Refresh = 8K/64ms
- Device Package = Monolithic FBGA
- Lead Finish = $\geq 0.76\mu m$ Gold
- Length x Height = 133.35mm x 30.00mm
- No. of sides = Double-sided
- Mating Connector (Examples)
 - Vertical = AMP - 5-1932000-9
- ZQ calibration supported
- On chip DLL align DQ, DQS and \overline{DQS} transition with CK transition
- DM write data-in at both the rising and falling edges of the data strobe
- All addresses and control inputs latched on the rising edges of the clock
- Dynamic On Die Termination supported
- Driver strength selected by EMRS
- Asynchronous RESET pin supported
- Write Levelization supported
- 8-bit pre-fetch

Addressing

Device Configuration	512Mx8
Number of Internal Banks	8
Bank Address	BA0 - BA2
Auto precharge	A10/AP
BC switch on the fly	A12/ \overline{BC}
Row Address	A0 - A15
Column Address	A0 - A9, A11
Page size	2KB

Pin Description Table

Symbol	Type	Polarity	Function
$\overline{CK0-CK1}$, CK0-CK1	Input	Differential Crossing	CK and \overline{CK} are differential clock inputs. All the DDR3 SDRAM address/control inputs are sampled on the crossing of the positive edge of CK and the negative edge of \overline{CK} . Output (read) data is referenced to the crossing of CK and \overline{CK} (Both directions of crossing).
CKE0	Input	Active High	Activates the SDRAM CK signal when high and deactivates the CK signal when low. By deactivating the clocks, CKE low initiates the Power Down mode, or the Self Refresh mode.
$\overline{CS0}$	Input	Active Low	Enables the associated SDRAM command decoder when low and disables the command decoder when high. When decoder is disabled, new commands are ignored but previous operations continue. This signal provides for external rank selection on systems with multiple ranks.
ODT0	Input	Active High	When high, termination resistance is enabled for all DQ, DQS, \overline{DQS} and DM pins, assuming this function is enabled on the DRAM.
BA0-BA2	Input	-	Selects which SDRAM bank of the eight is activated.

Pin Description Table (Continued)


Symbol	Type	Polarity	Function
A0-A15	Input	-	During a Bank Activate command cycle, address inputs define the row address (RA0-RA15). During a Read or Write command cycle, address inputs define the column address (CA0-CA9, CA11). In addition to the column address, AP is used to invoke auto-precharge operation at the end of the burst read or write cycle. If AP is high, auto-precharge is selected and BA0, BA1, BA2 defines the bank to be precharged. If AP is low, auto-precharge is disabled. During a Precharge command cycle, AP is used in conjunction with BA0, BA1, BA2 to control which bank(s) to precharge. If AP is high, all banks will be precharged regardless of the state of BA0, BA1 or BA2. If AP is low, BA0, BA1 and BA2 are used to define which bank to precharge. A12(\overline{BC}) is sampled during READ and WRITE commands to determine if burst chop (on-the-fly) will be performed (HIGH, no burst chop; LOW, burst chopped).
RAS, CAS, WE	Input	Active Low	RAS, CAS, and WE (along with CS) define the command being entered.
DQ0-DQ63 CB0-CB7	Input/ Output	-	Data and Check Bit Input/Output pins.
DQS0-DQS8 DQS0-DQS8	Input/ Output	Differential Crossing	Data strobe for input and output data.
DM0-DM8	Input	Active High	DM is an input mask signal for write data. Input data is masked when DM is sampled high coincident with that input data during a write access. DM is sampled on both edges of DQS. Although DM pins are input only, the DM loading matches the DQ and DQS loading.
SA0-SA2	Input	-	These signals are tied at the system to either V_{SS} or V_{DDSPD} to configure the serial SPD EEPROM address range.
SDA	Input/ Output	-	This bidirectional pin is used to transfer data into or out of the SPD EEPROM. An external resistor may be connected from the SDA bus line to V_{DDSPD} to act as a pull-up on the system board.
SCL	Input	-	This signal is used to clock data into and out of the SPD EEPROM. An external resistor may be connected from the SCL bus tied to V_{DDSPD} to act as a pull-up on the system board.
\overline{EVENT}	Output	Active Low	This signal indicates that a thermal event has been detected in the thermal sensing device. The system should guarantee the electrical level requirement is met for the \overline{EVENT} pin on TS/SPD part. No pull-up resistor is provided on DIMM.
\overline{RESET}	Input	Active Low	Asynchronous Reset is active when \overline{RESET} is LOW, and inactive when \overline{RESET} is HIGH. \overline{RESET} must be HIGH during normal operation. \overline{RESET} is CMOS rail to rail signal with DC high and low at 80% and 20% of V_{DD} .
V_{DD} , V_{SS}	Supply	-	Power and ground for the DDR3 SDRAM input buffers, and core logic. V_{DD} and V_{DDQ} pins are tied to V_{DD}/V_{DDQ} planes on these modules. V_{SS} pins are tied to V_{SS} planes on these modules.
V_{DDQ}	Supply	-	Power supply for the DDR3 SDRAM output buffers to provide improved noise immunity. V_{DDQ} shares the same power plane as V_{DD} pins.
V_{REFDQ}	Supply		Reference voltage for I/O inputs.
V_{REFCA}	Supply	-	Reference voltage for address/command inputs.
V_{DDSPD}	Supply	-	Power supply for SPD EEPROM. This supply is separate from the V_{DD}/V_{DDQ} power plane.
V_{TT}	Supply	-	Termination voltage for address/command/control/clock nets.
NC	-	-	No Connect.

DDR3 240-Pin Unbuffered DIMM Pin List

Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name	Pin No.	Pin Name
1	V _{REFDQ}	31	DQ25	61	A2	91	DQ41	121	V _{SS}	151	V _{SS}	181	A1	211	V _{SS}
2	V _{SS}	32	V _{SS}	62	V _{DD}	92	V _{SS}	122	DQ4	152	DM3	182	V _{DD}	212	DM5
3	DQ0	33	$\overline{\text{DQS3}}$	63	CK1	93	$\overline{\text{DQS5}}$	123	DQ5	153	NC	183	V _{DD}	213	NC
4	DQ1	34	DQS3	64	$\overline{\text{CK1}}$	94	DQS5	124	V _{SS}	154	V _{SS}	184	CK0	214	V _{SS}
5	V _{SS}	35	V _{SS}	65	V _{DD}	95	V _{SS}	125	DM0	155	DQ30	185	$\overline{\text{CK0}}$	215	DQ46
6	$\overline{\text{DQS0}}$	36	DQ26	66	V _{DD}	96	DQ42	126	NC	156	DQ31	186	V _{DD}	216	DQ47
7	DQS0	37	DQ27	67	V _{REFCA}	97	DQ43	127	V _{SS}	157	V _{SS}	187	$\overline{\text{EVENT}}$	217	V _{SS}
8	V _{SS}	38	V _{SS}	68	NC	98	V _{SS}	128	DQ6	158	CB4	188	A0	218	DQ52
9	DQ2	39	CB0	69	V _{DD}	99	DQ48	129	DQ7	159	CB5	189	V _{DD}	219	DQ53
10	DQ3	40	CB1	70	A10/AP	100	DQ49	130	V _{SS}	160	V _{SS}	190	BA1	220	V _{SS}
11	V _{SS}	41	V _{SS}	71	BA0	101	V _{SS}	131	DQ12	161	DM8	191	V _{DD}	221	DM6
12	DQ8	42	$\overline{\text{DQS8}}$	72	V _{DD}	102	$\overline{\text{DQS6}}$	132	DQ13	162	NC	192	$\overline{\text{RAS}}$	222	NC
13	DQ9	43	DQS8	73	$\overline{\text{WE}}$	103	DQS6	133	V _{SS}	163	V _{SS}	193	$\overline{\text{CS0}}$	223	V _{SS}
14	V _{SS}	44	V _{SS}	74	$\overline{\text{CAS}}$	104	V _{SS}	134	DM1	164	CB6	194	V _{DD}	224	DQ54
15	$\overline{\text{DQS1}}$	45	CB2	75	V _{DD}	105	DQ50	135	NC	165	CB7	195	ODT0	225	DQ55
16	DQS1	46	CB3	76	$\overline{\text{CS1}}$ (NC)	106	DQ51	136	V _{SS}	166	V _{SS}	196	A13	226	V _{SS}
17	V _{SS}	47	V _{SS}	77	ODT1 (NC)	107	V _{SS}	137	DQ14	167	NC	197	V _{DD}	227	DQ60
18	DQ10	48	NC	78	V _{DD}	108	DQ56	138	DQ15	168	$\overline{\text{RESET}}$	198	NC	228	DQ61
19	DQ11	49	NC	79	NC	109	DQ57	139	V _{SS}	169	CKE1 (NC)	199	V _{SS}	229	V _{SS}
20	V _{SS}	50	CKE0	80	V _{SS}	110	V _{SS}	140	DQ20	170	V _{DD}	200	DQ36	230	DM7
21	DQ16	51	V _{DD}	81	DQ32	111	$\overline{\text{DQS7}}$	141	DQ21	171	A15	201	DQ37	231	NC
22	DQ17	52	BA2	82	DQ33	112	DQS7	142	V _{SS}	172	A14	202	V _{SS}	232	V _{SS}
23	V _{SS}	53	NC	83	V _{SS}	113	V _{SS}	143	DM2	173	V _{DD}	203	DM4	233	DQ62
24	$\overline{\text{DQS2}}$	54	V _{DD}	84	$\overline{\text{DQS4}}$	114	DQ58	144	NC	174	A12/ $\overline{\text{BC}}$	204	NC	234	DQ63
25	DQS2	55	A11	85	DQS4	115	DQ59	145	V _{SS}	175	A9	205	V _{SS}	235	V _{SS}
26	V _{SS}	56	A7	86	V _{SS}	116	V _{SS}	146	DQ22	176	V _{DD}	206	DQ38	236	V _{DDSPD}
27	DQ18	57	V _{DD}	87	DQ34	117	SA0	147	DQ23	177	A8	207	DQ39	237	SA1
28	DQ19	58	A5	88	DQ35	118	SCL	148	V _{SS}	178	A6	208	V _{SS}	238	SDA
29	V _{SS}	59	A4	89	V _{SS}	119	SA2	149	DQ28	179	V _{DD}	209	DQ44	239	V _{SS}
30	DQ24	60	V _{DD}	90	DQ40	120	V _{TT}	150	DQ29	180	A3	210	DQ45	240	V _{TT}






Block Diagram


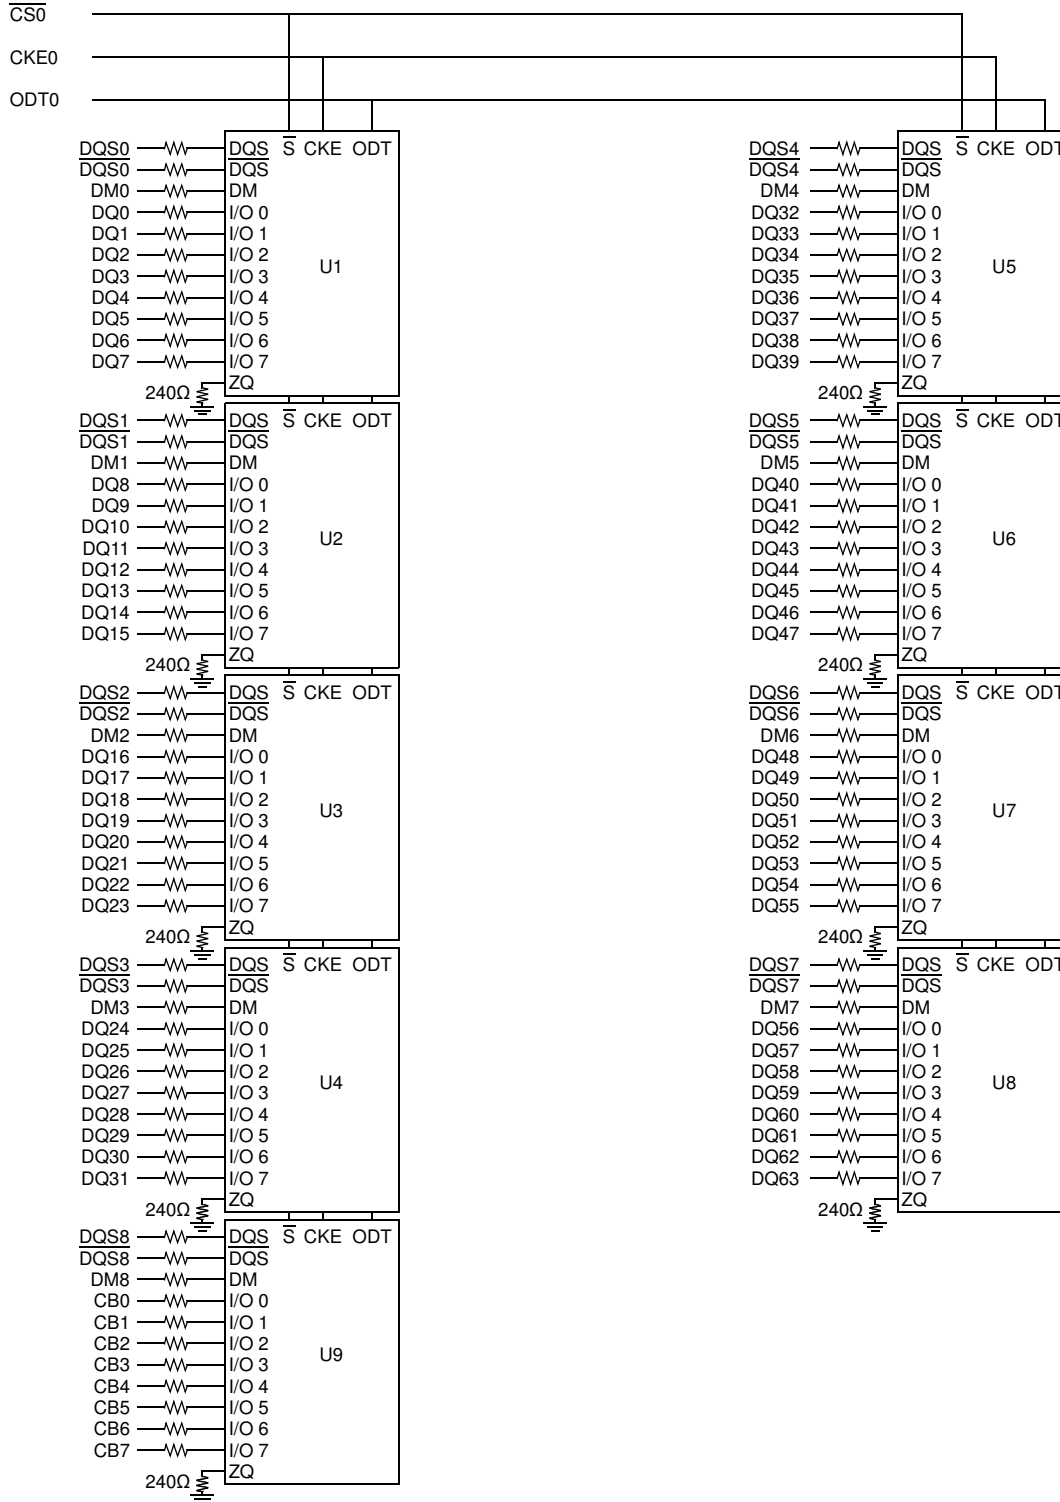


Note: Unless otherwise noted, data resistor values are 15Ω ± 5%.

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963

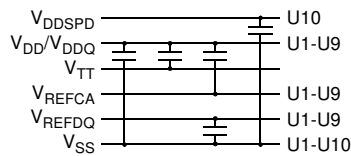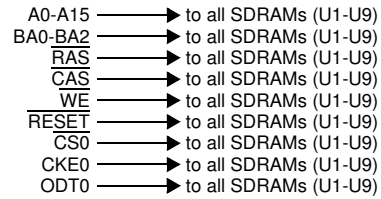Block Diagram (Continued)

Clock Wiring


CK Signals	Clock Wiring
CK0/CK0	9 SDRAMs (U1-U9)
CK1/CK1	0 SDRAMs


Notes:

1. All address, command and control signal lines are terminated through a 39Ω series resistor to V_{TT}.
2. Data bits may be swapped within a device. However, DQ/DQS/DM relationship must be maintained as shown on page 7.

Physical Dimensions

240-Pin Unbuffered DIMM Module

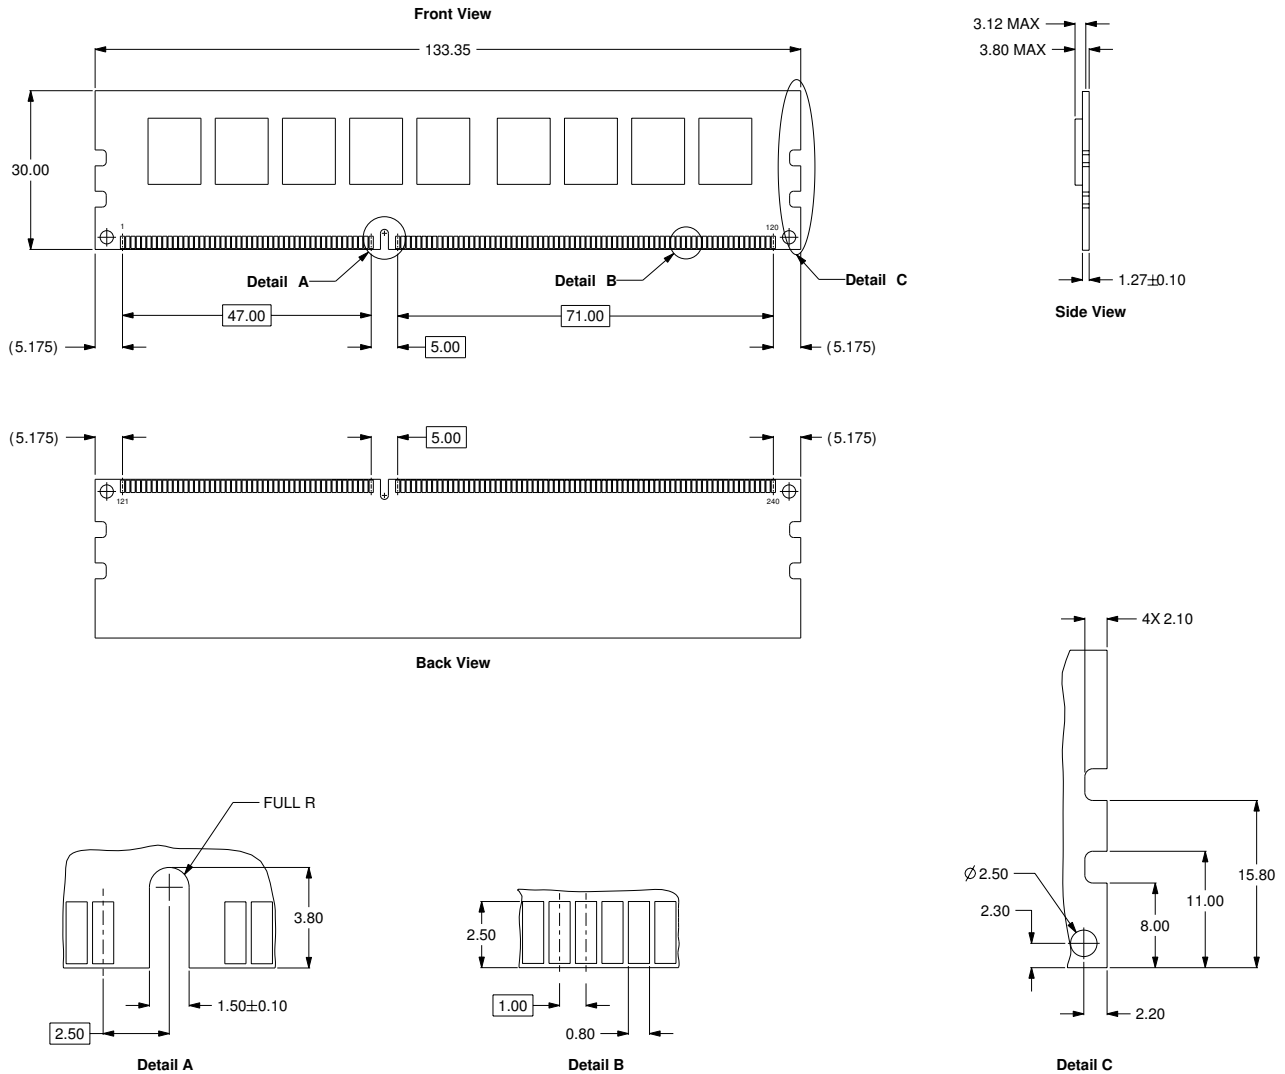


(All dimensions are in millimeters with ±0.15mm tolerance unless specified otherwise.)

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963

Mode Register (MR0) Table Definition

The mode register stores the data for controlling the various operating modes of DDR3 SDRAM. It controls CAS latency, burst length, burst chop, burst sequence, test mode, DLL reset, t_{WR} and various vendor specific options to make DDR3 SDRAM useful for various applications. The mode register is written by asserting low on \overline{CS} , \overline{RAS} , \overline{CAS} , \overline{WE} , BA0, BA1 and BA2 while controlling the state of address pins A0~A15.

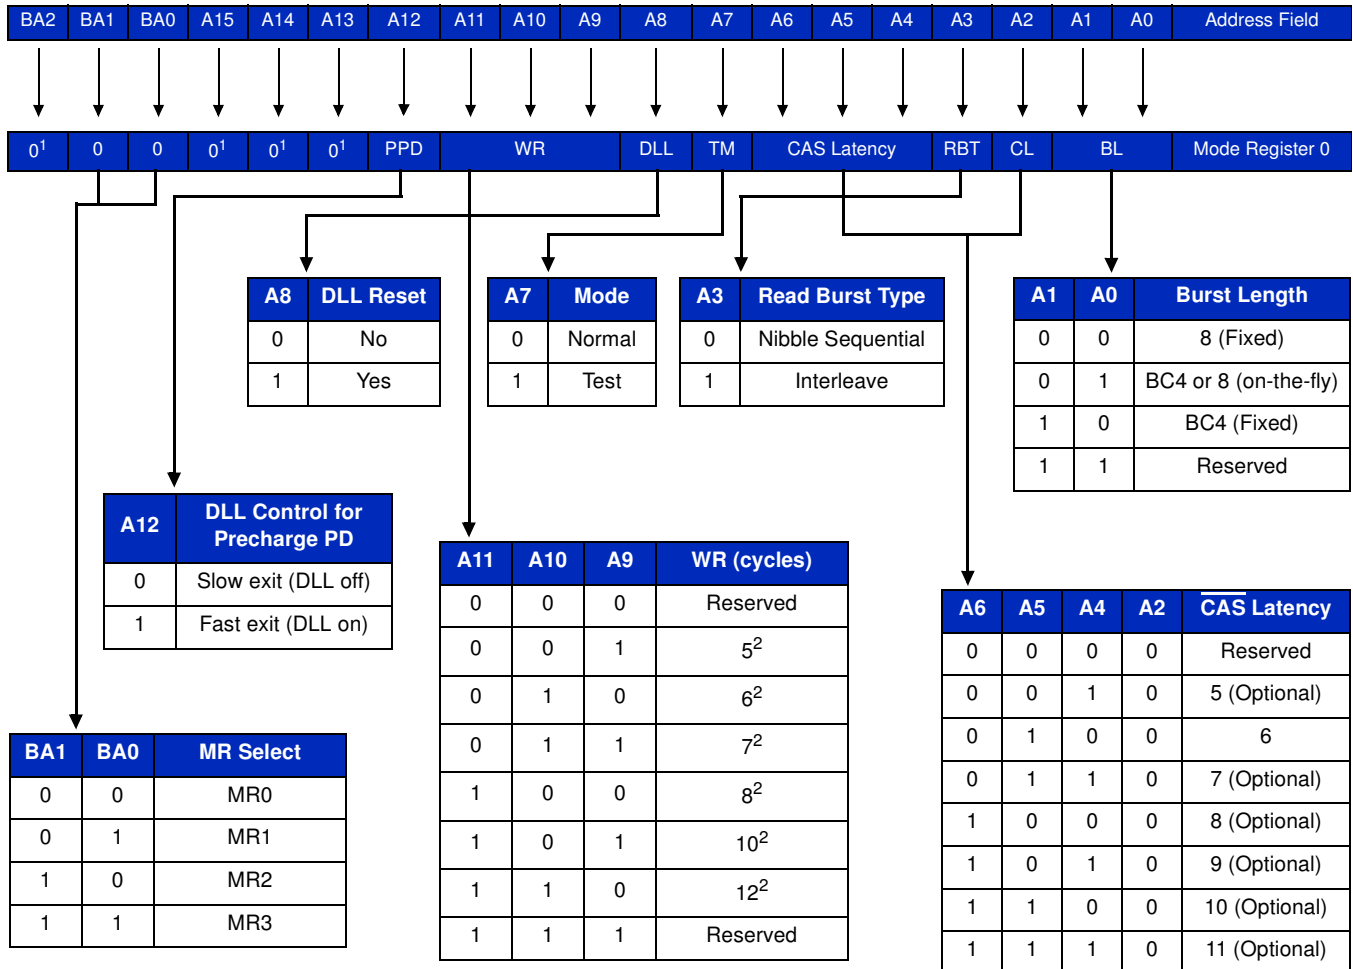


Notes:

- BA2 and A13~A15 are reserved for future use and must be programmed to 0 during MRS.
- WR_{min} (write recovery for auto-precharge) in clock cycles is calculated by dividing t_{WR} (in ns) by t_{CK} (in ns) and rounding up to the next integer: $WR_{min} [\text{cycles}] = \text{Round-up} (t_{WR}[\text{ns}] / t_{CK}[\text{ns}])$. The WR value in the mode register must be programmed to be equal or larger than WR_{min} . The programmed WR value is used with t_{RP} to determine t_{DAL} .

Mode Register (MR1) Table Definition

The Mode Registers MR1 stores the data for enabling or disabling the DLL, output driver strength, Rtt_Nom impedance, additive latency, Write Leveling enable, TDQS enable and Qoff. The Mode Register 1 is written by asserting low on \overline{CS} , \overline{RAS} , \overline{CAS} , \overline{WE} , high on BA0 and low on BA1 and BA2, while controlling the state of address pins A0~A15.

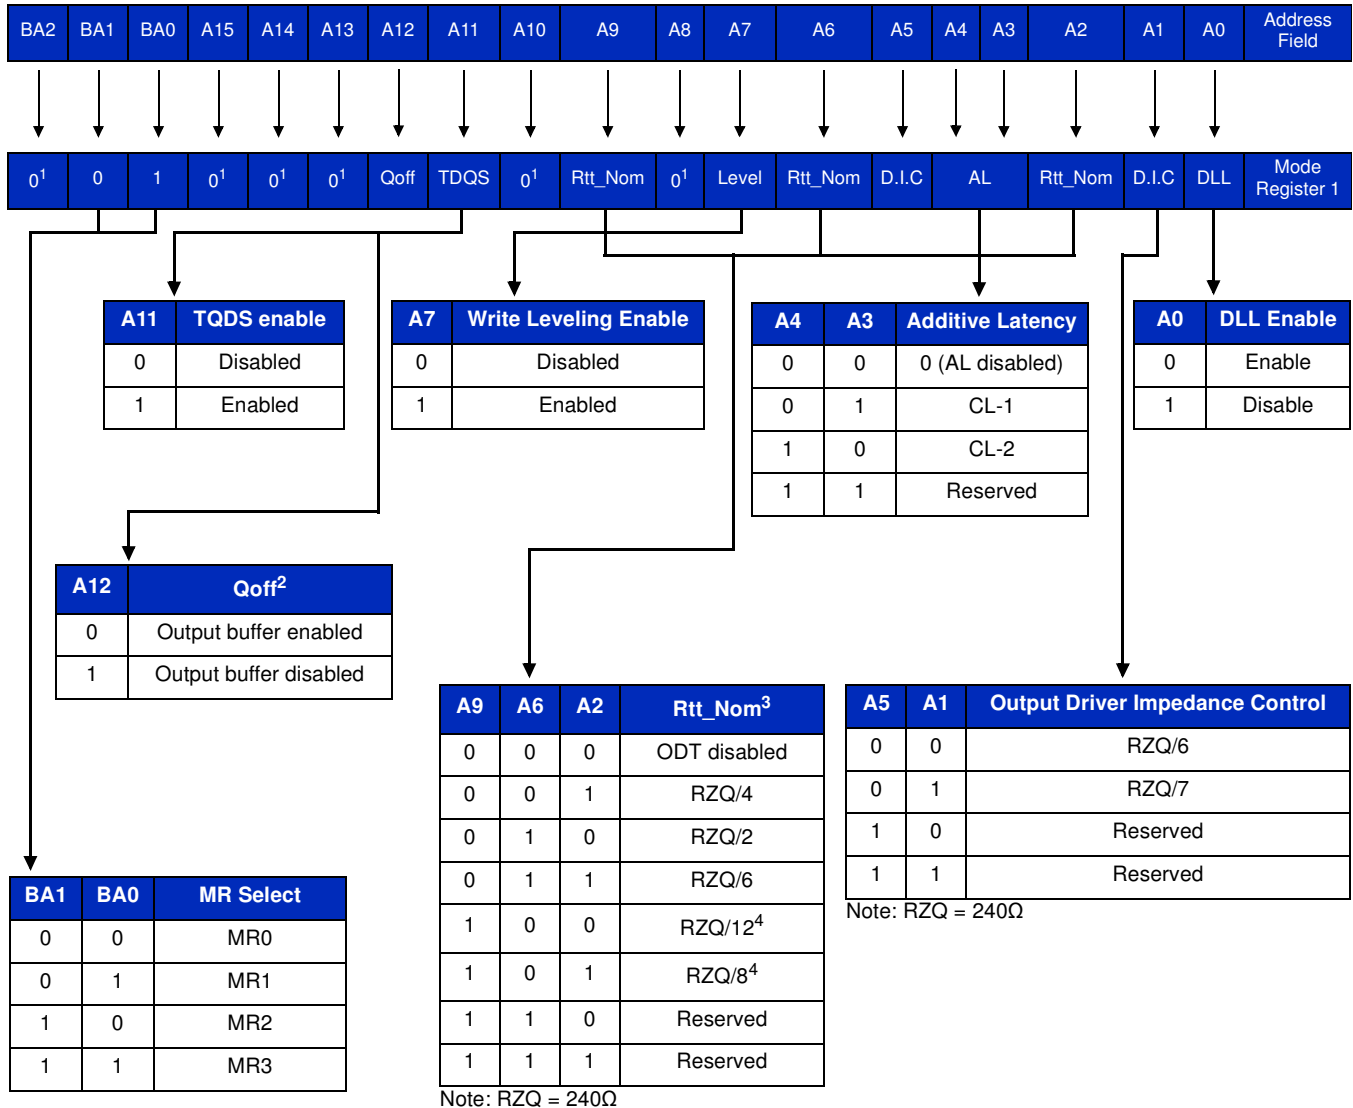


Notes:

1. BA2 and A8, A10, A13~A15 are reserved for future use and must be programmed to 0 during MRS.
2. Outputs disabled - DQs, DQSs, DQSs.
3. In Write Leveling Mode (MR1[bit7] = 1) with MR1[bit12] = 1, all Rtt_Nom settings are allowed; in Write Leveling Mode (MR1[bit7] = 1) with MR1[bit12] = 0, only Rtt_Nom settings of RZQ/2, RZQ/4 and RZQ/6 are allowed.
4. If Rtt_Nom is used during Writes, only the values RZQ/2, RZQ/4 and RZQ/6 are allowed.

Mode Register (MR2) Table Definition

The Mode Registers MR2 stores the data for controlling refresh related features, Rtt_WR impedance, and CAS Write Latency. The Mode Register 2 is written by asserting low on CS, RAS, CAS, WE, high on BA1 and low on BA0 and BA2 while controlling the state of address pins A0~A15.

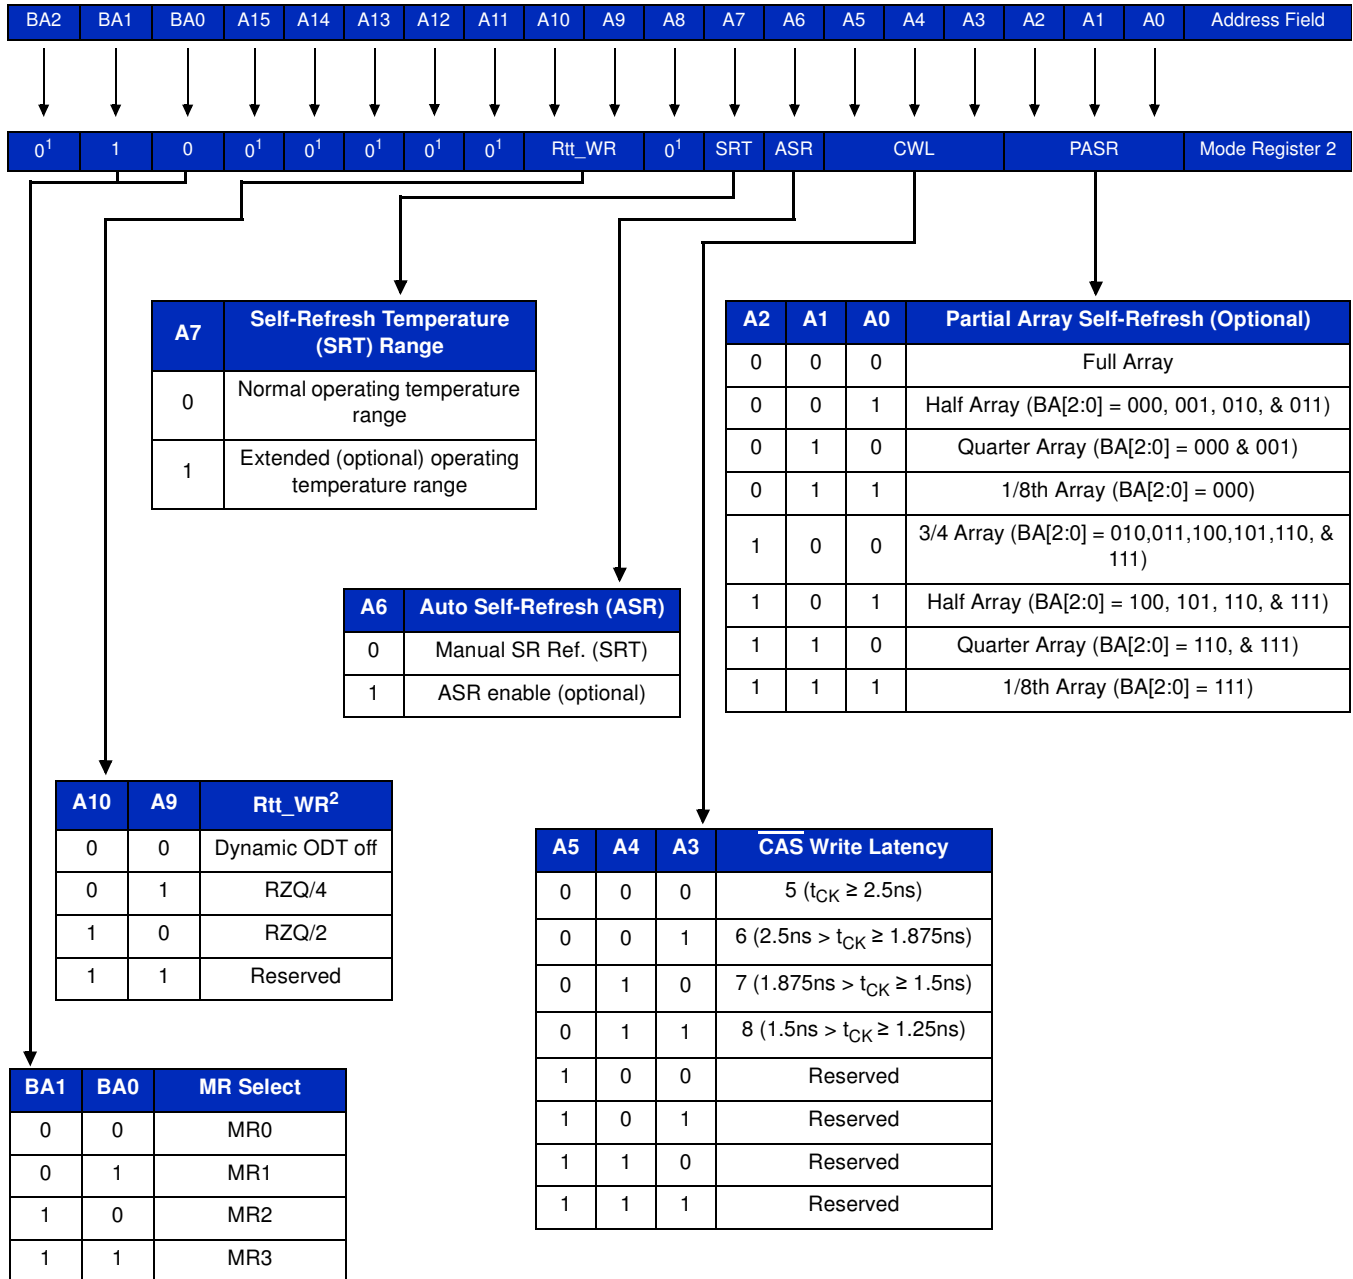


Notes:

- BA2, A8 and A11~A15 are reserved for future use and must be programmed to 0 during MRS.
- If Rtt_WR value can be applied during writes even when Rtt_Nom is disabled. During Write Leveling, Dynamic ODT is not available.

Mode Register (MR3) Table Definition

The Mode Register MR3 controls Multi-purpose registers. The Mode Register 3 is written by asserting low on \overline{CS} , \overline{RAS} , \overline{CAS} , \overline{WE} , high on BA1 and BA0, low on BA2 while controlling the state of address pins A0~A15.

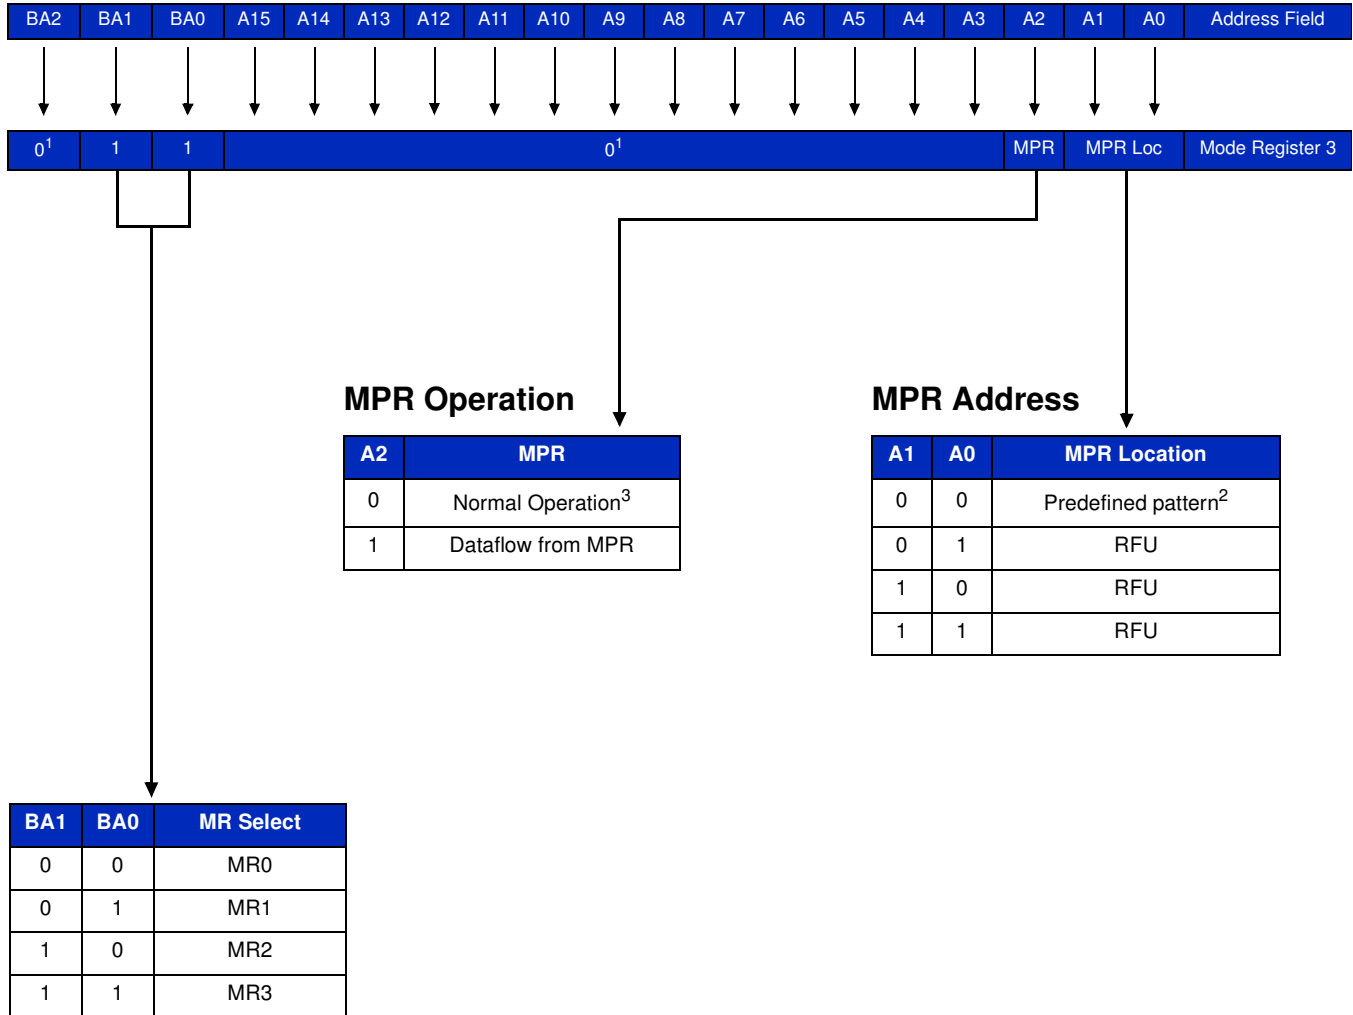

Notes:

1. BA2, A3~A15 are reserved for future use and must be programmed to 0 during MRS.
2. The predefined pattern will be used for read synchronization.
3. When MPR control is set for normal operation (MR3 A[2] = 0), then MR3 A[1:0] will be ignored.

Command Truth Table

The following Truth Tables provide a general reference of available commands. For a more detailed description please refer to the device data sheets.

- Notes 1- 4 apply to the entire Command Truth Table.
- Note 5 applies to all Read/Write command.

[BA= Bank address, RA= row Address, CA = Column Address, \overline{BC} = Burst chop, X = Don't care, V = Valid]

Command Truth Table

Function	Abbreviation	CKE		\overline{CS}	\overline{RAS}	\overline{CAS}	\overline{WE}	BA0-BA2	A13-A15	A12/ \overline{BC}	A10/AP	A0-A9, A11	Notes
		Previous Cycle	Current Cycle										
Mode Register Set	MRS	H	H	L	L	L	L	BA	OP Code				
Refresh	REF	H	H	L	L	L	H	V	V	V	V	V	
Self-Refresh Entry	SRE	H	L	L	L	L	H	V	V	V	V	V	7, 9, 12
Self-Refresh Exit	SRX	L	H	H	V	V	V	V	V	V	V	V	7, 8, 9, 12
				L	H	H	H						
Single Bank Precharge	PRE	H	H	L	L	H	L	BA	V	V	L	V	
Precharge All Banks	PREA	H	H	L	L	H	L	V	V	V	H	V	
Bank Activate	ACT	H	H	L	L	H	H	BA	Row Address				
Write (Fixed BL8 or BC4)	WR	H	H	L	H	L	L	BA	RFU	V	L	CA	
Write (BC4, on the Fly)	WRS4	H	H	L	H	L	L	BA	RFU	L	L	CA	
Write (BL8, on the Fly)	WRS8	H	H	L	H	L	L	BA	RFU	H	L	CA	
Write with Auto-Precharge (Fixed BL8 or BC4)	WRA	H	H	L	H	L	L	BA	RFU	V	H	CA	
Write with Auto-Precharge (BC4, on the Fly)	WRAS4	H	H	L	H	L	L	BA	RFU	L	H	CA	
Write with Auto-Precharge (BL8, on the Fly)	WRAS8	H	H	L	H	L	L	BA	RFU	H	H	CA	
Read (Fixed BL8 or BC4)	RD	H	H	L	H	L	H	BA	RFU	V	L	CA	
Read (BC4, on the Fly)	RDS4	H	H	L	H	L	H	BA	RFU	L	L	CA	
Read (BL8, on the Fly)	RDS8	H	H	L	H	L	H	BA	RFU	H	L	CA	
Read with Auto-Precharge (Fixed BL8 or BC4)	RDA	H	H	L	H	L	H	BA	RFU	V	H	CA	
Read with Auto-Precharge (BC4, on the Fly)	RDAS4	H	H	L	H	L	H	BA	RFU	L	H	CA	
Read with Auto-Precharge (BL8, on the Fly)	RDAS8	H	H	L	H	L	H	BA	RFU	H	H	CA	
No Operation	NOP	H	H	L	H	H	H	V	V	V	V	V	10
Device Deselected	DES	H	H	H	X	X	X	X	X	X	X	X	11
Power-Down Entry	PDE	H	L	L	H	H	H	V	V	V	V	V	6, 12
				H	V	V	V						
Power-Down Exit	PDX	L	H	L	H	H	H	V	V	V	V	V	6, 12
				H	V	V	V						
ZQ Calibration Long	ZQCL	H	H	L	H	H	L	X	X	X	H	X	
ZQ Calibration Short	ZQCS	H	H	L	H	H	L	X	X	X	L	X	

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963

Notes:

1. All DDR3 SDRAM commands are defined by states of \overline{CS} , \overline{RAS} , \overline{CAS} , \overline{WE} , and CKE at the rising edge of the clock. The MSB of BA, RA and CA are device density and configuration dependant.
2. \overline{RESET} command is enabled when Low, which will be used only for asynchronous reset, so \overline{RESET} must be maintained HIGH during any function.
3. Bank addresses (BA) determine which bank is to be operated upon. For (E)MRS, BA selects an (Extended) Mode Register.
4. "V" means "H or L (but a defined logic level)" and "X" means either "defined or undefined (like floating) logic level".
5. Burst reads or writes cannot be terminated or interrupted and Fixed/on-the-Fly BL will be defined by the MRS.
6. The Power-Down Mode does not perform any refresh operation.
7. The state of ODT does not affect the states described in this table. The ODT function is not available during Self-Refresh.
8. Self-Refresh Exit is asynchronous.
9. V_{REF} (Both V_{REFDQ} and V_{REFCA}) must be maintained during Self-Refresh operation.
10. The No Operation command should be used in cases when the DDR3 SDRAM is in an idle or wait state. The purpose of the No Operation command (NOP) is to prevent the DDR3 SDRAM from registering any unwanted commands between operations. A No Operation command will not terminate a previous operation that is still executing, such as a burst read and write cycle.
11. The Deselect command performs the same function as No Operation command.
12. Refer to the CKE Truth Table for more detail with CKE transition.

CKE Truth Table

- Notes 1-7 apply to the entire CKE Truth Table.
- CKE low is allowed only if t_{MRD} and t_{MOD} are satisfied.

CKE Truth Table

Current State	CKE		Command (N) ³ RAS, CAS, WE, CS	Action (N) ³	Notes
	Previous Cycle (N-1)	Current Cycle (N)			
Power-Down	L	L	X	Maintain Power-Down	14, 15
	L	H	Deselect or NOP	Power-Down Exit	11, 14
Self-Refresh	L	L	X	Maintain Self-Refresh	15, 16
	L	H	Deselect or NOP	Self-Refresh Exit	8, 12, 16
Bank Activate	H	L	Deselect or NOP	Active Power-Down Entry	11, 13, 14
Reading	H	L	Deselect or NOP	Power-Down Entry	11, 13, 14, 17
Writing	H	L	Deselect or NOP	Power-Down Entry	11, 13, 14, 17
Precharging	H	L	Deselect or NOP	Power-Down Entry	11, 13, 14, 17
Refreshing	H	L	Deselect or NOP	Precharge Power-Down Entry	11
All Banks Idle	H	L	Deselect or NOP	Precharge Power-Down Entry	11, 13, 14, 18
		L	Refresh	Self-Refresh	9, 13, 18
For more details with all signals, see Command Truth Table on page 14.					10

Notes:

- CKE (N) is the logic state of CKE at clock edge N; CKE (N-1) was the state of CKE at the previous clock edge.
- Current state is defined as the state of the DDR3 SDRAM immediately prior to clock edge N.
- COMMAND (N) is the command registered at clock edge N, and ACTION (N) is a result of COMMAND (N), ODT is not included here.
- All states and sequences not shown are illegal or reserved unless explicitly described elsewhere in this document.
- The state of ODT does not affect the states described in this table. The ODT function is not available during Self-Refresh.
- CKE must be registered with the same value on t_{CKEmin} consecutive positive clock edges. CKE must remain at the valid input level the entire time it takes to achieve the t_{CKEmin} clocks of registration. Thus, after any CKE transition, CKE may not transition from its valid level during the time period of $t_{IS} + t_{CKEmin} + t_{IH}$.
- Deselect and NOP are defined in the Command Truth Table.
- On Self-Refresh Exit, Deselect or NOP commands must be issued on every clock edge occurring during the t_{XS} period. Read or ODT commands may be issued only after t_{XSDLL} is satisfied.
- Self-Refresh mode can only be entered from the All Banks Idle state.
- Must be a legal command as defined in the Command Truth Table.
- Valid commands for Power-Down Entry and Exit are NOP and Deselect only.
- Valid commands for Self-Refresh Exit are NOP and Deselect only.
- Self-Refresh can not be entered during Read or Write operations.
- The Power-Down does not perform any refresh operations.
- "X" means "don't care" (including floating around V_{REF}) in Self-Refresh and Power-Down. It also applies to Address pins.
- V_{REF} (Both V_{REFDQ} and V_{REFCA}) must be maintained during Self-Refresh operation.
- If all banks are closed at the conclusion of the read, write or precharge command, then Precharge Power-Down is entered, otherwise Active Power-Down is entered.
- "Idle state" is defined as all banks are closed (t_{RP} , t_{DAL} , etc. satisfied), no data bursts are in progress, CKE is high, and all timings from previous operations are satisfied (t_{MRD} , t_{MOD} , t_{RFC} , t_{ZQinit} , t_{ZQoper} , t_{ZQCS} , etc.) as well as all Self-Refresh exit and Power-Down Exit parameters are satisfied (t_{XS} , t_{XP} , t_{XPDLL} , etc.).

Absolute Maximum Ratings

Absolute Maximum DC Ratings

Symbol	Parameter	Rating	Units	Notes
V_{DD}	Voltage on V_{DD} relative to V_{SS}	-0.4 ~ 1.975	V	1, 3
V_{DDQ}	Voltage on V_{DDQ} relative to V_{SS}	-0.4 ~ 1.975	V	1, 3
V_{IN}, V_{OUT}	Voltage on any pin relative to V_{SS}	-0.4 ~ 1.975	V	1
V_{DDSPD}	Voltage on V_{DDSPD} relative to V_{SS}	3.0 ~ 3.6	V	1
T_{STG}	Storage Temperature	-50 to +100	°C	1, 2

Notes:

- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- Storage Temperature is the case surface temperature on the center/top side of the DRAM.
- V_{DD} and V_{DDQ} must be within 300 mV of each other at all times and V_{REF} must be not greater than $0.6 \cdot V_{DDQ}$. When V_{DD} and V_{DDQ} are less than 500 mV; V_{REF} may be equal to or less than 300 mV.

Recommended DC Operating Conditions

Symbol	Parameter	Rating			Units	Notes
		Min	Typical	Max		
V_{DD}	Supply Voltage	1.425	1.5	1.575	V	1, 2
V_{DDQ}	Supply Voltage for Output	1.425	1.5	1.575	V	1
V_{DDSPD}	SPD Supply Voltage	3.0	3.3	3.6	V	
V_{TT}	Termination Voltage	0.7125	0.75	0.7875	V	3
V_{SS}	Ground	0	0	0	V	

Notes:

- Under all conditions, V_{DDQ} must be less than or equal to V_{DD} .
- V_{DDQ} tracks with V_{DD} . AC parameters are measured with V_{DD} and V_{DDQ} tied together.
- $V_{TT} = V_{DDQ}/2$

Operating Temperature Range

Symbol	Parameter	Range	Units	Notes
T _{OPER}	Normal Operating Temperature Range (Case)	0 to 95	°C	1, 2, 3

Notes:

- Operating Temperature T_{OPER} is the case surface temperature on the center/top side of the DRAM.
- The Normal Temperature Range specifies the temperatures where all DRAM specifications will be supported. During operation, the DRAM case temperature must be maintained between 0 °C and 85 °C under all operating conditions.
- Some applications require operation of the DRAM between 85 °C and 95 °C case temperature. Full specifications are supported in this range, but the following additional conditions apply:
 - Refresh commands must be doubled in frequency, therefore reducing the Refresh interval t_{REFI} to 3.9µs. It is also possible to specify a component with 1X refresh (t_{REFI} to 7.8µs) in the Extended Temperature Range. Please refer to the SPD for option availability.
 - If Self-Refresh operation is required in the Extended Temperature Range, then it is mandatory to either use the Manual Self-Refresh mode with Extended Temperature Range capability (MR2 A6 = 0b and MR2 A7 = 1b) or enable the optional Auto Self-Refresh mode (MR2 A6 = 1b and MR2 A7 = 0b). Please refer to the SPD for option availability.

Temperature Sensor Characteristics³

Symbol	Description	Test Condition ¹	Typical ²	Max	Units
JEDEC B-Grade	Accuracy for corresponding range 3.0 V ≤ V _{DDSPD} ≤ 3.6 V	+75 °C ≤ T _{AMB} ≤ +95 °C	±0.5	±1	°C
		+40 °C ≤ T _{AMB} ≤ +125 °C	±1	±2	°C
		-40 °C ≤ T _{AMB} ≤ +125 °C	±2	±3	°C

Notes:

- Guaranteed ambient operating temperature: T_{AMB} = -40 °C to 125 °C (except where noted).
- Typical numbers taken at V_{DDSPD} = 3.3 V, T_{AMB} = 25 °C.
- The temperature sensor may not be installed on all modules. Check the block diagram to determine if it is installed.

Refresh Parameters

Parameter	Symbol	4Gb	Units
REF command to ACT or REF command time	t _{RFC}	260	ns
Average periodic refresh interval	t _{REFI}	0 °C ≤ T _{CASE} ≤ 85 °C	7.8
		85 °C ≤ T _{CASE} ≤ 95 °C	3.9

AC and DC Logic Input Levels for Single-Ended Signals

Symbol	Parameter	DDR3-1866		Units	Notes
		Min	Max		
V_{IH} (DC100)	DC input logic high	$V_{REF} + 0.100$	V_{DD}	V	1
V_{IL} (DC100)	DC input logic low	V_{SS}	$V_{REF} - 0.100$	V	1
V_{IH} (AC135)	AC input logic high	$V_{REF} + 0.135$	Note 2	V	1
V_{IL} (AC135)	AC input logic low	Note 2	$V_{REF} - 0.135$	V	1
V_{IH} (AC125)	AC input logic high	$V_{REF} + 0.125$	Note 2	V	1, 4
V_{IL} (AC125)	AC input logic low	Note 2	$V_{REF} - 0.125$	V	1, 4
V_{REFCA} (DC)	Reference voltage for ADD/CMD inputs	$0.49 \cdot V_{DD}$	$0.51 \cdot V_{DD}$	V	3

Notes:

1. For Command and Address signals except RESET#, $V_{REF} = V_{REFCA}$. For DQ and DM, $V_{REF} = V_{REFDQ}$.
2. Refer to AC Overshoot and Undershoot Specifications for Address/Control Pins on page 20.
3. The AC peak noise on V_{REF} may not allow V_{REF} to deviate from $V_{REF(DC)}$ by more than $\pm 1\% V_{DD}$ (for reference: approximately $\pm 15mV$).
4. Applies to Command and Address signals only.

Differential Swing Requirements for Clock ($\overline{CK}/\overline{CK}$) and Strobe ($\overline{DQS}/\overline{DQS}$)


Symbol	Parameter	DDR3-1866		Units	Notes
		Min	Max		
V_{IHDIFF}	Differential input logic high	0.200	Note 3	V	1
V_{ILDIFF}	Differential input logic low	Note 3	-0.200	V	1
$V_{IHDIFF(AC)}$	AC input logic high	$2 * (V_{IH(AC)} - V_{REF})$	Note 3	V	2
$V_{ILDIFF(AC)}$	AC input logic low	Note 3	$2 * (V_{REF} - V_{IL(AC)})$	V	2

Notes:


1. Used to define a differential signal slew-rate.
2. For $\overline{CK}/\overline{CK}$, use $V_{IH}/V_{IL(AC)}$ of ADD/CMD and V_{REFCA} ; for $\overline{DQS}/\overline{DQS}$, use $V_{IH}/V_{IL(AC)}$ of DQs and V_{REFDQ} ; if a reduced AC-high or AC-low level is used for a signal group, then the reduced level applies also here.
3. These values are not defined, however the single-ended signals \overline{CK} , \overline{CK} , \overline{DQS} , \overline{DQS} need to be within the respective limits ($V_{IH(DC)max}$, $V_{IL(DC)min}$) for single-ended signals as well as the limitations for overshoot and undershoot. Refer to AC Overshoot/Undershoot Specification for Clock, Data, Strobe and Mask Pins on page 20.

AC Overshoot/Undershoot Specification for Address/Control Pins

Parameter	DDR3-1866	Units
Maximum peak amplitude allowed for overshoot area.	0.4	V
Maximum peak amplitude allowed for undershoot area.	0.4	V
Maximum overshoot area above V_{DD} .	0.28	V-ns
Maximum undershoot area under V_{SS} .	0.28	V-ns
(A0-A15, BA0-BA2, CS, RAS, CAS, WE, CKE, ODT)		

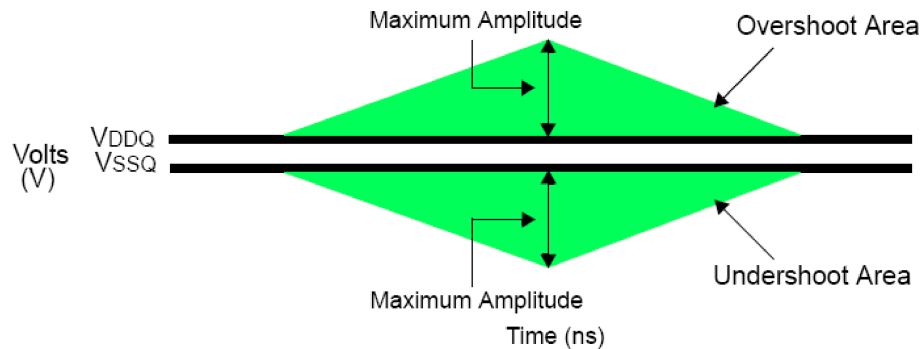
AC Overshoot/Undershoot Specification for Clock, Data, Strobe and Mask Pins

Parameter	DDR3-1866	Units
Maximum peak amplitude allowed for overshoot area.	0.4	V
Maximum peak amplitude allowed for undershoot area.	0.4	V
Maximum overshoot area above V_{DD} .	0.11	V-ns
Maximum undershoot area under V_{SS} .	0.11	V-ns
(CK, CK#, DQ, DQS, DQS#, DM)		

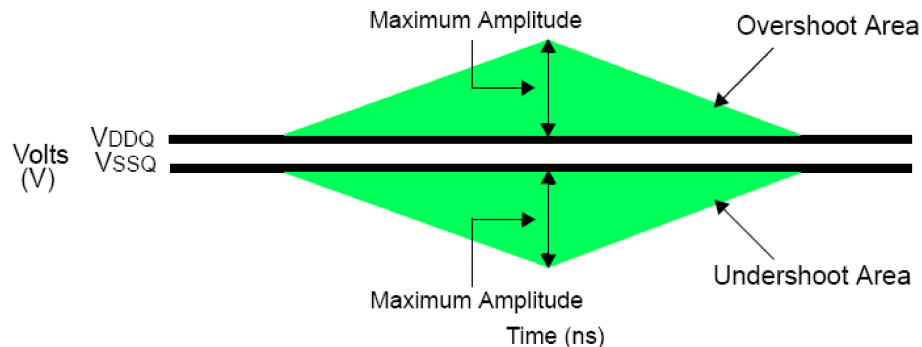

Device Standard Speed Bins
DDR3-1866 Speed Bins

Speed Bin		DDR3-1866		Units	Notes	
CL - nRCD - nRP		13-13-13				
Parameter	Symbol	Min	Max			
Internal read command to first data	t_{AA}	13.125	20	ns	6	
ACT to internal read or write delay time	t_{RCD}	13.125	-	ns	6	
Pre command period	t_{RP}	13.125	-	ns	6	
ACT to ACT or REF command period	t_{RC}	47.125	-	ns	6	
ACT to PRE command period	t_{RAS}	34	$9 * t_{REFI}$	ns		
CL = 5	CWL = 5	$t_{CK(avg)}$	3.0	3.3	ns	1, 2, 3, 5, 7
	CWL = 6, 7, 8, 9		Reserved		ns	4
CL = 6	CWL = 5	$t_{CK(avg)}$	2.5	3.3	ns	1, 2, 3, 5
	CWL = 6, 7, 8, 9		Reserved		ns	4
CL = 7	CWL = 5	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 6		1.875	< 2.5	ns	1, 2, 3, 5
	CWL = 7, 8, 9		Reserved		ns	4
CL = 8	CWL = 5	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 6		1.875	< 2.5	ns	1, 2, 3, 5
	CWL = 7, 8, 9		Reserved		ns	4
CL = 9	CWL = 5, 6	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 7		1.5	< 1.875	ns	1, 2, 3, 5
	CWL = 8, 9		Reserved		ns	4
CL = 10	CWL = 5, 6	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 7		1.5	< 1.875	ns	1, 2, 3, 5
	CWL = 8, 9		Reserved		ns	4
CL = 11	CWL = 5, 6, 7	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 8		1.25	< 1.5	ns	1, 2, 3, 5
	CWL = 9		Reserved		ns	4
CL = 12	CWL = 5, 6, 7, 8, 9	$t_{CK(avg)}$	Reserved		ns	4
CL = 13	CWL = 5, 6, 7, 8	$t_{CK(avg)}$	Reserved		ns	4
	CWL = 9		1.071	< 1.25	ns	1, 2, 3

DDR3-1866 Speed Bins

Speed Bin		DDR3-1866		Units	Notes
CL - nRCD - nRP		13-13-13			
Parameter	Symbol	Min	Max		
Supported CL Settings		5, 6, 7, 8, 9, 10, 11, 13		n _{CK}	
Supported CWL Settings		5, 6, 7, 8, 9		n _{CK}	

Speed Bin Tables Notes

1. The CL setting and CWL setting result in $t_{CK(AVG)min}$ and $t_{CK(AVG)max}$ requirements. When making a selection of $t_{CK(AVG)}$, both need to be fulfilled: Requirements from CL setting as well as requirements from CWL setting.
2. $t_{CK(AVG)min}$ limits: Since CAS Latency is not purely analog - data and strobe output are synchronized by the DLL - all possible intermediate frequencies may not be guaranteed. An application should use the next smaller JEDEC standard $t_{CK(AVG)}$ value (3.0ns, 2.5ns, 1.875ns, 1.5ns, 1.25ns, or 1.071ns) when calculating CL [nCK] = $t_{AA} [ns] / t_{CK(AVG)} [ns]$, rounding up to the next 'Supported CL', where $t_{CK(AVG)} = 3.0ns$ should only be used for CL = 5 calculation.
3. $t_{CK(AVG).max}$ limits: Calculate $t_{CK(AVG)} = t_{AA.max} / CL$ SELECTED and round the resulting $t_{CK(AVG)}$ down to the next valid speed bin (i.e. 3.0ns, 2.5ns, 1.875ns, 1.5ns, 1.25ns, or 1.071ns). This result is $t_{CK(AVG)max}$ corresponding to CL SELECTED.
4. 'Reserved' settings are not allowed. User must program a different value.
5. Any DDR3-1866 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
6. In order to support down binning to CL=7, CL=9, and CL = 11, $t_{AA}/t_{RCD}/t_{RPmin}$ must be 13.125 ns. SPD settings must be programmed to match. For example, DDR3-1866-13-13-13 devices supporting down binning to DDR3-1600-11-11-11, DDR3-1333-9-9-9, or DDR3-1066-7-7-7 should program 13.125 ns in SPD bytes for $t_{AA.min}$ (Byte16), t_{RCDmin} (Byte 18), and t_{RPmin} (Byte 20). Once t_{RP} (Byte 20) is programmed to 13.125ns, t_{RCmin} (Bytes 21 & 23) also should be programmed accordingly ($t_{RASmin} + t_{RPmin} = 34 ns + 13.125 ns = 47.125ns$).
7. DDR3-800 AC timing apply if DRAM operates at lower than 800 MT/s data rate.

Device Timing Parameters by Speed Bin

Parameter	Symbol	DDR3-1866		Units	Notes
		Min	Max		
Clock Timing					
Minimum clock cycle time (DLL off mode)	$t_{CK(DLL_OFF)}$	8	-	t_{CK}	6
Average clock period	$t_{CK(avg)}$	Refer to Speed Bin on page 22.		ps	
Average high pulse width	$t_{CH(avg)}$	0.47	0.53	$t_{CK(avg)}$	
Average low pulse width	$t_{CL(avg)}$	0.47	0.53	$t_{CK(avg)}$	
Absolute clock period	$t_{CK(abs)}$	$t_{CK(avg)min} + t_{JIT(per)min}$	$t_{CK(avg)max} + t_{JIT(per)max}$	ps	
Absolute clock high pulse width	$t_{CH(abs)}$	0.43	-	$t_{CK(avg)}$	25
Absolute clock low pulse width	$t_{CL(abs)}$	0.43	-	$t_{CK(avg)}$	26
Clock period jitter	$t_{JIT(per)}$	-60	60	ps	
Clock period jitter during DLL locking period	$t_{JIT(per, lck)}$	-50	50	ps	
Cycle to cycle period jitter	$t_{JIT(CC)}$	120		ps	
Cycle to cycle period jitter during DLL locking period	$t_{JIT(CC, lck)}$	100		ps	
Duty cycle jitter	$t_{JIT(duty)}$	-	-	ps	
Cumulative error across 2 cycles	$t_{ERR(2per)}$	-88	88	ps	
Cumulative error across 3 cycles	$t_{ERR(3per)}$	-105	105	ps	
Cumulative error across 4 cycles	$t_{ERR(4per)}$	-117	117	ps	
Cumulative error across 5 cycles	$t_{ERR(5per)}$	-126	126	ps	
Cumulative error across 6 cycles	$t_{ERR(6per)}$	-133	133	ps	
Cumulative error across 7 cycles	$t_{ERR(7per)}$	-139	139	ps	
Cumulative error across 8 cycles	$t_{ERR(8per)}$	-145	145	ps	
Cumulative error across 9 cycles	$t_{ERR(9per)}$	-150	150	ps	
Cumulative error across 10 cycles	$t_{ERR(10per)}$	-154	154	ps	
Cumulative error across 11 cycles	$t_{ERR(11per)}$	-158	158	ps	
Cumulative error across 12 cycles	$t_{ERR(12per)}$	-161	161	ps	
Cumulative error across n = 13-50 cycles	$t_{ERR(nper)}$	$t_{ERR(nper)min} = (1 + 0.68\ln(n)) * t_{JIT(per)min}$ $t_{ERR(nper)max} = (1 + 0.68\ln(n)) * t_{JIT(per)max}$		ps	24

Device Timing Parameters by Speed Bin (Continued)

Parameter	Symbol	DDR3-1866		Units	Notes
		Min	Max		
Data Timing					
DQS, $\overline{\text{DQS}}$ to DQ skew, per group, per access	t_{DQSQ}	-	85	ps	13
DQ output hold time from DQS, $\overline{\text{DQS}}$	t_{QH}	0.38	-	$t_{\text{CK(avg)}}$	13, b
DQ low-impedance from CK, $\overline{\text{CK}}$	$t_{\text{LZ(DQ)}}$	-390	195	ps	13, 14, a
DQ high-impedance from CK, $\overline{\text{CK}}$	$t_{\text{HZ(DQ)}}$	-	195	ps	13, 14, a
Data setup time to DQS, $\overline{\text{DQS}}$ referenced to $V_{\text{IH(AC)}} / V_{\text{IL(AC)}}$ levels	$t_{\text{DS(base) AC150}}$	-	-	ps	17, d
Data setup time to DQS, $\overline{\text{DQS}}$ referenced to $V_{\text{IH(AC)}} / V_{\text{IL(AC)}}$ levels	$t_{\text{DS(base) AC135}}$	68	-	ps	17, 27, d
Data hold time from DQS, $\overline{\text{DQS}}$ referenced to $V_{\text{IH(DC)}} / V_{\text{IL(DC)}}$ levels	$t_{\text{DH(base) DC100}}$	-	-	ps	17, d
DQ and DM input pulse width for each input	t_{DIPW}	320	-	ps	28
Data Strobe Timing					
DQS, $\overline{\text{DQS}}$ differential READ preamble	t_{RPRE}	0.9	Note 19	$t_{\text{CK(avg)}}$	13, 19, b
DQS, $\overline{\text{DQS}}$ differential READ postamble	t_{RPST}	0.3	Note 11	$t_{\text{CK(avg)}}$	11, 13, b
DQS, $\overline{\text{DQS}}$ differential output high time	t_{QSH}	0.4	-	$t_{\text{CK(avg)}}$	13, b
DQS, $\overline{\text{DQS}}$ differential output low time	t_{QSL}	0.4	-	$t_{\text{CK(avg)}}$	13, b
DQS, $\overline{\text{DQS}}$ differential WRITE preamble	t_{WPRE}	0.9	-	$t_{\text{CK(avg)}}$	
DQS, $\overline{\text{DQS}}$ differential WRITE postamble	t_{WPST}	0.3	-	$t_{\text{CK(avg)}}$	
DQS, $\overline{\text{DQS}}$ rising edge output access time from rising CK, $\overline{\text{CK}}$	t_{DQSCK}	-195	195	ps	13, a
DQS and $\overline{\text{DQS}}$ low-impedance time (Referenced from RL - 1)	$t_{\text{LZ(DQS)}}$	-390	195	ps	13, 14, a
DQS and $\overline{\text{DQS}}$ low-impedance time (Referenced from RL + BL / 2)	$t_{\text{HZ(DQS)}}$	-	195	ps	13, 14, a
DQS, $\overline{\text{DQS}}$ differential input low pulse width	t_{DQSL}	0.45	0.55	$t_{\text{CK(avg)}}$	
DQS, $\overline{\text{DQS}}$ differential input high pulse width	t_{DQSH}	0.45	0.55	$t_{\text{CK(avg)}}$	
DQS, $\overline{\text{DQS}}$ rising edge to CK, $\overline{\text{CK}}$ rising edge	t_{DQSS}	-0.27	0.27	$t_{\text{CK(avg)}}$	c
DQS, $\overline{\text{DQS}}$ falling edge setup time to CK, $\overline{\text{CK}}$ rising edge	t_{DSS}	0.18	-	$t_{\text{CK(avg)}}$	c
DQS, $\overline{\text{DQS}}$ falling edge hold time from CK, $\overline{\text{CK}}$ rising edge	t_{DSH}	0.18	-	$t_{\text{CK(avg)}}$	c

Device Timing Parameters by Speed Bin (Continued)

Parameter	Symbol	DDR3-1866		Units	Notes
		Min	Max		
Command and Address Timing					
DLL locking time	t_{DLLK}	512	-	nCK	
Internal READ command to PRECHARGE command delay	t_{RTP}	max (4nCK, 7.5ns)	-		e
Delay from start of internal write transaction to internal READ command	t_{WTR}	max (4nCK, 7.5ns)	-		18, e
WRITE recovery time	t_{WR}	15	-	ns	e
Mode Register Set command cycle time	t_{MRD}	4	-	nCK	
Mode Register Set command update delay	t_{MOD}	max (12nCK, 15ns)	-		
ACT to internal read or write delay time	t_{RCD}	Refer to Speed Bin on page 22.			e
PRECHARGE command period	t_{RP}	Refer to Speed Bin on page 22.			e
ACT to ACT or REF command period	t_{RC}	Refer to Speed Bin on page 22.			e
\overline{CAS} to \overline{CAS} command delay	t_{CCD}	4	-	nCK	
Auto-precharge write recovery + precharge time	$t_{DAL(min)}$	WR + roundup ($t_{RP} / t_{CK(avg)}$)		nCK	
Multi-purpose register recovery time	t_{MPRR}	1	-	nCK	22
ACTIVE to PRECHARGE command period	t_{RAS}	Refer to Speed Bin on page 22.			e
ACTIVE to ACTIVE command period for 1KB page size	t_{RRD}	max (4nCK, 5ns)	-		e
ACTIVE to ACTIVE command period for 2KB page size	t_{RRD}	max (4nCK, 6ns)	-		e
Four activate window for 1KB page size	t_{FAW}	27	-	ns	e
Four activate window for 2KB page size	t_{FAW}	35	-	ns	e
Command and Address setup time to CK, \overline{CK} referenced to $V_{IH(AC)} / V_{IL(AC)}$ levels	$t_{IS(base)}$ AC150	-	-	ps	16, b
Command and Address setup time to CK, \overline{CK} referenced to $V_{IH(AC)} / V_{IL(AC)}$ levels	$t_{IS(base)}$ AC125	150	-	ps	16, b
Command and Address hold time to CK, \overline{CK} referenced to $V_{IH(DC)} / V_{IL(DC)}$ levels	$t_{IS(base)}$ DC100	100	-	ps	16, b
Control and Address input pulse width for each input	t_{IPW}	535	-	ps	28

Device Timing Parameters by Speed Bin (Continued)

Parameter	Symbol	DDR3-1866		Units	Notes
		Min	Max		
Calibration Timing					
Power-up and RESET calibration time	t_{zQinit}	max (512nCK, 640ns)	-		
Normal operation Full calibration time	t_{zQoper}	max (256nCK, 320ns)	-		
Normal operation Short calibration time	t_{zQCS}	max (64nCK, 80ns)	-		23
Reset Timing					
Exit Reset from CKE HIGH to a valid command	t_{XPR}	max (5nCK, $t_{RFC(min)} + 10ns$)	-		
Self Refresh Timing					
Exit Self Refresh from to commands not requiring a locked DLL	t_{XS}	max (5nCK, $t_{RFC(min)} + 10ns$)	-		
Exit Self Refresh from to commands requiring a locked DLL	t_{XSDLL}	$t_{DLLK(min)}$	-	nCK	
Minimum CKE low width for Self Refresh entry to exit timing	t_{CKESR}	$t_{CKE(min)} + 1nCK$	-		
Valid clock requirement after Self Refresh Entry (SRE) or Power-Down Entry (PDE)	t_{CKSRE}	max (5nCK, 10ns)	-		
Valid clock requirement before Self Refresh Exit (SRX) or Power-Down Exit (PDX) or Reset Exit	t_{CKSRX}	max (5nCK, 10ns)	-		
Power Down Timing					
Exit Power Down with DLL on to any valid command; Exit Precharge Power Down with DLL frozen to commands not requiring a locked DLL	t_{XP}	max (3nCK, 6ns)	-		
Exit Precharge Power Down with DLL frozen to commands requiring a locked DLL	t_{XPDLL}	max (10nCK, 24ns)	-		2
CKE minimum pulse width	t_{CKE}	max (3nCK, 5ns)	-	nCK	
Command pass disable delay	t_{CPDED}	2	-	nCK	
Power Down Entry to Exit Timing	t_{PD}	$t_{CKE(min)}$	$9 * t_{REFI}$		15
Timing of ACT command to Power Down entry	$t_{ACTPDEN}$	1	-	nCK	20
Timing of PRE or PREA command to Power Down entry	t_{PRPDEN}	1	-	nCK	20

Device Timing Parameters by Speed Bin (Continued)

Parameter	Symbol	DDR3-1866		Units	Notes
		Min	Max		
Timing of RD/RDA command to Power Down entry	t_{RDPDEN}	$RL + 4 + 1$	-	nCK	
Timing of WR command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	t_{WRPDEN}	$WL + 4 + (t_{WR} / t_{CK(avg)})$	-	nCK	9
Timing of WRA command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	$t_{WRAPDEN}$	$WL + 4 + WR + 1$	-	nCK	10
Timing of WR command to Power Down entry (BC4MRS)	t_{WRPDEN}	$WL + 2 + (t_{WR} / t_{CK(avg)})$	-	nCK	9
Timing of WRA command to Power Down entry (BC4MRS)	$t_{WRAPDEN}$	$WL + 2 + WR + 1$	-	nCK	10
Timing of REF command to Power Down entry	$t_{REFPDEN}$	1	-	nCK	20, 21
Timing of MRS command to Power Down entry	$t_{MRSPDEN}$	$t_{MOD(min)}$	-		
ODT Timing					
ODT turn on latency	ODTLon	$WL-2 = CWL + AL -2$		nCK	
ODT turn off latency	ODTLoff	$WL-2 = CWL + AL -2$		nCK	
ODT high time without Write command or with Write command and BC4	ODTH4	4	-	nCK	
ODT high time with Write command and BL8	ODTH8	6	-	nCK	
Asynchronous RTT turn-on delay (Power-Down with DLL frozen)	t_{AONPD}	2	8.5	ns	
Asynchronous RTT turn-off delay (Power-Down with DLL frozen)	t_{AOFPD}	2	8.5	ns	
RTT turn-on	t_{AON}	-195	195	ps	7, a
RTT_Nom and RTT_WR turn-off time from ODTLoff reference	t_{AOF}	0.3	0.7	$t_{CK(avg)}$	8, a
RTT dynamic change skew	t_{ADC}	0.3	0.7	$t_{CK(avg)}$	a
Write Leveling Timing					
First DQS/DQS rising edge after write leveling mode is programmed	t_{WLMRD}	40	-	nCK	3
DQS/DQS delay after write leveling mode is programmed	$t_{WLDQSEN}$	25	-	nCK	3
Write leveling setup time from rising CK, CK crossing to rising DQS, DQS crossing	t_{WLS}	140	-	ps	
Write leveling hold time from rising DQS, DQS crossing to rising CK, CK crossing	t_{WLH}	140	-	ps	
Write leveling output delay	t_{WLO}	0	7.5	ns	
Write leveling output error	t_{WLOE}	0	2	ns	

Device Timing Parameters Notes

1. Actual value dependant upon measurement level definitions which are TBD.
2. Commands requiring a locked DLL are: READ (and RAP) and synchronous ODT commands.
3. The max values are system dependent.
4. WR as programmed in the Mode Register.
5. Value must be rounded-up to next higher integer value.
6. There is no maximum cycle time limit besides the need to satisfy the refresh interval, t_{REFI} .
7. Minimum RTT turn-on time (t_{AONmin}) is the point in time when the device leaves high impedance and ODT resistance begins to turn on. Maximum RTT turn on time (t_{AONmax}) is the point in time when the ODT resistance is fully on. Both are measured from ODTLon.
8. Minimum RTT turn-off time (t_{AOFmin}) is the point in time when the device starts to turn off the ODT resistance. Maximum RTT turn off time (t_{AOFmax}) is the point in time when the on-die termination has reached high impedance. Both are measured from ODTLoff.
9. t_{WR} is defined in ns, for calculation of t_{WRPDEN} it is necessary to round up t_{WR} / t_{CK} to the next integer.
10. WR is in clock cycles as programmed in MR0.
11. The maximum postamble is bound by $t_{HZDQS(max)}$.
12. Output timing deratings are relative to the SDRAM input clock. When the device is operated with input clock jitter, this parameter needs to be derated by TBD.
13. Value is only valid for RON34.
14. Single ended signal parameter.
15. t_{REFI} depends on T_{OPER} .
16. $t_{IS(base)}$ and $t_{IH(base)}$ values are for 1V/ns CMD/ADD single-ended slew rate and 2V/ns CK, \overline{CK} differential slew rate. Note for DQ and DM signals, $V_{REF(DC)} = V_{REFDQ(DC)}$. For input only pins except \overline{RESET} , $V_{REF(DC)} = V_{REFCA(DC)}$.
17. $t_{DS(base)}$ and $t_{DH(base)}$ values are for 1V/ns DQ single-ended slew rate and 2V/ns DQS, \overline{DQS} differential slew rate. Note for DQ and DM signals, $V_{REF(DC)} = V_{REFDQ(DC)}$. For input only pins except \overline{RESET} , $V_{REF(DC)} = V_{REFCA(DC)}$.
18. Start of internal write transaction is defined as follows:
19. For BL8 (fixed by MRS and on- the-fly): Rising clock edge 4 clock cycles after WL.
20. For BC4 (on- the- fly): Rising clock edge 4 clock cycles after WL.
21. For BC4 (fixed by MRS): Rising clock edge 2 clock cycles after WL.
22. The maximum preamble is bound by $t_{LZDQS(min)}$.
23. CKE is allowed to be registered low while operations such as row activation, precharge, auto-precharge or refresh are in progress, but power-down IDD spec will not be applied until finishing those operations.
24. Although CKE is allowed to be registered LOW after a REFRESH command once $t_{REFPDEN(min)}$ is satisfied, there are cases where additional time such as $t_{XPDLL(min)}$ is also required.
25. Defined between end of MPR read burst and MRS which reloads MPR or disables MPR function.
26. One ZQCS command can effectively correct a minimum of 0.5% (ZQCorrection) of RON and RTT impedance error within 64 nCK for all speed bins assuming the maximum sensitivities specified in the 'Output Driver Voltage and Temperature Sensitivity' and 'ODT Voltage and Temperature Sensitivity' tables. The appropriate interval between ZQCS commands can be determined from these tables and other application-specific parameters.
27. One method for calculating the interval between ZQCS commands, given the temperature ($T_{driftrate}$) and voltage ($V_{driftrate}$) drift rates that the SDRAM is subject to in the application, is illustrated. The interval could be defined by the following formula:

$$\frac{ZQCorrection}{(TSens \times Tdriftrate) + (VSens \times Vdriftrate)}$$

28. where $TSens = \max(dRTTdT, dRONdTM)$ and $VSens = \max(dRTTdV, dRONdVM)$ define the SDRAM temperature and voltage sensitivities.
29. For example, if $TSens = 1.5\% / ^\circ C$, $VSens = 0.15\% / mV$, $Tdriftrate = 1 ^\circ C / sec$ and $Vdriftrate = 15 mV / sec$, then the interval between ZQCS commands is calculated as:

$$\frac{0.5}{(1.5 \times 1) + (0.15 + 15)} = 0.133 \approx 128 ms$$

30. $n =$ from 13 cycles to 50 cycles. This row defines 38 parameters.
31. $t_{CH(abs)}$ is the absolute instantaneous clock high pulse width, as measured from one rising edge to the following falling edge.
32. $t_{CL(abs)}$ is the absolute instantaneous clock low pulse width, as measured from one falling edge to the following rising edge.
33. The $t_{IS(base)}$ AC150 specifications are adjusted from the $t_{IS(base)}$ specification by adding an additional 100 ps of derating to accommodate for the lower alternate threshold of 150 mV and another 25 ps to account for the earlier reference point $[(175mv - 150mV) / 1 V/ns]$.
34. Pulse width of a input signal is defined as the width between the first crossing of V_{REFDC} and the consecutive crossing of V_{REFDC} .

Jitter Notes

- a. When the device is operated with input clock jitter, this parameter needs to be derated by the actual $t_{ERR(mper)}^{act}$ of the input clock, where $2 \leq m \leq 12$. (Output deratings are relative to the SDRAM input clock.)

For example, if the measured jitter into a DDR3-800 SDRAM has $t_{ERR(mper)}^{act, min} = -172$ ps and $t_{ERR(mper)}^{act, max} = +193$ ps, then $t_{DQSCkmin}^{(derated)} = t_{DQSCkmin} - t_{ERR(mper)}^{act, max} = -400$ ps - 193 ps = -593 ps and $t_{DQSCkmax}^{(derated)} = t_{DQSCkmax} - t_{ERR(mper)}^{act, min} = 400$ ps + 172ps = +572ps. Similarly, $t_{LZ(DQ)}$ for DDR3-800 derates to $t_{LZ(DQ)min}^{(derated)} = -800$ ps - 193 ps = -993 ps and $t_{LZ(DQ)max}^{(derated)} = 400$ ps + 172ps = +572ps. (Caution on the min/max usage!)

Note that $t_{ERR(mper)}^{act, min}$ is the minimum measured value of $t_{ERR(nper)}$ where $2 \leq n \leq 12$, and $t_{ERR(mper)}^{act, max}$ is the maximum measured value of $t_{ERR(nper)}$ where $2 \leq n \leq 12$.

- b. When the device is operated with input clock jitter, this parameter needs to be derated by the actual $t_{JIT(per)}^{act}$ of the input clock. (Output deratings are relative to the SDRAM input clock.)

For example, if the measured jitter into a DDR3-800 SDRAM has $t_{CK(avg)}^{act} = 2500$ ps, $t_{JIT(per)}^{act, min} = -72$ ps and $t_{JIT(per)}^{act, max} = +93$ ps, then $t_{RPREmin}^{(derated)} = t_{RPREmin} + t_{JIT(per)}^{act, min} = 0.9 \times t_{CK(avg)}^{act} + t_{JIT(per)}^{act, min} = 0.9 \times 2500$ ps - 72 ps = +2178 ps. Similarly, $t_{QHmin}^{(derated)} = t_{QHmin} + t_{JIT(per)}^{act, min} = 0.38 \times t_{CK(avg)}^{act} + t_{JIT(per)}^{act, min} = 0.38 \times 2500$ ps - 72 ps = +878 ps. (Caution on the min/max usage!)

- c. These parameters are measured from a data strobe signal (DQS, \overline{DQS}) crossing to its respective clock signal (CK, \overline{CK}) crossing. The spec values are not affected by the amount of clock jitter applied (i.e. $t_{JIT(per)}, t_{JIT(CC)}$, etc.), as these are relative to the clock signal crossing. That is, these parameters should be met whether clock jitter is present or not.
- d. These parameters are measured from a data signal ($DM, DQ0, DQ1$, etc.) transition edge to its respective data strobe signal (DQS, \overline{DQS}) crossing.
- e. For these parameters, the DDR3 SDRAM device supports $t_{nPARAM} [nCK] = RU \{t_{PARAM} [ns] / t_{CK(avg)} [ns]\}$, which is in clock cycles, assuming all input clock jitter specifications are satisfied. For example, the device will support $t_{nRP} = RU \{t_{RP} / t_{CK(avg)}\}$, which is in clock cycles, if all input clock jitter specifications are met. This means: For DDR3-800 6-6-6, of which $t_{RP} = 15$ ns, the device will support $t_{nRP} = RU \{t_{RP} / t_{CK(avg)}\} = 6$, as long as the input clock jitter specifications are met, i.e. Precharge command at T_m and Active command at T_m+6 is valid even if $(T_m+6 - T_m)$ is less than 15 ns due to input clock jitter.

IDD and IDDQ Measurement-Loop Patterns Timing

Speed Bin		DDR3-1866	Units
Parameter		13-13-13	
t _{CKmin} (IDD)		1.071	ns
CL(IDD)		13	nCK
nRCD		13	nCK
nRC		45	nCK
nRAS		32	nCK
nRP		13	nCK
nFAW	1KB page size	26	nCK
nFAW	2KB page size	33	nCK
nRRD	1KB page size	5	nCK
nRRD	2KB page size	6	nCK
nRFC		243	nCK

Definitions for IDD Measurement Conditions

- “0” and “LOW” is defined as $V_{IN} \leq V_{ILAC(max)}$.
- “1” and “HIGH” is defined as $V_{IN} \geq V_{IHAC(min)}$.
- “MID-LEVEL” is defined as inputs that are $V_{REF} = V_{DD}/2$.
- Timings used for IDD and IDDQ Measurement-Loop Patterns are provided in IDD and IDDQ Measurement-Loop Patterns Timing above.
- Basic IDD and IDDQ Measurement Conditions are described in IDD Measurement Conditions on pages 31-32.
- Detailed IDD and IDDQ Measurement-Loop Patterns are described in IDD Measurement-Loop Patterns on pages 34-39.
- IDD Measurements are done after properly initializing the DDR3 SDRAM. This includes but is not limited to setting:
 - RON = RZQ/7 (34 Ohm in MR1);
 - Qoff = 0_B (Output Buffer enabled in MR1);
 - RTT_Nom = RZQ/6 (40 Ohm in MR1);
 - RTT_Wr = RZQ/2 (120 Ohm in MR2);
 - TDQS Feature disabled in MR1.
- **Attention:** The IDD and IDDQ Measurement-Loop Patterns need to be executed at least one time before actual IDD or IDDQ measurement is started.
- Define $\underline{D} = \{\underline{CS}, \underline{RAS}, \underline{CAS}, \underline{WE}\} = \{\text{HIGH}, \text{LOW}, \text{LOW}, \text{LOW}\}$
- Define $\underline{D} = \{\underline{CS}, \underline{RAS}, \underline{CAS}, \underline{WE}\} = \{\text{HIGH}, \text{HIGH}, \text{HIGH}, \text{HIGH}\}$



IDD Measurement Conditions

Symbol	Description	Conditions
I _{DD0}	Operating One Bank Active-Precharge Current	CKE: High; External clock: On; t _{CK} , nRC, nRAS, CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : High between ACT and PRE; Command, Address, Bank Address Inputs: partially toggling according to IDD0 Measurement-Loop Pattern on page 34; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: Cycling with one bank active at a time: 0,0,1,1,2,2,... (See IDD0 Measurement-Loop Pattern on page 34); Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD0 Measurement-Loop Pattern on page 34.
I _{DD1}	Operating One Bank Active-Read-Precharge Current	CKE: High; External clock: On; t _{CK} , nRC, nRAS, nRCD, CL: See IDD and IDDQ Timings on page 30; BL: 8 ^{1,6} ; AL: 0; \overline{CS} : High between ACT, RD and PRE; Command, Address, Bank Address Inputs, Data I/O: partially toggling according to IDD1 Measurement-Loop Pattern on page 35; DM: stable at 0; Bank Activity: Cycling with one bank active at a time: 0,0,1,1,2,2,... (See IDD1 Measurement-Loop Pattern on page 35); Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD1 Measurement-Loop Pattern on page 35.
I _{DD2P0}	Precharge Power-Down Current Slow Exit	CKE: Low; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: stable at 0; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks closed; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Precharge Power Down Mode: Slow Exit ³ .
I _{DD2P1}	Precharge Power-Down Current Fast Exit	CKE: Low; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: stable at 0; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks closed; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Precharge Power Down Mode: Fast Exit ³ .
I _{DD2Q}	Precharge Quiet Standby Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: stable at 0; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks closed; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0.
I _{DD2N}	Precharge Standby Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: partially toggling according to IDD2N and IDD3N Measurement-Loop Pattern on page 36; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks closed; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD2N and IDD3N Measurement-Loop Pattern on page 36.



IDD Measurement Conditions (Continued)

Symbol	Description	Conditions
I _{DD2NT}	Precharge Standby ODT Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: partially toggling according to IDD2NT Measurement-Loop Pattern on page 36; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks closed; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: toggling according to IDD2NT Measurement-Loop Pattern on page 36; Pattern Details: See IDD2NT Measurement-Loop Pattern on page 36.
I _{DD3P}	Active Power Down Current	CKE: Low; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: stable at 0; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks open; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0.
I _{DD3N}	Active Standby Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : stable at 1; Command, Address, Bank Address Inputs: partially toggling according to IDD2N and IDD3N Measurement-Loop Pattern on page 36; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: all banks open; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD2N and IDD3N Measurement-Loop Pattern on page 36.
I _{DD4R}	Operating Burst Read Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ^{1, 6} ; AL: 0; \overline{CS} : High between RD; Command, Address, Bank Address Inputs: partially toggling according to IDD4R Measurement-Loop Pattern on page 37; Data I/O: seamless read data burst with different data between one burst and the next one according to IDD4R Measurement-Loop Pattern on page 37; DM: stable at 0; Bank Activity: all banks open, RD commands cycling through banks: 0,0,1,1,2,2,... (See IDD4R Measurement-Loop Pattern on page 37); Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD4R Measurement-Loop Pattern on page 37.
I _{DD4W}	Operating Burst Write Current	CKE: High; External clock: On; t _{CK} , CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : High between WR; Command, Address, Bank Address Inputs: partially toggling according to IDD4W Measurement-Loop Pattern on page 37; Data I/O: seamless write data burst with different data between one burst and the next one according to IDD4W Measurement-Loop Pattern on page 37; DM: stable at 0; Bank Activity: all banks open, WR commands cycling through banks: 0,0,1,1,2,2,... (See IDD4W Measurement-Loop Pattern on page 37); Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at HIGH; Pattern Details: See IDD4W Measurement-Loop Pattern on page 37.



IDD Measurement Conditions (Continued)

Symbol	Description	Conditions
I_{DD5B}	Burst Refresh Current	CKE: High; External clock: On; t_{CK} , CL, nRFC: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} : High between REF; Command, Address, Bank Address Inputs: partially toggling according to IDD5B Measurement-Loop Pattern on page 38; Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: REF command every nRFC (See IDD5B Measurement-Loop Pattern on page 38); Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD5B Measurement-Loop Pattern on page 38.
I_{DD6}	Self-Refresh Current: Normal Temperature Range	T_{CASE} : 0 °C - 85 °C; Auto Self-Refresh (ASR): Disabled ⁴ ; Self-Refresh Temperature Range (SRT): Normal ⁵ ; CKE: Low; External clock: Off; CK and CK#: LOW; CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} , Command, Address, Bank Address, Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: MID-LEVEL.
I_{DD6ET}	Self-Refresh Current: Extended Temperature Range	T_{CASE} : 85 °C - 95 °C; Auto Self-Refresh (ASR): Disabled ⁴ ; Self-Refresh Temperature Range (SRT): Extended ⁵ ; CKE: Low; External clock: Off; CK and CK#: LOW; CL: See IDD and IDDQ Timings on page 30; BL: 8 ¹ ; AL: 0; \overline{CS} , Command, Address, Bank Address, Data I/O: MID-LEVEL; DM: stable at 0; Bank Activity: Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: MID-LEVEL.
I_{DD7}	All Bank Interleave Read Current	CKE: High; External clock: On; t_{CK} , nRC, nRAS, nRCD, nRRD, nFAW, CL: See IDD and IDDQ Timings on page 30; BL: 8 ^{1, 6} ; AL: CL-1; \overline{CS} : High between ACT and RDA; Command, Address, Bank Address Inputs: partially toggling according to IDD7 Measurement-Loop Pattern on pages 38-39; Data I/O: read data bursts with different data between one burst and the next one according to IDD7 Measurement-Loop Pattern on pages 38-39; DM: stable at 0; Bank Activity: two times interleaved cycling through banks (0, 1,...7) with different addressing, See IDD7 Measurement-Loop Pattern on pages 38-39; Output Buffer and RTT: Enabled in Mode Registers ² ; ODT Signal: stable at 0; Pattern Details: See IDD7 Measurement-Loop Pattern on pages 38-39.

Notes:

- Burst Length: BL8 fixed by MRS: set MR0 A[1,0]=00B.
- Output Buffer Enable: set MR1 A[12] = 0B; set MR1 A[5,1] = 01B; RTT_Nom enable: set MR1 A[9,6,2] = 011B; RTT_Wr enable: set MR2 A[10,9] = 10B.
- Precharge Power Down Mode: set MR0 A[12] = 0B for Slow Exit or MR0 A[12]=1B for Fast Exit.
- Auto Self-Refresh (ASR): set MR2 A[6] = 0B to disable or 1B to enable feature.
- Self-Refresh Temperature Range (SRT): set MR2 A[7] = 0B for normal or 1B for extended temperature range.
- Read Burst Type: Nibble Sequential, set MR0 A[3] = 0B.



IDD Measurement Conditions (Continued)

IDD0 Measurement-Loop Pattern¹

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²			
toggling	Static High	0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	-			
			1, 2	D, D	1	0	0	0	0	0	0	00	0	0	0	0	-		
			3, 4	D, D	1	1	1	1	0	0	0	00	0	0	0	0	-		
			...	Repeat pattern 1-4 until nRAS - 1. Truncate if necessary															
			nRAS	PRE	0	0	1	0	0	0	0	00	0	0	0	0	-		
			...	Repeat pattern 1-4 until nRC - 1. Truncate if necessary															
			1*nRC + 0	ACT	0	0	1	1	0	0	0	00	0	0	F	0	-		
			1*nRC + 1, 2	D, D	1	0	0	0	0	0	0	00	0	0	F	0	-		
			1*nRC + 3, 4	D, D	1	1	1	1	0	0	0	00	0	0	F	0	-		
			...	Repeat pattern nRC + 1-4 until 1*nRC + nRAS - 1. Truncate if necessary															
			1*nRC + nRAS	PRE	0	0	1	0	0	0	0	00	0	0	F	0	-		
			...	Repeat pattern nRC + 1-4 until 2*nRC - 1. Truncate if necessary															
			1	2*nRC	Repeat Sub-Loop 0, but BA[2:0] = 1														
			2	4*nRC	Repeat Sub-Loop 0, but BA[2:0] = 2														
3	6*nRC	Repeat Sub-Loop 0, but BA[2:0] = 3																	
4	8*nRC	Repeat Sub-Loop 0, but BA[2:0] = 4																	
5	10*nRC	Repeat Sub-Loop 0, but BA[2:0] = 5																	
6	12*nRC	Repeat Sub-Loop 0, but BA[2:0] = 6																	
7	14*nRC	Repeat Sub-Loop 0, but BA[2:0] = 7																	



IDD Measurement Conditions (Continued)

IDD1 Measurement-Loop Pattern¹

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²		
toggling	Static High	0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	-		
			1-2	D, D	1	0	0	0	0	0	0	00	0	0	0	0	-	
			3-4	D, D	1	1	1	1	0	0	0	00	0	0	0	0	-	
			...	Repeat pattern 1-4 until nRCD - 1. Truncate if necessary														
			nRCD	RD	0	1	0	1	0	0	0	0	00	0	0	0	0	00000000
			...	Repeat pattern 1-4 until nRAS - 1. Truncate if necessary														
			nRAS	PRE	0	0	1	0	0	0	0	0	00	0	0	0	0	-
			...	Repeat pattern 1-4 until nRC - 1. Truncate if necessary														
			1*nRC + 0	ACT	0	0	1	1	0	0	0	0	00	0	0	F	0	-
			1*nRC + 1-2	D, D	1	0	0	0	0	0	0	0	00	0	0	F	0	-
			1*nRC + 3-4	D, D	1	1	1	1	0	0	0	0	00	0	0	F	0	-
			...	Repeat pattern nRC + 1-4 until 1*nRC + nRCD - 1. Truncate if necessary														
			1*nRC + nRCD	RD	0	1	0	1	0	0	0	0	00	0	0	F	0	00110011
			...	Repeat pattern nRC + 1-4 until 1*nRC + nRAS - 1. Truncate if necessary														
		1*nRC + nRAS	PRE	0	0	1	0	0	0	0	0	00	0	0	F	0	-	
		...	Repeat pattern nRC + 1-4 until 2*nRC - 1. Truncate if necessary															
		1	2*nRC	Repeat Sub-Loop 0, but BA[2:0] = 1														
		2	4*nRC	Repeat Sub-Loop 0, but BA[2:0] = 2														
		3	6*nRC	Repeat Sub-Loop 0, but BA[2:0] = 3														
		4	8*nRC	Repeat Sub-Loop 0, but BA[2:0] = 4														
		5	10*nRC	Repeat Sub-Loop 0, but BA[2:0] = 5														
6	12*nRC	Repeat Sub-Loop 0, but BA[2:0] = 6																
7	14*nRC	Repeat Sub-Loop 0, but BA[2:0] = 7																



IDD Measurement Conditions (Continued)

IDD2N and IDD3N Measurement-Loop Pattern

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²		
toggling	Static High	0	0	D	1	0	0	0	0	0	00	0	0	0	0	-		
			1	D	1	0	0	0	0	0	0	00	0	0	0	0	-	
			2	D	1	1	1	1	1	0	0	0	00	0	0	F	0	-
			3	D	1	1	1	1	1	0	0	0	00	0	0	F	0	-
		1	4-7	Repeat Sub-Loop 0, but BA[2:0] = 1														
		2	8-11	Repeat Sub-Loop 0, but BA[2:0] = 2														
		3	12-15	Repeat Sub-Loop 0, but BA[2:0] = 3														
		4	16-19	Repeat Sub-Loop 0, but BA[2:0] = 4														
		5	20-23	Repeat Sub-Loop 0, but BA[2:0] = 5														
		6	24-27	Repeat Sub-Loop 0, but BA[2:0] = 6														
		7	28-31	Repeat Sub-Loop 0, but BA[2:0] = 7														

IDD2NT Measurement-Loop Pattern

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²		
toggling	Static High	0	0	D	1	0	0	0	0	0	00	0	0	0	0	-		
			1	D	1	0	0	0	0	0	0	00	0	0	0	0	-	
			2	D	1	1	1	1	1	0	0	0	00	0	0	F	0	-
			3	D	1	1	1	1	1	0	0	0	00	0	0	F	0	-
		1	4-7	Repeat Sub-Loop 0, but ODT = 0 and BA[2:0] = 1														
		2	8-11	Repeat Sub-Loop 0, but ODT = 1 and BA[2:0] = 2														
		3	12-15	Repeat Sub-Loop 0, but ODT = 1 and BA[2:0] = 3														
		4	16-19	Repeat Sub-Loop 0, but ODT = 0 and BA[2:0] = 4														
		5	20-23	Repeat Sub-Loop 0, but ODT = 0 and BA[2:0] = 5														
		6	24-27	Repeat Sub-Loop 0, but ODT = 1 and BA[2:0] = 6														
		7	28-31	Repeat Sub-Loop 0, but ODT = 1 and BA[2:0] = 7														



IDD Measurement Conditions (Continued)

IDD4R Measurement-Loop Pattern¹

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²	
toggling	Static High	0	0	RD	0	1	0	1	0	0	00	0	0	0	0	00000000	
			1	D	1	0	0	0	0	0	0	00	0	0	0	0	-
			2-3	D, D	1	1	1	1	0	0	0	00	0	0	0	0	-
			4	RD	0	1	0	1	0	0	0	00	0	0	F	0	00110011
			5	D	1	0	0	0	0	0	0	00	0	0	F	0	-
			6-7	D, D	1	1	1	1	0	0	0	00	0	0	F	0	-
		1	8-15	Repeat Sub-Loop 0, but BA[2:0] = 1													
		2	16-23	Repeat Sub-Loop 0, but BA[2:0] = 2													
		3	24-31	Repeat Sub-Loop 0, but BA[2:0] = 3													
		4	32-39	Repeat Sub-Loop 0, but BA[2:0] = 4													
		5	40-47	Repeat Sub-Loop 0, but BA[2:0] = 5													
		6	48-55	Repeat Sub-Loop 0, but BA[2:0] = 6													
		7	56-63	Repeat Sub-Loop 0, but BA[2:0] = 7													

IDD4W Measurement-Loop Pattern¹

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²	
toggling	Static High	0	0	WR	0	1	0	0	1	0	00	0	0	0	0	00000000	
			1	D	1	0	0	0	1	0	00	0	0	0	0	-	
			2-3	D, D	1	1	1	1	1	0	0	00	0	0	0	0	-
			4	WR	0	1	0	0	0	1	0	00	0	0	F	0	00110011
			5	D	1	0	0	0	0	1	0	00	0	0	F	0	-
			6-7	D, D	1	1	1	1	1	0	0	00	0	0	F	0	-
		1	8-15	Repeat Sub-Loop 0, but BA[2:0] = 1													
		2	16-23	Repeat Sub-Loop 0, but BA[2:0] = 2													
		3	24-31	Repeat Sub-Loop 0, but BA[2:0] = 3													
		4	32-39	Repeat Sub-Loop 0, but BA[2:0] = 4													
		5	40-47	Repeat Sub-Loop 0, but BA[2:0] = 5													
		6	48-55	Repeat Sub-Loop 0, but BA[2:0] = 6													
		7	56-63	Repeat Sub-Loop 0, but BA[2:0] = 7													

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963



IDD Measurement Conditions (Continued)

IDD5B Measurement-Loop Pattern¹

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²	
toggling	Static High	0	0	REF	0	0	0	1	0	0	00	0	0	0	0	-	
		1	1-2	D	1	0	0	0	0	0	0	00	0	0	0	0	-
			3-4	D	1	1	1	1	1	0	0	00	0	0	F	0	-
			5-8	Repeat cycles 1-4, but BA[2:0] = 1													
			9-12	Repeat cycles 1-4, but BA[2:0] = 2													
			13-16	Repeat cycles 1-4, but BA[2:0] = 3													
			17-20	Repeat cycles 1-4, but BA[2:0] = 4													
			21-24	Repeat cycles 1-4, but BA[2:0] = 5													
			25-28	Repeat cycles 1-4, but BA[2:0] = 6													
			29-32	Repeat cycles 1-4, but BA[2:0] = 7													
		2	33-nRFC - 1	Repeat Sub-Loop 1 until nRFC - 1. Truncate if necessary													

IDD7 Measurement-Loop Pattern¹

ATTENTION: Sub-Loops 10-19 have inverse A[6:3] Pattern and Data Pattern than Sub-Loops 0-9

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²	
toggling	Static High	0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	-	
			1	RDA	0	1	0	1	0	0	00	1	0	0	0	00000000	
			2	D	1	0	0	0	0	0	0	00	0	0	0	0	-
			...	Repeat above D Command until nRRD - 1													
		1	nRRD	ACT	0	0	1	1	0	1	00	0	0	F	0	0	-
			nRRD + 1	RDA	0	1	0	1	0	1	00	1	0	F	0	0	00110011
			nRRD + 2	D	1	0	0	0	0	0	1	00	0	0	F	0	-
			...	Repeat above D Command until 2*nRRD - 1													
		2	2*nRRD	Repeat Sub-Loop 0, but BA[2:0] = 2													
		3	3*nRRD	Repeat Sub-Loop 1, but BA[2:0] = 3													
		4	4*nRRD	D	1	0	0	0	0	0	3	00	0	0	F	0	-
				Assert and repeat above D Command until nFAW - 1, if necessary													
		5	nFAW	Repeat Sub-Loop 0, but BA[2:0] = 4													
		6	nFAW + nRRD	Repeat Sub-Loop 1, but BA[2:0] = 5													



IDD7 Measurement-Loop Pattern¹ (Continued)

ATTENTION: Sub-Loops 10-19 have inverse A[6:3] Pattern and Data Pattern than Sub-Loops 0-9

CK, $\overline{\text{CK}}$	CKE	Sub-Loop	Cycle Number	Command	$\overline{\text{CS}}$	RAS	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data ²	
toggling	Static High	7	nFAW + 2*nRRD	Repeat Sub-Loop 0, but BA[2:0] = 6													
		8	nFAW + 3*nRRD	Repeat Sub-Loop 1, but BA[2:0] = 7													
		9	nFAW + 4*nRRD	D	1	0	0	0	0	0	7	00	0	0	F	0	-
				Assert and repeat above D Command until 2*nFAW - 1, if necessary													
		10	2*nFAW	ACT	0	0	1	1	0	0	0	00	0	0	F	0	-
			2*nFAW + 1	RDA	0	1	0	1	0	0	0	00	1	0	F	0	00110011
			2*nFAW + 2	D	1	0	0	0	0	0	0	00	0	0	F	0	-
				Repeat above D Command until 2*nFAW + nRRD - 1													
		11	2*nFAW + nRRD	ACT	0	0	1	1	0	1	00	0	0	0	0	0	-
			2*nFAW + nRRD + 1	RDA	0	1	0	1	0	1	00	1	0	0	0	0	00000000
			2*nFAW + nRRD + 2	D	1	0	0	0	0	0	1	00	0	0	0	0	-
				Repeat above D Command until 2*nFAW + 2*nRRD - 1													
		12	2*nFAW + 2*nRRD	Repeat Sub-Loop 10, but BA[2:0] = 2													
		13	2*nFAW + 3*nRRD	Repeat Sub-Loop 11, but BA[2:0] = 3													
		14	2*nFAW + 4*nRRD	D	1	0	0	0	0	0	3	00	0	0	0	0	-
				Assert and repeat above D Command until 3*nFAW - 1, if necessary													
		15	3*nFAW	Repeat Sub-Loop 10, but BA[2:0] = 4													
		16	3*nFAW + nRRD	Repeat Sub-Loop 11, but BA[2:0] = 5													
		17	3*nFAW + 2*nRRD	Repeat Sub-Loop 10, but BA[2:0] = 6													
18	3*nFAW + 3*nRRD	Repeat Sub-Loop 11, but BA[2:0] = 7															
19	3*nFAW + 4*nRRD	D	1	0	0	0	0	0	7	00	0	0	0	0	-		
		Assert and repeat above D Command until 4*nFAW - 1, if necessary															

Notes:

- DM must be driven LOW all the time. DQS, $\overline{\text{DQS}}$ are used according to RD Commands, otherwise MID-LEVEL
- Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are MID-LEVEL.

IDD Specifications

Parameter	PC3-14900	Units
	13-13-13	
I _{DD0}	TBD	mA
I _{DD1}	TBD	mA
I _{DD2P0}	TBD	mA
I _{DD2P1}	TBD	mA
I _{DD2Q}	TBD	mA
I _{DD2N}	TBD	mA
I _{DD2NT}	TBD	mA
I _{DD3P}	TBD	mA
I _{DD3N}	TBD	mA
I _{DD4R}	TBD	mA
I _{DD4W}	TBD	mA
I _{DD5B}	TBD	mA
I _{DD6}	TBD	mA
I _{DD7}	TBD	mA

Input/Output Capacitance

Parameter	Symbol	PC3-14900		Units	Notes
		Min	Max		
Input/output capacitance, (DQ, DM, DQS, \overline{DQS} , TDQS, \overline{TDQS})	C_{IO}	1.4	2.2	pF	1, 2
Input/output capacitance delta, (DQ, DM, DQS, \overline{DQS} , TDQS, \overline{TDQS})	C_{DIO}	-0.5	0.3	pF	2, 10
Input/output capacitance delta, (DQS and \overline{DQS})	C_{DDQS}	0	0.15	pF	2, 4
Input capacitance, (CK and \overline{CK})	C_{CK}	7.2	11.7	pF	2
Input capacitance delta, (CK and \overline{CK})	C_{DCK}	0	1.35	pF	2, 3
Input capacitance, (ADD/CMD/CTRL input-only pins)	C_I	6.75	10.8	pF	2, 5
Input capacitance delta, (All ADD/CMD input-only pins)	$C_{DI_ADD_CM_D}$	-3.6	3.6	pF	2, 6, 7
Input capacitance delta, (All CTRL input-only pins)	C_{DI_CTRL}	-3.6	1.8	pF	2, 8, 9

Notes:

1. Although the DM, TDQS and \overline{TDQS} pins have different functions, the loading matches DQ and DQS.
2. This parameter is not subject to production test. It is verified by design and characterization.
3. Absolute value of $C_{CK} - C_{\overline{CK}}$.
4. Absolute value of $C_{IO}(DQS) - C_{IO}(\overline{DQS})$.
5. C_I applies to ODT, \overline{CS} , CKE, A0-A15, BA0-BA2, \overline{RAS} , \overline{CAS} , \overline{WE} .
6. $C_{DI_ADD_CMD}$ applies to A0-A15, BA0-BA2, \overline{RAS} , \overline{CAS} and \overline{WE} .
7. $C_{DI_ADD_CMD} = C_I(ADD_CMD) - 0.5 * (C_I(CK) + C_I(\overline{CK}))$.
8. C_{DI_CTRL} applies to ODT, \overline{CS} and CKE.
9. $C_{DI_CTRL} = C_I(CTRL) - 0.5 * (C_I(CK) + C_I(\overline{CK}))$.
10. $C_{DIO} = C_{IO}(DQ,DM) - 0.5 * (C_{IO}(DQS) + C_{IO}(\overline{DQS}))$.

Serial Presence Detect (SPD)

Serial Presence Detect Table

Byte No.	Byte Description	Supported Value	Hex Value
0	Number of Bytes Used / Number of Bytes in SPD Device / CRC Coverage	0~116 CRC / 256 Total / 176 Used	92h
1	SPD Revision	1.2	12h
2	Key Byte / DRAM Device Type	DDR3 SDRAM	0Bh
3	Key Byte / Module Type	UDIMM	02h
4	SDRAM Density and Banks	4Gb / 8 Banks	04h
5	SDRAM Addressing	16 Row / 10 Column	21h
6	Module Nominal Voltage VDD	1.5V	00h
7	Module Organization	1 Rank x8	01h
8	Module Memory Bus Width	x72	0Bh
9	Fine Timebase (FTB) Dividend / Divisor	Dividend = 1 / Divisor = 1	11h
10	Medium Timebase (MTB) Dividend	1	01h
11	Medium Timebase (MTB) Divisor	8	08h
12	SDRAM Minimum Cycle Time (tCKmin)	1.071ns	09h
13	Reserved	-	00h
14	CAS Latencies Supported (LSB)	5 / 6 / 7 / 8 / 9 / 10 / 11	FEh
15	CAS Latencies Supported (MSB)	13	02h
16	Minimum CAS Latency Time (tAAmin)	13.125ns	69h
17	Minimum Write Recovery Time (tWRmin)	15ns	78h
18	Minimum RAS# to CAS# Delat Time (tRCDmin)	13.125ns	69h
19	Minimum Row Active to Row Active Delay Time (tRRD-min)	5ns	28h
20	Minimum Row Precharge Delay Time (tRPmin)	13.125ns	69h
21	Upper Nibbles for tRASmin and tRCmin	-	11h
22	Minimum Active to Precharge Delay Time (tRASmin) (LSB)	34ns	10h
23	Minimum Active to Active/Refresh Delay Time (tRCmin) (LSB)	47.125ns	79h
24	Minimum Refresh Recovery Delay Time (tRFCmin) (MSB)	260ns	20h
25	Minimum Refresh Recovery Delay Time (tRFCmin) (LSB)	260ns	08h

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963



Byte No.	Byte Description	Supported Value	Hex Value
26	Minimum Internal Write to Read Command Delay Time (tWTRmin)	7.5ns	3Ch
27	Minimum Internal Read to Precharge Command Delay (tRTPmin)	7.5ns	3Ch
28	Upper Nibbles for tFAWmin	27ns	00h
29	Minimum four Active window delay (tFAWmin) (LSB)	27ns	D8h
30	SDRAM Optional Features	DLL-OFF / RZQ/7 / RZQ/6	83h
31	SDRAM Thermal and Refresh Options	No PASR / No ODTs / ASR / 2x refresh / Ext. Range	05h
32	Module Thermal Sensor	EEPROM/Thermal Sensor	80h
33	SDRAM Device Type	Monolithic	00h
34	Fine Offset for SDRAM Minimum Cycle Time (tCKmin)	-54ns	CAh
35	Fine Offset for Minimum CAS Latency Time (tAAmin)	0ns	00h
36	Fine Offset for Minimum RAS# to CAS# Delay Time (tRCDmin)	0ns	00h
37	Fine Offset for Minimum Row Precharge Delay Time (tRPmin)	0ns	00h
38	Fine Offset for Minimum Active to Active/Refresh Delay Time (tRCmin)	0ns	00h
39-59	Reserved	-	00h
60	Module Nominal Height	30mm	0Fh
61	Module Maximum Thickness	Front: 1.2mm / Back: <1mm	01h
62	Reference Raw Card Used	R/C D / Rev. 1	23h
63	Address Mapping from Edge Connector to DRAM	Standard	00h
64-116	Reserved	-	00h
117	Module Manufacturer ID Code (LSB)	Continuation Code	01h
118	Module Manufacturer ID Code (MSB)	SMART's ID	94h
119	Module Manufacturing Location	See Note 1	xxh
120	Module Manufacturing Date (Year)	Date	xxh
121	Module Manufacturing Date (Week)	Date	xxh
122-125	Module Serial Number	Serial Number	xxh
126	SPD Cyclical Redundancy Code (CRC)		0Bh

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963



Byte No.	Byte Description	Supported Value	Hex Value
127	SPD Cyclical Redundancy Code (CRC)		A7h
128	Module Part Number	S	53h
129	Module Part Number	H	48h
130	Module Part Number	5	35h
131	Module Part Number	1	31h
132	Module Part Number	2	32h
133	Module Part Number	7	37h
134	Module Part Number	U	55h
135	Module Part Number	D	44h
136	Module Part Number	3	33h
137	Module Part Number	5	35h
138	Module Part Number	1	31h
139	Module Part Number	8	38h
140	Module Part Number	3	33h
141	Module Part Number	8	38h
142	Module Part Number	S	53h
143	Module Part Number	E	45h
144	Module Part Number		20h
145	Module Part Number		20h
146	Module Revision Code (LSB)	Rev. 0	00h
147	Module Revision Code (MSB)	For Internal Use	xxh
148	DRAM Manufacturer's ID Code (LSB)	Samsung	80h
149	DRAM Manufacturer's ID Code (MSB)	Samsung	CEh
150	Manufacturer's Specific Data	S	53h
151	Manufacturer's Specific Data	M	4Dh
152	Manufacturer's Specific Data	A	41h
153	Manufacturer's Specific Data	R	52h
154	Manufacturer's Specific Data	T	54h
155	Manufacturer's Specific Data	M	4Dh
156	Manufacturer's Specific Data	o	6Fh
157	Manufacturer's Specific Data	d	64h
158	Manufacturer's Specific Data	u	75h

Corporate Headquarters: 39870 Eureka Dr., Newark, CA, 94560, USA • Tel: (510) 623-1231 • Fax: (510) 623-1434 • E-mail: info@smartm.com
Europe: 305 Nasmyth Building, Scottish Enterprise Tech Park, Glasgow, Scotland, G75 0QD, United Kingdom • Tel: (+44) 1355 813455 • Fax: (+44) 1355 813456
Latin America: Av. Tegula, 888, Edificio Cristal - CEA, Ponte Alta, Atibaia, Sao Paulo, Brazil, 12952-820 • Tel: (+55) 11 4417-7200 • Fax: (+55) 11 4417-7219
Asia: Plot 18, Lorong Jelawat 4, Kawasan Perindustrian Seberang Jaya, 13700 Perai, Penang, Malaysia • Tel: (+604) 399 2909 • Fax: (+604) 399 2963



Byte No.	Byte Description	Supported Value	Hex Value
159	Manufacturer's Specific Data	l	6Ch
160	Manufacturer's Specific Data	a	61h
161	Manufacturer's Specific Data	r	72h
162	Manufacturer's Specific Data	T	54h
163	Manufacturer's Specific Data	e	65h
164	Manufacturer's Specific Data	c	63h
165	Manufacturer's Specific Data	h	68h
166	Manufacturer's Specific Data	n	6Eh
167	Manufacturer's Specific Data	o	6Fh
168	Manufacturer's Specific Data	l	6Ch
169	Manufacturer's Specific Data	o	6Fh
170	Manufacturer's Specific Data	g	67h
171	Manufacturer's Specific Data	i	69h
172	Manufacturer's Specific Data	e	65h
173	Manufacturer's Specific Data	s	73h
174	Manufacturer's Specific Data	-	00h
175	Manufacturer's Specific Data	-	00h
176-255	Open for Customer Use	-	00h

Notes:

- Manufacturing Location:
 - 00h - Undefined,
 - 01h - Newark, CA, USA,
 - 02h - Aguada, Puerto Rico,
 - 03h - East Kilbride, Scotland,
 - 04h - Penang, Malaysia,
 - 05h - Bangalore, India,
 - 06h - Sao Paulo, Brazil,
 - 07h - Aguadilla, Puerto Rico,
 - 08h - Mayaguez, Puerto Rico,
 - 09h - Santo Domingo, Dominican Republic,
 - 0Ah - Dongguan, China,

Declaration of Conformity



Responsible Party Name: SMART Modular Technologies, Inc.
Address: 39870 Eureka Drive
Newark, CA 94560-4809, USA
Phone: +1-510-623-1231

hereby declares that the products:

SH5127UD351838SE

to which this declaration relates are in conformity with the following Directives and other normative documents:

RoHS Directive 2011/65/EU

Restriction of the use of certain hazardous substances in electrical and electronic equipment

• **EN 50581:2012**

Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

Name: Jeffrey Milano
Title: Director, Worldwide Quality
Date: May 22, 2015

Representative in the European Union (for regulatory topics only):

Mr. Graham Kyle
SMART Modular Technologies (Europe) Ltd.
312 Nasmyth Building, Nasmyth Avenue
Scottish Enterprise Technology Park
East Kilbride, Scotland, G75 0QR

Disclaimer:

No part of this document may be copied or reproduced in any form or by any means, or transferred to any third party, without the prior written consent of an authorized representative of SMART Modular Technologies, Inc. ("SMART"). The information in this document is subject to change without notice. SMART assumes no responsibility for any errors or omissions that may appear in this document, and disclaims responsibility for any consequences resulting from the use of the information set forth herein. SMART makes no commitments to update or to keep current information contained in this document. The products listed in this document are not suitable for use in applications such as, but not limited to, aircraft control systems, aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. Moreover, SMART does not recommend or approve the use of any of its products in life support devices or systems or in any application where failure could result in injury or death. If a customer wishes to use SMART products in applications not intended by SMART, said customer must contact an authorized SMART representative to determine SMART's willingness to support a given application. The information set forth in this document does not convey any license under the copyrights, patent rights, trademarks or other intellectual property rights claimed and owned by SMART. The information set forth in this document is considered to be "Proprietary" and "Confidential" property owned by SMART.

ALL PRODUCTS SOLD BY SMART ARE COVERED BY THE PROVISIONS APPEARING IN SMART'S TERMS AND CONDITIONS OF SALE ONLY, INCLUDING THE LIMITATIONS OF LIABILITY, WARRANTY AND INFRINGEMENT PROVISIONS. SMART MAKES NO WARRANTIES OF ANY KIND, EXPRESS, STATUTORY, IMPLIED OR OTHERWISE, REGARDING INFORMATION SET FORTH HEREIN OR REGARDING THE FREEDOM OF THE DESCRIBED PRODUCTS FROM INTELLECTUAL PROPERTY INFRINGEMENT, AND EXPRESSLY DISCLAIMS ANY SUCH WARRANTIES INCLUDING WITHOUT LIMITATION ANY EXPRESS, STATUTORY OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

©2015 SMART Modular Technologies, Inc. All rights reserved.