

**SP619**


## High Current Power Switch

### FEATURES

- Max  $R_{DS(ON)}$  .377 Ohms
- Overcurrent deactivation 800mA
- Max leakage current less than  $2\mu A$  while deactivated
- Small 6 pin SOT-23 package
- Built-in Over-temperature Protection
- 4.5V to 5.5V Input voltage range

### APPLICATIONS


- Ultra low cost handsets
- PDA, DSC, MP3 players
- Cell phones
- Power Distribution Switch
- Battery-Charger Circuit

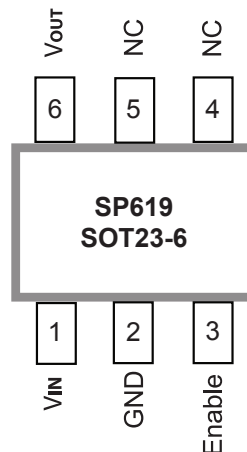

### DESCRIPTION

The SP619 is a low  $R_{DS(ON)}$  high current switch designed with precision current limiting to protect connected devices from damage due to a short circuit condition or against current surges that may cause the supply voltages to fall out of regulation. This switch is functional over an input voltage range of 2.5V to 7V, but is targeted at 5V applications. The SP619 is also protected from thermal overload which limits power dissipation. In shutdown mode, the supply current drops to  $2\mu A$ .

### TYPICAL APPLICATION CIRCUIT

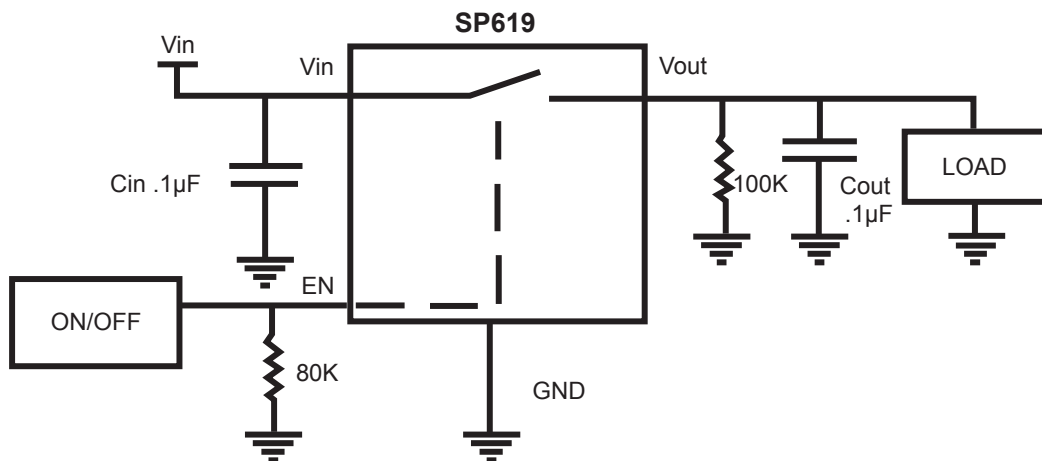

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

V<sub>IN</sub>.....-0.3V to 7V  
 Storage Temperature..... -65°C to 150°C  
 Junction Temperature.....150°C  
 Lead Temperature (Soldering, 10 sec).....300°C  
 ESD RATING  
 Human Body Model.....2000V  
 Machine Model.....200V  
 OPERATING RATINGS  
 Thermal resistance SOT23-6  
 Junction to Ambient.....191°C  
 Junction to lead .....50°C

## RECOMMENDED OPERATING CONDITIONS

Unless otherwise specified: V<sub>IN</sub> = 4.5V - 5.5V, C<sub>IN</sub> = 0.1μF, T<sub>A</sub> = -10°C to + 85°C

PARAMETER	CONDITIONS	MIN	TYP (Note 1)	MAX	UNITS
Operating Input Voltage Range		4.5		5.5	V
Overcurrent Deactivation Range	EN=1.5V	620	800	1010	mA
Overcurrent Duration Before Deactivation	EN=1.5V	1		5.25	ms
Shutdown Supply Current	V <sub>IN</sub> =4.5V			2	μA
Quiescent Supply Current	EN=1.5V V <sub>IN</sub> =4.5V I <sub>OUT</sub> =0mA			350	μA
Quiescent Supply Current	EN=1.5V V <sub>IN</sub> =4.5V I <sub>OUT</sub> =725mA			5.25	mA
R <sub>DS(ON)</sub>	V <sub>IN</sub> =4.5V I <sub>OUT</sub> =100mA EN=1.5V			.377	Ω
Post Fault Output Load for Recovery	Enable=1.5V	10	15	23	KΩ
Post Fault Activation Turn On Time	Enable=1.5V	1		55	ms
Thermal Shutdown Die Temperature	SP619 will self recover when temperature drops below the trip point .	120	150	180	°C
Thermal Restart Die Temperature		90	120	135	°C
ENABLE Logic LOW	Driver is disabled			.5	V
ENABLE Pin Logic HIGH	Driver is active	.655		1.4	V
Turn On Delay	R <sub>L</sub> =100kΩ, C <sub>L</sub> = 0.01μF (Note 2,3)			600	μs
Turn Off Delay	R <sub>L</sub> =100kΩ, C <sub>L</sub> = 0.01μF (Note 2,4)			200	μs
Rise Time	R <sub>L</sub> =100kΩ, C <sub>L</sub> = 0.01μF (Note 2)			100	μs
Fall Time	R <sub>L</sub> =100kΩ, C <sub>L</sub> = 0.01μF (Note 2)			2500	μs

Note 1: Typicals are T<sub>J</sub>=25°C

Note 2: Characterized, not 100% tested

Note 3: Turn on delay is measured from the time the enable pin is turned on to the time it takes the output to rise to 10% of its final value.

Note 4: Turn off delay is measured from the time the enable pin is turned to the time it takes for the output to fall to 90% of its current value.

**FAULT AND RECOVERY TRUTH TABLE\***

Enable	Load	Temperature (TJ)	Previous State	Switch	Current State/Fault (Note*)
Low	X	X	X	Open	Off
High	< 800 mA	< 163°C	Off	Closed	Normal
High	< 800 mA	> 163°C	Off	Open	Thermal Cutoff
High	> 800 mA	< 163°C	Off	Open	Overcurrent
High	> 800 mA	> 163°C	Off	Open	Thermal Cutoff, Overcurrent
High	< 15kΩ	< 163°C	Overcurrent	Open	Load Condition
High	< 15kΩ	> 163°C	Overcurrent	Open	Thermal Cutoff, Overcurrent, Load Condition
High	> 15kΩ	< 163°C	Overcurrent	Closed	Normal
High	> 15kΩ	> 163°C	Overcurrent	Open	Thermal Cutoff
High	< 15kΩ	< 120°C	Thermal Cutoff	Open	Load Condition
High	< 15kΩ	> 120°C	Thermal Cutoff	Open	Load Condition, Thermal Cutoff
High	> 15kΩ	< 120°C	Thermal Cutoff	Closed	Normal
High	> 15kΩ	> 120°C	Thermal Cutoff	Open	Thermal Cutoff

\*Note: This table is for fault conditions, not for continuous operation, else damage to the device may occur. In order to recover to the normal state after a Thermal Cutoff fault, the part's junction temperature must decrease below 120°C and the load on its output must be greater than 15kΩ.

**PIN ASSIGNMENTS**

PIN NUMBER	PIN NAME	FUNCTION
1	VIN	Input power supply pin (4.5V to 5.5V)
2	GND	Ground connection
3	Enable	A logic high turns on the switch
4	NC	No connect
5	NC	No connect
6	VOUT	Switch output

The SP619 is a switch capable of handling up to 800mA of current.

The SP619 is targeted as a 5V USB protection power distribution switch. And can be used in general power distribution applications where short circuits are likely to be encountered.

### Short circuit operation

When the SP619 enters a short circuit condition, the switch is disabled. The output of the SP619 will not restart until the output impedance is greater than 15KΩ. The enable pin can be used to re-enable the SP619 into any load condition that is not a fault condition. Refer to the truth table on page 4 for more information on the different SP619 switch states. The typical deactivation time is about 2ms.

### Enable

The enable pin allows easy control of the SP619. The enable pin should not be enabled high prior to a voltage being present on the input of the device. The enable pin should not exceed the input voltage by more than 0.1V due to an internal ESD diode. Doing so will affect the operation of the SP619 and could damage the device. In a typical application an 80KΩ resistor to GND should be used on the enable pin. This resistor will pull the enable low when an enable signal is not present. This prevents the SP619 from falsely turning on. The enable pin can also be used to restart the part into a load condition that is high in current. Please refer to the truth table on page 4 for more details.

### Inrush Current

The SP619 is a simple resistive switch. When the switch is turned on into a highly capacitive load there could be a significant

inrush current that can be encountered. At 6 volts in, the inrush current was about 250mA into a 100μF capacitor.

### Output Voltage Rise Time

The output voltage of the SP619 has an output capacitance dependency on the slope of V<sub>OUT</sub>. A simple RC circuit is created when the switch is turned on.

Equation 1

$$V(t) = V_O + V_{IN} \left( 1 - e^{\frac{-t}{R_{DS(ON)} \cdot C_{OUT}}} \right)$$


Where V<sub>O</sub> is initial Voltage condition typically 0V

V<sub>IN</sub> is the input voltage


R<sub>DS(ON)</sub> is the switch resistance

C<sub>OUT</sub> is the output capacitance

For 4.2V V<sub>IN</sub> and 100μF output capacitance we get about 150ns delay in figure 2.


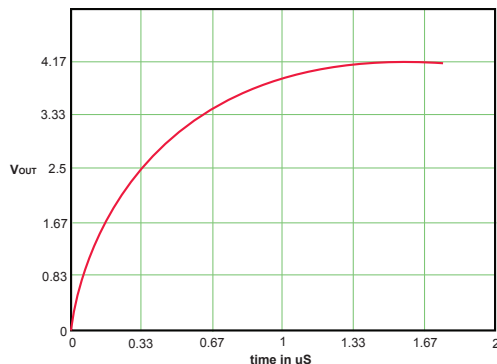


This is comparable to actual measured value in figure 3.

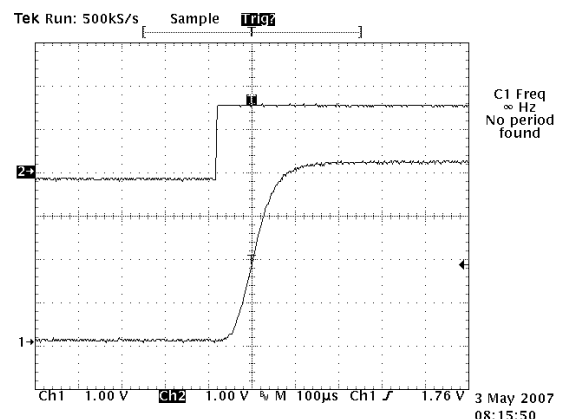


## Layout Considerations

## Recommended Layout

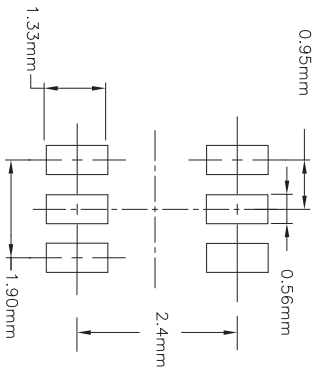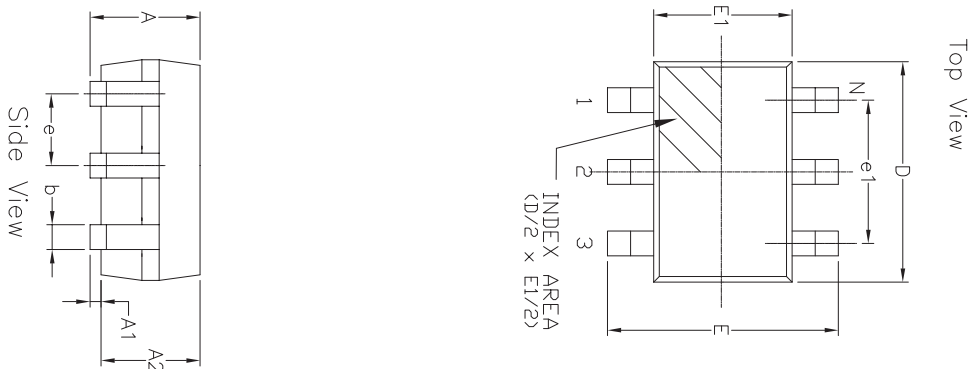

LAND PATTERN RECOMMENDATION

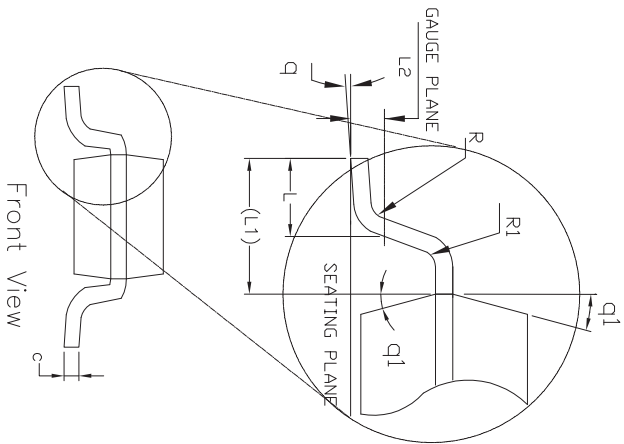

6 Pin SOT-23 JEDEC MO-178 Variation AB									
SYMBOLS	DIMENSIONS IN MM (Control Unit)				DIMENSIONS IN INCH (Reference Unit)				
	MIN	NOM	MAX		MIN	NOM	MAX		
A	—	—	1.45	—	—	—	—	0.057	
A1	0.00	—	0.15	0.000	—	—	—	0.006	
A2	0.90	1.15	1.30	0.036	0.045	0.051			
b	0.30	—	0.50	0.012	—	0.020			
c	0.08	—	0.22	0.003	—	0.009			
D	2.90 BSC				0.115 BSC				
E	2.80 BSC				0.111 BSC				
E1	1.60 BSC				0.063 BSC				
e	0.95 BSC				0.038 BSC				
e1	1.90 BSC				0.075 BSC				
L	0.30	0.45	0.60	0.012	0.018	0.024			
L1	0.60 REF				0.024 REF				
L2	0.25 BSC				0.010 BSC				
R	0.10	—	—	0.004	—	—	—		
R1	0.10	—	0.25	0.004	—	—	0.010		
q	0°	4°	8°	0°	4°	8°			
q1	5°	10°	15°	5°	10°	15°			
N	6				6				

Drawing No: PDD-00000032  
Revision: A

Part number	Operating Temperature Range	Lead-Free	Package Type	Packaging Method
SP619EK-L/TR <sup>(3)</sup>	-10 to +85°C	Yes <sup>(2)</sup>	6 pin SOT23	Tape and Reel
SP619EK-L/TRR3	-10 to +85°C			Tape and Reel (reverse orientation)

## NOTE:

1. Refer to [www.exar.com/SP619](http://www.exar.com/SP619) for most up-to-date Ordering Information
2. Visit [www.exar.com](http://www.exar.com) for additional information on Environmental Rating.
3. NRND - Not recommended for new designs.

**Corporate Headquarters:**

5966 La Place Court  
Suite 100  
Carlsbad, CA 92008  
Tel.: +1 (760) 692-0711  
Fax: +1 (760) 444-8598  
[www.maxlinear.com](http://www.maxlinear.com)

**High Performance Analog:**

48720 Kato Road  
Fremont, CA 94538  
Tel.: +1 (510) 668-7000  
Fax: +1 (510) 668-7001  
Email: [powertechsupport@exar.com](mailto:powertechsupport@exar.com)  
[www.exar.com](http://www.exar.com)

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc.. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

MaxLinear, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless MaxLinear, Inc. receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of MaxLinear, Inc. is adequately protected under the circumstances.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

Company and product names may be registered trademarks or trademarks of the respective owners with which they are associated.

© 2008 - 2017 MaxLinear, Inc. All rights reserved