

## Description

The SP6300 is specifically designed to satisfy the requirements for increased Integration and reliability in offline Quasi-resonant (ZVS: Zero Voltage Switching at switch turn-on) flyback converters. Quasi-resonant operation is achieved by means of a transformer demagnetization sensing input that triggers MOSFET's turn-on. Converter's power capability variations with the mains voltage are compensated by line voltage feedforward. At light load the device features a special function that automatically lowers the operating frequency still maintaining the operation as close to ZVS as possible. In addition to very low start-up and quiescent currents, this feature helps keep low the consumption from the mains at light load and be Blue Angel and Energy Star compliant.

## Features

- Flyback Operation with Quasi-Resonant Soft Switching for Low Power Dissipation and EMI
- Temperature-Compensated Pulse-by-pulse Over-Current Protection
- Latched Over-Voltage and Thermal Protection
- Under-Voltage Lockout with Hysteresis
- Active Low-Pass Filter for Enhanced Light-Load Stability
- Regulated Soft Gate Drive

## Applications


- TV/MONITOR SMPS
- AC-DC ADAPTERS/CHARGERS
- DIGITAL CONSUMER
- PRINTERS, FAX MACHINES, PHOTOCOPIERS AND SCANNERS

## Ordering Information


Type NO.	Marking	Package Code
SP6300P	SP6300	SOP-8

## Outline Dimensions

unit : mm

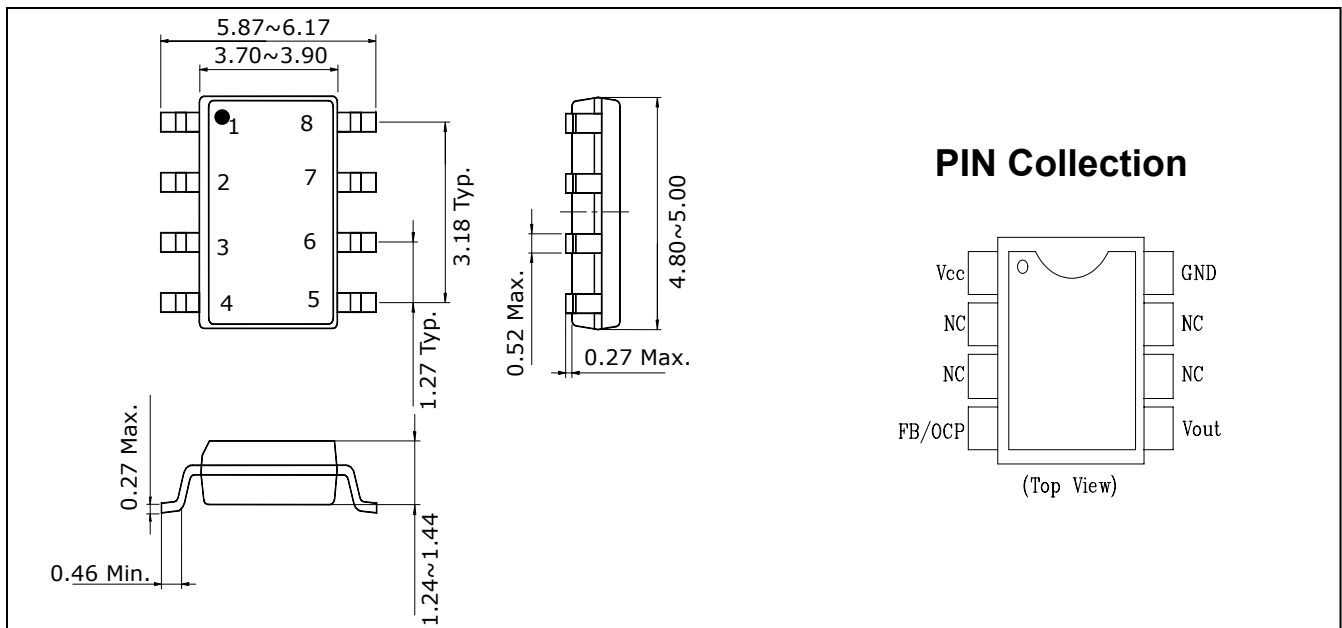

### Internal Block Diagram

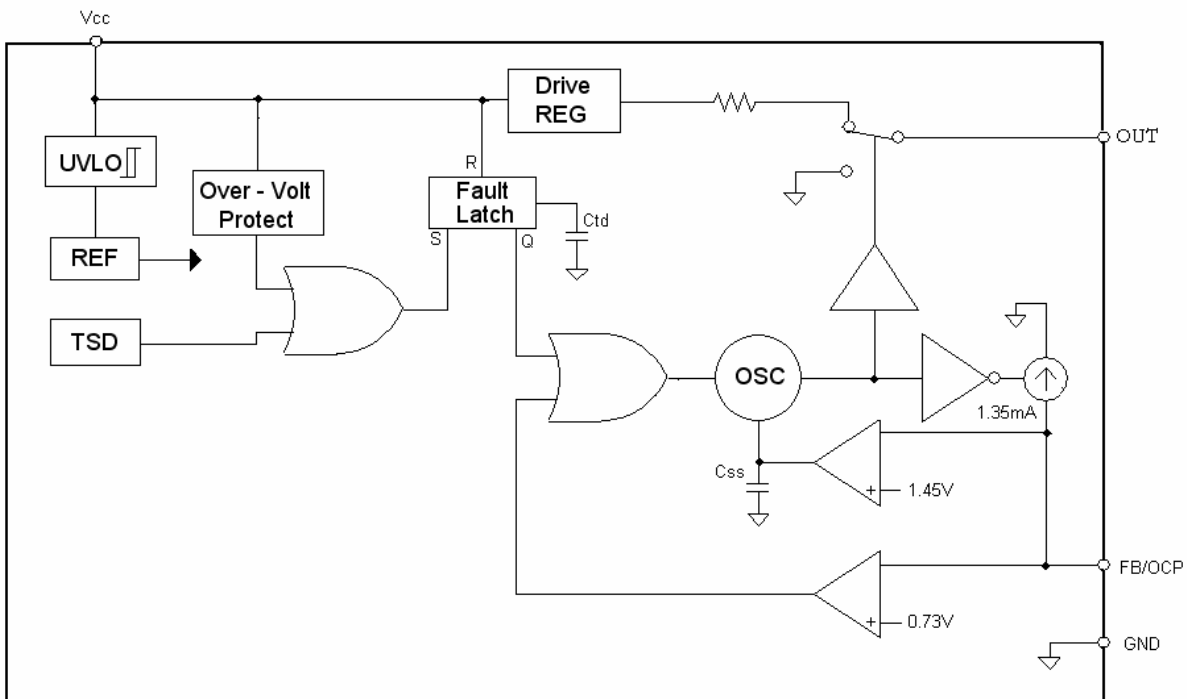

### Pin Function

Pin Number	Pin Name	Pin Function Description
1	Vcc	Supply voltage of both the signal part of the IC and the gate driver
2, 3	NC	No Connection
4	FB/OCF	Voltage mode control feedback signal, and over current detection
5	OUT	Gate driver output. The totem-pole output driver to drive the power MOSFET.
6, 7	NC	No Connection
8	GND	Ground. Current return for both the signal part of the IC and the gate driver.

### Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply Voltage	$V_{CC}$	20	V
Peak Drive Output Current	$I_{OH} / I_{OL}$	+400 / -100	mA
FB/OCF Voltage Range	$V_{FB/OCF}$	-0.3 ~ +6	V
Power Dissipation	$P_D$	0.5	W
Operating Temperature Range	$T_{opr}$	-25 ~ +125	°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150	°C

## Electrical Characteristics

( $V_{CC} = 11V$ ,  $-25^{\circ}C \leq T_a \leq +125^{\circ}C$  ; Unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>SUPPLY VOLTAGE &amp; CURRENT SECTION</b>						
Start Threshold Voltage	$V_{TH(ST)}$	Vcc Increasing	8.5	9.5	10.5	V
Stop Threshold Voltage	$V_{TH(SP)}$	Vcc Decreasing after Turn on Start Threshold Voltage	7.2	8	8.8	V
Start up Supply Current	$I_{ST}$	$V_{CC} = V_{TH(ST)} - 0.1V$	-	-	100	$\mu A$
Operating Supply Current	$I_{CC}$	$V_{FB} = 1V$	-	3	7	mA
Dynamic Operating Supply Current (Note1)	$I_{DCC}$	$C_o = 1.0nF$	-	4	10	mA
<b>PROTECTION SECTION</b>						
Over Voltage Threshold	$V_{OVP}$	Vcc Increasing until Shut down Output	15.3	17	18.7	V
Thermal Shutdown Activation Temperature	$T_j(TSD)$	-	-	140	-	$^{\circ}C$
Latch Release Voltage	$V_{RE}$	Vcc Decreasing until Latch Releasing	2.5	-	6.0	V
Latch Holding Current	$I_{CC(RE)}$	-	-	-	400	$\mu A$
<b>FEEDBACK SECTION</b>						
Feedback Threshold Voltage	$V_{FB}$	-	0.68	0.73	0.78	V
Css Synchronized Voltage	$V_{SYNC}$	-	1.30	1.45	1.60	V
Feedback Sink Current	$I_{SINK}$	$V_{FB} = 1V$	1.20	1.35	1.50	mA
<b>MAXIMUM &amp; MINIMUM OFF TIME SECTION</b>						
Maximum Off Time	$t_{MAX}$	-	30	-	60	$\mu s$
Minimum Off Time (Note1)	$t_{MIN}$	-	-	-	1.5	$\mu s$
Minimum Input Pulse Width (Note1)	$t_{MIN(W)}$	-	-	-	1.0	$\mu s$
<b>OUTPUT SECTION</b>						
Output Voltage High	$V_{OH}$	$V_{FB} = 0V, I_{SOURCE} = 5mA$	9.5	10	10.5	V
Output Voltage Low	$V_{OL}$	$V_{FB} = 1V, I_{SINK} = 5mA$	-	10	50	mV
Output Sink Current	$I_{GDSINK}$	$V_o = 7V$	-	300	-	mA
Output Source Current	$I_{GDSOURCE}$	$V_o = 5V$	-	80	-	mA
Output Voltage Rising Time	$t_r$	$C_o = 1nF$	-	150	-	ns
Output Voltage Falling Time	$t_f$	$C_o = 1nF$	-	50	-	ns

Note 1 : Feedback is square wave,  $V_1 = 0V$ ,  $V_2 = 2V$ ,  $T_d = 0$ ,  $T_r = 1ns$ ,  $T_f = 1ns$ ,  $PW = 1\mu s$ ,  $PER = 36\mu s$

## Electrical Characteristic Curves

Fig. 1  $I_{CC}$  vs.  $T_a$

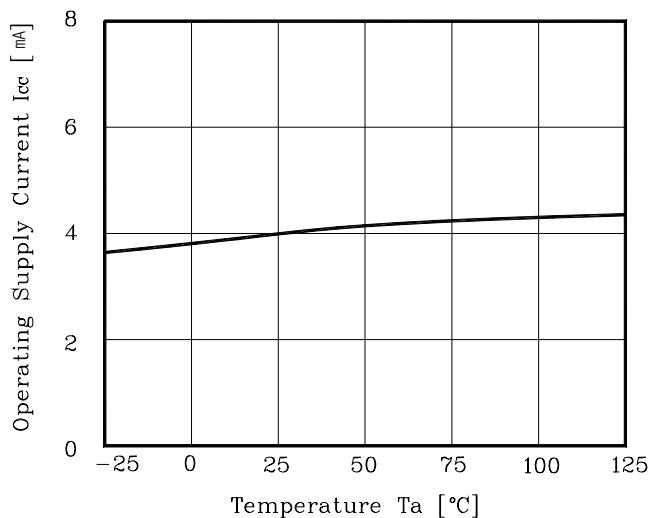


Fig. 2  $V_{TH(SP)}$  vs.  $T_a$

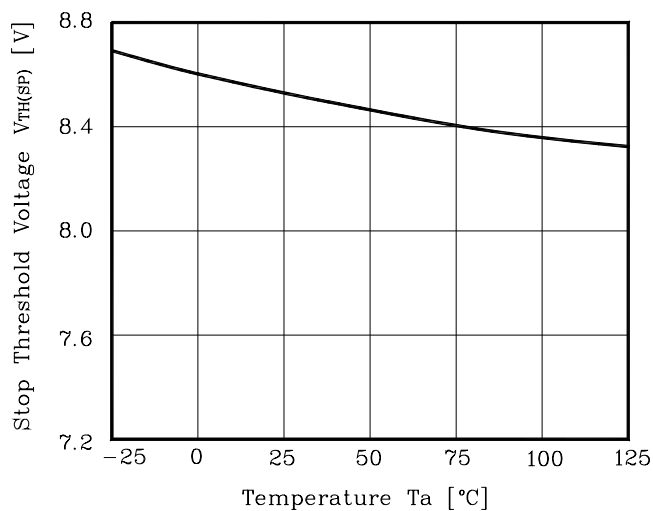


Fig. 3  $I_{ST}$  vs.  $T_a$

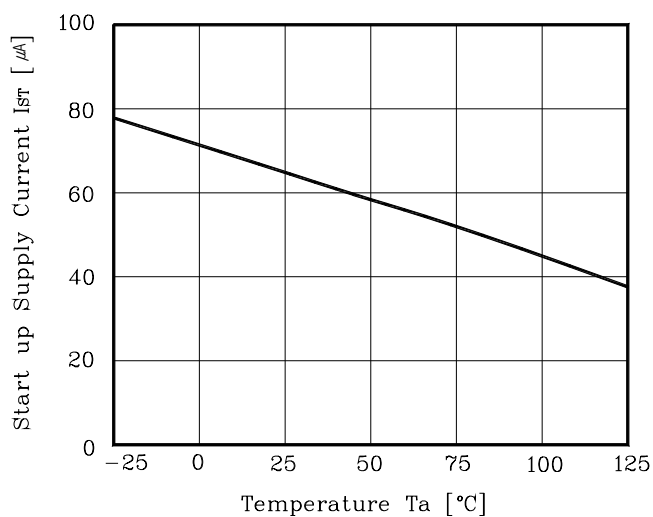


Fig. 4  $V_{FB}$  vs.  $T_a$

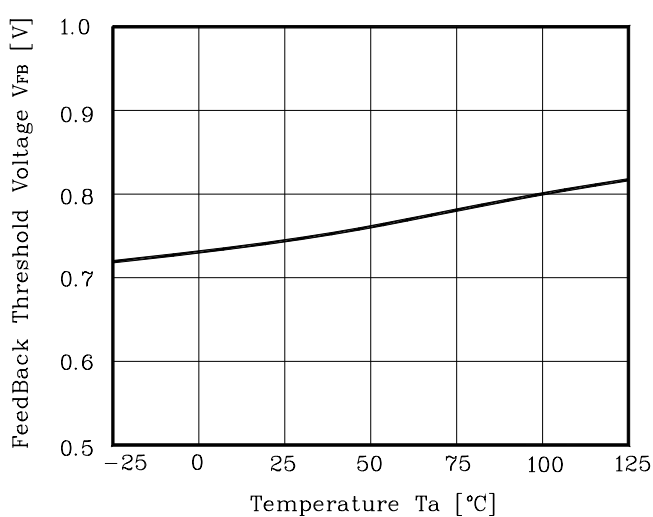


Fig. 5  $V_{TH(ST)}$  vs.  $T_a$


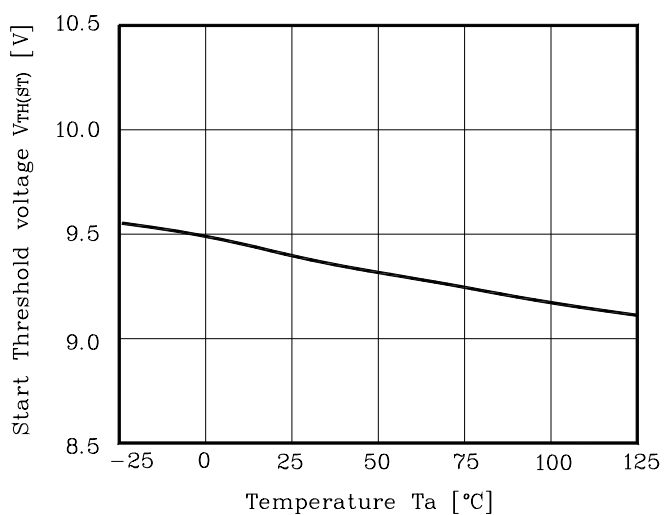


Fig. 6  $V_{OH}$  vs.  $T_a$

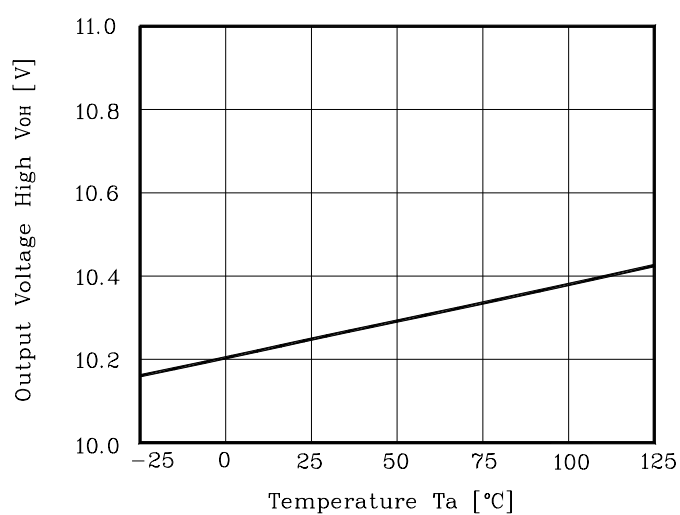

## Electrical Characteristic Curves

Fig. 7  $V_{OL}$  vs.  $T_a$

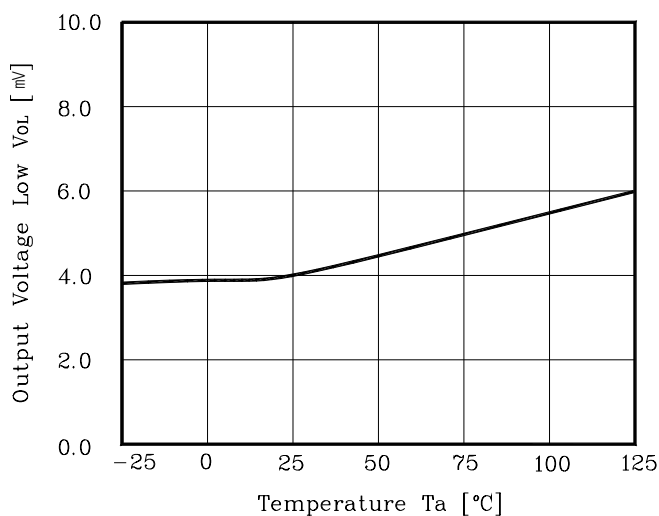


Fig. 8  $V_{OUT}$  vs.  $I_{sink}$


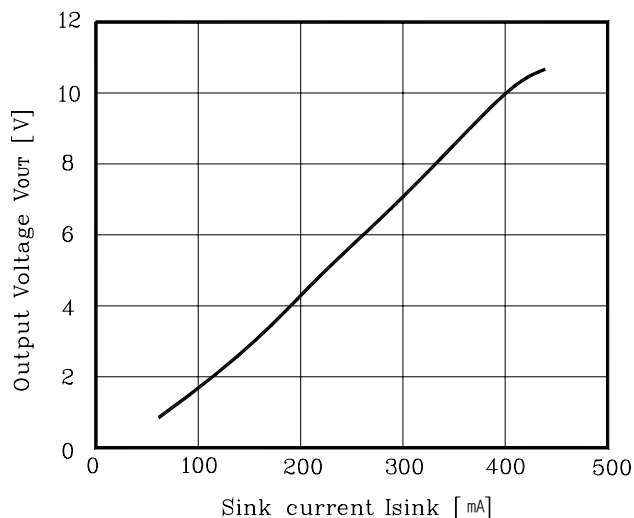


Fig. 9  $V_{OUT}$  vs.  $I_{source}$

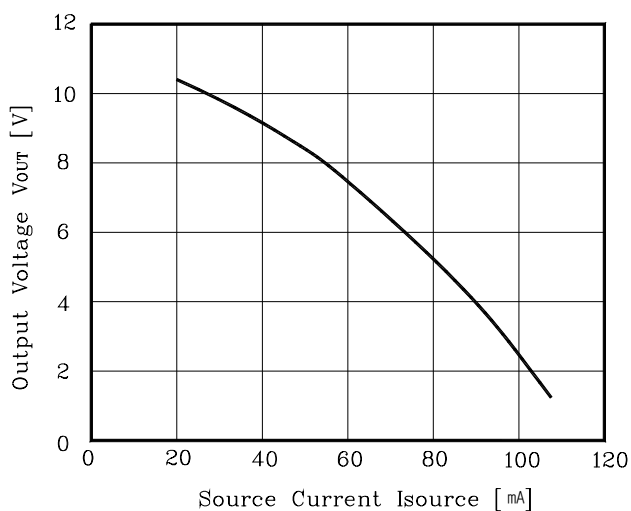

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.