

NON-ISOLATED DC/DC CONVERTER

9.0 V - 32 V Input

10 V - 12 V/3.5 A Output

bel
POWER PRODUCTS

SRDB-04HX20

RoHS Compliant

- Non-Isolated
- Fixed Frequency (340 kHz)
- Over Current Protection
- SCP
- Remote Sense
- Low Profile Package (8.5mm)
- Remote On/Off (Active Low)



www.DataSheet4U.com

Description

The SRDB-04HX20 is part of the low cost non-isolated dc/dc converter. The module uses a DIP package for ease of layout and space savings, with a low profile of 8.5 mm. The output is closely regulated and the efficiency of 12 V is typically 86% at full load. Features include remote sense, over current protection and remote on/off.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number
10 V - 12 V	9.0 V - 32 V	3.5 A	42 W	86%	SRDB-04HX20

Note: Add "R" suffix at the end of the model number to indicate "Reel Packaging", and "G" for "Tray Packaging".

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	36 V	
Output Enable Voltage	-0.3 V	-	12 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	9 V	20 V	32 V	
Input Current (Full load)	-	-	5.6 A	
Input Current (No load)	-	50 mA	100 mA	
Remote Off Input Current	-	1 mA	3 mA	
Input Reflected Ripple Current (pk-pk)	-	500 mA	750 mA	Tested with simulated source impedance of 500 nH, 5 Hz to 20 MHz; and two 100 uF/50 V electrolytic capacitors and a 3.3 uF/50 V ceramic capacitor at the input.
Input Reflected Ripple Current (rms)	-	170 mA	250 mA	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn-on Voltage Threshold	-	8.5 V	9.0 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTER

9.0 V - 32 V Input

10 V - 12 V/3.5 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	11.89 V	12.13 V	12.37 V	Vin=20 V, Iout=50% full load	
Line Regulation	-	±12 mV	±24 mV		
Load Regulation	-	±12 mV	±24 mV		
Regulation Over Temperature (-40 °C to 85 °C)	-	±30 mV	±50 mV		
Ripple and Noise (rms)	-	2.5 mV	5 mV	Test conditions: 0-20 MHz BW; with 33 uF-0.5 uH-33 uF second stage filter.	
Ripple and Noise (pk-pk)	-	10 mV	20 mV		
Output Current	0 A	-	3.5 A		
Output Current Limit Threshold	4 A	-	7 A		
Short Circuit Surge Transient	-	0.2 A ² s	0.5 A ² s		
Turn on Time	-	3.5 mS	10 mS		
Overshoot at Turn on	-	2%	5%		
Output Capacitance	0 uF		220 uF		
Transient Response					
50% ~ 100% Max Load	Overshoot	-	220 mV	250 mV	Tested at di/dt=0.5 A/us, Vin=20 V, with 33uF-0.5 uH-33 uF second stage filter.
	Settling Time	-	300 uS	500 uS	
100% ~ 50% Max Load	Overshoot	-	130 mV	250 mV	
	Settling Time	-	300 uS	500 uS	

Note: All specifications are typical at 20 V input, full load at 25 °C unless otherwise stated.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	83%	86%	-	Vin=20 V, full load
Switching Frequency	310 kHz	340 kHz	370 kHz	
Output Voltage Trim Range	80%Vo	-	105%Vo	
Remote Sense Compensation	-	-	5%	
MTBF	5,373,282 hours			Calculated Per Bell Core SR-332 (Io = 2 A, Vo=12 V, Vin=20 V; Ta = 25 °C)
Dimensions	Inches 1.22 x 0.827 x 0.345 millimeters 30.99 x 21.00 x 8.76			
Weight	-	11 g	-	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit On)	-0.3 V	-	1 V	Remote on/off pin open, unit on.
Signal High (Unit Off)	2.8 V	-	12 V	

NON-ISOLATED DC/DC CONVERTER

9.0 V - 32 V Input

10 V - 12 V/3.5 A Output





Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) and the nominal output voltage of the converter (V_{nom}) are shown below. The Trim Down resistor should be connected between the Trim pin and V_{out} . The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.


$$R_{trimdown} = \frac{83.408}{V_{nom} - V_{adj}} - 8.66$$

$$R_{trimup} = \frac{21.65}{V_{adj} - V_{nom}}$$

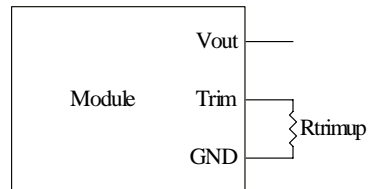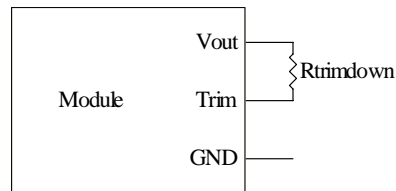

Note: The output voltage $V_{nom} = 12.13V$.

Efficiency Data

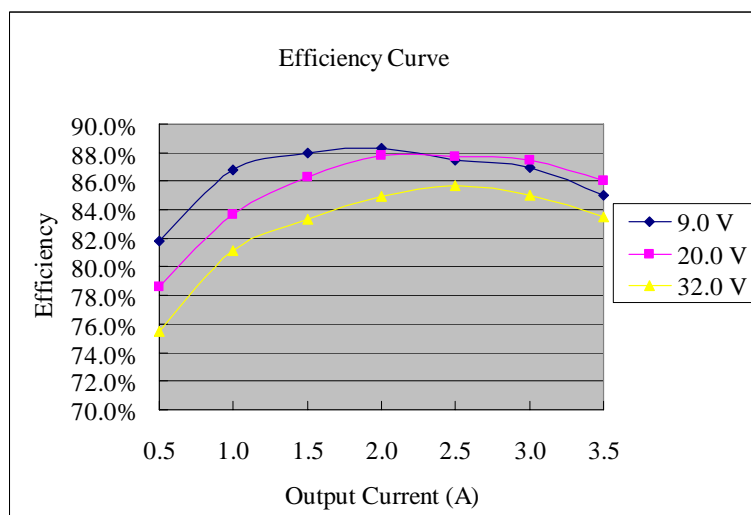


NON-ISOLATED DC/DC CONVERTER

9.0 V - 32 V Input

10 V - 12 V/3.5 A Output

bel
POWER PRODUCTS

Thermal Derating Curve

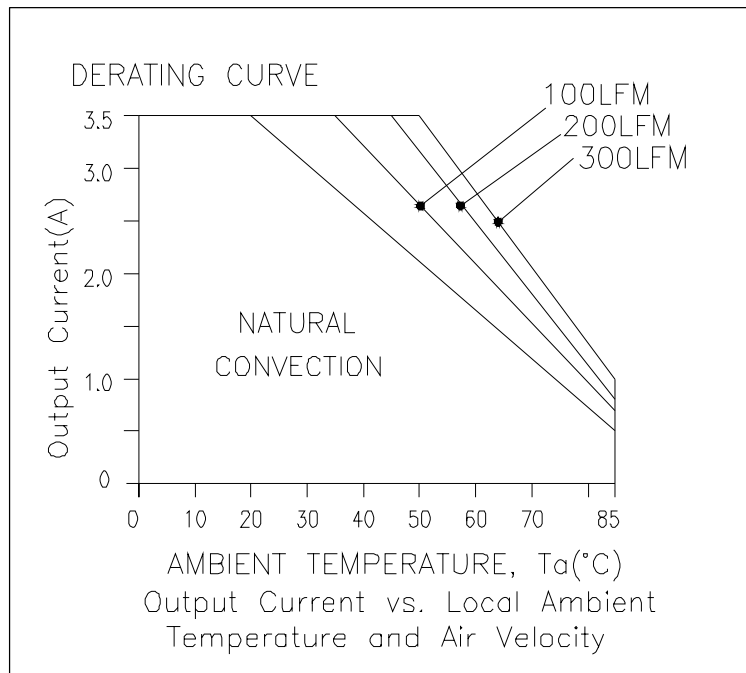

Note: Derating curve is for 12 V output and tested at nominal input voltage.




NON-ISOLATED DC/DC CONVERTERS

9.0 V - 32 V Input

10 V - 12 V/3.5 A Output




Mechanical Outline

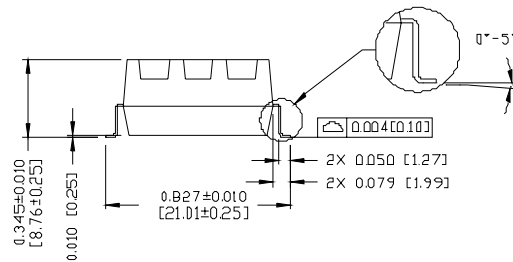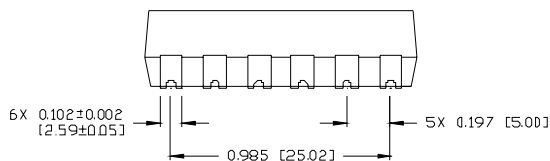


www.DataSheet4U.com

Pin Connections



Pin	Function
1	Trim
2	Remote On/Off
3	Remote Sense
4	Vo
5	Vo
6	Vo
7	Ground
8	Ground
9	Ground
10	N/A (Leave this pin unconnected)
11	Vin
12	Vin

RECOMMENDED PAD LAYOUT

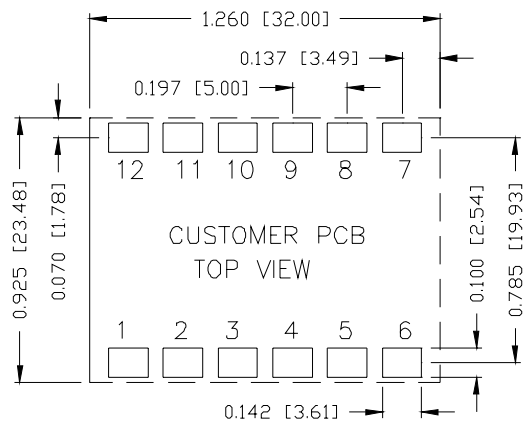

DON'T PLACE OTHER COMPONENTS IN THIS DASHED AREA

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2005 Bel Fuse Inc. Specifications subject to change without notice. 112205

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com