



STK402-950

Class AB Audio Power Amplifier IC 30 W × 5 Channels

Overview

The STK402-900 series products are audio power amplifier hybrid ICs that consist of optimally-designed discrete component power amplifier circuits that have been miniaturized using SANYO's unique insulated metal substrate technology (IMST). The adoption of a newly-developed low thermal resistance substrate allows this product to integrate five power amplifier channels in a single compact package.


Features

- Series of pin compatible power amplifiers ranging from 20 W/ch to 45 W/ch (10%/1 kHz) devices. The same printed circuit board can be used depending on the output power grade.
- The pin arrangement is compatible with that of the 2-channel STK403-000 series and 3-channel for STK403-200 series.
- Miniature packages
 - 15 W/ch to 45 W/ch (THD = 0.4%, $f = 20$ Hz to 20 kHz); 78.0 mm × 32.0 mm × 8.5 mm *
 - *: Not including the pins.
- Output load impedance: $R_L = 6 \Omega$
- Allowable load shorted time: 0.3 seconds
- Supports the use of standby, muting, and load shorting protection circuits.

Package Dimensions

unit: mm

4200-SIP24

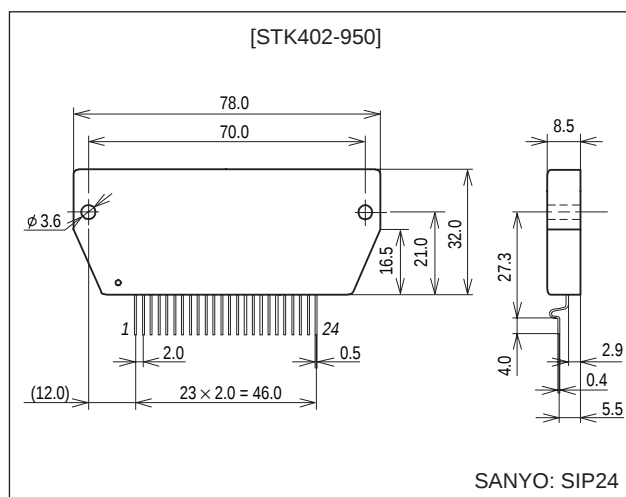

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Series Organization

These products are organized as a series based on their output capacity.

Item	Type No.			
	STK402-920	STK402-930	STK402-940	STK402-950
Output 1 (10%/1 kHz)	20 W × 5 ch	30 W × 5 ch	40 W × 5 ch	45 W × 5 ch
Output 2 (0.4%/20 Hz to 20 kHz)	15 W × 5 ch	20 W × 5 ch	25 W × 5 ch	30 W × 5 ch
Maximum supply voltage (No signal)	±30 V	±36 V	±38 V	±40 V
Maximum supply voltage (6 Ω)	±28 V	±34 V	±36 V	±38 V
Recommended supply voltage (6 Ω)	±20 V	±23 V	±26 V	±28 V
Package	78.0 mm × 32.0 mm × 8.5 mm			

Specifications

Maximum Ratings at T_a = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage (No signal)	V _{CC} max(0)		±40	V
Maximum supply voltage	V _{CC} max(1)	R _L = 6 Ω	±38	V
Thermal resistance	θ _{j-c}	Per power transistor	3.6	°C/W
Junction temperature	T _j max	Both the T _j max and the T _c max conditions must be met.	150	°C
Operating IC substrate temperature	T _c max		125	°C
Storage temperature	T _{stg}		−30 to +125	°C
Allowable load shorted time *4	ts	V _{CC} = ±28.0 V, R _L = 6 Ω, f = 50 Hz, P _O = 30 W	0.3	s

Operating Characteristics at T_c = 25°C, R_L = 6 Ω (noninductive load), R_g = 600 Ω, V_G = 30 dB


Parameter	Symbol	Conditions*1					Ratings			Unit
		V _{CC} (V)	f (Hz)	P _O (W)	THD (%)		min	typ	max	
Output power *1	P _O (1)	±28.0	20 to 20 k		0.4		27	30		W
	P _O (2)	±28.0	1 k		10			45		
Total harmonic distortion *1	THD (1)	±28.0	20 to 20 k	1.0					0.4	%
	THD (2)	±28.0	1 k	5.0				0.01		
Frequency characteristics *1	f _L , f _H	±28.0		1.0		+0 −3 dB		20 to 50 k		Hz
Input impedance	r _i	±28.0	1 k	1.0				55		kΩ
Output noise voltage *3	V _{NO}	±34.0				R _g = 2.2 kΩ			1.2	mVrms
Quiescent current	I _{CCO}	±34.0					70	95	120	mA
Neutral voltage	V _N	±34.0					−70	0	+70	mV

Notes: 1. 1 ch drive

2. Unless otherwise noted, use a constant-voltage supply for the power supply used during inspection.

3. The output noise voltage values shown are peak values read with a VTVM. However, an AC stabilized (50 Hz) power supply should be used to minimize the influence of AC primary side flicker noise on the reading.

4. Use the transformer power supply circuit shown in the figure below for allowable load shorted time measurement and output noise voltage measurement.

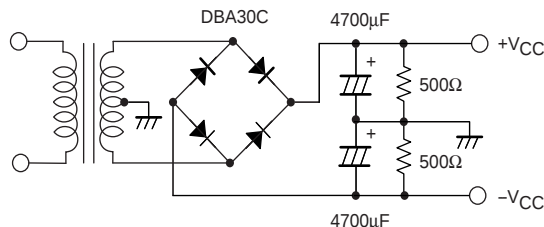

Designated Transformer Power Supply (RP-25 equivalent)



ITF02196

Thermal Design Example

The heat sink thermal resistance, θ_{c-a} , required to handle the total power dissipated within this hybrid IC is determined as follows.

Condition 1: The IC substrate temperature T_c must not exceed 125°C.

$$P_d \times \theta_{c-a} + T_a < 125^\circ\text{C} \dots (1)$$

T_a : Guaranteed ambient temperature for the end product.

Condition 2: The junction temperature of each individual transistor must not exceed 150°C.

$$P_d \times \theta_{c-a} + P_d/N \times \theta_{j-c} + T_a < 150^\circ\text{C} \dots (2)$$

N : Number of power transistors

θ_{j-c} : Thermal resistance per power transistor

We take the power dissipation in the power transistors to be P_d evenly distributed across those N power transistors.

If we solve for θ_{c-a} in equations (1) and (2), we get the following inequalities.

$$\theta_{c-a} < (125 - T_a)/P_d \dots (1)'$$

$$\theta_{c-a} < (150 - T_a)/P_d - \theta_{j-c}/N \dots (2)'$$

Values that satisfy both these inequalities at the same time are the required heat sink thermal resistance values.

Determining the following specifications allows us to determine the required heat sink thermal resistance from inequalities (1)' and (2)'.

- Supply voltage: V_{CC}
- Load resistance: R_L
- Guaranteed ambient temperature: T_a

Example:

Assume that the IC supply voltage, V_{CC} , is $\pm 28\text{ V}$, R_L is $6\ \Omega$, and that the signal is a continuous sine wave. In this case, from the $P_d - P_O$ characteristics, the maximum power will be 135 W for a signal with a frequency of 1 kHz.

For actual music signals, it is usual to use a P_d of 1/8 of P_{Omax} , which is the power estimated for continuous signals in this manner. (Note that depending on the particular safety standard used, a value somewhat different from the value of 1/8 used here may be used.)

That is:

$$P_d = 85\text{ W (when } 1/8\ P_{Omax} \text{ is } 3.8\text{ W)}$$





The number, N , of power transistors in the hybrid IC's audio amplifier block is 10. Since the thermal resistance, θ_{c-a} , per transistor is 3.6°C/W , the required heat sink thermal resistance, θ_{c-a} , for a guaranteed ambient temperature of 50°C will be as follows.

$$\begin{aligned} \text{From inequality (1)': } \theta_{c-a} &< (125 - 50)/85 \\ &< 0.88 \end{aligned}$$

$$\begin{aligned} \text{From inequality (2)': } \theta_{c-a} &< (150 - 50)/85 - 3.6/10 \\ &< 0.81 \end{aligned}$$

Therefore, the thermal resistance that satisfies both these expressions at the same time is 0.81°C/W .

Note that this thermal design example assumes the use of a constant-voltage power supply, and is only provided as an example for reference purposes. Thermal designs must be tested in an actual end product.

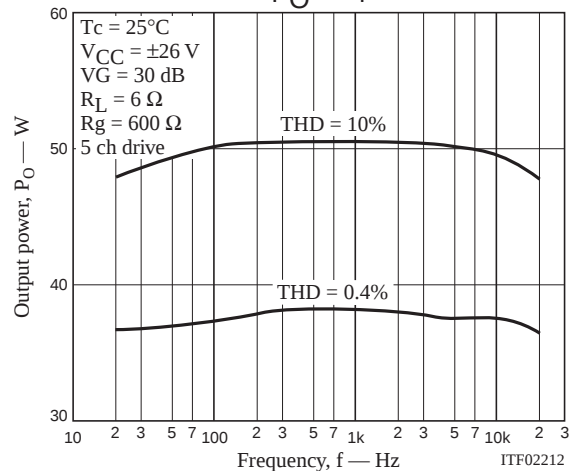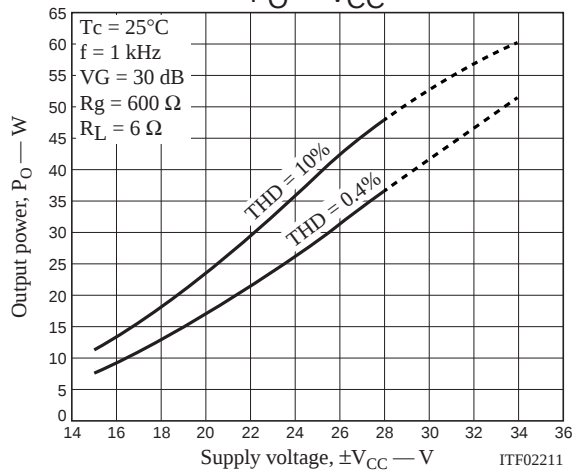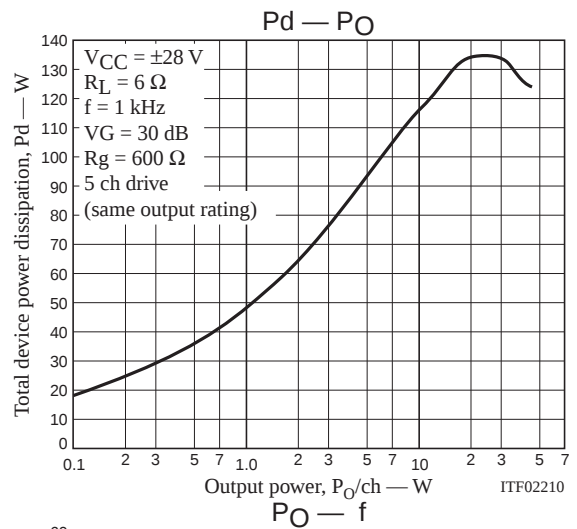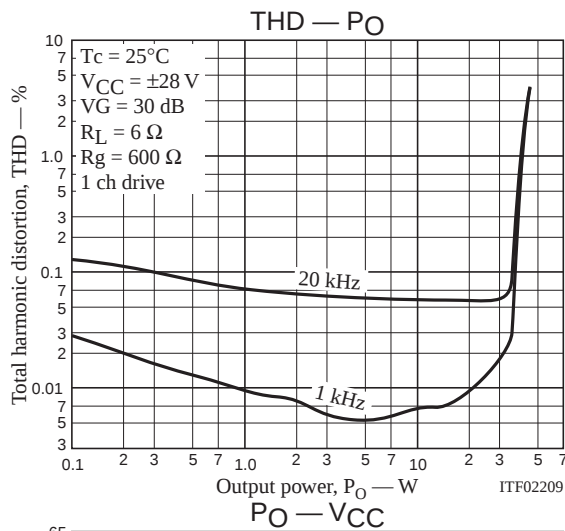

■ Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 2003. Specifications and information herein are subject to change without notice.