

9097247 TOSHIBA. ELECTRONIC

02E 17137 D

TA7335P
TA7335F

T-77-05-05

FM FRONT END IC

The TA7335P is a front end IC suitable for Portable Radio and Radio Cassette applications. This IC contains RF amplifier, MIX, local oscillator and varicap for AFC. This IC simplify the design of front end circuit.

- . Operating Supply Voltage
 - : $V_{CC}=2\sim 5V$TA7335F
 - $V_{CC}=2\sim 6V$TA7335P, TA7335P-LB
- . Local OSC Stop Voltage: $V_{CC}=1.5V$ (Typ.)
- . Varicap for AFC
- . Japan/U Band Available
- . The Item is Different Each Outlines
 - : TA7335P : Single in Line Package....Outline 1
 - TA7335P-LB: Lead Forming.....Outline 2
 - TA7335F : Flat Package.....Outline 3


MAXIMUM RATINGS ($T_a=25^{\circ}C$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage	TA7335P TA7335P-LB	V_{CC}	8	V
	TA7335F		6	
	TA7335P TA7335P-LB		500	
Power Dissipation (Note)	TA7335P TA7335P-LB	P_D	500	mW
	TA7335F		300	
Operating Temperature		T_{opr}	-25 ~ 75	$^{\circ}C$
Storage Temperature		T_{stg}	-55 ~ 150	$^{\circ}C$


Note : TA7335P, TA7335P-LB : Derated above $T_a=25^{\circ}C$ in the proportion of 5.6mW/ $^{\circ}C$.

TA7335F : Derated above $T_a=25^{\circ}C$ in the proportion of 2.8mW/ $^{\circ}C$.


Unit in mm

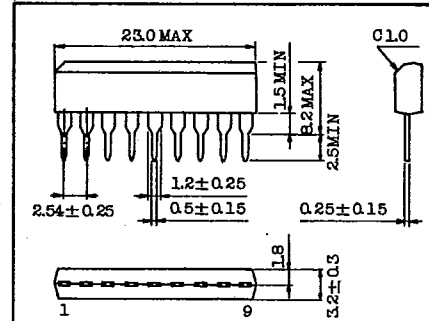

JEDEC -
TOSHIBA S9A-P OUTLINE(1)

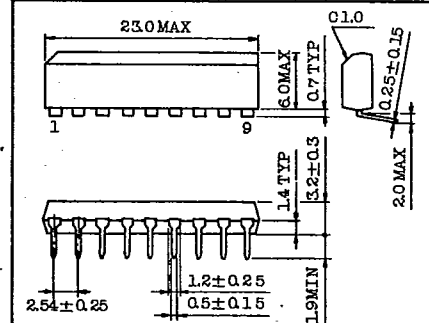

JEDEC -
TOSHIBA S9B-P OUTLINE(2)

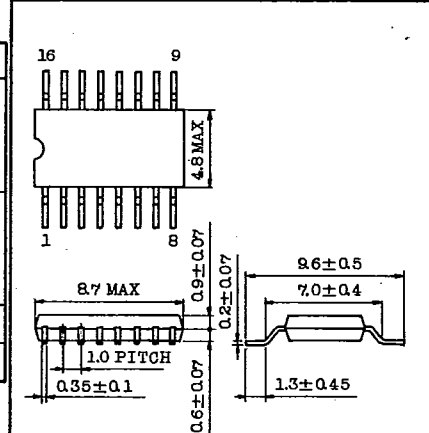

JEDEC -
TOSHIBA F16GA1-P OUTLINE(3)

TOSHIBA

9097247 TOSHIBA. ELECTRONIC

02E 17138 D

TA7335P
TA7335F

T-77-05-05

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified $V_{CC}=4V$, $T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT		
Supply Current	I_{CC}	1	$V_{IN}=0$	-	2.5	4	mA		
Local OSC Voltage	V_{OSC}	1	$SW_1=A$, $f_{osc}=60MHz$	40	75	200	mV _{RMS}		
Conversion Gain	G_C	2	$f=83MHz$	-	20	-	dB		
Recovered Output Voltage	V_{OD}	2	$f=83MHz$, $\Delta F=\pm 22.5kHz$ dev. $V_{IN}=12dB\mu V$	40	60	-	mV _{RMS}		
Capacitance of AFC Diode	C_{AFC}	3	$V_{AFC}=1V$	-	3.8	-	pF		
Q of AFC Diode	Q	3	$V_{AFC}=1V$	-	100	-	-		
Capacitance V_{AFC} Dependence	K	3	$K = \frac{C(V_{AFC}=1V) - C(V_{AFC}=3V)}{C(V_{AFC}=3V)}$	-	0.23	-	-		
3 Pin Impedance	Parallel Output Resistance	r_{op3}	$f=83MHz$	3	-	24	-	k Ω	
	Parallel Output Capacitance	c_{op3}		3	-	3	-	pF	
4 Pin Impedance	Parallel Input Resistance	r_{ip4}		3	-	20	-	k Ω	
	Parallel Input Capacitance	c_{ip4}		3	-	3.2	-	pF	
6 Pin Impedance	Parallel Output Resistance	r_{op6}		$f=10.7MHz$	3	-	44	-	k Ω
	Parallel Output Capacitance	c_{op6}			3	-	3.7	-	pF
Local OSC Stop Voltage	V_{stp}	1	$SW_1=A$, $f_{osc}=60MHz$	-	1.5	-	V		


AUDIO LINEAR IC

TA7335P
TA7335F

T-77-05-05


EQUIVALENT CIRCUIT AND TEST CIRCUIT (1)

TA7335P, TA7335F-LB

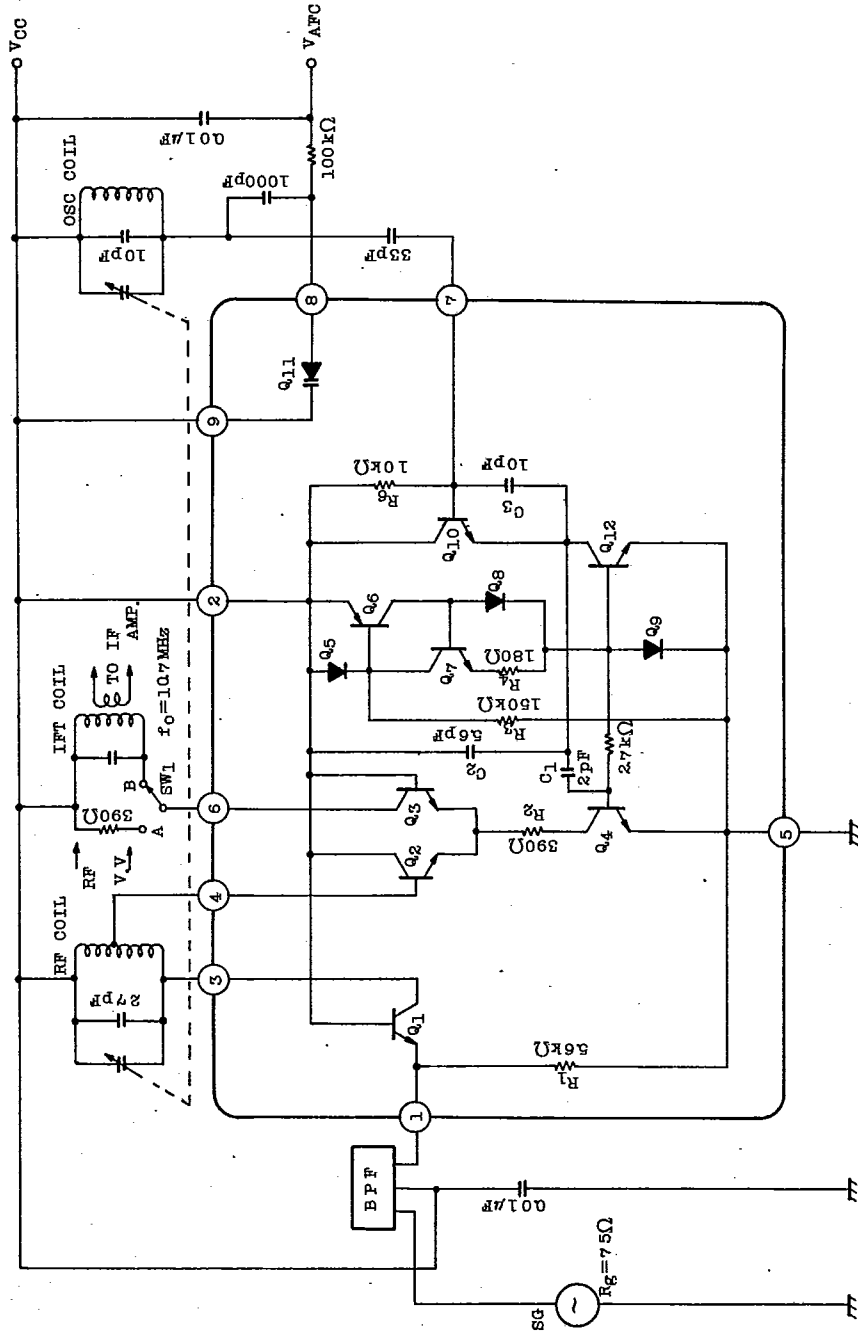

TA7335P
TA7335F

T-77-05-05

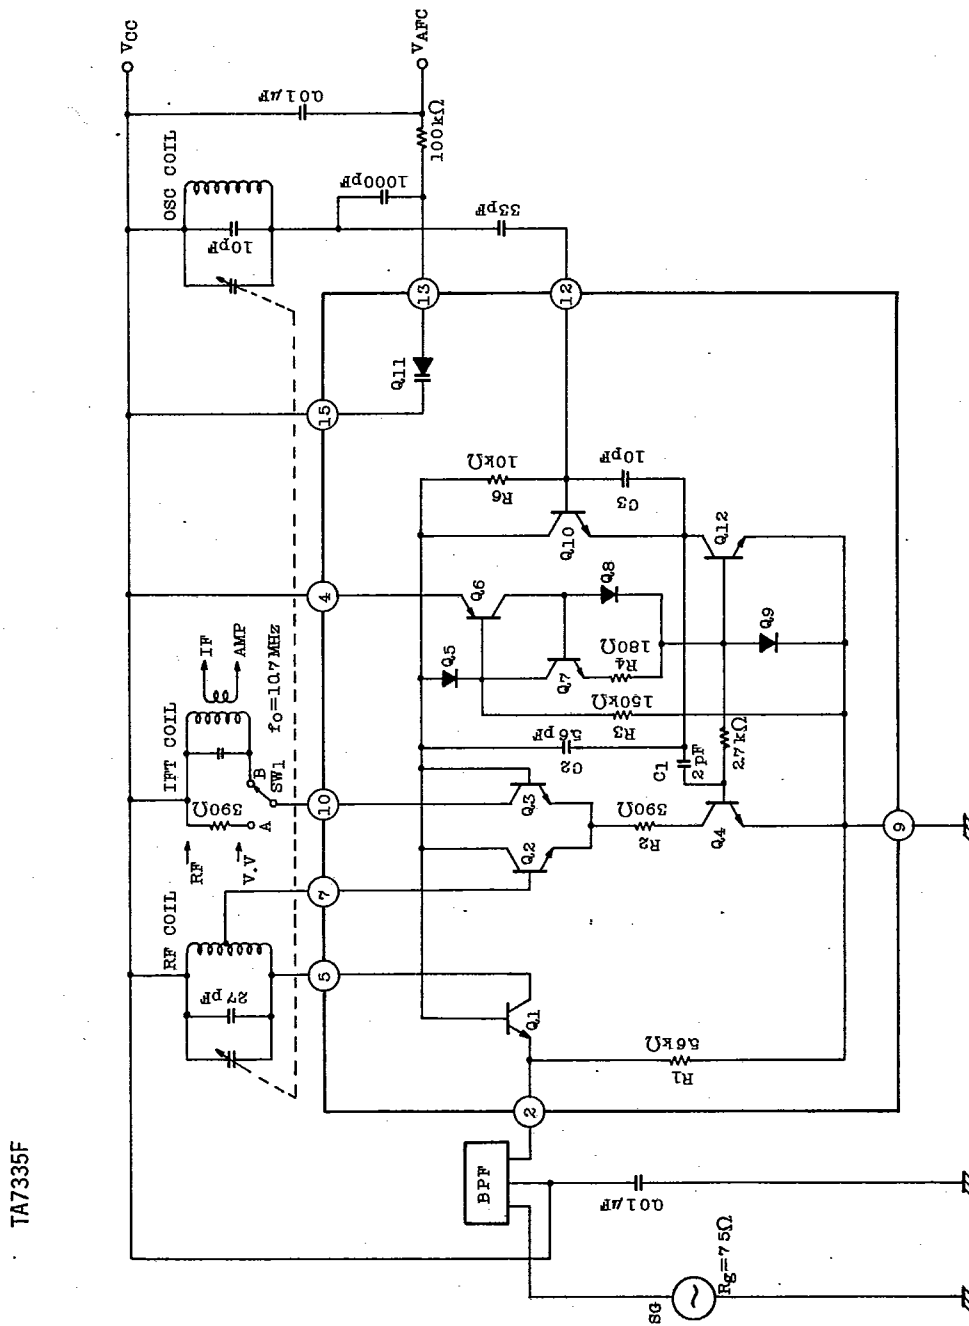


AUDIO LINEAR IC

TA7335P TA7335F

T-77-05-05

TA7335F

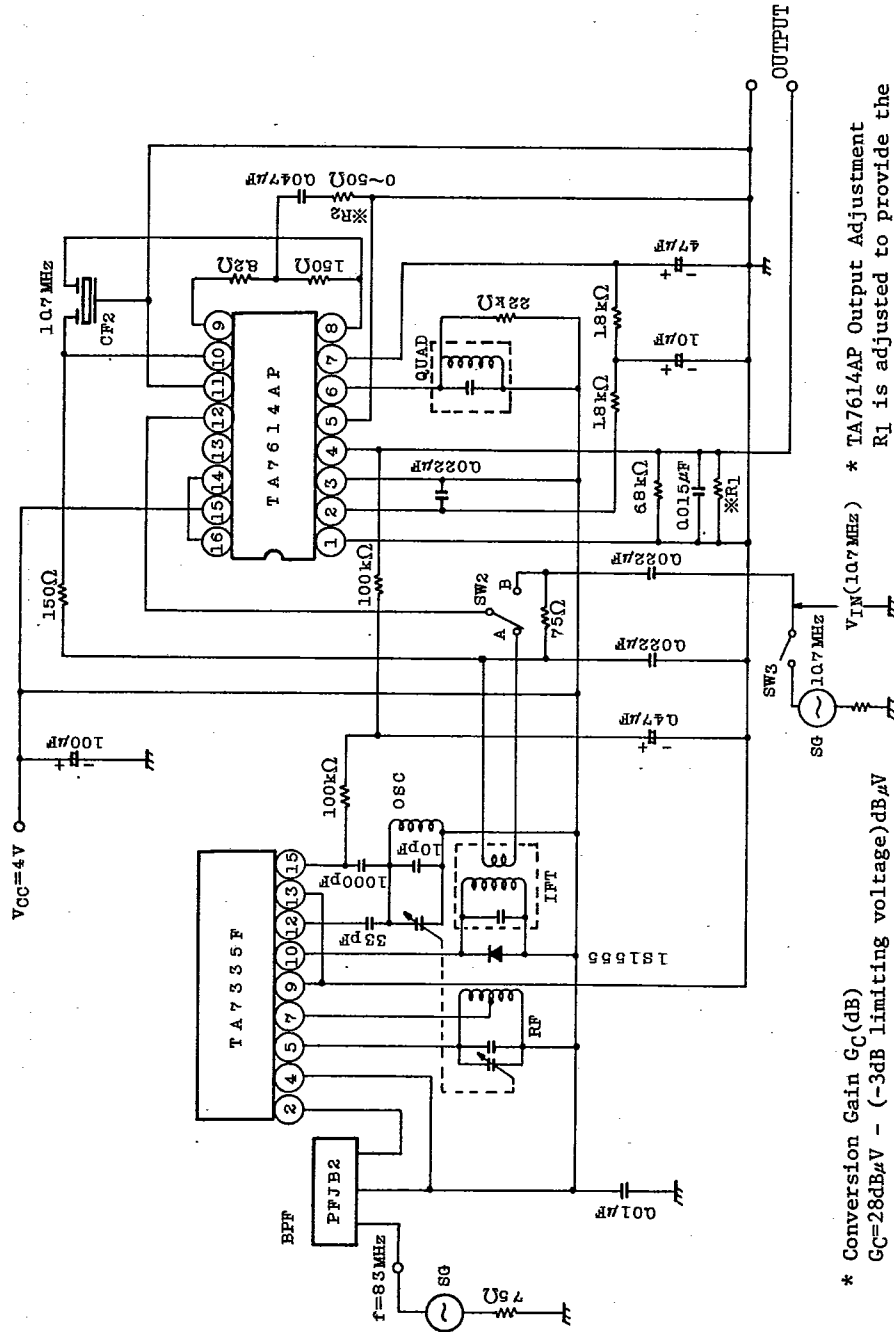

- * Conversion Gain G_c (dB)
 $G_c = 28 \text{ dB} \mu\text{V} - (-3 \text{ dB limiting voltage}) \text{ dB} \mu\text{V}$
- * TA7614AP Gain Adjustment
R2 is adjusted to provide the following gain.
-3dB limiting Voltage = 28dB μV
at SW2=B, SW3=ON
- * TA7614AP Output Adjustment
R1 is adjusted to provide the following recovered output voltage VOD.
VOD = 60mV r_{rms}
at f = 10.7MHz, $\Delta f = \pm 22.5 \text{ kHz dev.}$
VIN = 80dB μV

AUDIO LINEAR IC





9097247 TOSHIBA. ELECTRONIC

02E 17143 D

TA7335P
TA7335F

T-77-05-05

COIL DATA (TEST CIRCUIT 1,2, APPLICATION CIRCUIT)

	f_0	Q_0	TURNS	CAPACITANCE	
RF Coil	83MHz	-	0.7mm ϕ 2 $\frac{1}{2}$ T Center Tap (JAPAN Band)	27pF	
OSC Coil	72.5MHz	-	0.7mm ϕ 3 $\frac{1}{2}$ T (JAPAN Band)	10pF	
IFT	10.7MHz	115	① - ③ 12T ④ - ⑥ 1T WIRE 0.12mm ϕ UEW SUMIDA ELECTRIC Co., LTD. S193-001 or (5764) or Equivalent	75pF	 (BOTTOM VIEW)
Quad Coil	10.7MHz	150	④ - ⑥ 14T WIRE 0.12mm ϕ UEW SUMIDA ELECTRIC Co., LTD. 44M-933A or Equivalent	47pF	 (BOTTOM VIEW)

Band Pass Filter (B.P.F.)

SOSHIN ELECTRIC Co., LTD. PFJB2 or Equivalent

TOSHIBA


TA7335P
TA7335F

T-77-05-05


TEST CIRCUIT 3

INPUT, OUTPUT IMPEDANCE, K


(1) r_{op3} , c_{op3}

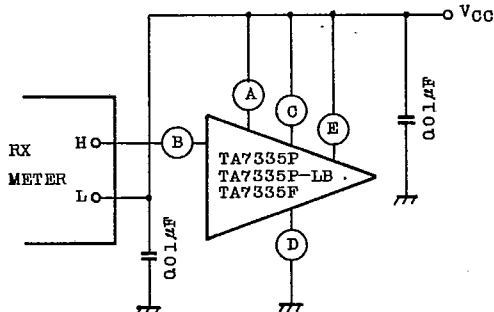


(2) r_{ip4} , c_{ip4}

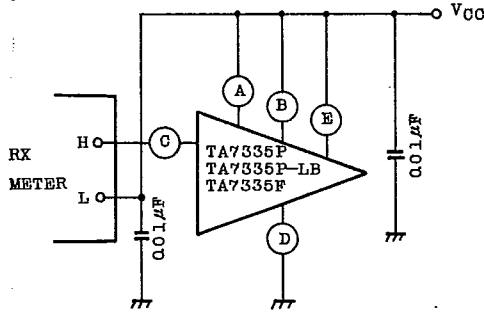

(3) r_{op6} , c_{op6}

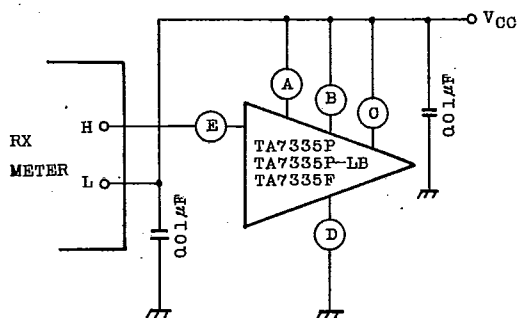

(4) C_{AFC} , K

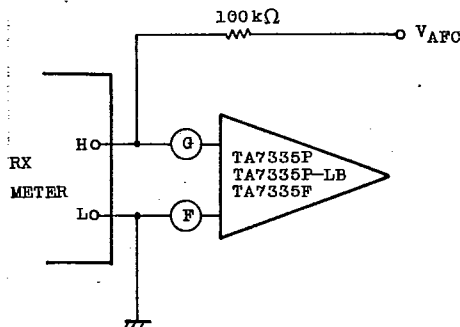

K (Capacitance V_{AFC} dependence)
is defined by following equation

$$K = \frac{C(V_{AFC}=1V) - C(V_{AFC}=3V)}{C(V_{AFC}=3V)}$$

CONTRASTIVE A TABLE


ITEM	PIN No.	A	B	C	D	E	F	G
TA7335P/P-LB		2	3	4	5	6	8	9
TA7335F		4	5	7	9	10	13	15

TA7335P
TA7335F

T-77-05-05

APPLICATION PRECAUTION

- (1) A core of local oscillation coil must be ferrite. If you use aluminium or brass core in stead of ferrite core, Q_0 becomes so small that there is a case of oscillation stop at low frequency.

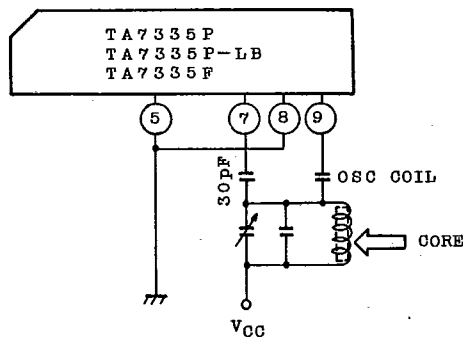






- (2) A capacitance between oscillation coil and ⑦ pin of IC is recommended to be more than 30pF. When this capacitance is so small, oscillation level at low frequency is small.

9097247 TOSHIBA, ELECTRONIC

02E 17146 D

TA7335P
TA7335F

T-77-05-05

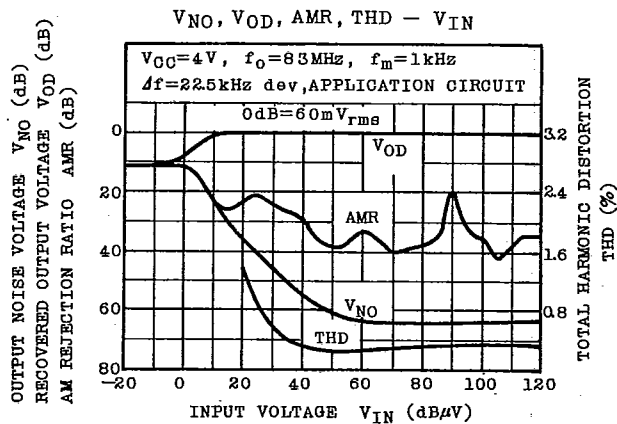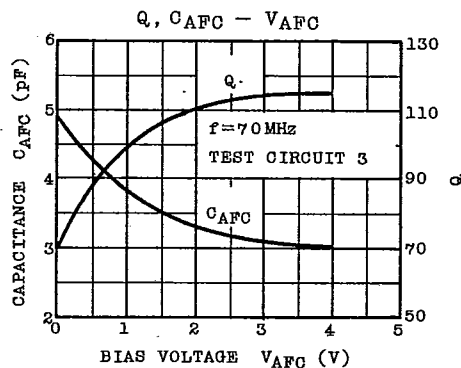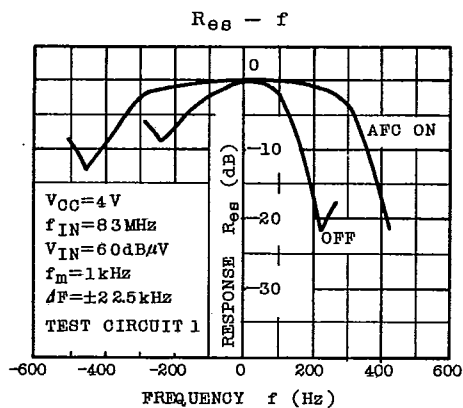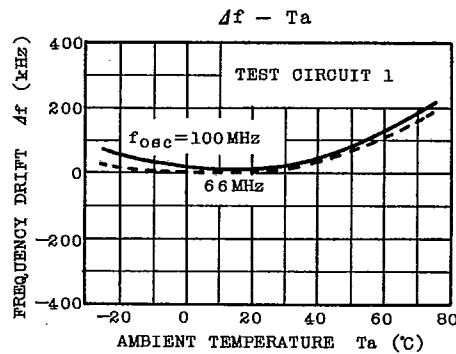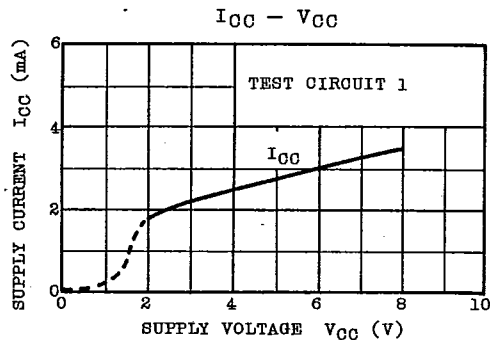

AUDIO LINEAR IC

TA7335P
TA7335F

T-77-05-05

