



# INTEGRATED CIRCUIT

## TECHNICAL DATA

# TA7680AP, TA7681AP

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT  
SILICON MONOLITHIC

TELEVISION PIF + SIF SYSTEM

TA7680AP....FOR FET TUNER

TA7681AP....FOR NPN TUNER

### FUNCTIONS

#### PIF

- . Three Controlled IF Amplifier Stages
- . Video Demodulator Controlled by Picture Carrier
- . Black Noise and White Noise Inverter
- . Peak AGC
- . DC Amplifier for RF AGC Out

#### SIF

- . Three Differential IF Amplifier Stages
- . Phase Detector
- . DC Controlled Attenuator
- . Audio Amplifier Stage with NFB Terminal

### FEATURES

- . PIF, SIF, ATT AUDIO DRIVER
- . 2 Chip Color TV System is Possible with TA7644BP


#### PIF

- . High Gain, Wide Band IF Amplifier
- . AGC Characteristics with Excellent Stability
- . Excellent DG/DP Characteristics
- . Excellent S/N Characteristics Due to Delayed 3 Stages AGC Action
- . Negative Video Output Signal
- . Switch Off the Video Part with VTR SW

#### SIF

- . Excellent Limiter Characteristics
- . Excellent Attenuator Characteristics

Unit in mm

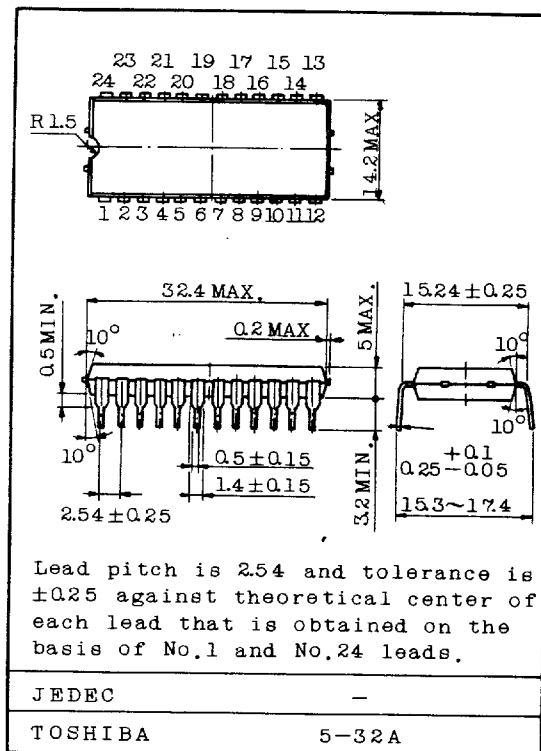

9097247 0019619 284

1983-3-30

TOSHIBA CORPORATION


EJ3-TA7680AP-1



#### MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V <sub>CC</sub>	15	V
Terminal 11 Open Voltage	V <sub>11</sub>	15	V
Video DC Output Current	I <sub>15</sub>	6	mA
Audio DC Output Current	I <sub>3</sub>	3	mA
Terminal 2 Voltage	V <sub>2</sub>	15	V
Power Dissipation (Note)	P <sub>D</sub>	1.6	W
Operating Temperature	T <sub>opr</sub>	-20 ~ 65	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ 150	°C

Note : Derated above Ta=25°C in the proportion of 12.8mW/°C.

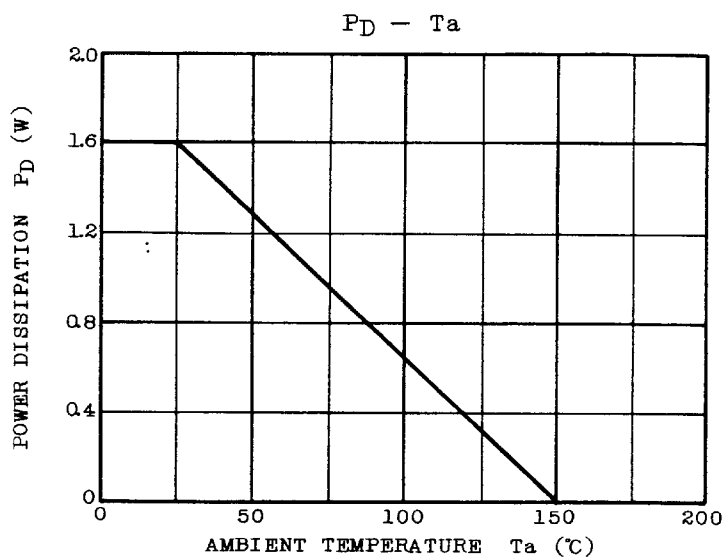

■ 9097247 0019620 TT6 ■




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### BLOCK DIAGRAM

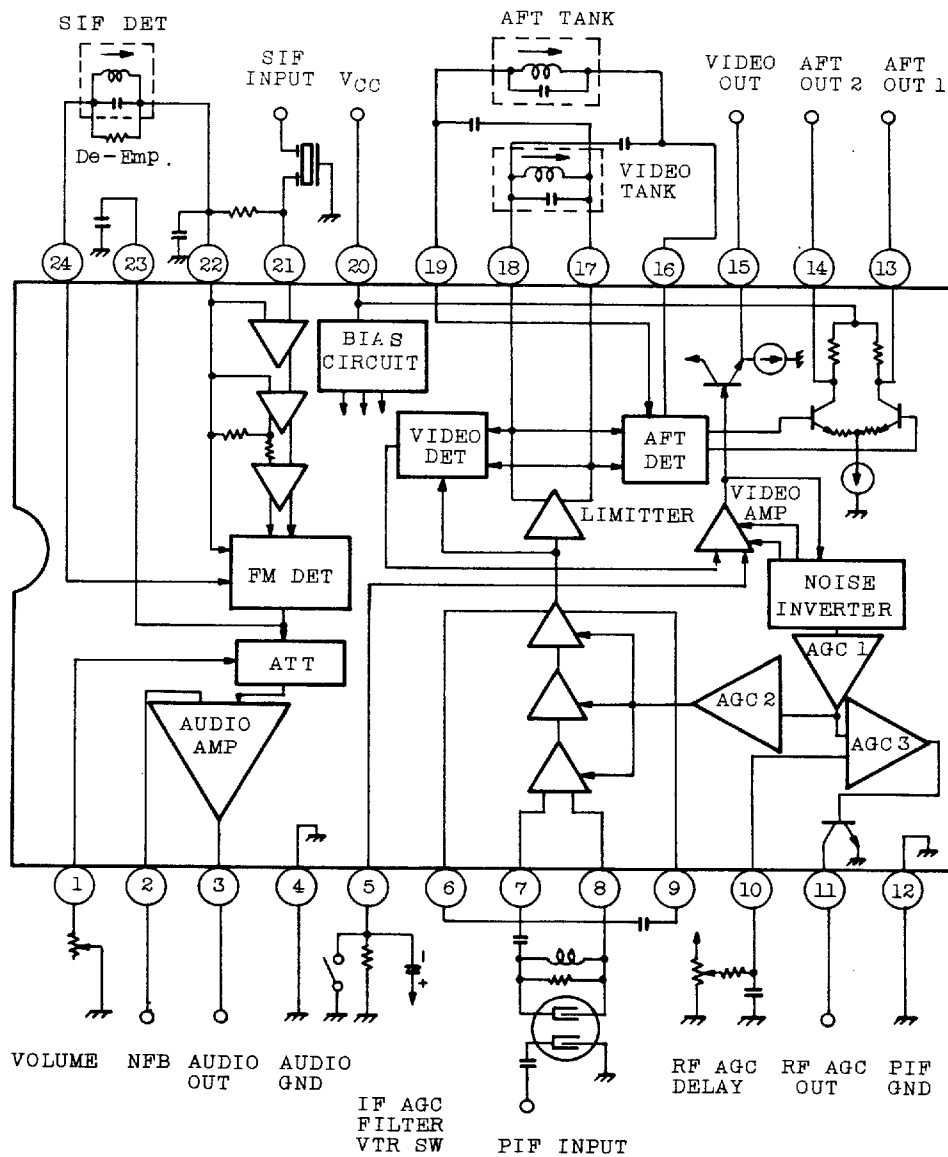

9097247 0019621 932



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

ELECTRICAL CHARACTERISTICS (Ta=25°C, VCC=12V, fp=58.75MHz, fs=54.25MHz)  
PIF SECTION

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Recommended Supply Voltage	VCC	-	-	10.8	12.0	13.2	V
Supply Current	ICC	1	-	50	72	95	mA
Video DC Output Voltage	V15	1	SW1:1(TA7680AP) 2(TA7681AP) SW2:2	5.2	5.5	5.8	V
AFT DC Output Voltage	V13	1	SW1:1(TA7680AP) 2(TA7681AP) SW2:2	5.3	6.8	8.3	V
	V14	1	SW1:1(TA7680AP) 2(TA7681AP) SW2:2	5.3	6.8	8.3	V
AFT DC Offset Voltage	$\Delta V_{13-14}$	1	SW1:1(TA7680AP) 2(TA7681AP) SW2:2	-1.5	0	1.5	V
RF AGC Residual Output Voltage	V11 SAT	1	SW1:1(TA7680AP) 2(TA7681AP) SW2:2	-	-	0.5	V
RF AGC Leak Current	I11 LEAK	1	SW1:1(TA7681AP) 2(TA7680AP) SW2:1	-	-	1	$\mu A$
Video Sensitivity	$v_i$ PIN7-8	2	(Note 1)	60	150	250	$\mu V_{rms}$
AGC Range	$\Delta A_{PIF}$	2	(Note 2)	60	64	-	dB
Sync Tip Level Voltage	VSYNC (V15)	2	(Note 3)	2.3	2.5	2.7	V
Max. IF Input Voltage	$v_{IN MAX}$ PIF	2	(Note 4)	100	120	-	mV <sub>rms</sub>
White Noise Threshold Level	VWTH (V15)	2	(Note 5)	5.8	6.2	6.6	V
White Noise Clamp Level	VWCL (V15)	2	(Note 5)	3.7	4.1	4.5	V

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-4

GT1A12

9097247 0019622 879



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Black Noise Threshold Level		$V_B^{TH}$ (V15)	2	(Note 5)	1.4	1.6	1.8	V
Black Noise Clamp Level		$V_B^{CL}$ (V15)	2	(Note 5)	2.9	3.3	3.7	V
Video Frequency Response		$f_{BW}$	3	(Note 6)	4.5	5.5	-	MHz
Suppression of Carrier		CL	4	(Note 7)	40	50	-	dB
Suppression of 2nd Carrier		I <sub>2nd</sub>	4	(Note 8)	40	50	-	dB
920kHz Beat Level		I <sub>920</sub>	4	(Note 9)	33	38	-	dB
Differential Phase		DP	5	(Note 10)	-	3.5	5	deg
Differential Gain		DG	5	(Note 10)	-	7	10	%
PIF Input Impedance		R <sub>IN</sub> (PIF)	6	(Note 11)	1.5	3.0	6.0	kΩ
		C <sub>IN</sub> (PIF)			-	3.0	10.0	pF
AFT Sensitivity		$\Delta F/V_{13-14}$	2	(Note 12)	-	16	-	kHz/V
AFT Output Voltage	Upper	V <sub>13U</sub> V <sub>14U</sub>	2	(Note 13)	11.7	11.9	1.20	V
	Lower	V <sub>13L</sub> V <sub>14L</sub>	2	(Note 13)	1.8	2.3	2.8	V
RF AGC Max. Available Current		I <sub>4</sub> MAX	1	TA7680AP SW <sub>1</sub> :1 SW <sub>2</sub> :1	0.3	-	-	mA
				TA7681AP SW <sub>1</sub> :2 SW <sub>2</sub> :1	7.0	-	-	
RF AGC Delay Setting Range		V <sub>IN</sub> DELAY		(Note 14)	5	7	9	V
AFT Band Width		$\Delta F_W$	2	(Note 13)	1.4	-	-	MHz
Video Output Voltage		$v_{OUT}$	2	(Note 15)	2.25	2.5	2.75	V
SIF Output Voltage		S <sub>OUT</sub>	3	(Note 16)	200	400	600	mV <sub>rms</sub>

9097247 0019623 705

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-5

GT1A12



# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### SIF SECTION

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Limiting Voltage		$v_{IN(LIM)}$	8	(Note 17) $R_D = \infty$	-	200	400	$\mu V_{rms}$
AM Rejection Ratio		AMR	8	SIF IN : $f = 4.5MHz$ $f_m = 400Hz$ , $\Delta f = \pm 25kHz$ AM 30%, $v_{in} = 100dB\mu$	40	45	-	dB
Recovered Output Voltage		$V_{OD}$	8	SIF IN : $f = 4.5MHz$ $f_m = 400Hz$ , $\Delta f = \pm 25kHz$ $v_{in} = 80dB\mu$ , $R_D = 12k\Omega$	0.5	0.75	-	$V_{rms}$
Total Harmonic Distortion		THD <sub>DET</sub>	8	SIF IN : $f = 4.5MHz$ $f_m = 400Hz$ , $\Delta f = \pm 25kHz$ $v_{in} = 80dB\mu$	-	1.0	-	%
Max. Audio Output Voltage		$v_{OM}$	8	SIF IN : $f = 4.4 \sim 4.6MHz$	4.0	-	-	$V_{p-p}$
SIF Input Impedance		$R_{IN(SIF)}$	7	$f = 4.5MHz$	10.0	20.0	30.0	$k\Omega$
		$C_{IN(SIF)}$			-	3.0	-	pF
DET Output Impedance		$R_o(DET)$	9	(Note 18)	10.0	15.0	20.0	$k\Omega$
DC Voltage	Terminal 21	$V_{21}$	1	SW <sub>1</sub> :1 (TA7680AP)	3.5	4.4	5.3	V
	Terminal 23	$V_{23}$		2 (TA7681AP)	4.8	6.0	7.2	V
	Terminal 1	$V_1$		SW <sub>2</sub> :2	6.0	6.7	7.4	V
Max. Attenuation		ATT MAX	10	(Note 19)	60	-	-	dB
DC Volume Gain		$G_{ATT MIN}$	10	$R_A = 0$ $G_{ATT MIN} = 20 \log \frac{v_2}{v_{23}}$	4	6	8	dB
ATT Characteristics	1	$V_1(1)$	10	*	3.4	3.8	4.2	V
	2	$V_1(2)$	10	**	4.5	4.9	5.3	V
Signal Leakage		$v_{PT}$	11	(Note 20)	-	1.0	3.0	$mV_{rms}$
AF Amp. Gain		$G_v AF$	13	(Note 21)	-	20	-	dB
AF Amp. Distortion		THD AF	12	$P_{23A} = 1V_{pp}$ , 400Hz SW <sub>3</sub> :ON ATT:-26dB Setting	-	1.5	-	%
AF Amp. Max. Output Voltage		$v_{OAF MAX}$	13	(Note 21) THD <sub>AF</sub> 5%	1.5	2.0	-	$V_{rms}$
AF Output DC Voltage		$V_3$	1	SW <sub>1</sub> :1 (TA7680AP) 2 (TA7681AP) SW <sub>2</sub> :2	6.7	7.7	8.8	V

\* Read the 400Hz component of  $V_{A1}$  at P<sub>2</sub> with  $R_A = 0$ . Set  $R_A$  so that  $V_{A1}' = \frac{1}{2} V_{A1}$  (-6dB), then read DC voltage of terminal 1 ( $V_1$ ).

\*\* Read the 400Hz component of  $V_{A1}$  at P<sub>2</sub> with  $R_A = 0$ . Set  $R_A$  so that  $V_{A1}' = 3.16 \times 10^{-3} V_{A1}$  (-50dB) then read DC voltage of terminal 1 ( $V_1$ ).

9097247 0019624 641




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### TEST CIRCUIT

##### 1. DC CHARACTERISTIC

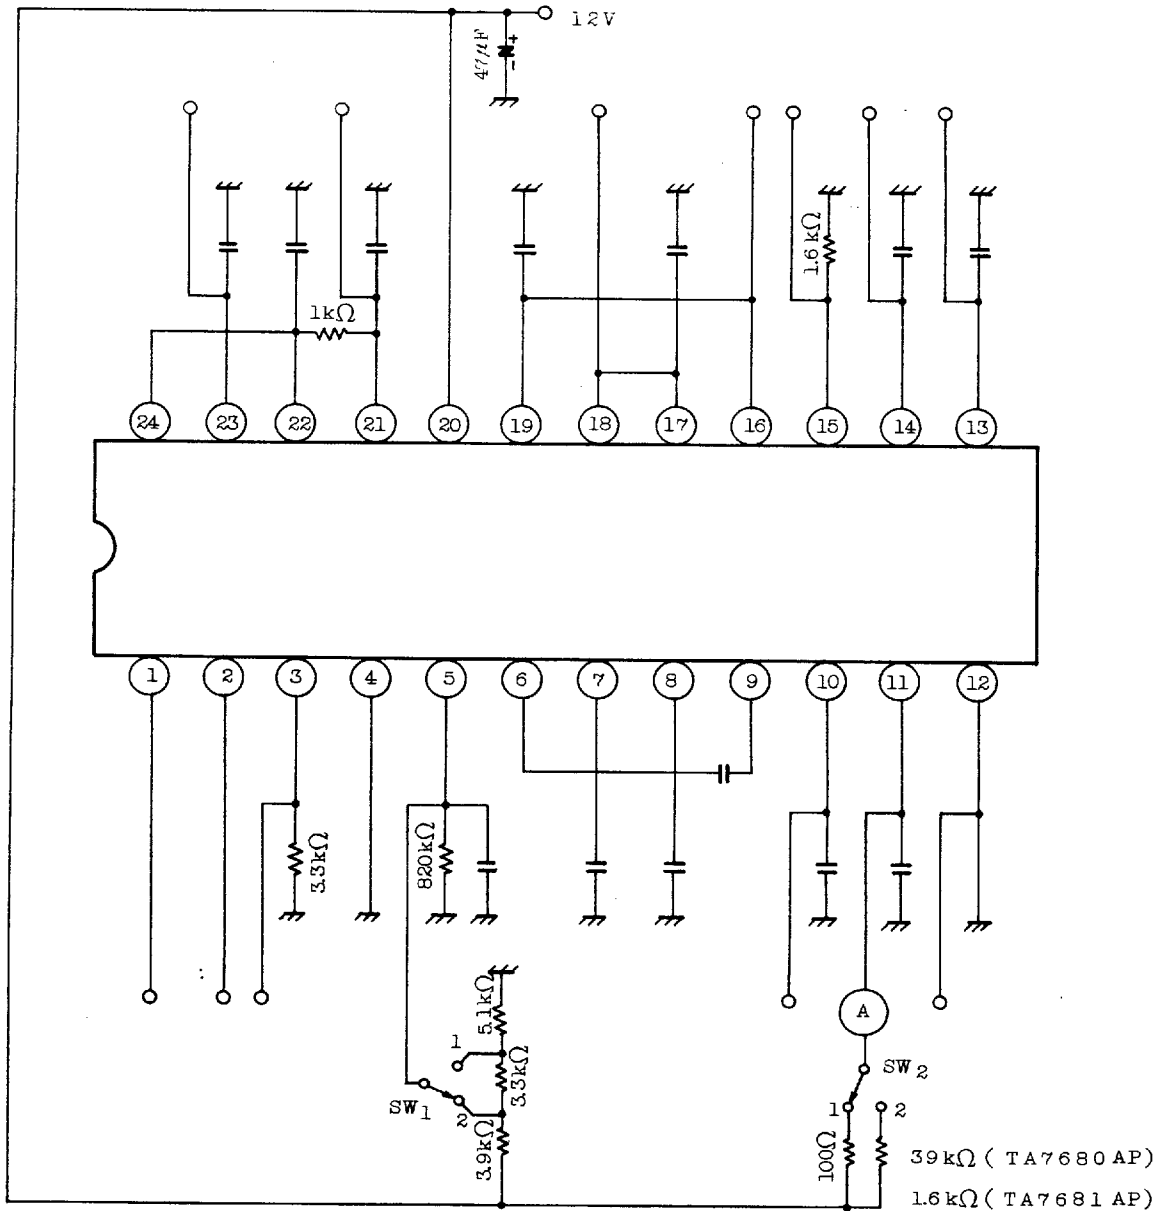

C = 0.01µF

9097247 0019625 588

1983-3-30

TOSHIBA CORPORATION

EJB-TA7680AP-7

GT1A12




# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

#### 2. AC CHARACTERISTIC

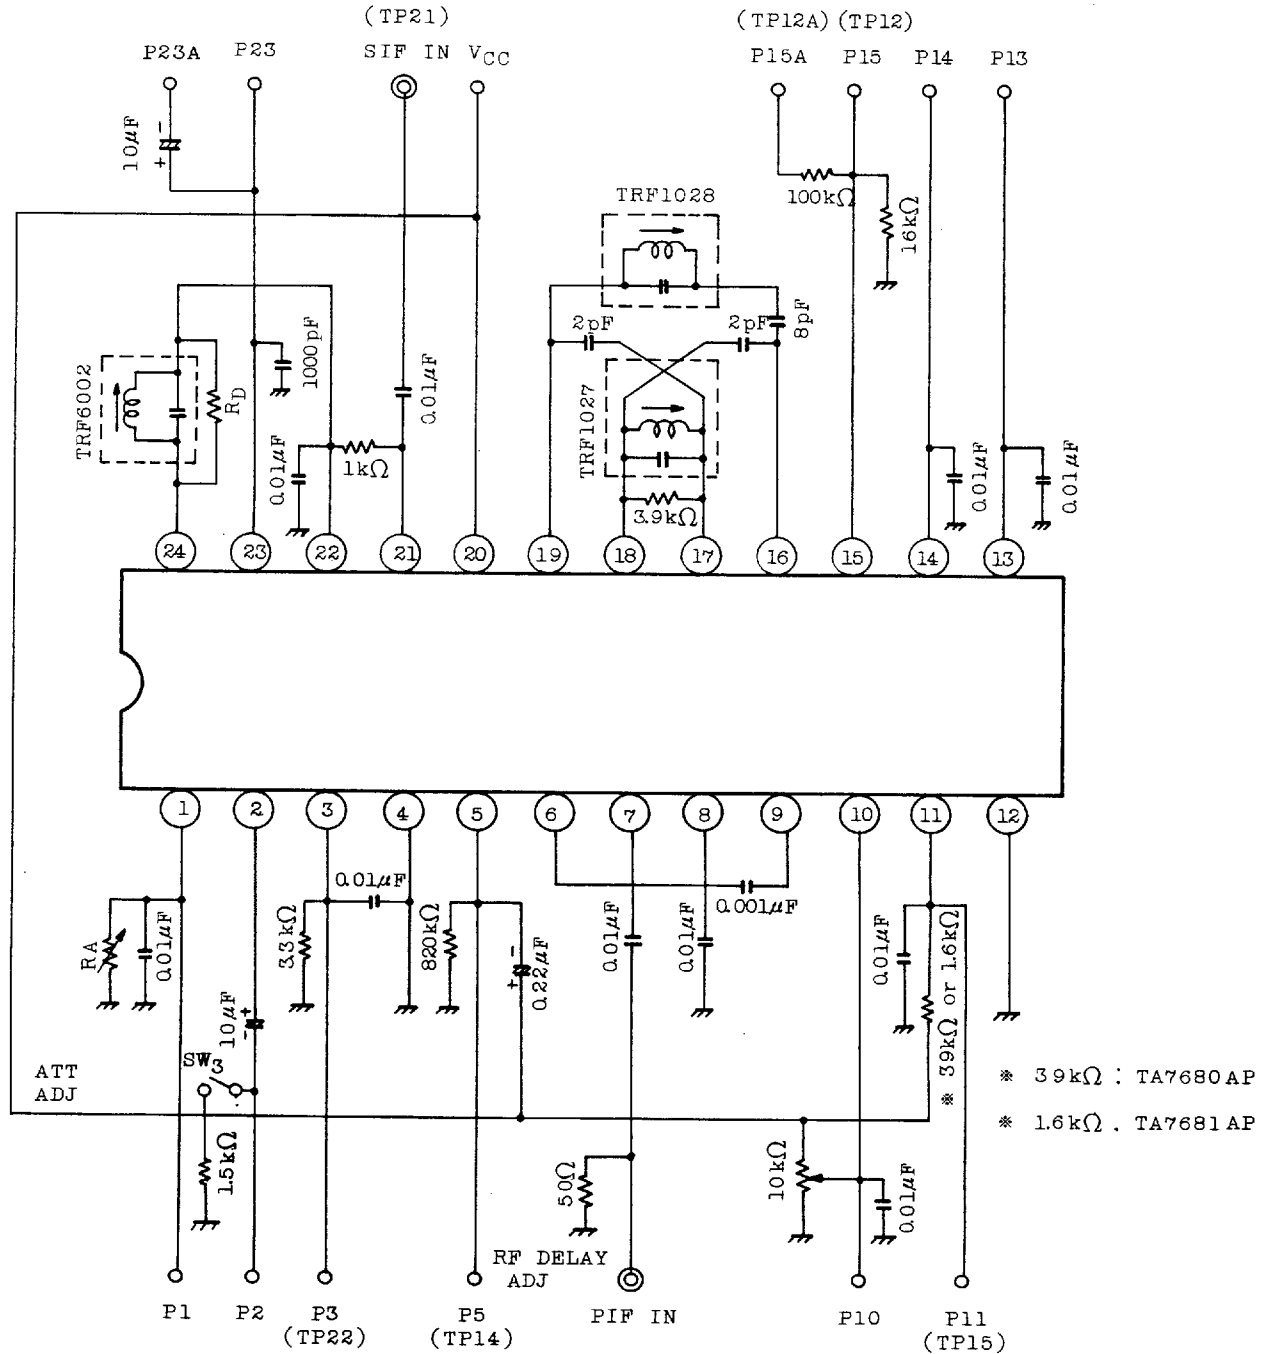

9097247 0019626 414

1983-3-30

TOSHIBA CORPORATION


EJB-TA7680AP-8

GT1A12







#### 3. VIDEO FREQUENCY RESPONSE AND SIF OUTPUT VOLTAGE

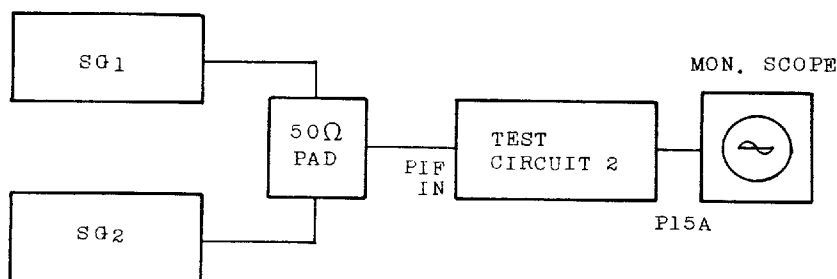

#### 4. INTER MODULATION

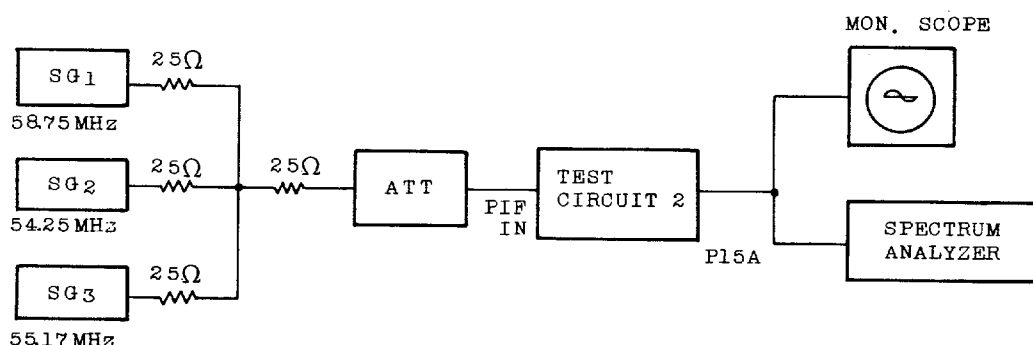

#### 5. DG, DP

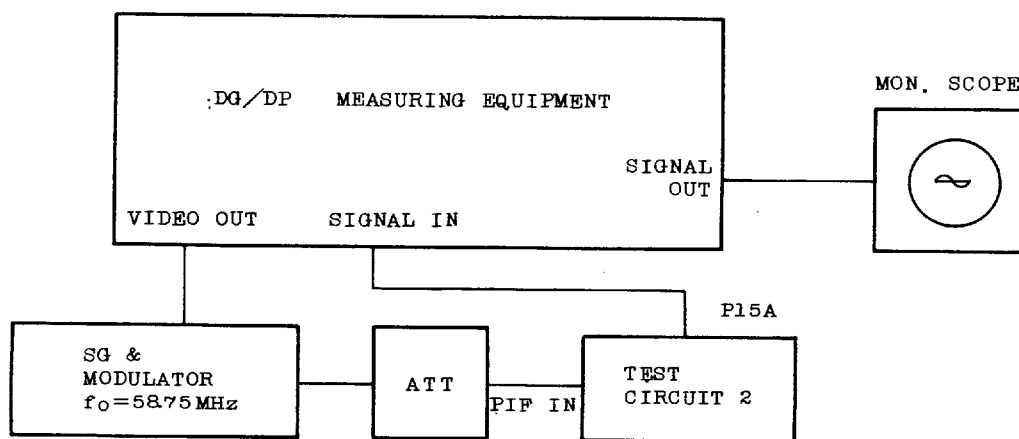

APL=50%

ATT : ADJUST SYNC TIP LEVEL TO DC 2.5V

■ 9097247 0019627 350 ■




# INTEGRATED CIRCUIT


## TECHNICAL DATA

TA7680AP, TA7681AP

### 6. PIF INPUT IMPEDANCE

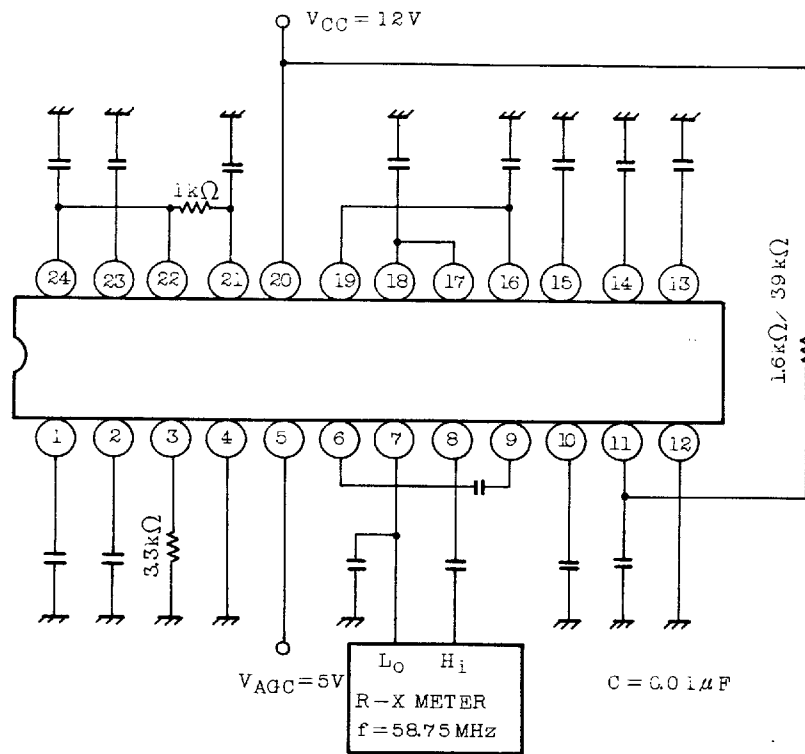

### 7. SIF INPUT IMPEDANCE

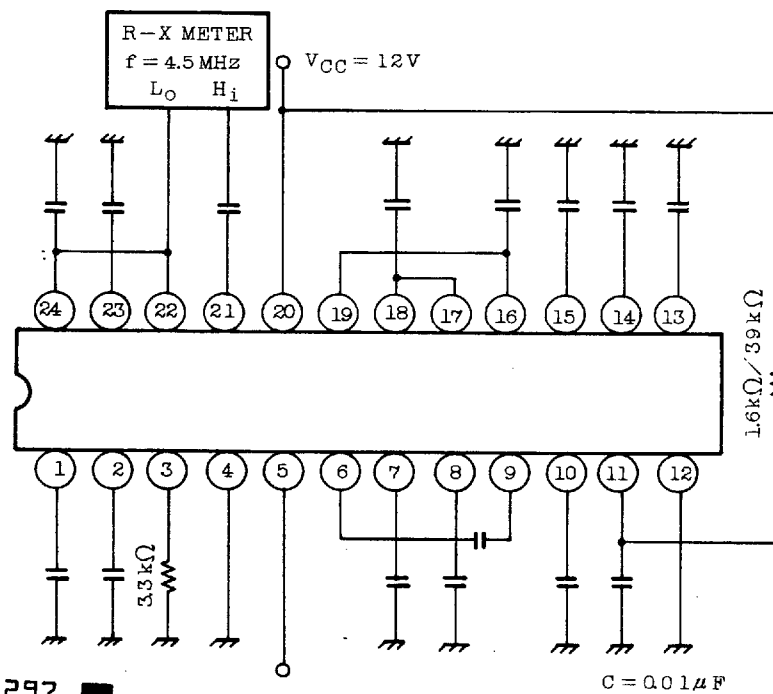

9097247 0019628 297

1983-3-30


TOSHIBA CORPORATION

EJB-TA7680AP-10


GT1A12




8.  $v_{IN(LIM)}$ , AMR,  $V_{OD}$ , THD,  $v_{OM}$

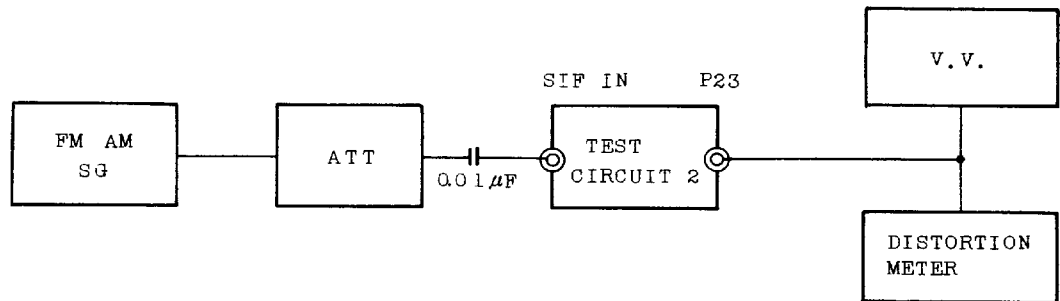

9. AUDIO OUTPUT IMPEDANCE

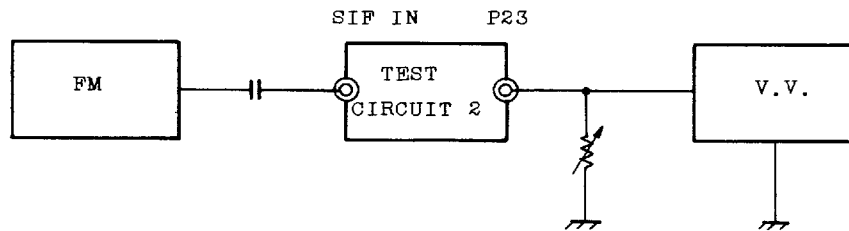


10.  $ATT_{MAX.}$ ,  $G_{ATT MIN.}$ ,  $V_1(1)$ ,  $V_1(2)$

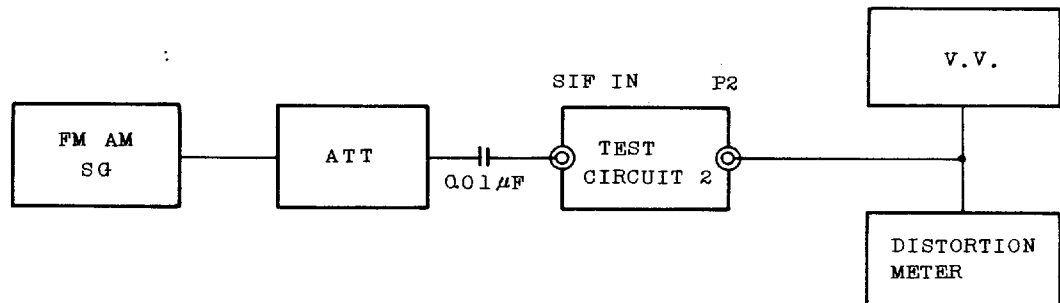


■ 9097247 0019629 123 ■




11.  $v_{PT}$

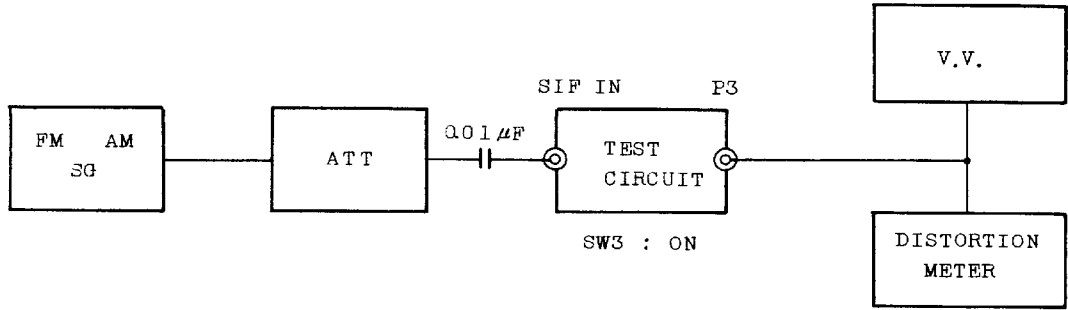

12.  $THD_{AF}$

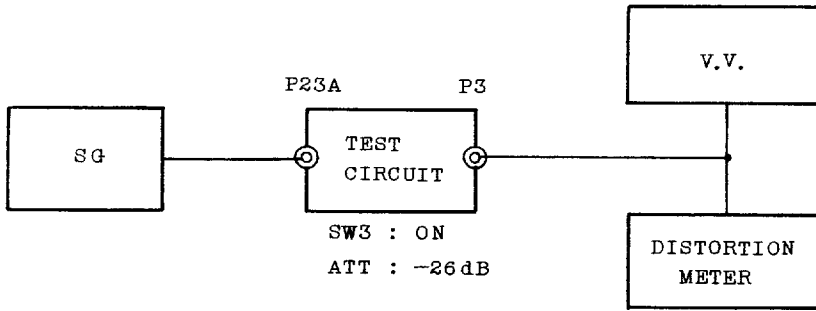

13.  $G_{V AF}$ ,  $v_{OAF MAX}$

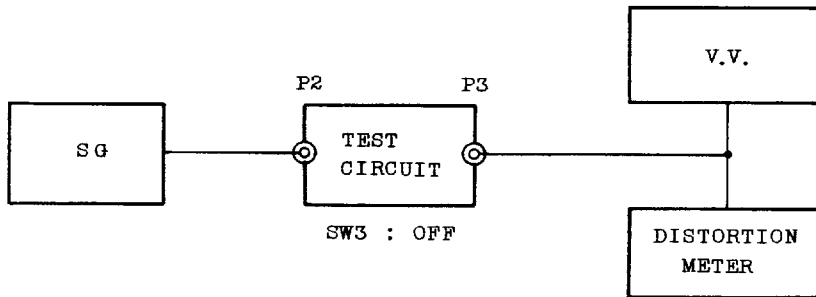

9097247 0019630 945



## TEST CONDITION

Note 1)  $V_{AGC}$  (P5 EXT. Applying Voltage)=11.5V

PIF IN ;  $f=58.75\text{MHz}$  1kHz 30% AM Modulation.

Adjust PIF Input Level  $v_i$  so that the detected output of P15A with high impedance probe will be  $0.8V_{p-p}$  and measure the Input Level.

Note 2)  $V_{AGC}=4V$

Measure PIF Input Level  $v_i'$  same as NOTE 1

$$\Delta A = 20 \log \frac{v_i'}{v_i} \quad (\text{dB})$$

Note 3) PIF IN ;  $f=58.75\text{MHz}$  CW  $15\text{mV}_{\text{rms}}$

Measure DC level of P15

Note 4) PIF IN ;  $f=58.75\text{MHz}$  APL 100%, 87.5% AM modulation.


P5 : open

(1) Adjust PIF Input Level  $50\text{mV}_{p-p}$  and measure the detected output level  $v_{01p-p}$

(2) Then increase the Input Level so that the detected output level will be  $1.1 \times v_{01p-p}$  and measure the Input Level.

Note 5)  $V_{AGC}=8V$

PIF IN ;  $f=58.75\text{MHz} \pm 10\text{MHz}$  variable or sweep  $15\text{mV}_{\text{rms}}$  measure DC level of P15.

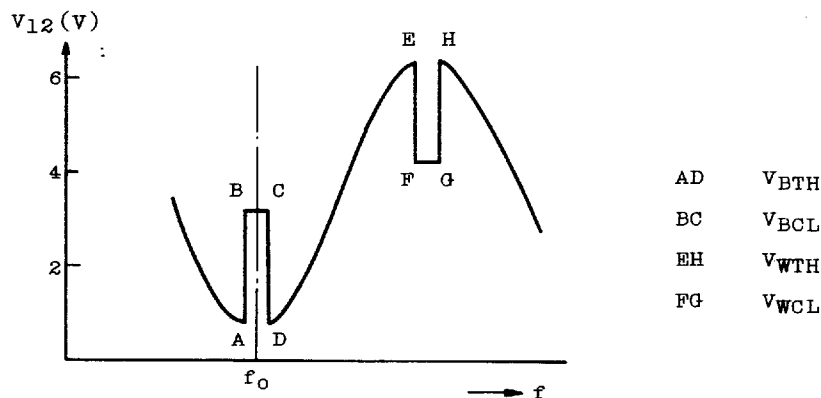



# INTEGRATED CIRCUIT

TA7680AP, TA7681AP

## TECHNICAL DATA

- Note 6)  $V_{AGC}=8V$  ( $GR \approx 30dB$ )  
SG<sub>1</sub> : 58.75MHz CW  
SG<sub>2</sub> : 58.65~40MHz Variable  
(1) Setting output of SG<sub>1</sub> so that DC level of P15 will be 4.0V  
(2) Setting output of SG<sub>2</sub> (58.65MHz) so that AC level of P15 will be 0.5V<sub>p-p</sub>  
(3) Decreasing frequency of SG<sub>2</sub> until AC level of P15 will be 0.35V<sub>p-p</sub> (-3dB of 0.5V<sub>p-p</sub>) then read  $f_{SG2}=F$   
 $f_{BW}=58.75-F$  MHz
- Note 7) SG<sub>1</sub> ; 58.75MHz, 1kHz 80% AM modulation 100mV<sub>rms</sub>  
SG<sub>2</sub>, SG<sub>3</sub> ; OFF  
Setting  $V_{AGC}$  so that output AC level of P15 will be 2.7V<sub>p-p</sub>  
Measure CL of P15 after setting to 0% AM of SG<sub>1</sub>  
$$CL = 20 \log \frac{2.7}{v_{CR}(V_{p-p})} \quad [dB]$$
- Note 8) Measure I<sub>2nd</sub> of P15 same as NOTE 7
- Note 9)  $V_{AGC}=8V$   
SG<sub>1</sub> ; 58.75MHz (P; Picture) 100mV<sub>rms</sub>  
SG<sub>2</sub> ; 54.25MHz (S; Sound) 32mV<sub>rms</sub> (-10dB of SG<sub>1</sub>)  
SG<sub>3</sub> ; 55.17MHz (C; Chroma) 32mV<sub>rms</sub> (-10dB of SG<sub>1</sub>)  
(1) Setting  $V_{AGC}$  so that the output tip level (lower) of P15 will be 3.0V DC  
(2) Measure the level difference (dB) between c-level and 920kHz level
- Note 10)  $V_{AGC}=8V$   
PIF IN ;  $f=58.75MHz$  Video Signal (ramp) 87.5% AM 100mV<sub>p-p</sub>  
Setting ATT so that the sync tip level of P15 will be 2.5V DC  
Measure DP and DG.
- Note 11)  $V_{AGC}=5V$   $f=58.75MHz$   
Measure R<sub>IN</sub>, C<sub>IN</sub>

9097247 0019632 718



Note 12) AFT Sensitivity  $\Delta F/\Delta(V_{13}-V_{14})$


- (1) INT, AGC (P5 Open)
- (2) PIF Input ; 58.75MHz  $\pm 1.0$ MHz, CW 15mV<sub>rms</sub>
- (3) Read the frequency ( $f_1$ ) of PIF when  $V_{13}-V_{14}=-1$ V
- (4) Read the frequency ( $f_2$ ) of PIF when  $V_{13}-V_{14}=1$ V

Then calculate

$$\Delta F/\Delta(V_{13}-V_{14})=|f_1-f_2|$$

Note 13)  $\Delta F_W$ ,  $V_{13U}$ ,  $V_{14U}$ ,  $V_{13L}$ ,  $V_{14L}$

- (1) INT AGC (P5 Open)
- (2) PIF IN ; 58.75MHz  $\pm 10$ MHz CW 15mV<sub>rms</sub>
- (3) 8pF at Pin 16 should be shorted
- (4) Read the frequency ( $f_1$  or  $f_2$ ) when the  $V_5$  or  $V_6$  reduced to 90% level of A or B with varying the frequency. Then band width is the difference from center frequency ( $f_0$ ).

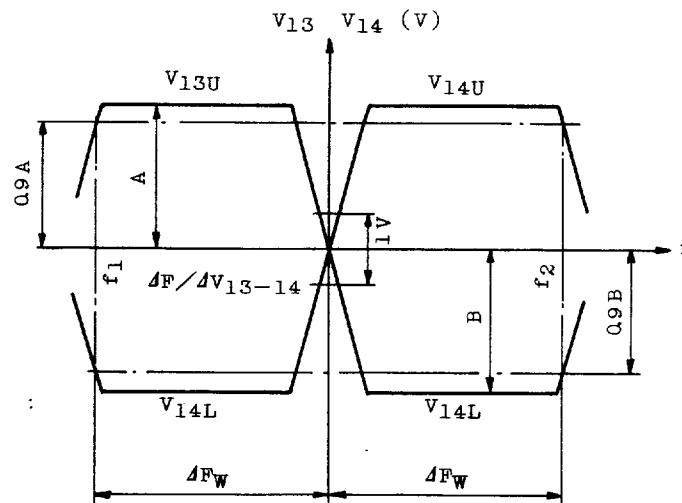

Note 14) P5 : Open

PIF IN ; 58.75MHz CW 20mV<sub>rms</sub>

- (1) Adjust the voltage of terminal 3 so that the voltage of terminal 4 will be 6.0V DC
- (2) Measure the terminal voltage 3



- Note 15) P5 : Open  
PIF IN ; 58.75MHz 100% APL 87.5% AM modulation signal amplitude 50mV<sub>p-p</sub>  
Measure detected output voltage (White peak to sync Tip)
- Note 16) P5 : Open  
SG<sub>1</sub> ; 58.75MHz CW 100mV<sub>rms</sub>  
SG<sub>2</sub> ; 54.25MHz CW 25mV<sub>rms</sub>  
Measure SIF (4.5MHz) output voltage at P15
- Note 17) SIF IN ; f=4.5MHz FM f<sub>MOD</sub>=400Hz Δf=±25kHz  
(1) Adjust SIF Input Level 100mV<sub>p-p</sub> and measure the detected output level  $v_{OS}$   
(2) Then decrease the Input Level so that the detected output level will be 3dB down of  $v_{OS}$  and measure the Input Level
- Note 18) Output Impedance  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz, Δf=±25kHz, 80dBμ  
(2) AT P23 read the V<sub>O1</sub> at R<sub>X</sub>=∞, then read the R<sub>X</sub> when recovered output become V<sub>O1</sub>/2 with varying the R<sub>X</sub>.  
The R<sub>X</sub> is the output impedance.
- Note 19) ATT MAX.  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz, Δf=±25kHz, 80dBμ  
(2) Read the 400Hz component of V<sub>A1</sub> at P2 with R<sub>A</sub>=0, then read V<sub>A1</sub>' with R<sub>A</sub>=∞.  
$$ATT\ MAX = 20 \log \frac{V_{A1}}{V_{A1}'}$$
- Note 20)  $v_{PT}$  :  
(1) SIF IN ; f=4.5MHz, f<sub>MOD</sub>=400Hz, Δf=±25kHz, 80dBμ  
(2) Read the 400Hz component at P3
- Note 21) G<sub>V</sub> AF  
(1) Apply 400Hz 0.1V<sub>rms</sub> signal to P2  
(2) Read the output voltage at P3






# INTEGRATED CIRCUIT

## TECHNICAL DATA

### TA7680AP, TA7681AP

### APPLICATION CIRCUIT

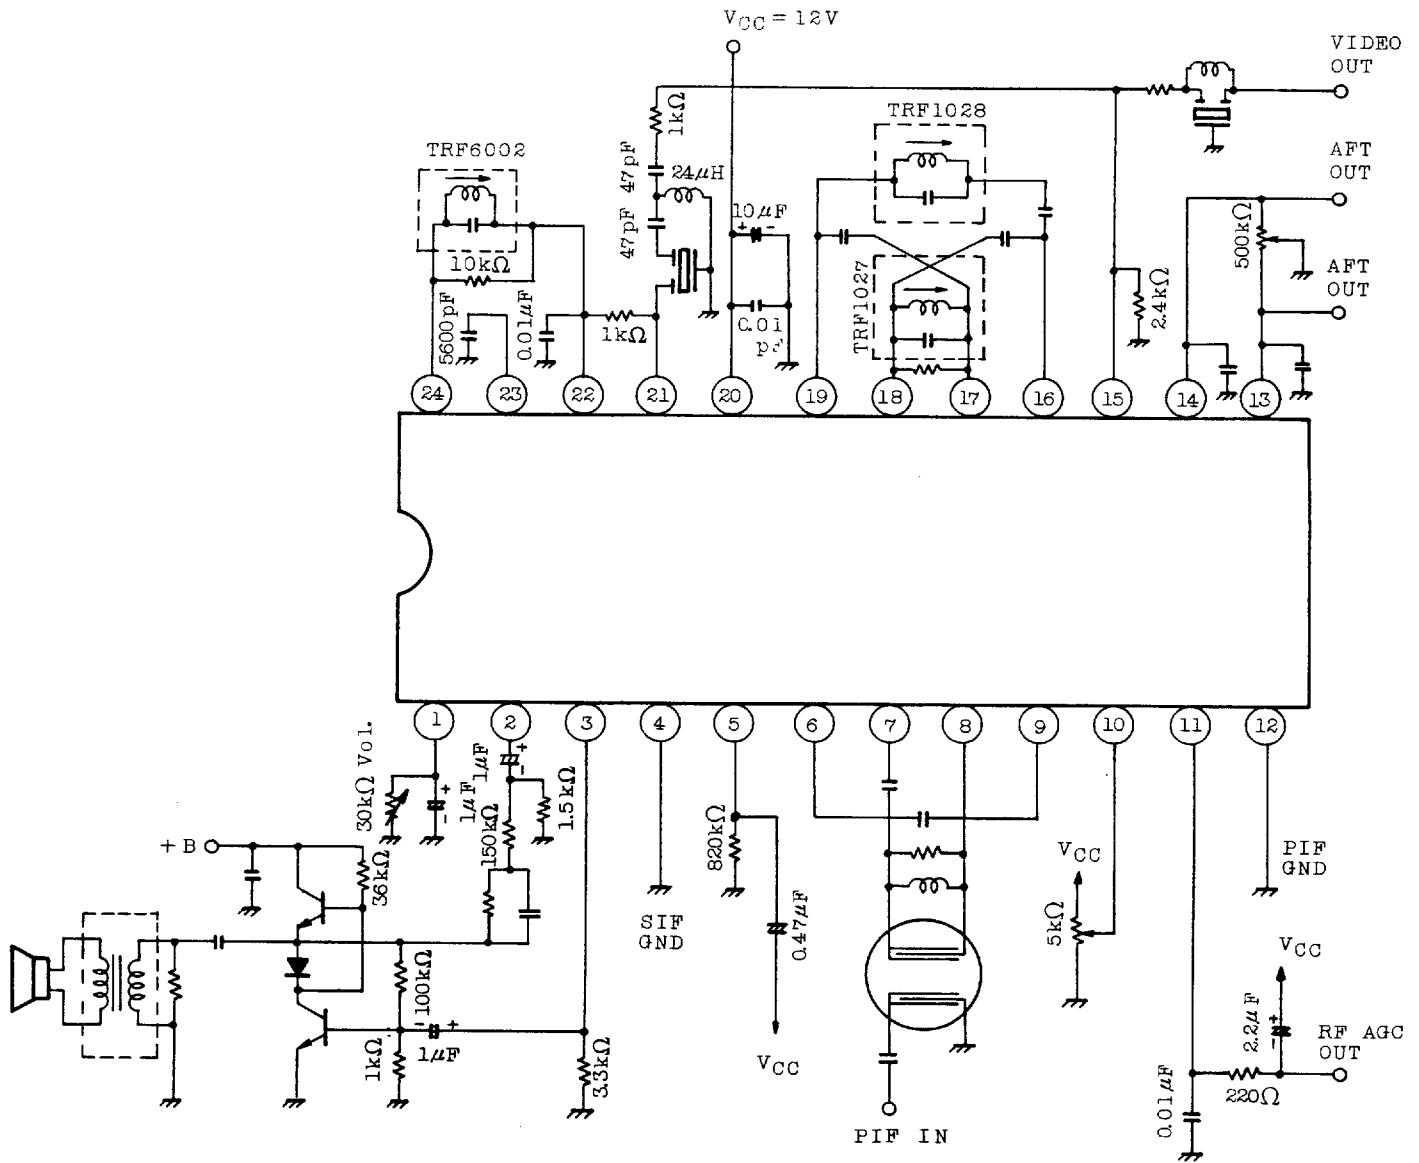

1983-3-30

GT1A12

TOSHIBA CORPORATION

9097247 0019635 427

EJB-TA7680AP-17