

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier



Applications

- Ku-band communications
- Ku-band VSAT
- Point-to-Point Radio

Product Features

- Frequency Range: 13.5 – 16 GHz
- Saturated Output Power: 37.4 dBm
- Small Signal Gain: 25 dB
- Bias: $V_d = 8\text{ V}$, $I_{dq} = 2.6\text{ A}$, $V_g = -0.6\text{ V}$ typical
- Pulsed operation

General Description

The TriQuint TGA2536-FL provides 25 dB of small signal gain and 5.5 W of output power across 13.5-16 GHz. The TGA2536-FL is designed using TriQuint's proven standard 0.25 μm gate pHEMT production process.


The TGA2536-FL features low loss ground-signal-ground (GSG) RF transitions designed to interface with a coplanar waveguide multilayer board.

This device is ideally suited for Ku-band communications including military, VSAT transmitter and Point to Point Radio applications. The flange lead package has a high thermal conductivity copper alloy base.

Lead-free and RoHS compliant.



Functional Block Diagram

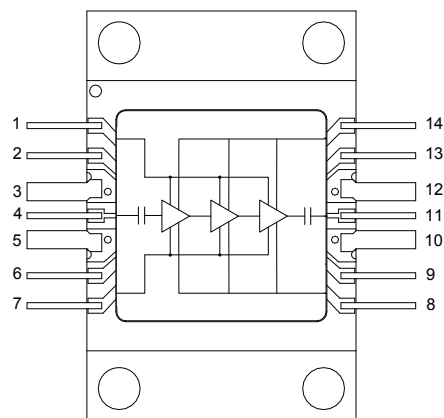

Pin Configuration

Pin #	Symbol
1,7	V_g
2,6,9,13	N/C
3,5,10,12	Gnd
4	RF In
8,14	V_d
11	RF Out

Ordering Information

Part No.	ECCN	Description
TGA2536-FL	3A001.b.2.c	Ku-band Power Amplifier

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier

Specifications

Absolute Maximum Ratings

Parameter	Rating
Drain Voltage, Vd	9 V
Gate Voltage, Vg	-5 to 0 V
Drain Current, Id	4.4 A
Gate Current range, Ig	-18 to 18 mA
RF Input Power, CW, 50Ω, T = 25°C	21 dBm
Channel Temperature, Tch	200°C
Mounting Temperature (30 Seconds)	260 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Vd		8		V
Idq (no RF drive)		2.6		A
Id_drive (under RF drive)		3.3		A
Vg		-0.6		V

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions

Electrical Specifications

Test conditions unless otherwise noted: 25°C, Vd = 8 V, 20% duty cycle, Idq = 2.6 A, Vg = -0.6 V typical


Parameter	Min	Typ	Max	Units
Operational Frequency Range	13.5		16	GHz
Small Signal Gain		25		dB
Output Power @ Saturation		37.4		dBm
Power-added Efficiency @ Saturation		20		%
Power Temperature Coefficient		-0.004		dB/°C

Specifications (cont'd)

Thermal and Reliability Information

Parameter	Condition	Rating
Channel Temperature (Tch), Median Lifetime (Tm), Thermal Resistance*, no RF drive	Tbase = 85 °C, Vd = 8V, Idq = 2.6 A, Pdis = 20.8 W, pulsed 20% duty cycle	Tch = 149 °C Tm = 1.0E+6 Hours θ_{JC} = 3.1 °C/W
Channel Temperature (Tch), Median Lifetime (Tm), Thermal Resistance*, under RF Drive	Tbase = 85 °C, Vd = 8V, Id = 3.5 A, Pout = 37.0 dBm, Pdis = 23.0 W, pulsed 20% duty cycle	Tch = 152 °C Tm = 1.0E+6 Hours θ_{JC} = 2.9 °C/W
Channel Temperature (Tch), Median Lifetime (Tm), Thermal Resistance*, under RF Drive	Tbase = 85 °C, Vd = 8V, Id = 3.1 A, Pout = 36.0 dBm, Pdis = 20.8 W, CW	Tch = 173 °C Tm = 1.6E+5 Hours θ_{JC} = 4.2 °C/W

* Thermal Resistance, θ_{JC} , measured to center back of package





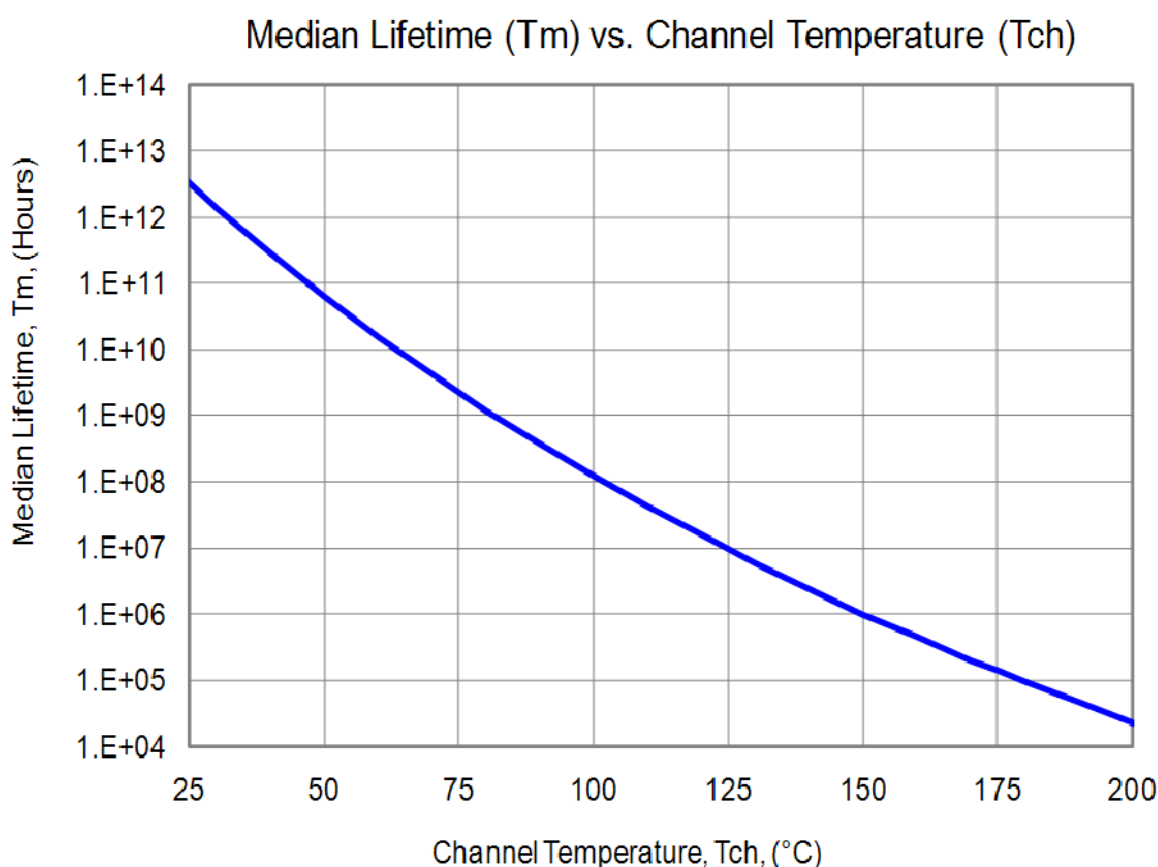


TGA2536-FL

5.5 Watt Ku-Band Power Amplifier



Typical Performance

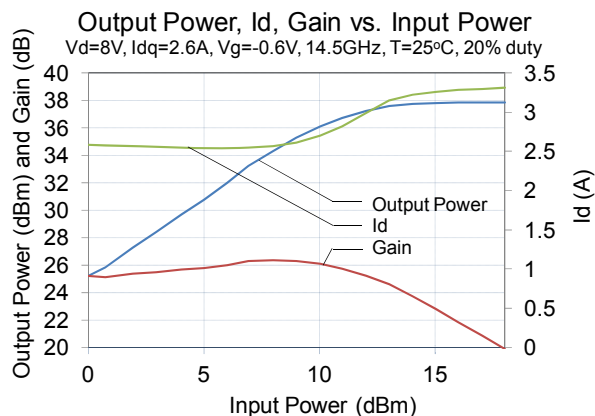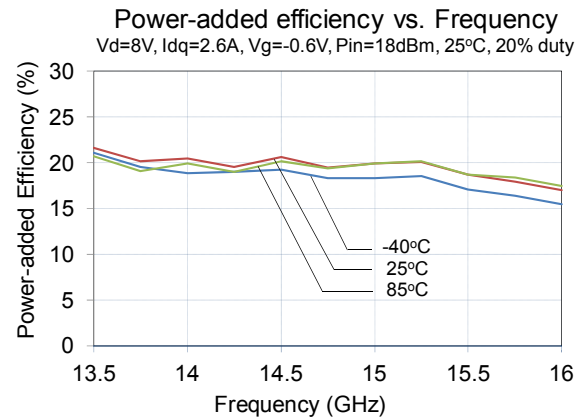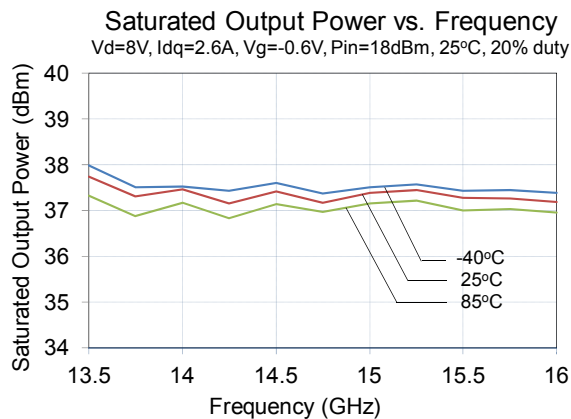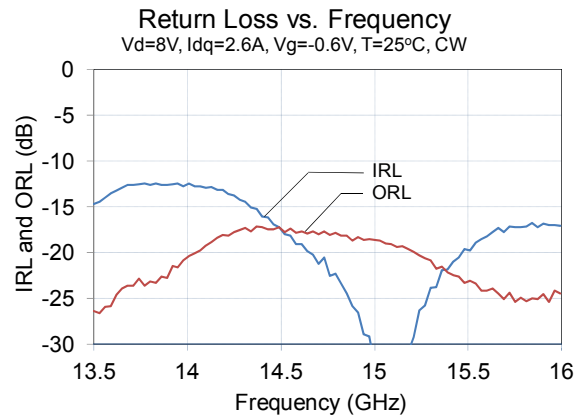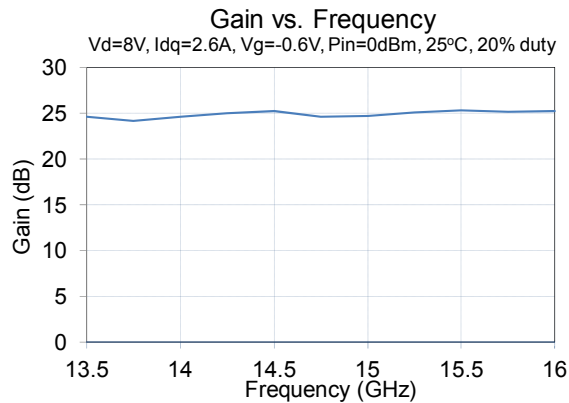


TGA2536-FL

5.5 Watt Ku-Band Power Amplifier



Application Circuit

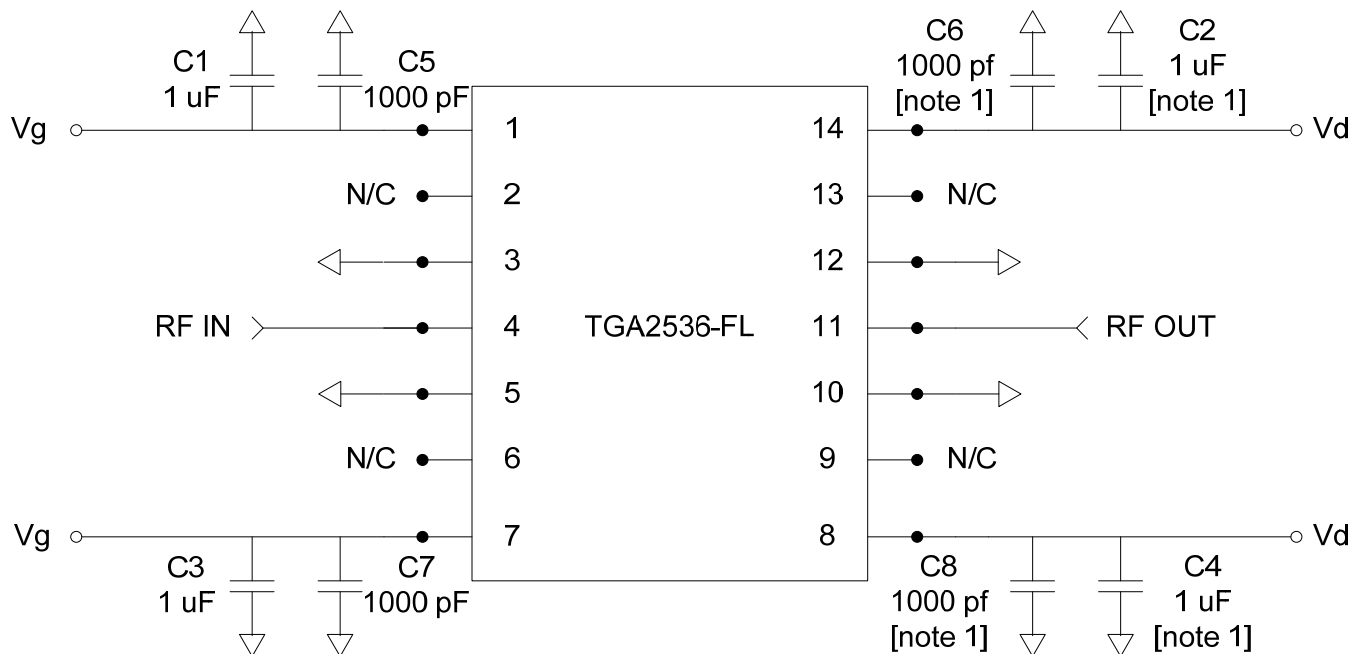

Note 1: Remove cap for pulsed drain operation

Bias-up Procedure

Turn Vg to -2 V

Turn Vd to 8 V

Adjust Vg more positive until quiescent Id is 2.6 A.
This will be Vg ~ -0.6 V typical

Apply RF signal

Bias-down Procedure

Turn off RF signal

Reduce Vg to -2 V. Ensure Id ~ 0 mA


Turn Vd to 0 V

Turn Vg to 0 V

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier

Pin Description

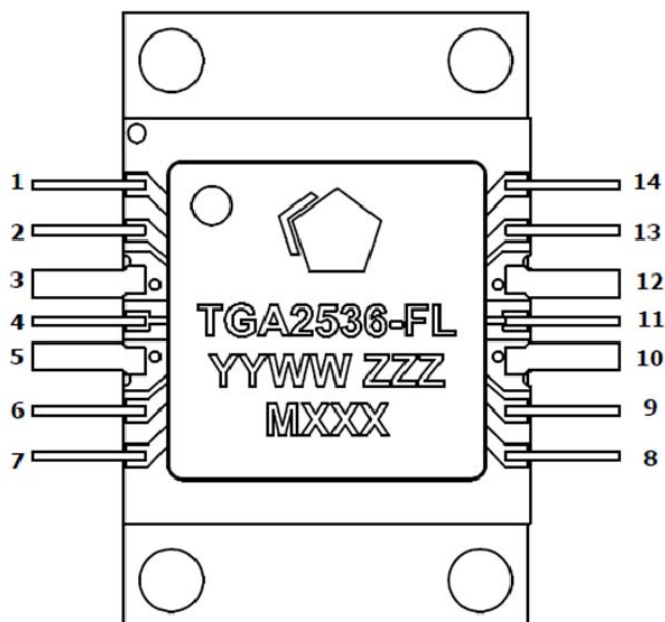


Pin #	Symbol	Description
1,7	Vg	Gate voltage. Bias network is required; top and bottom sides must be connected and biased
2,6,9,13	N/C	Internally grounded; may be left open
3,5,10,12	Gnd	Connect to Ground
4	RF In	Input, matched to 50 ohms
8,14	Vd	Drain voltage. Bias network is required; all Drain voltage pins must be connected and biased
11	RF Out	Output, matched to 50 ohms

Note: See Application Circuit on page 5 as an example

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier

Evaluation Board Layout

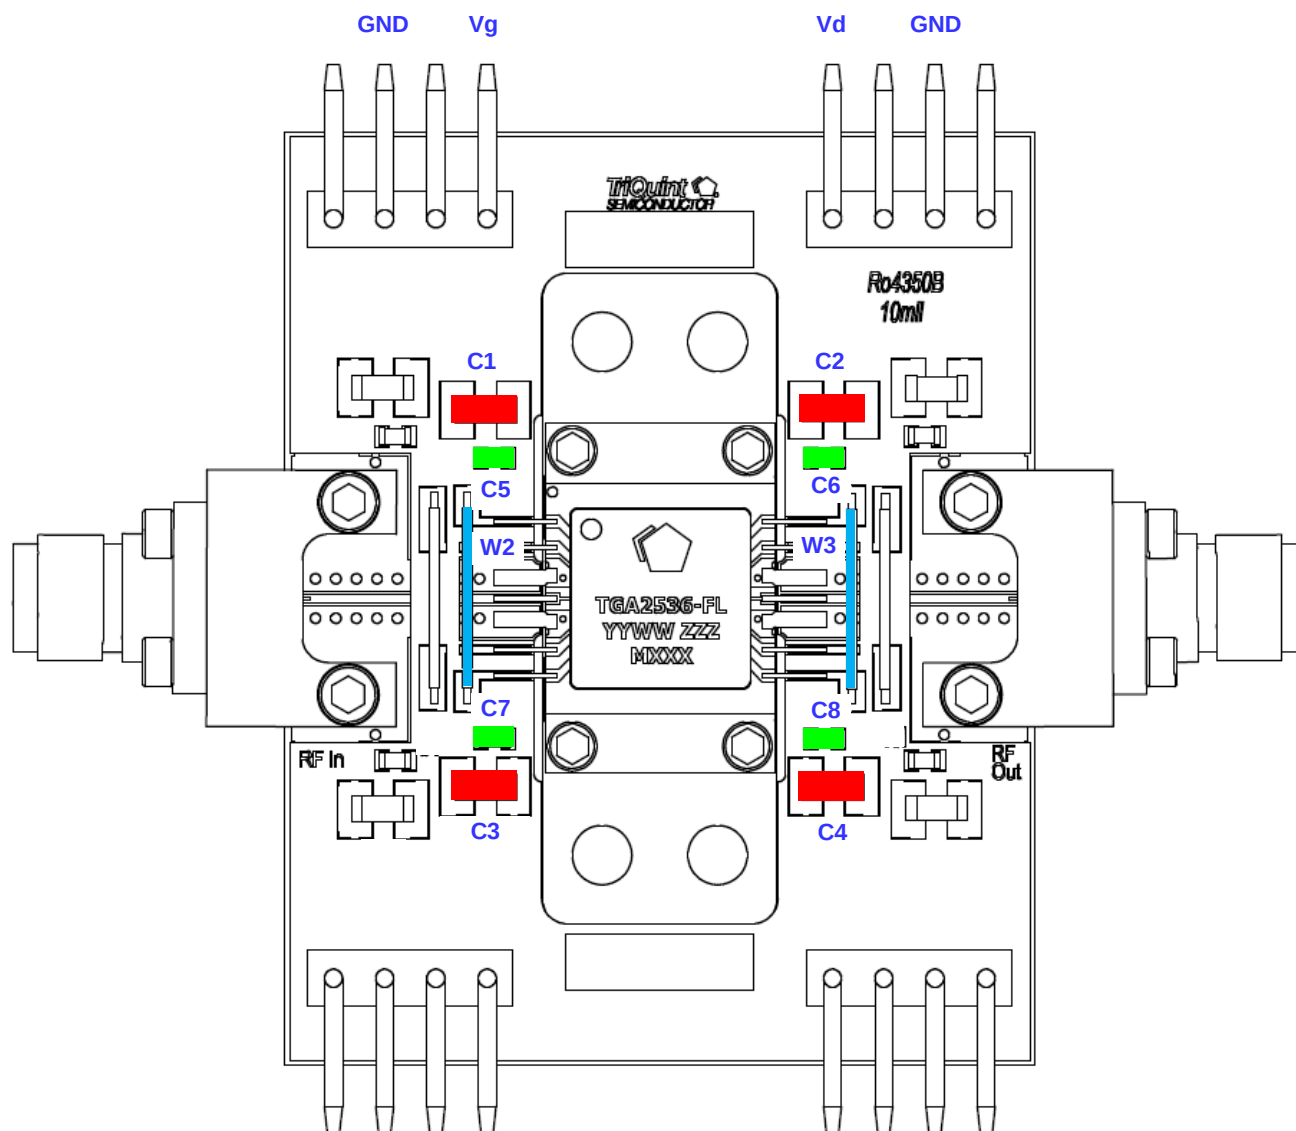


Bill of Material

Ref Des	Value	Description	Manufacturer	Part Number
C1-C4	1 uF	Cap, 1206, 50V, 10%, X7R	Panasonic	ECJ-3YX1H105K
C5-C8	1000 pF	Cap, 0603, 50V, 10%, X7R	Panasonic	ECJ-ZEB1H102K
W2,W3		Jumper, 20 gauge wire	Various	

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier

Mechanical Information

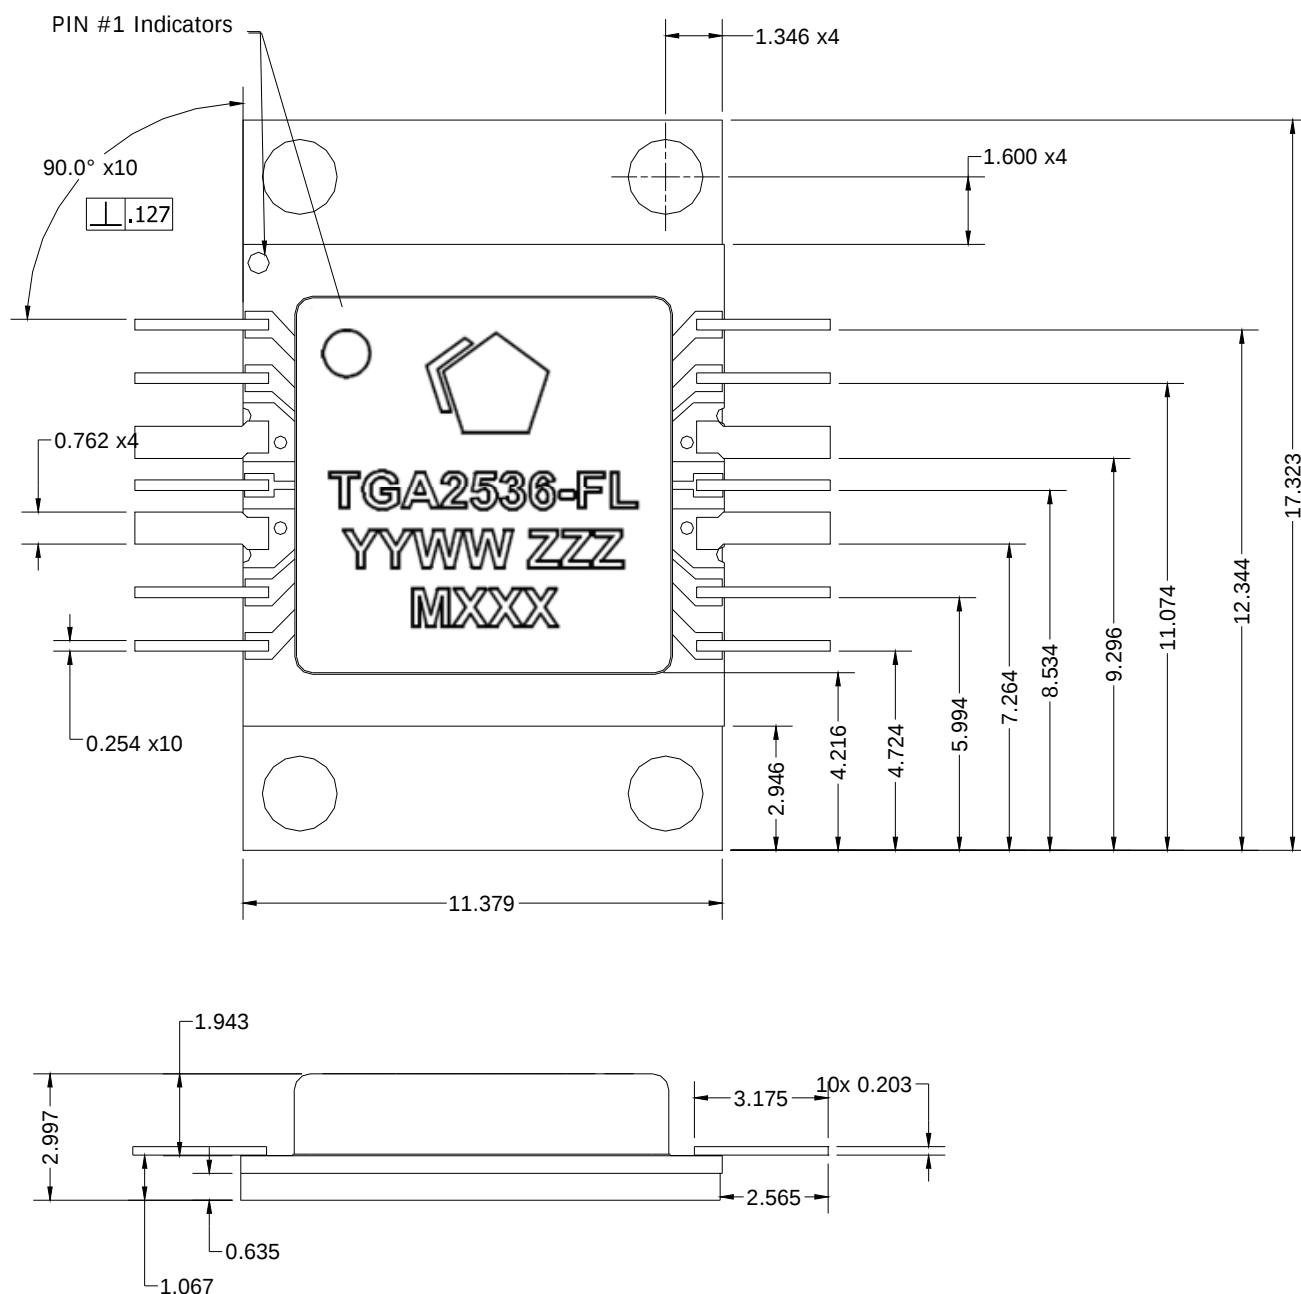

Unit: millimeters

Part marking:

YY	assembly lot start year
WW	assembly lot start week
ZZZ	part serial number
MXXX	batch ID

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

ESD rating: TBD
Value: Passes $\geq$ TBD V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

Solderability

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free

ECCN

US Department of Commerce: 3A001.b.2.c

Assembly Notes

1. Clean the board or module with alcohol. Allow it to fully dry
2. Nylock screws are recommended for mounting the TGA2536-FL to the board
3. To improve the thermal and RF performance, we recommend a heat sink attached to the bottom of the board and/or apply thermal compound to the bottom of the TGA2536-FL
4. Apply solder to each pin of the TGA2536-FL.
5. Clean the assembly with alcohol.

TGA2536-FL

5.5 Watt Ku-Band Power Amplifier



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-products@tqs.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information:

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.