

TL32088 DIFFERENTIAL ANALOG BUFFER AMPLIFIER FOR THE TLC320AD58

SLAS123B – MARCH 1995 – REVISED NOVEMBER 1995


- **Analog Front-End Integrated Circuit for the 18-Bit Stereo Audio Sigma-Delta Analog-to-Digital Converter TLC320AD58C**
- **Low Distortion, Low Noise**
 - THD+N . . . 0.00056% Typ
 - SNR . . . 108-dB Typ
- **Adjustable Signal Gain**
- **5-V Single Supply Operation**
- **Internal Voltage Reference**
- **Operating Temperature . . . 0°C to 70°C**

description


The TL32088 is an analog signal conditioning integrated circuit built using a proprietary Texas Instruments bipolar process. This device is used for the analog signal input stage for the 18-bit, stereo audio, sigma-delta, analog-to-digital converter (ADC) TLC320AD58C exclusively. The TL32088 can convert input signals from single-ended to differential and differential to single-ended. The TL32088 also implements a single-ended to single-ended and differential to differential amplifier buffer. The differential output can be connected to the TLC320AD58C directly. The TL32088 is composed of high performance amplifiers that offer wide output swing with low distortion and low noise. The reference voltage for the internal amplifier circuit is provided from an internal voltage reference circuit.

The TL32088 provides a wide output swing while maintaining 0.00056% THD+N and 108-dB SNR and, therefore, is ideally suited for high-end audio systems.

functional block diagram

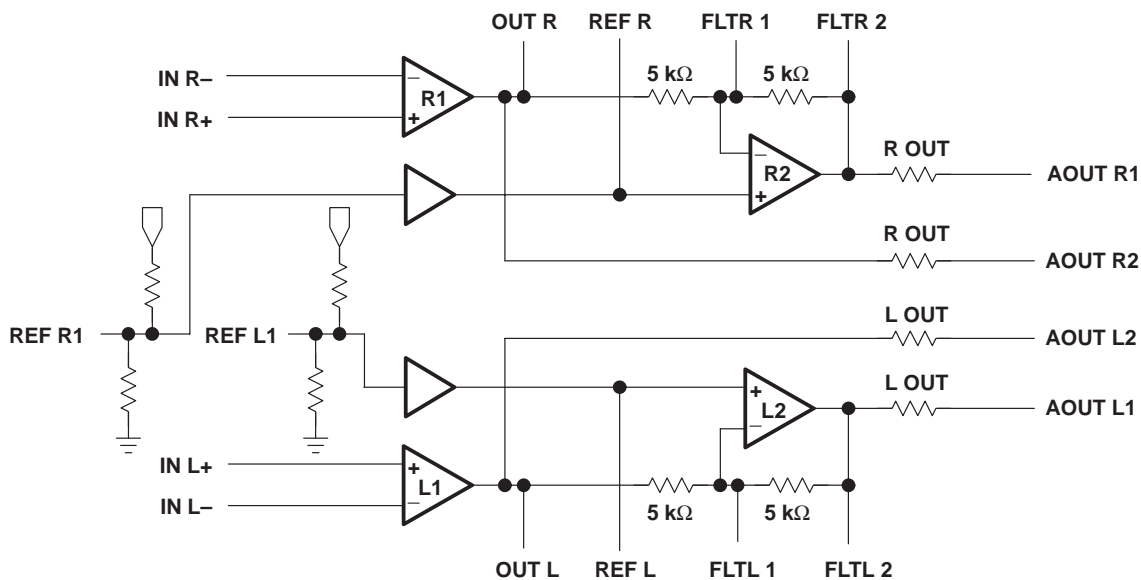

NS PACKAGE (TOP VIEW)

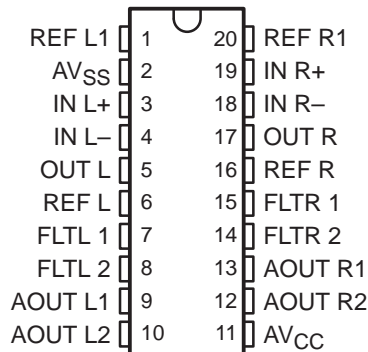

AVAILABLE OPTIONS

T _A	PACKAGE
	SMALL OUTLINE (NS)
0°C to 70°C	TL32088CNS



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1995, Texas Instruments Incorporated

TL32088

DIFFERENTIAL ANALOG BUFFER AMPLIFIER

FOR THE TLC320AD58

SLAS123B – MARCH 1995 – REVISED NOVEMBER 1995

absolute maximum rating over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC} (see Note 1)	7 V
Differential input voltage, V_{ID} (see Note 2)	V_{CC}
Input voltage range, V_I (any input) (see Notes 1 and 3)	-0.3 to V_{CC}
Output voltage, V_O	-0.3 to V_{CC}
Output current, I_O	20 mA
Duration of short-circuit current at or below 25°C (output shorted to GND)	unlimited
Continuous total power dissipation, P_D ($T_A \leq 25^\circ\text{C}$) (see Note 4)	625 mW
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltage, are with respect to GND.
 2. Differential voltage is at the noninverting input with respect to the inverting input.
 3. All input voltage values must not exceed V_{CC} .
 4. Derating factor above $T_A = 25^\circ\text{C}$ is 10 mW/°C.

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	4.75	5	5.25	V
Input voltage range, V_I (see Note 5)	1.1		3.9	V
Operating free-air temperature, T_A	0		70	°C

NOTE 5: The output voltage is undetermined when the input voltage exceeds recommended input voltage range.

electrical characteristics over recommended operating free-air temperature range, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_{IC} = 2.5\text{ V}$, $V_O = 2.5\text{ V}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		1	6	mV
			$T_A = 0^\circ\text{C}$ to 70°C			7.5	
I_{IO}	Input offset current	$V_{IC} = 2.5\text{ V}$, $V_O = 2.5\text{ V}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		5	100	nA
			$T_A = 0^\circ\text{C}$ to 70°C			150	
I_{IB}	Input bias current	$V_{IC} = 2.5\text{ V}$, $V_O = 2.5\text{ V}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		20	150	nA
			$T_A = 0^\circ\text{C}$ to 70°C			250	
V_{IC}	Common-mode input voltage	$V_O \leq 7.5\text{ mV}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		0.9	4.1	V
			$T_A = 0^\circ\text{C}$ to 70°C			1.1	
V_{OM+}	Maximum positive-peak output voltage			4.4			V
V_{OM-}	Maximum negative-peak output voltage					0.6	V
A_{vd}	Differential voltage amplification	$V_O = 2.5\text{ V} \pm 1\text{ V}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		60		dB
CMRR	Common-mode rejection ratio	$V_O = 2.5\text{ V} \pm 1\text{ V}$ (AMP L1, R1)	$T_A = 25^\circ\text{C}$		85		dB
V_{ref}	Reference voltage			2.4	2.5	2.6	V
EG	Gain error	See Note 6				$\pm 3\%$	
r_o	Output resistance		$T_A = 25^\circ\text{C}$		50		Ω
I_{CC}	Supply current (both channels)	$V_O = 2.5\text{ V}$, No load	$T_A = 25^\circ\text{C}$		17	20	mA
			$T_A = 0^\circ\text{C}$ to 70°C			25	

NOTE 6: Gain error is between OUT L and FLTL 1, OUT R and FLTR 1.




TL32088 DIFFERENTIAL ANALOG BUFFER AMPLIFIER FOR THE TLC320AD58

SLAS123B – MARCH 1995 – REVISED NOVEMBER 1995

operating characteristics over recommended operating free-air temperature range, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR	Slew rate	$A_V = 1$, $V_I = 2.5\text{ V} + 0.5\text{ V (AMP L1, R1)}$		3		$\text{V}/\mu\text{s}$
B_1	Unity-gain bandwidth	AMP L1, R1		7		MHz
SNR	Signal-to-noise ratio (EIAJ)	A-Weighted test circuit (see Figure 2)	104	108		dB
THD+N	Total harmonic distortion plus noise	$V_{O(PP)} = 3.2\text{ V}$ $f = 1\text{ kHz}$, BW = 10 Hz to 20 kHz test circuit		0.00056%	0.001%	
Crosstalk		$V_{O(PP)} = 3.2\text{ V}$, $f = 20\text{ kHz}$		-125		dB

APPLICATION INFORMATION

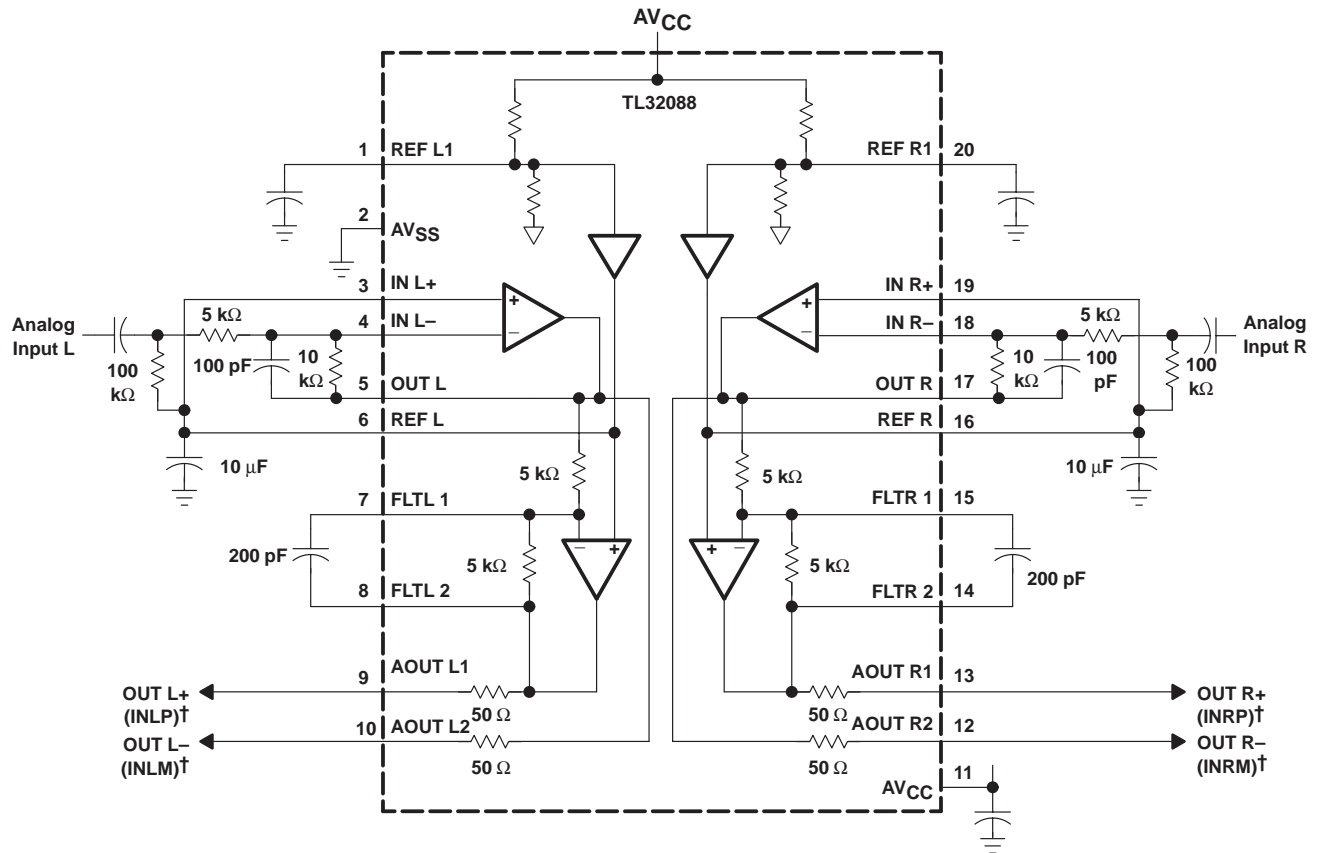

† TLC320AD58C input terminals.

Figure 1. TL32088 to TLC320AD58C Connections

TL32088
DIFFERENTIAL ANALOG BUFFER AMPLIFIER
FOR THE TLC320AD58

SLAS123B – MARCH 1995 – REVISED NOVEMBER 1995

APPLICATION INFORMATION

Table 1. A-Weighted Data

FREQUENCY	A WEIGHTING (dB)	FREQUENCY	A WEIGHTING (dB)
25	-44.6 ±2	800	-0.1 ±1
31.5	-39.2 ±2	1000	0 ±0
40	-34.5 ±2	1250	0.6 ±1
50	-30.2 ±2	1600	1.0 ±1
63	-26.1 ±2	2000	1.2 ±1
80	-22.3 ±2	2500	1.2 ±1
100	-19.1 ±1	3150	1.2 ±1
125	-16.1 ±1	4000	1.0 ±1
160	-13.2 ±1	5000	0.5 ±1
200	-10.8 ±1	6300	-0.1 ±1
250	-8.6 ±1	8000	-1.1 ±1
315	-6.5 ±1	10000	-2.4 ±1
400	-4.8 ±1	12500	-4.2 ±2
500	-3.2 ±1	16000	-6.5 ±2
630	-1.9 ±1	—	—

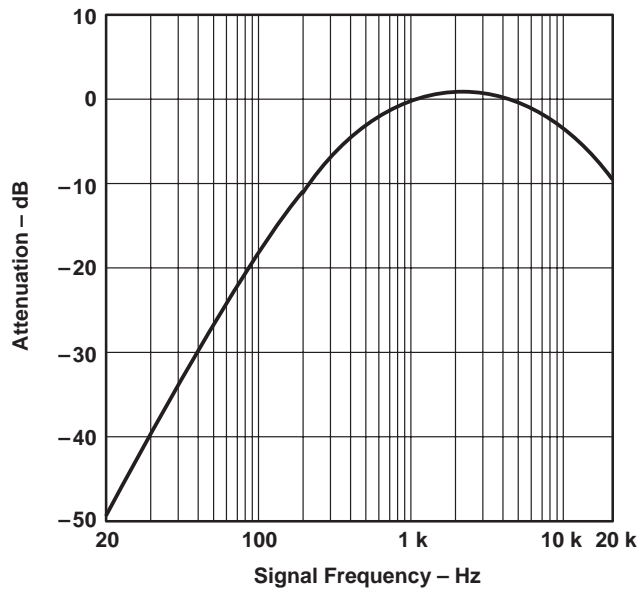


Figure 2. A-Weighted Function

TL32088
 DIFFERENTIAL ANALOG BUFFER AMPLIFIER
 FOR THE TLC320AD58


SLAS123B – MARCH 1995 – REVISED NOVEMBER 1995

MECHANICAL DATA

NS (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

14 PIN SHOWN

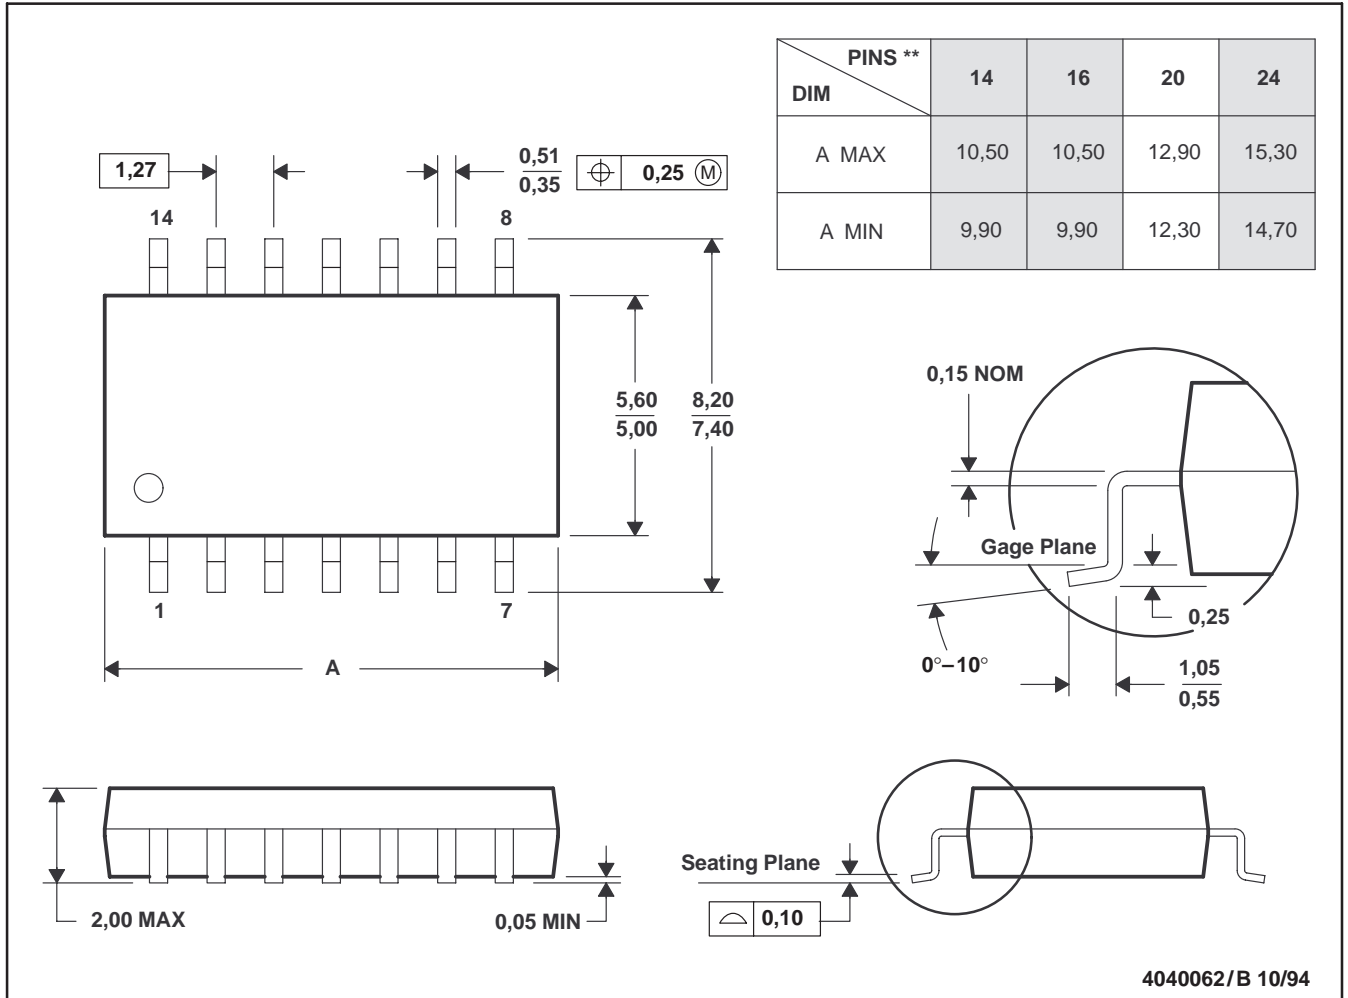

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TL32088CNSLE	OBSOLETE	SO	NS	20		TBD	Call TI	Call TI
TL32088CNSR	OBSOLETE	SO	NS	20		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265