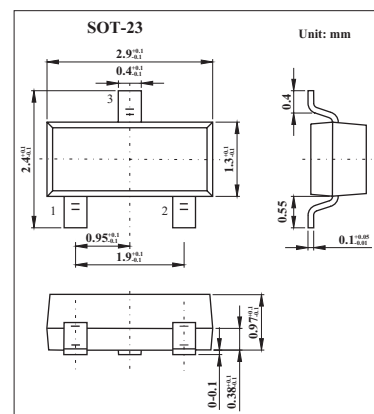


PIN Diode for VHF,UHF,AGC USE

1SV233

■ Features

- Very small-sized package facilitates high-density mounting and permits 1SV233-applied equipment to be made smaller.
- Small interterminal capacitance ($C=0.23\text{ pF typ.}$).
- Small forward series resistance ($r_s=5\ \Omega\text{ typ.}$).

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	50	V
Forward Current	I_F	50	mA
Allowable Power Dissipation	P	150	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R = 10\ \mu\text{A}$	50			V
Reverse Current	I_R	$V_R = 50\text{ V}$			0.1	μA
Forward Voltage	V_F	$I_F = 50\text{ mA}$		0.95		V
Interterminal Capacitance	C	$V_R = 50\text{ V}, f = 1\text{ MHz}$		0.23		pF
Series Resistance	r_s	$I_F = 10\text{ mA}, f = 100\text{ MHz}$		5		Ω

■ Marking

Marking	BV
---------	----